Google

@fhinkel

TRY IT

- `--trace-opt` and `--trace-deopt`: which functions are (de)optimized
- `--print-opt-code`: code generated by optimizing compiler
- `--trace-ic`: different object types in the caches

Not Optimized

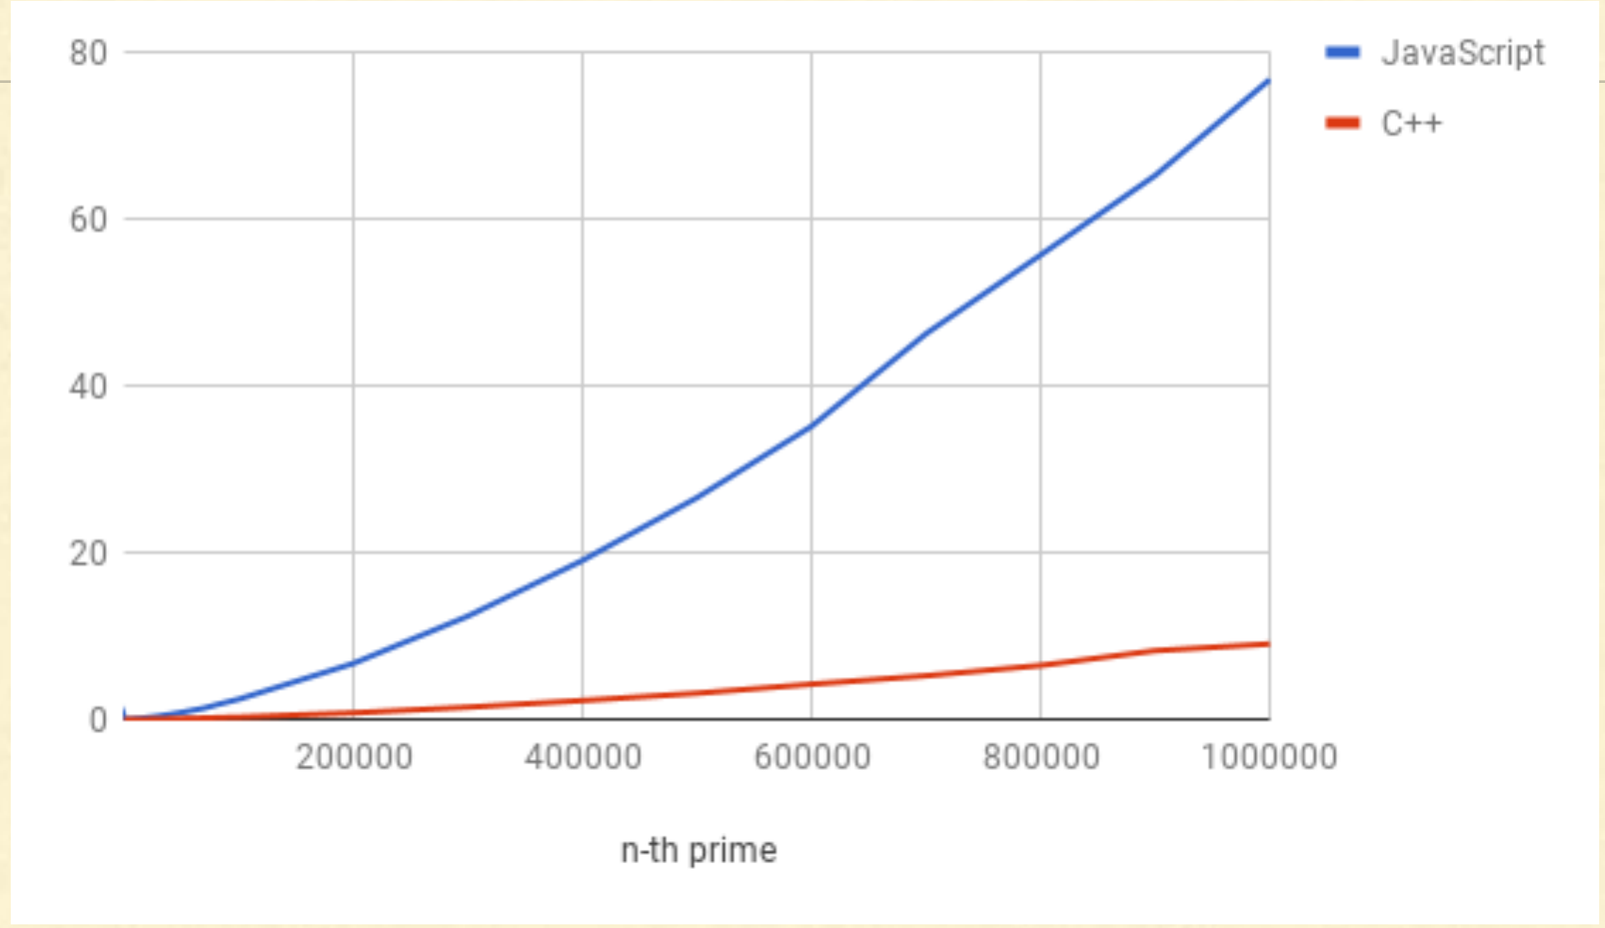

Optimized

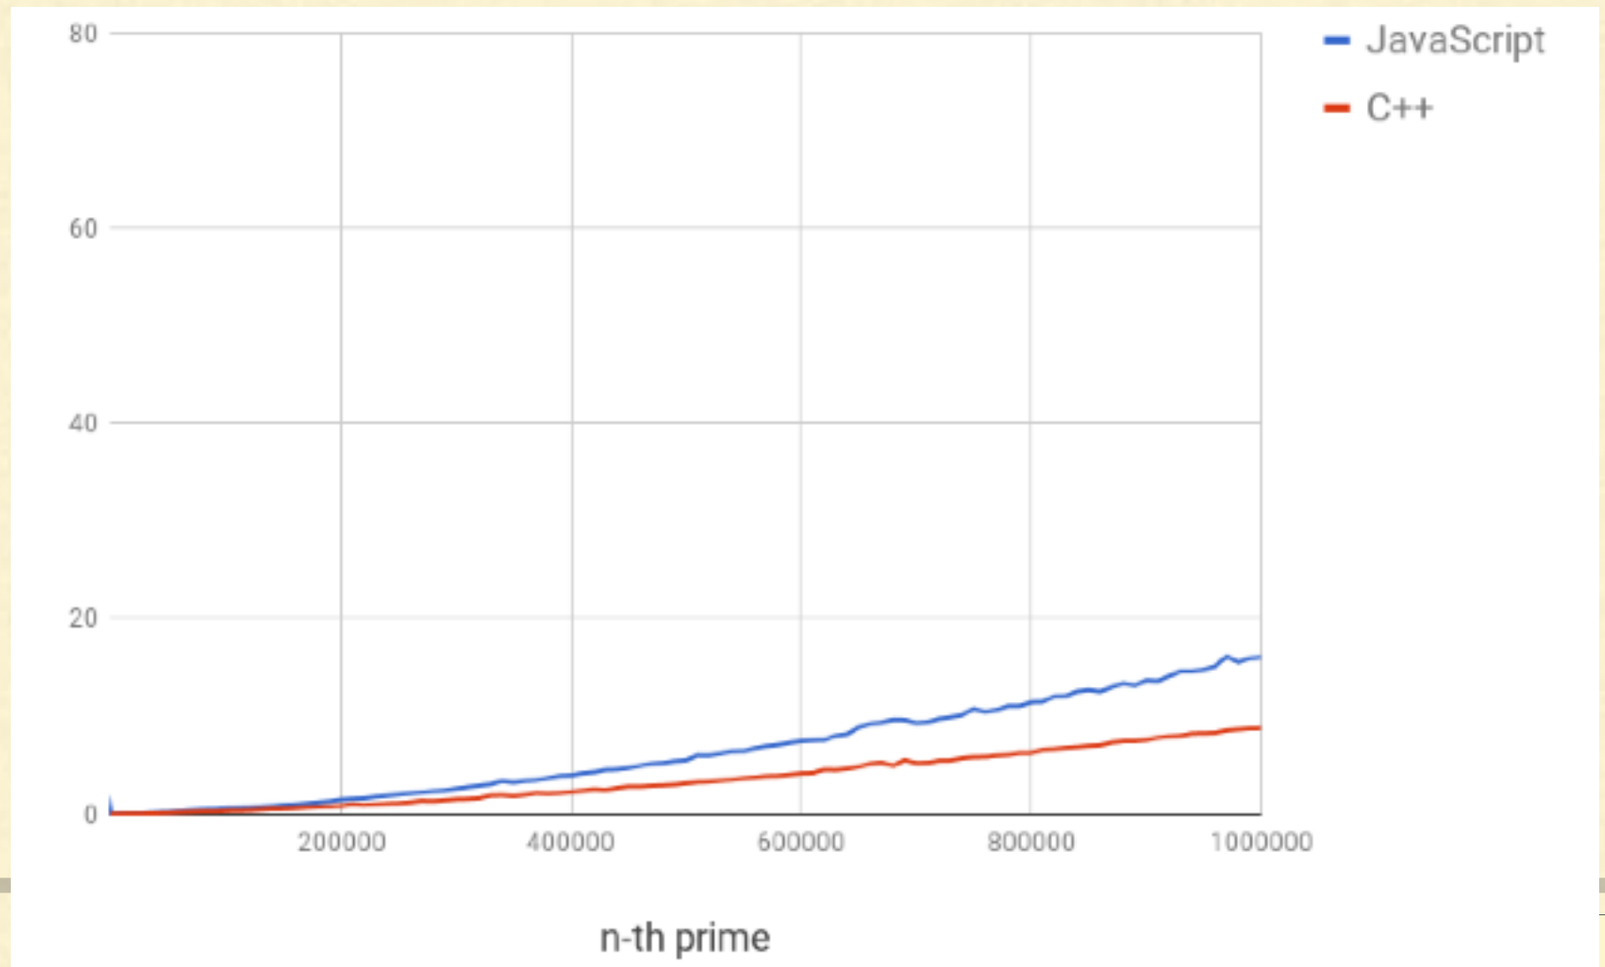

TRY IT

- `--trace-opt` and `--trace-deopt`: which functions are (de)optimized
- `--print-opt-code`: code generated by optimizing compiler
- `--trace-ic`: different object types in the caches