


Mathematical Thinking

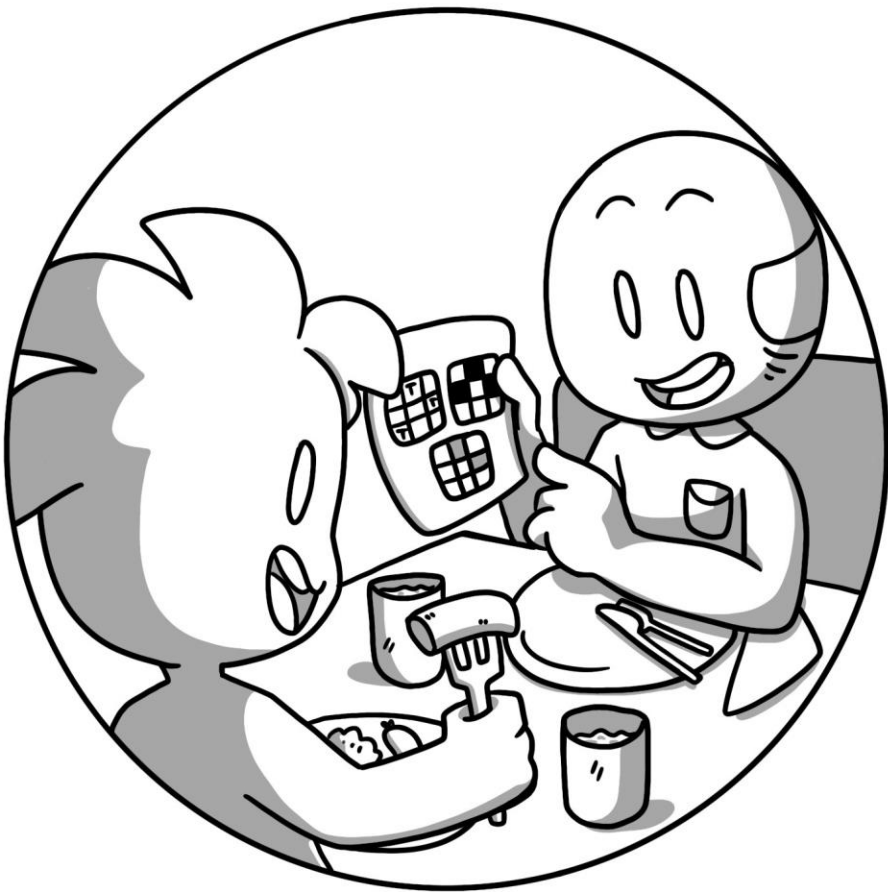

COMIXPLAIN

This comic was created as part of the Comixplain research project, funded by the University of Applied Sciences St. Pölten (USTP) through the Innovation Call 2022.

Project Team:

Victor-Adriel De-Jesus-Oliveira
Hsiang-Yun Wu
Christina Stoiber
Magdalena Boucher
Alena Boucher

Contact:

victor.oliveira@ustp.at

Illustrations:






Magdalena Boucher & Alena Boucher




University of
Applied Sciences
St. Pölten
EUDRES




Mathematical Thinking © 2025 by Comixplain Team
(Victor-Adriel De-Jesus-Oliveira, Hsiang-Yun Wu, Christina
Stoiber, Magdalena Boucher, and Alena Boucher) with
illustrations by Magdalena Boucher and Alena Boucher,
University of Applied Sciences St. Pölten (USTP), licensed
under [CC BY-SA 4.0](https://creativecommons.org/licenses/by-sa/4.0/)

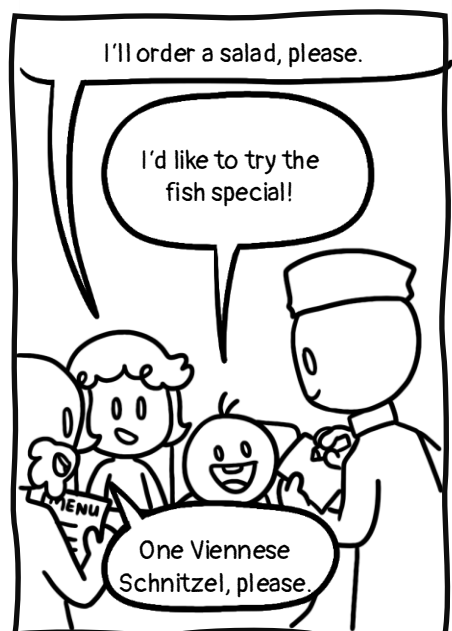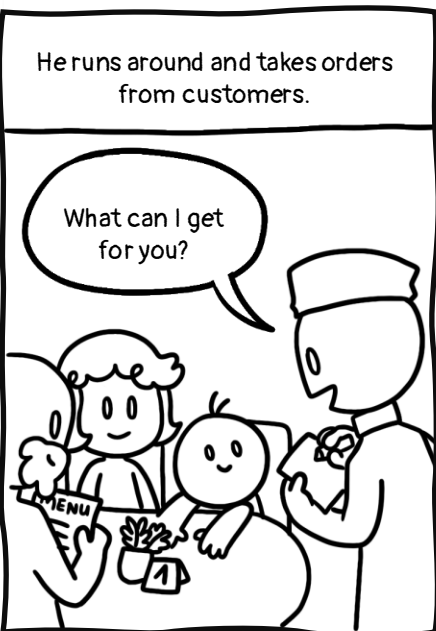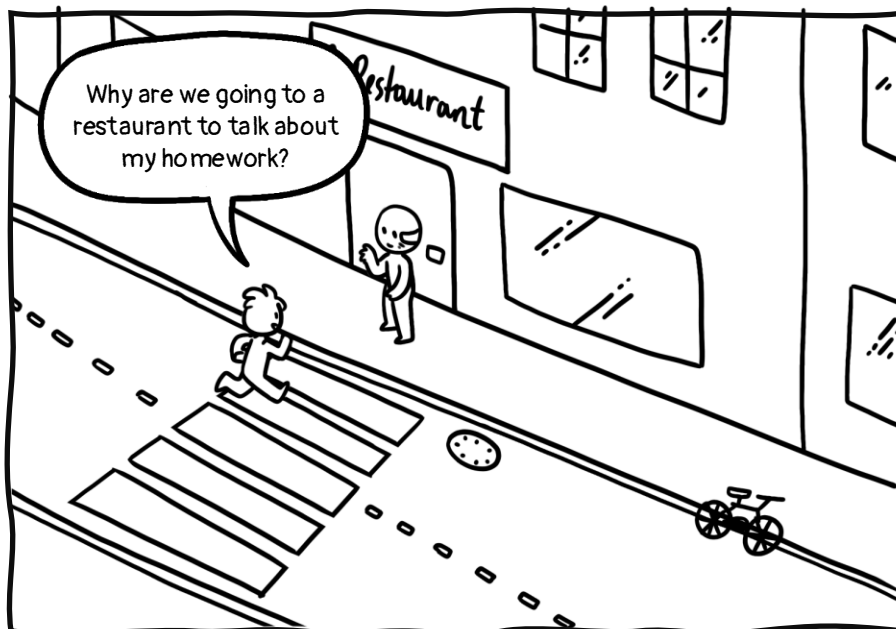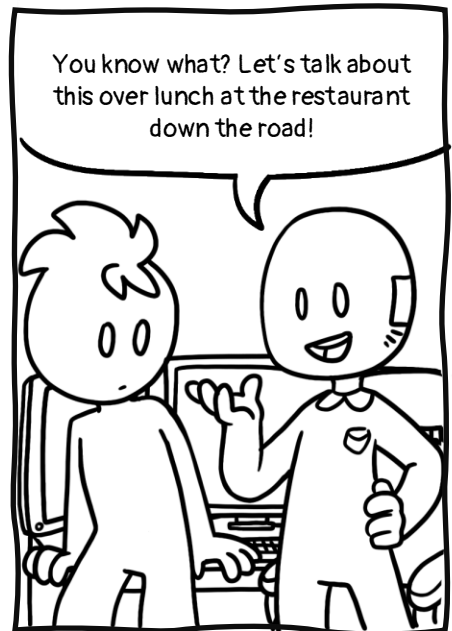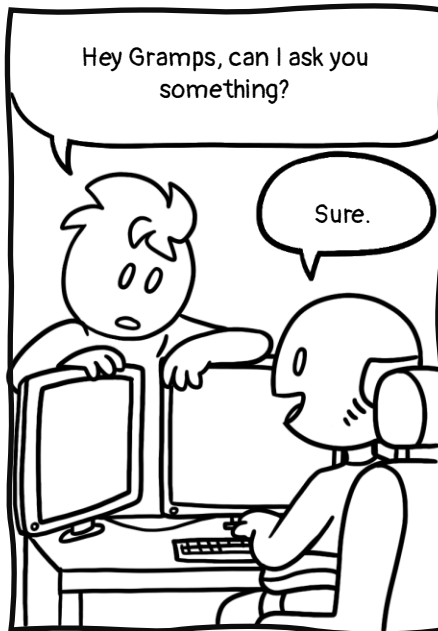

The waiter writes down the table's order...

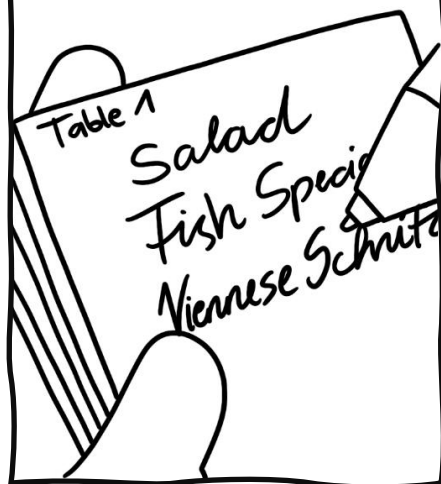

...and continues his work, until...

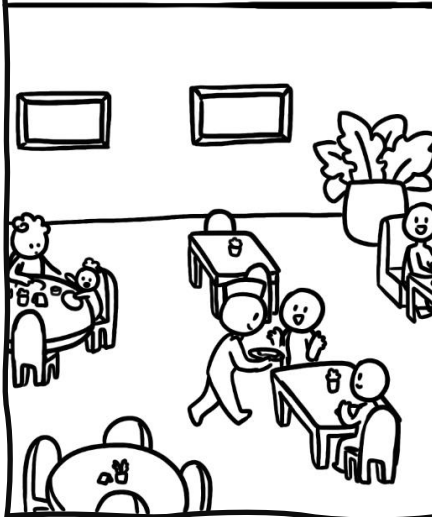

Food for table one is ready!



Now the waiter must give each customer the correct meal. Usually, he will ask who gets what.



For you, ma'am.

Who gets the fish?

That's for me!




For the last meal, he doesn't have to ask, because there is only one food and one customer left.



Now, we could take this scenario of getting the right meal to the right customer and try to find a mathematical approach to this „problem“.




We have three customers and three meals.

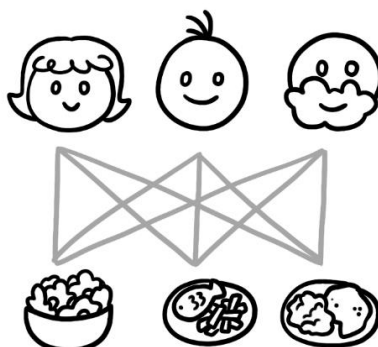

This means that there are nine possible combinations.



What happens as soon as one match is found?

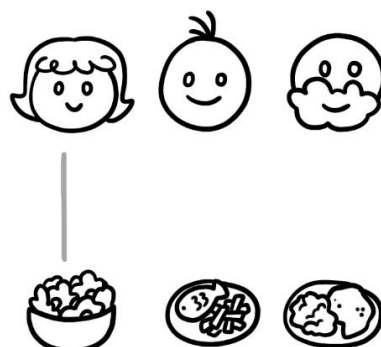

How many possibilities are left?

MOM KID DAD

So, as soon as one combination is fixed, the problem becomes easier
- there are only four possibilities left.

We can also describe this meal-to-customer-problem with mathematical notation. This transformation process is called „abstraction“.

Through the abstraction, the problem is described in a way that it can easily – mathematically – be applied to other cases. For example, the mom, who gets the salad, can be abstracted in the following way:

MOM wants her food

M (s)

The food for the mom has to be put into the brackets. She gets the salad, so we'll abbreviate that with "s".

Food goes here

M ()

↓

M (s)

M(s) is our mathematical notation for the sentence "The salad is given to the mom".

The same can be done with the other customer-meal-relationships as well:

M(s) means "The salad is given to the mom".

K(f) means "The fish is given to the kid".

D(vs) means "The Schnitzel is given to the dad".

If the salad is the correct food for the mom, then we can say:

M(s)=true

This describes a fact.

Mathematicians want to write as little letters as possible, so technically, instead of

M(s)=true

we could also write

m=true

Or x=true. Or a=true. Anything, really; you could even use an emoji. It's just a variable that represents a value.

We can describe everything the waiter knows at first in a mathematical way.

If each customer can get one meal, the mom can get either:

salad fish schnitzel

OR OR

In a mathematical notation, this would look like this:

s ∨ f ∨ vs

↑ this is the "math symbol" for OR

After having delivered two correct meals, he knows that the dad can't get the salad or the fish, since the following is already on the table:

AND

This means that the dad does NOT get the salad AND NOT the fish, which leaves only the schnitzel:

this is the "math symbol" for NOT

¬s ∧ ¬f = vs

↑ and this stands for AND


As the waiter, I could evaluate my performance mathematically, too. Basically, I want to check how many people got their food delivered correctly.



We can do this with a "matching game" of sorts. This table shows all possible combinations of customer and food:

	M	K	D
s			
f			
vs			


...and we have three tags  to put in a cell. But a  can only appear in one row or column, since every customer can only get one of the three meals.



In different cases, there might even be some restrictions - so-called constraints. For example, a kid can't get any alcohol. In that case, one of the cells would be "blocked".



For each meal and customer, we look whether the placement of our  matches the precondition. If it does, we get one point, if it doesn't, we don't. And if we get all 3 points, we win!

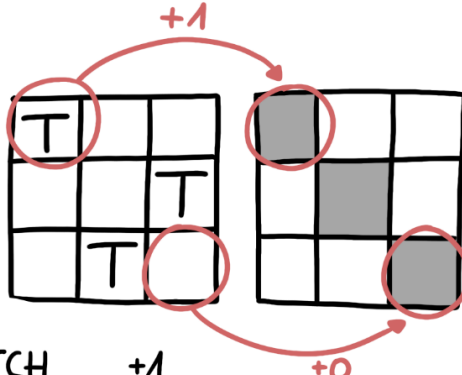

IF MATCH +1
IF NO MATCH +0

There could be many solutions to our "problem", but only one is correct. The correct solution would be the precondition, and we have to evaluate how our guess fits this precondition.

Tags						
	+	+	+	+	+	+
pre-condition						
	↓	↓	↓	↓	↓	↓
Evaluation						
	3	1	1	0	1	0

Oof, I'm full now... but hey, I finished my homework!

So that means (homework) = true?



Sources:

Ben-Ari, M. (2012). Mathematical logic for computer science. Springer Science & Business Media.

Devlin, K. J. (2012). Introduction to mathematical thinking (Vol. 331). Palo Alto, CA: Keith Devlin.

How to cite this document:

Wu, H.-Y., Boucher, A., Boucher, M., Stoiber, C., & De-Jesus-Oliveira, V.-A. (2025). *Mathematical Thinking*. University of Applied Sciences St. Pölten (USTP). <https://www.comixplain.cc>

This comic book was adapted from:

Mathematical Thinking © 2023 by Comixplain Team: Victor-Adriel De-Jesus-Oliveira, Hsiang-Yun Wu, Christina Stoiber, Magdalena Boucher, and Alena Ertl, with illustrations by Magdalena Boucher and Alena Ertl, all employed by Sankt Pölten University of Applied Sciences is licensed under CC BY-SA 4.0. To view a copy of this license, visit <http://creativecommons.org/licenses/by-sa/4.0/>