

CS460 Fall 2022

Name: Farhan Warsame


Github Username: fhwarsam

Due Date: 10/18/2022

Assignment 5: Scene Control with dat.GUI and Transformations!

Welcome back to framework country! This time we will use XTK and Three.js to study rotations.

In class, we connected the `dat.gui` library with XTK to control properties of a single cube. We also introduced the `transformer` object to rotate the cube along the world `x`- and `y` axis. In this assignment, we will create a website with two 3D scenes. One scene will be based on XTK, and the other will be based on Three.js. Then, we will use `dat.gui` to control objects in the scene. As a final result, each scene will contain two objects. We then can observe two different ways of rotating objects since XTK and Three.js.

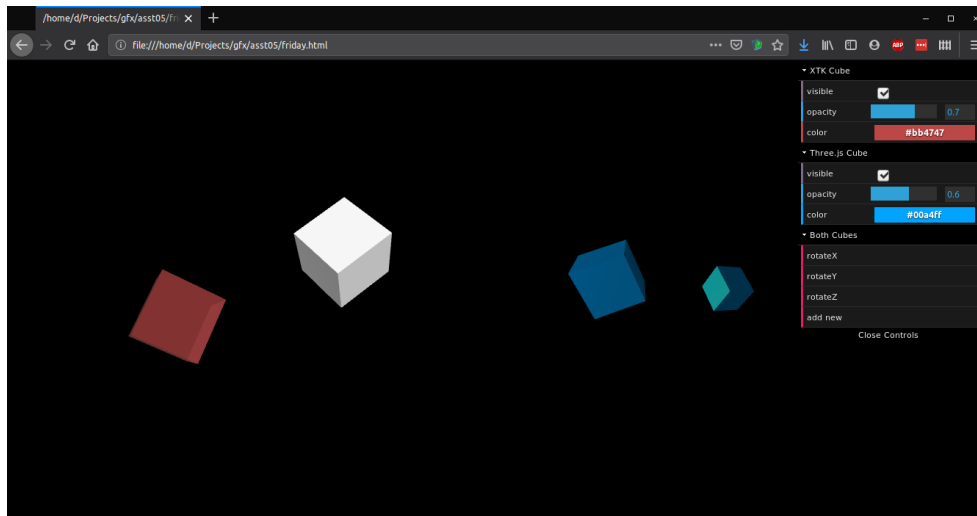

There is no starter code for assignment 5. Please start from scratch and save your code your fork as `05/index.html`.

Part 1 Coding: Configure the `<div>`s. (10 points)

We will create two viewports next to each other. Please add two `<div>` containers in the body of the HTML document. Name these containers `r1` and `r2` using the `id` property. Then, add styling to the header of the HTML document as follows:

```
<style>
  html, body {
    background-color: #000;
    margin: 0;
    padding: 0;
    height: 100%;
    overflow: hidden !important;
  }
  #r1 {
    width: 50%;
    height: 100%;
```

```

    float: left;
  }
  #r2 {
    width:50%;
    height:100%;
    float:left;
  }
</style>

```

You can verify the placement of the <div> containers using the Web Developer Tools. They should be next to each other and together, fill the whole window.

Part 2 Coding: Setup the XTK scene. (10 points)

Add the `xtk_edge.js` and `xtk_xdat.gui.js` libraries using the <script> tags as we did in class and in assignment 2. Then, create the `window.onload` function to set up the `X.renderer3D` and add a single `X.cube`. **Since we place the renderer into the `r1` container, we need to set `r.container='r1'`; just before calling `r.init()`;** Please check if the XTK cube appears by reloading the website.

Part 3 Coding: Setup the Three.js scene. (15 points)

For Three.js, please add the `three.min.js` and `TrackballControls.js` as we did in assignment 3. Then, follow our old code to setup a `THREE.Scene` with the `THREE.PerspectiveCamera`, the `THREE.WebGLRenderer`, the `THREE.AmbientLight`, the `THREE.DirectionalLight`, and the `THREE.TrackballControls`. **Since we now use a <div> container as our viewport, we need to do the following:**

```

var r2 = document.getElementById('r2'); // get the div container!!!
// ...
var ratio = r2.clientWidth / r2.clientHeight; // use the container's clientWidth and clientHeight
// rather than window.innerWidth and window.innerHeight
// ...
var camera = new THREE.PerspectiveCamera(fov, ratio, zNear, zFar);

var renderer = new THREE.WebGLRenderer({antialias:true});
renderer.setSize( r2.clientWidth, r2.clientHeight ); // again use the container
r2.appendChild( renderer.domElement ); // and append the domElement to the container

// ...

var controls = new THREE.TrackballControls( camera, r2 ); // pass the container to the camera

```

Please don't forget the `animate` loop! Then, please add the `THREE.BoxBufferGeometry` and the `THREE.MeshStandardMaterial` to create a new `THREE.Mesh` and add it to the scene. **When you reload the page, there should be now two cubes - one with XTK and one with Three.js!**

Part 4 Coding: Connect XTK to `dat.GUI` to control cube properties. (10 points)

Please create the `dat.GUI()` user interface for XTK. For this, we will use `gui.addFolder` and access the `visible`, `opacity`, and `color` properties as we did in class. After reloading, this should work right away.

Part 5 Coding: Introduce the helper object for `dat.GUI`. (5 points)

XTK's properties connect well with `dat.GUI` but for more advanced functionality, and especially to control Three.js, we will need a helper object. Please add the following code just before the `dat.GUI()` setup.

```

var controller = {

```

```

    'threejs_color': 0xffffffff
};

```

Part 6 Coding: Connect Three.js to dat.GUI to control cube properties. (5 points)

To connect dat.GUI and Three.js, we will first use `gui.addFolder` to group the controls. Then, we want to access the same properties as in the XTK case. However, connecting Three.js with dat.GUI is not as straight forward—even with a helper object :(. It requires the following code:

```

var threejsUI = gui.addFolder('Three.js Cube');
threejsUI.add(cube, 'visible');
threejsUI.add(cube.material, 'opacity', 0, 1).onChange( function() {
    cube.material.transparent = true;
});
threejsUI.addColor(controller, 'threejs_color').onChange( function() {
    cube.material.color.set( controller.threejs_color );
} );
threejsUI.open();

```

After reloading, this should allow to control the visibility, opacity, and color for both the XTK cube and the THREE.js cube.

Part 7 Coding: Extend the helper object for dat.GUI and rotate both cubes. (10 points)

We now want to rotate both cubes with three buttons. For this, we will add a new folder to dat.GUI as follows:

```

var both = gui.addFolder('Both Cubes');
both.add(controller, 'rotateX');
both.add(controller, 'rotateY');
both.add(controller, 'rotateZ');
both.open();

```

Then, we will extend the controller helper object with three rotate methods that rotate by 20 degrees:

```

var controller = {
    'threejs_color': 0xffffffff,

    'rotateX': function() {
        c.transform.rotateX(20);
        cube.rotateX(20);
    },
    'rotateY': function() {
        c.transform.rotateY(20);
        cube.rotateY(20);
    },
    'rotateZ': function() {
        c.transform.rotateZ(20);
        cube.rotateZ(20);
    }
};

```

In the code above, we assume that the XTK cube is accessible as `c` and the THREE.js cube is accessible as `cube`. After reloading, this should allow to rotate the cubes in X,Y, and Z using the three new buttons.

Part 8 Coding: Add a second cube. (10 points)

Please extend the controller helper object with a new method 'add new' and update the dat.GUI controls.

```

var controller = {
  // ...
  'add new': function() {
    // TODO!
  }
};

// ...

both.add(controller, 'add new');
both.open();

```

Now, please replace the `//TODO!` above with code that creates for both, XTK and Three.js, a second cube and adds it the viewport. **The new cube should be positioned at (50, 50, 50).** After reloading, and pressing 'add new', both viewports should show two cubes (maybe hidden by the dat.GUI panel).

Part 9 Explaining: Different rotations? (20 points)

So, if we rotate the cubes before adding the second cube, the rotations in XTK and Three.js are very similar. But, after adding the second cube the rotations are very different. Please try to explain what happens.

Both cubes rotate without the second cubes, however, they seem to rotate opposite direction. For example, if I press rotate-X button, the threejs cube rotates clock-wise while the XTK cube goes counter clock-wise. I could not understand the reason behind that. When I add a new cube, the rotation is the same but one of them disappears. It looks like I am not rendering one the cubes properly.

Part 10 Cleanup: Replace the screenshot above, activate Github pages, edit the URL below, and add this PDF to your repo. Then, send a pull request or assignment submission (or do the bonus first). (5 points)

Link to your assignment: <https://fhwarsam.github.io/AssignmentFive/xtk.html>

Bonus (33 points):

We will use `spector.js` to analyse the two viewports. If you did not install this extension yet, please do so by following the instructions at <https://spector.babylonjs.com/>. Then, you can use the extension to capture/record WebGL activity.


Part 1 (5 points): Please use `spector.js` to capture the viewport that uses XTK and insert a screenshot here.

✓ settings

Environment

sttling | Timeout: 5000 ms

Desktop | 483×721 px



▼ XTK Assignment

file:///C:/Users/fhwarsam/Projects/cs460student/05/xtk.html

type: navigate

url: file:///C:/Users/fhwarsam/Projects/cs460student/05/xtk.html

asserted events:

type: navigation

url: file:///C:/Users/fhwarsam/Projects/cs460student/05/xtk.html

title: XTK Assignment

▼ Click

type: click

target: main

frame: 0

selectors:

selector #1:

#r2 > canvas

deviceType: mouse

offsetX: 179.39999389648438


offsetY: 388

Part 2 (5 points): Please use `spector.js` capture the viewport that uses Three.js and insert a screenshot here.

▼ Click

type: click

target: main

selectors: 

selector #1:

body > div.dg.ac > div > ul > li:nth-child(3) > div > ul > li:nth-child(2) > div > span

offsetX: 10.39996337890625

offsetY: 18

Add frame

Add button

Add deviceType

Add duration

Add assertedEvents

Add timeout

▼ Click

type: click

target: main

selectors: 

selector #1:

body > div.dg.ac > div > ul > li:nth-child(3) > div > ul > li:nth-child(4) > div > span

offsetX: 19.39996337890625

Part 3 (23 points): Compare the `spector.js` recordings. (a) Please report if either XTK or Three.js use an indexed geometry. (b) Also, please explore and compare the length of the GLSL shader codes both libraries use. (c) And, please figure out how the object transformations are passed to the shaders.

YOUR_ANSWER