

Abstract

This thesis studies an algorithms for the detection of circles which are produced by particles travelling through the RICH detectors generating Cherenkov radiation. At the beginning there is an introduction to the linear hough transform and then to the hough transform to detect circles. The first case considered is when there is only one unknown (radius) and the center is known. The second case is with two unknowns where the radius is known but the center unknown ((x, y) coordinates of the center are the two unknown parameters). Lastly there is the case where all the parameters are unknown. For this case there is on the one hand the traditional approach studied with the conventional accumulator space and on the other hand a new approach is developed and studied. This approach works on the basis that each circle is defined by 3 points. Once there are three points the radius and the center can be calculated.

Contents

Abstract	1
1 Introduction	8
1.1 LHC - Large Hadron Collider	8
1.2 LHCb	9
1.2.1 Particle Identification	10
2 Theory	11
2.1 Cherenkov-Radiation	11
2.2 RICH Detector	12
2.3 Hough Transform	13
2.3.1 Linear Hough Transform	13
2.3.2 Circle Hough Transform	14
3 Methods	15
3.1 Conventional Hough-Transforms	15
3.1.1 1D: Known Center - Find Radius	15
3.1.2 2D: Known Radius - Find Center	16
3.1.3 Simple Example of 2 Circles Without Background	19
3.1.4 3D: Nothing is Known - Find Everything	21
3.2 Combinatorial approach	22
3.2.1 Generating the triples	23
3.2.2 Calculating the Circle given 3 points	23
3.2.3 Drawback	24
3.2.4 Possible Optimisation: Average Radius of Random Circles In a Unit Square	28
4 Results	29
4.1 1D Hough Transform Results	29
4.1.1 Overview of the results	29
4.1.2 1D Hough Transform - 2 circles, 0 background	30
4.1.3 1D Hough Transform - 5 circles, 30 background hits	32
4.2 2D Hough Transform Results	33
4.2.1 Overview of the results	33
4.2.2 2D Hough Transform, 2 circles, 0 background hits	33
4.2.3 2D Hough Transform, 5 circles, 30 background hits	36
4.2.4 2D Hough Transform, 6 circles, 200 background hits	36
4.3 3D Hough Transform Results	39
4.4 Combinatorial Approach Results	39

List of Tables

2.1	Angle vs Distance	14
3.1	Example of ways to split points into 2 lists.	26

List of Figures

1.1	The LHC ring with its 4 experiments: ATLAS, CMS, Alice and LHCb	8
1.2	LHCb Detector: RICH1 before the magnet and RICH2 after the magnet with silicon strip detector in between and muon and calorimeter at the end.	9
2.1	Cherenkov radiation	11
2.2	RICH-1 detector [4].	12
2.3	ρ - θ parametrisation	13
3.1	Using the probability density function of the normal distribution to calculate the score of a point in order to have a well defined maximum if a point lies directly on the circle and $\eta(r) = 0$	16
3.2	Pseudo code for the 1D Hough Transform. r is an array of length 1001 so η will also be an array of length 1001. Scores is where the score for each iteration is stored. For each point the score is computed and added to the scores array and at the end the index with the highest score is the index we need to get the radius.	16
3.3	Pseudo code for the 2D Hough Transform. x bins and y bins are arrays of length 1001. Here we use array broadcasting in order to avoid for loops and the weights can be evaluated in one line. This means that the x and y variables have dimension (1001,1001) but they don't take up that much memory. The x variable for example just broadcasts its value from the first row down to all the other rows and for y it broadcasts the first column to all the other columns. Weights variable is a 1001 by 1001 matrix. Again the entry with the highest score is the candidate for a possible circle center and if found stores in a final variable called circle.	17
3.4	2D weight matrix in the first iteration of the Hough Transform algorithm. The circles have similar radiuses (0.170 and 0.158) which explains one clear maximum in the bottom left and a smeared one a bit to the top right.	19
3.5	2D weight matrix in the second iteration. Points that satisfied the condition being less than a certain ϵ away from the radius found in the first iteration are removed leaving (hopefully) only points available that belong to the second circles.	20
3.6	The circumradius (R) and the circumcenter (P) of a circle defined by three points.	24

3.7	Scaling of the algorithm. Binomial Growth with $\binom{N}{3}$ compared with the approximation $\frac{N^3}{3!}$. So the algorithm runs in the order of $\mathcal{O}(n^3)$	25
3.8	Number of combinations with $\binom{N}{3}$ compared to the number of combinations generated from $\binom{N/2}{3}$	26
3.9	Distribution of points per circle.	27
3.10	The probability when splitting randomly a list of x points into two that one list has more than 10 points.	27
4.1	Circles found by the 1D Hough Transform. The circle in Figure 4.1a has its center in the origin so the algorithm did find the circle.	30
4.2	These are the circles as generated by the simulation. All of these examples were correctly solved by the 1D Hough Transform. . .	30
4.3	Radius score for the 1D Hough Transform for 2 circles with 0 background. The respective radiuses are 0.191 and 0.108	31
4.4	Radius scores for all the centers for an event with 5 circles. . . .	32
4.5	The reconstructed result on the left while the circles from the simulated data is on the right.	32
4.6	Circles found by the 2D Hough Transform. The circle in Figure 4.1a has its center in the origin so the algorithm did find the circle.	34
4.7	These are the circles as generated by the simulation. All of these examples were correctly solved by the 2D Hough Transform. . .	34
4.8	Circles found by the algorithm on the left and the correct results on the right. Here the 2D Hough Transform fails to find the magenta colored circle.	34
4.9	Center score for the 2D Hough Transform for 2 circles with 0 background.	35
4.10	Although already shown before for completeness the 2 circle 2D Hough Transform result. Left side the result from the algorithm on the right side the correct result from data.	35
4.11	Center scores for all the centers for an event with 5 circles. . . .	36
4.12	The reconstructed result on the left while the circles from the simulated data is on the right.	36
4.13	Center scores for 6 circles with 200 background hits. There is a lot more going on because of all the background hits that by accident contribute to a high score all over the grid.	37
4.14	On the left side the wrong result obtained by the 2D Hough Transform and the correct one on the right side	37
4.15	Old center score in the top row for circle 5 (magenta) and 6 (yellow). And below the same circles this time with the new $\sigma = 0.0005$. Something that quite clear is how big the influence of sigma is for the center score. With a σ of 0.001 just by eye there seem to be many similar maxima whereas with a $\sigma = 0.0005$ the maximas get much more distinct.	38

- 4.16 Again on the left the calculated result and the result taken from data on the right. With the new σ the algorithm is able to calculate all the circles correctly. 39

1 Introduction

1.1 LHC - Large Hadron Collider

The Large Hadron Collider (LHC) is a proton-proton collider. It is the largest and highest-energy particle accelerator in the world. It was built by the European Organisation for Nuclear Research from 1998 to 2008. It aims to test the predictions of different theories in high-energy particle physics, and in particular for the search of the Higgs boson (which has been confirmed this year) and signs for new physics beyond the Standard Model of particle physics. The LHC lies in a tunnel 27 km in circumference and 100 m below the surface of the French-Swiss border near Geneva. The LHC was built in collaboration with over 10000 scientists and engineers from over 100 countries. The accelerator has been running with a center of mass energy $\sqrt{s} = 13$ TeV since 20 May 2015.

The core physics program for the period 2014-2015 includes:

- <COMMENT: PROGRAM>

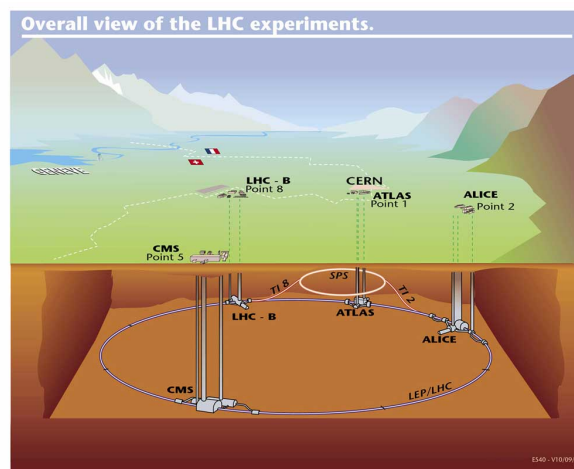


FIG. 1.1 – The LHC ring with its 4 experiments: ATLAS, CMS, Alice and LHCb

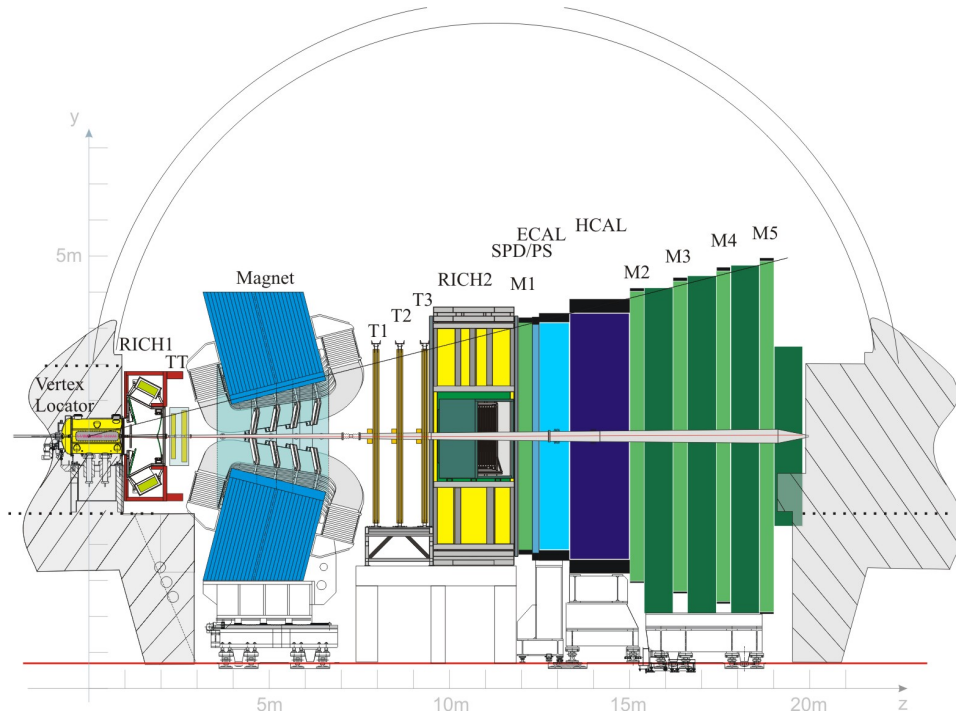


FIG. 1.2 – LHCb Detector: RICH1 before the magnet and RICH2 after the magnet with silicon strip detector in between and muon and calorimeter at the end.

1.2 LHCb

The LHCb is one of the four big experiments conducted at the LHC (ATLAS, CMS and ALICE being the other 3). The aim of this experiment is the study of decays of particles containing b and \bar{b} particles (B-Mesons). During collisions these particles don't fly in all direction but rather stay close to the beam pipe. This is reflected in the design of the LHCb detector which is a forward arm spectrometer 20 meters long with subdetectors along the beam pipe as seen in figure 1.2.

A quick overview of the detector parts [2].

VELO The VERTex LOcator is where the beams collide and b/\bar{b} are produced. The VELO measures the distance between the photon collision point and the point where B particles decay. Thus the B particles are not measured directly but inferred from the separation of these two points.

RICH The RICH detectors are built for particle identification. One detector on each side of the magnet are used to cover different momentum ranges. RICH detectors work by measuring emissions of Cherenkov radiation which is emitted if a particle travels faster than the speed of light through a certain medium (often compared to breaking the sound barrier).

Magnet A particle normally moves in a straight line but entering a magnetic field causes the path of charged particles to curve according to the Lorentz force

$$\mathbf{F} = q (\mathbf{E} + (\mathbf{v} \times \mathbf{B}))$$

thus allowing to determine the charge of the particle. Also the track curvature can be used to infer the momentum of the particle.

Tracking System The tracking system is based on 4 large tracking stations, each covering about 40 m^2 . It is used to determine the position where the particle passed the detector. In the silicon detector a charge gets deposited on a strip which defines the position and in the gas-filled tubes of the outer tracker a passing particle ionizes the gas molecules producing electrons.

Calorimeters They are designed to stop particles and measuring the amount of energy lost while coming to a halt. The design of the stations is sandwich like. One metal plate and one plastic plate. A particle hitting the metal plate causes a secondary shower which induces a UV light in the plastic plate. The energy lost is proportional to the amount of light emitted. It is the main way of identifying particles with no charge (e.g. photons, neutrons).

Muon system Muons are present in the final stage of B decays and thus important for the LHCb experiment. There are 5 rectangular stations increasing in size at the end of the detector. The total area covered by these stations is about 435 m^2 . Each station is filled with a combination of 3 gases. Passing muons react with this mixture and wire electrodes detect the result.

1.2.1 Particle Identification

An important requirement at LHCb is the particle identification. This is handled by CALO, Muon and RICH sub-detectors. The Calorimeters beside measuring energies and positions of electrons, photons and hadrons also provide identification of said particles. The Muon system identifies muons to a very high level of purity which is essential for many J/Ψ 's in their final states.

Hadron identification is very important for decays where the final states of interest are purely hadronic. The LHCb RICH system provides. It is composed of two detectors. One positioned upstream of the dipole magnet and the other one positioned downstream of the dipole magnet. The optics is arranged similarly in both sub-detectors: spherical focusing mirrors project the Cherenkov photons onto a series of flag mirrors which then reflect them onto a series of photon detector arrays, located outside the detector acceptance [5].

2 Theory

2.1 Cherenkov-Radiation

The speed of light in vacuum, c , is a universal physical constant. According to Einstein's special theory of relativity, c is the maximum speed at which all matter (or information) in the universe can travel. The speed at which light propagates in a medium, however, can be significantly less than c .

Cherenkov radiation results when a charged particle travels through a dielectric medium with a speed greater than the speed of light through said medium. Moreover, the velocity that must be exceeded is the phase velocity (v_{Phase} or short v_p) and not the group velocity $v_{\text{Group}} = \frac{\partial \omega}{\partial k}$.

$$v_p = \frac{\lambda}{T} \quad \text{or} \quad \frac{\omega}{k}$$

As a charged particle travels through the medium, it disrupts the local electromagnetic field. If the particle travels slowly then the disturbance elastically relaxes to the mechanical equilibrium as the particle passes. However, if the particle travels fast enough, the limited response speed of the medium means that a disturbance is left in the wake of the particle, and the energy in this disturbance radiates as coherent shockwave.

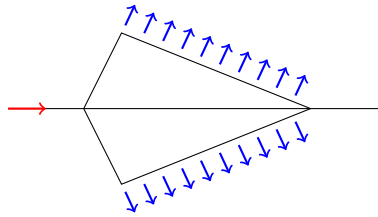


FIG. 2.1 – Cherenkov radiation

$$\begin{aligned} x_p &= v_p \cdot t = \beta ct \\ x_{\text{em}} &= v_{\text{em}} \cdot t = \frac{c}{n} t \\ \cos \theta &= \frac{x_p}{x_{\text{em}}} = \frac{\frac{c}{n} t}{\beta ct} = \frac{1}{n\beta} \end{aligned}$$

which is independent from the angle θ .

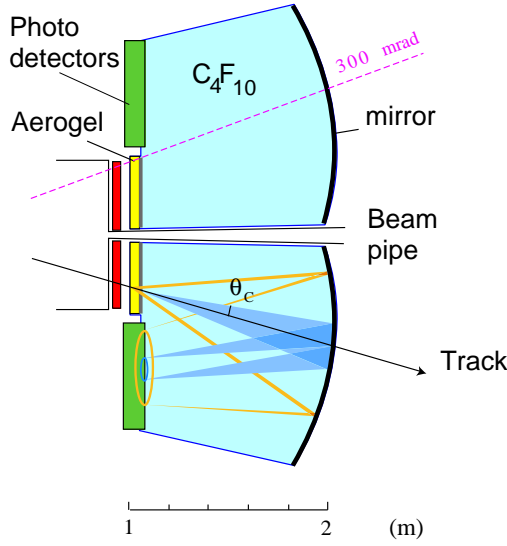


FIG. 2.2 – RICH-1 detector [4].

2.2 RICH Detector

Particle identification is a fundamental requirement at the LHCb experiment. Meaningful CP-violation measurements are only possible if hadron identification is available hence the ability to distinguish between kaons and pions is essential. The LHCb experiment is unique in the sense that its hadronic particle identification is handled only by the RICH sub-detectors. This means – as mentioned before – that the RICH has to cover a wide range of momentum (1-100 GeV/ c).

The RICH-1 in front of the magnet covers a lower momentum range from 1-60 GeV/ c . It is composed of 5 cm thick aerogel tiles arranged around the beam pipe. The aerogel with $n = 1.03$ is suited for the lowest momentum tracks. Directly behind the aerogel is circa 1 m of C_4F_{10} which covers the intermediate region of momentum. For the highest momentum tracks, gaseous CF_4 is used in the RICH-2.

There is a strong correlation between the polar angle and momentum of the tracks. Tracks with a wider angle often have lower momentum. That is why RICH-1 with the aerogel is located before the dipole magnet so tracks with low momentum will be covered before they are swept out of the acceptance by the magnet.

Both sub-detectors are located in low magnetic field regions to keep the tracks straight while they pass through the radiators.

2.3 Hough Transform

The Hough-Transform is a feature extraction technique used in image analysis, computer vision and digital image processing.

the purpose is to find imperfect instances of objects within a certain class of shapes by a voting procedure. This voting procedure is carried out in a parameter space from which object candidates are obtained as local maxima in a so called accumulator space that is explicitly constructed by the algorithm for computing the Hough-Transform.

Initially the Hough-Transform was concerned with finding straight lines but has been extended to identifying positions of arbitrary shapes, such as circles and ellipses.

2.3.1 Linear Hough Transform

A linear function is normally defined as the following:

$$f(x) = m \cdot x + b$$

where m is the slope of the line and b the intercept. For the Hough-Transform however, this representation is not ideal. For a vertical line m would go to infinity which gives us an unbound transform space for m . For this reason Duda and Hart suggested the ρ - θ parametrization [3].

$$r = x \cos \theta + y \sin \theta$$

where r is the distance from the origin to the closest point in the line and θ is the angle between the x -axis and the line connecting the origin with that closest point.

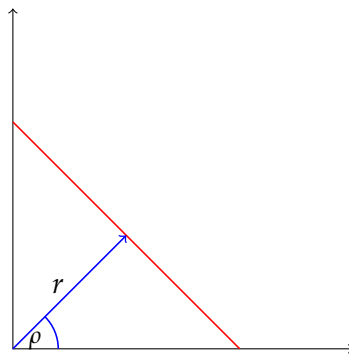


FIG. 2.3 – ρ - θ parametrisation


This means given a single point in the plane, the set of all lines going through this point form a sinusoidal curve in ρ - θ space. Another point that lies on the

TAB. 2.1 – Angle vs Distance

Angle	Distance
0	2.334

same straight line in the plane will produce a sinusoidal curve that intersects with the other at $(\rho-\theta)$ and so do all the points lying on the same straight line.

Example of a Linear HT



2.3.2 Circle Hough Transform

For this thesis we are interested in circle detection so we need to adapt our linear Hough Transform in order to find circles. In a two dimensional space, a circle can be described by:

$$(x - c_x)^2 + (y - c_y)^2 = r^2 \quad (2.1)$$

Where (c_x, c_y) is the center of the circle and r the radius. The possible parameters for the parameters space are now c_x, c_y and r . This means if we know the center of the circle the parameter space is one-dimensional and if we know the radius of the circle our parameter space is two-dimensional and of course if we know nothing the parameter space is three-dimensional.

3 Methods

3.1 Conventional Hough-Transforms

In the following subsections we discuss the conventional Hough-Transforms for the case of a one, two and three dimensional parameter space. These methods were mainly considered to get an idea what was possible with the conventional hough transform. For closer study the method of choice was the combinatorial approach discussed in depth in section 3.2.

3.1.1 1D: Known Center - Find Radius

In this case the center(s) of the circle(s) is/are known so only the radius is missing. For the radius there is an array with a minimum value and increasing by a defined stepsize to the maximum possible radius value. For the example in this thesis the minimum is 0, the maximum radius is 1 and stepsize equal to 0.001. Introducing following scoring function $\eta(r)$ allows to find the right radius.

$$\eta(r) = (c_x - x)^2 + (c_y - y) - r^2 \quad (3.1)$$

and using this in a gauss distribution

$$w(\eta) = \frac{1}{\sqrt{2\pi}\sigma} \exp\left(\frac{-\eta^2}{2\sigma^2}\right) \quad (3.2)$$

This is of course just the circle equation with c_x, c_y being the center of the circle, x, y are the data points and r the radius. So if a lot of the data points have the same distance r from the circle center there will be a high score for this particular radius. The index for the highest score can then be used to find the corresponding radius.

Runtime

The runtime of this algorithm is of $\mathcal{O}(n)$ where n is the dimension of the radius array.

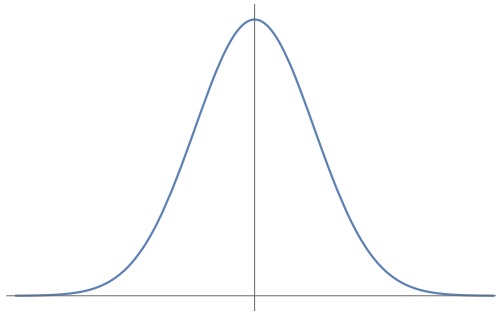


FIG. 3.1 – Using the probability density function of the normal distribution to calculate the score of a point in order to have a well defined maximum if a point lies directly on the circle and $\eta(r) = 0$.

```

DIMENSION = 1001
r= linspace(0,1,DIMENSION)
for c in centers:
    scores = zeros(DIMENSION)
    for x,y in allPoints:
        s = 2*BIN_WIDTH
        eta = (c_x-x)**2 + (c_y-y)**2 - r**2
        scores += 1. / ( sqrt( 2 * Pi ) * s )
                * exp( -( eta ** 2 )
                    / ( 2 * s ** 2 ) )

    index = max(scores)
    circle = {}
    circle['center'] = c
    circle['radius'] = r[index]

```

FIG. 3.2 – Pseudo code for the 1D Hough Transform. r is an array of length 1001 so η will also be an array of length 1001. Scores is where the score for each iteration is stored. For each point the score is computed and added to the scores array and at the end the index with the highest score is the index we need to get the radius.

3.1.2 2D: Known Radius - Find Center

Now the radius is known and the x and y coordinate of the center (c_x, c_y) are unknown. Now instead of a one dimension the accumulator is 2 dimensional. The range of that space is simply the dimension of the plane which for this thesis is generally $[-0.5, 0.5]$. Size of the bins is 0.001. So if the plane was 1 m wide the accuracy of the accumulator is up to 1 mm. As in the one dimensional case we use the scoring function 3.1 in combination with the weight function 3.2.

Runtime

The runtime of this algorithm is $\mathcal{O}(n^2)$ where n is the dimension of the histogram. The calculation of the weight has to be done for each data point of the 2D histogram. So in a 1000×1000 histogram with 400 data points we calculate 400'000'000 times the weight of a grid point. Reducing the dimensions of the histogram weakens the accuracy of the whole algorithm but can speed up the calculations considerably. With a 1000×1000 histogram the resolution in each space dimension is 1 mm. The RICH Technical Design Report states the resolution of the HPD is $2.5 \text{ mm} \times 2.5 \text{ mm}$.

The need (not entirely true) to calculate the weight for each grid point and data point means that there is a loop over data points and two loops for the x and y coordinate of the grid. To improve upon that there is the possibility of array broadcasting.

```
DIMENSION = 1001
xbins = linspace(-0.5,0.5,DIMENSION)
ybins = linspace(-0.5,0.5,DIMENSION)
x, y = broadcast_arrays( xbins[..., newaxis],
                        ybins[newaxis,...] )

for r in Radiuses:
    weights = zeros( (DIMENSION,DIMENSION) )
    for xd,yd in allPoints:
        s = 2*BIN_WIDTH
        eta = (xd-x)**2 + (yd-y)**2 - r**2
        weights += 1. / ( sqrt( 2 * pi ) * s )
                    * exp( -( eta ** 2 )
                      / ( 2 * s ** 2 ) )
    i, j = argmax(weights)
    removeUsedPoints()
    circle['Center'] = (xbins[i], ybins[j])
    circle['Radius'] = r
```

FIG. 3.3 – Pseudo code for the 2D Hough Transform. `xbins` and `ybins` are arrays of length 1001. Here we use array broadcasting in order to avoid for loops and the weights can be evaluated in one line. This means that the x and y variables have dimension (1001,1001) but they don't take up that much memory. The x variable for example just broadcasts its value from the first row down to all the other rows and for y it broadcasts the first column to all the other columns. Weights variable is a 1001 by 1001 matrix. Again the entry with the highest score is the candidate for a possible circle center and if found stores in a final variable called `circle`.

Array broadcasting

Consider following one dimensional arrays where x is a 1D histogram binning entries from 1 to 4 and same for y .

$$x = [1, 2, 3, 4]$$
$$y = [1, 2, 3, 4]$$

Now all combinations between an element of x and y represent a 2D grid $((1,1), (1,2), \dots)$. So to iterate through all those grid points one would have to create 2 for-loops iterating through x and y

```
def funcB():
    a = np.random.randn(100)
    b = np.random.randn(100)
    for x in a:
        for y in b:
            print (1-x)^2 + (2-y)^2 - 9
```

This is not only slow but also doesn't look too nice if there are even more loops. Broadcasting now turns this one dimensional array of length n into an n by n matrix

$$x = \begin{bmatrix} 1 & 1 & 1 & 1 \\ 2 & 2 & 2 & 2 \\ 3 & 3 & 3 & 3 \\ 4 & 4 & 4 & 4 \end{bmatrix}$$

and

$$y = \begin{bmatrix} 1 & 2 & 3 & 4 \\ 1 & 2 & 3 & 4 \\ 1 & 2 & 3 & 4 \\ 1 & 2 & 3 & 4 \end{bmatrix}$$

And with this the loops can be omitted:

```
def funcA():
    a = np.random.randn(100)
    b = np.random.randn(100)
    x, y = np.broadcast_arrays(a[... , np.newaxis],
                               b[np.newaxis, ...])
    print (1-x)^2 + (2-y)^2 - 9
```

In this case this prints a 4 by 4 array with the function evaluated for each combination of entries of x and y

$$\begin{bmatrix} -8 & -9 & -8 & -5 \\ -7 & -8 & -7 & -4 \\ -4 & -5 & -4 & -1 \\ 1 & 0 & 1 & 4 \end{bmatrix}$$

A runtime comparison shows

```
In [3]: %timeit funcA()  
10000 loops, best of 3: 76.8 us per loop
```

```
In [4]: %timeit funcB()  
100 loops, best of 3: 7.99 ms per loop
```

So the version with broadcasting is 100 times than the double loop. And the memory consumption is moderate since they broadcasted entries aren't new memory locations but just refer to the initial array.

Optimizations

It was mentioned before that for each data point the weight for the whole grid has to be calculated, that is not true. In the 2D case each grid point is a potential center for a circle only if it is not further away and a threshold radius R_T , so if a grid point is further away than this threshold radius this calculation could be skipped. This could probably be done even smarter with the use of some sub grid so only points in the surrounding sub grids.

3.1.3 Simple Example of 2 Circles Without Background

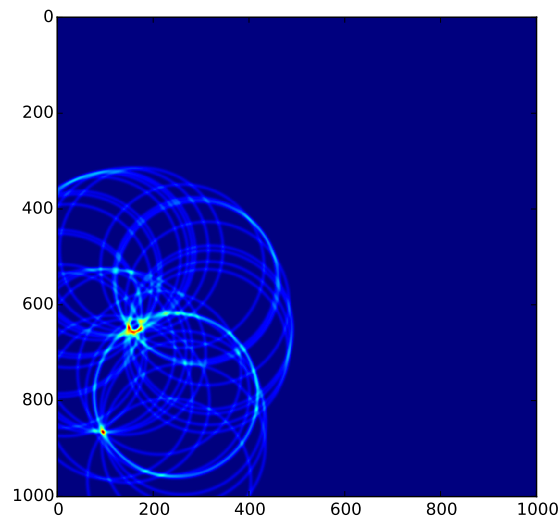


FIG. 3.4 – 2D weight matrix in the first iteration of the Hough Transform algorithm. The circles have similar radiuses (0.170 and 0.158) which explains one clear maximum in the bottom left and a smeared one a bit to the top right.

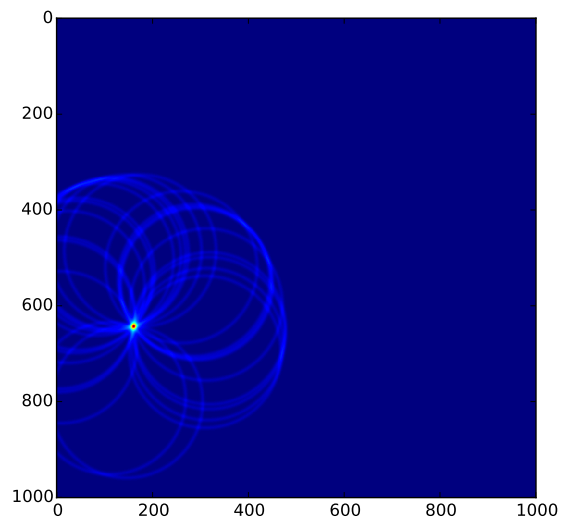


FIG. 3.5 – 2D weight matrix in the second iteration. Points that satisfied the condition being less than a certain ϵ away from the radius found in the first iteration are removed leaving (hopefully) only points available that belong to the second circles.

3.1.4 3D: Nothing is Known - Find Everything

In this section all that is known are the data points and the algorithm has to retrieve both center and radius of the circles. The accumulator space is now in three dimensions. Two for the center coordinate and one for the radius. Similar as to the 2D case array broadcasting is used again to speed up the calculations of the weight. Furthermore it is the first time that the algorithm has to decide itself whether or not all circles have been found since there unlike in the previous two cases there isn't any information available about the circles so a condition has to be set to decide when there are no more circles.

```
xbins = np.linspace(-0.5,0.5,DIMENSION)
ybins = np.linspace(-0.5,0.5,DIMENSION)
rbins = np.linspace(0,0.5, R_DIMENSION)

x,y,r = np.broadcast_arrays(\
    xbins[np.newaxis,...,np.newaxis],\
    ybins[np.newaxis,np.newaxis,...],\
    rbins[...,np.newaxis,np.newaxis])
```

Broadcasting the x, y, r arrays to speed up the calculations. To display the x, y plane for a fixed radius it is important that $rbins$ is broadcast along the 2nd and 3rd axis.

```
while True:
    weights = np.zeros(\
        (R_DIMENSION, DIMENSION, DIMENSION))

    for x0,y0 in data['allPoints']:
        s = 0.001
        eta = (x-x0)**2 + (y-y0)**2 - r**2
        weights += 1./ ( sqrt( 2 * sconst.pi ) * s ) * \
            np.exp( -( eta ** 2 ) / \
                ( 2 * s ** 2 ) )

    index = np.argmax( weights )
    rr,ii,jj = np.unravel_index( index,
        (R_DIMENSION, DIMENSION, DIMENSION))
    score = weights[rr][ii][jj]
    if score < 2100:
        break
```

As before a scoring function is used but this time the scoring function is of the form $f(x, y, r)$ and each point in $weights$ then stands for the score of the x, y, r entries and their respective value.

Since there is now no information about any of the circles it is unknown how many circles there are so a condition is needed to stop looking for circles. This algorithm uses a simple score threshold that whenever the highest score of the

weight matrix is less than a defined threshold the algorithm stops and it is assumed that all circles have been found.

```

circle['center'] = (xbins[ii], ybins[jj])
circle['radius'] = rbins[rr]
circles.append(circle)

used_xy += [tup for tup in data['allPoints'] if
    abs( ( tup[0] - circle['center'][0] ) ** 2 +
        ( tup[1] - circle['center'][1] ) ** 2 -
        circle['radius'] ** 2 ) < 2 * 0.001]
data['allPoints'][:] =
    [tup for tup in data['allPoints'] if
    abs( ( tup[0] - circle['center'][0] ) ** 2 +
        ( tup[1] - circle['center'][1] ) ** 2 -
        circle['radius'] ** 2 ) >= 2 * 0.001]

```

Finally with the indices found the center and radius are retrieved from the respective bins and saved to a circle dictionary. In order to avoid finding the same circle twice or use data points twice a check is being done to see whether a data point fulfills the requirement of being a circle point. If that's the case that point will be put into another list of already used points and the algorithm will not use this point anymore.

Runtime

Assuming that the radius array has the same length as the two space dimensions means that the complexity of this algorithm is of order $\mathcal{O}(N^3)$. As the 1D and 2D Hough Transform the accuracy directly depends on the binning. Same as for the 2D Hough Transform too match the resolution of the HPD of the RICH detector a binning of 400 makes sense if the detector dimensions are $1\text{ m} \times 1\text{ m}$.

Optimisations

As for the 2D HT introducing some kind of sub grid for the x, y plane so only grid points in the vicinity of a data point are used for calculating the score.

3.2 Combinatorial approach

A circle is uniquely defined by 3 points and radius and center can be calculated. If there are 15 points lying on the same circle there are 455 possible

combinations of triplets According to the binomial distribution.

$$\binom{N}{3} = \frac{N!}{k!(N-k)!}$$

Calculating the center and radius for these 455 triplets should result in the same center and same radius for all the triplets (floating point inaccuracy not considered).

Having one background hit in addition to the 15 circle hits increases the triplet number to 560. The triplets with points solely consisting of points on the circle still have the same center and radius but the new combinations that now include a background hit will vary and it is unlikely that any two triplets that include the background point will have the same center and radius. Here is an overview of the algorithm used for this thesis.

1. Build all possible triples of points given the data points
2. For all the point triples calculate the center and the radius of the potential circle
3. Due to constraints in the radius many of the circles with a radius bigger than a certain threshold will be dropped.
4. Create a histogram with the radius distribution. Peaks in the radius distribution hint to a circle.
5. Scan the radius histogram for peaks and look at the center point histogram for the given radius of a peak. If there is also a peak in the center point histogram the set of the points of the triples lie on a circle with a radius and center given by the histogram peaks.

3.2.1 Generating the triples

For generating the triples the built-in function `itertools.combinations()` of python is used. The input is an iterable, in our case a list of tuples (each tuple is the x and y coordinate of a data point) which is used to create all possible combinations of triples (of said tuples).

3.2.2 Calculating the Circle given 3 points

Let (A, B, C) be a triple of points in a 2D plane and a, b, c the length of the sides opposite to the respective corner. The semiperimeter is defined as

$$s = \frac{a + b + c}{2} \tag{3.3}$$

using this we can calculate the radius R of the circumcircle of triangle \overline{ABC} :

$$R = \frac{abc}{4\sqrt{s(a+b-s)(a+c-s)(b+c-s)}} \tag{3.4}$$




FIG. 3.6 – The circumradius (R) and the circumcenter (P) of a circle defined by three points.

We have $\lambda_1, \lambda_2, \lambda_3$ as the barycentric coordinates of the circumcenter:

$$\lambda_1 = a^2 \cdot (b^2 + c^2 - a^2) \quad (3.5)$$

$$\lambda_2 = b^2 \cdot (a^2 + c^2 - b^2) \quad (3.6)$$

$$\lambda_3 = c^2 \cdot (a^2 + b^2 - c^2) \quad (3.7)$$

Multiplying a matrix consisting of the column vectors of A, B, C with a column vector of $\lambda_1, \lambda_2, \lambda_3$ and dividing the resulting vector by the sum of the barycentric coordinates (for normalization) leads to the circumcenter of the triangle \overline{ABC}

$$\begin{pmatrix} A_x & B_x & C_x \\ A_y & B_y & C_y \end{pmatrix} \cdot \begin{pmatrix} \lambda_1 \\ \lambda_2 \\ \lambda_3 \end{pmatrix} = \mathbf{P}' \quad (3.8)$$

$$\frac{\mathbf{P}'}{\lambda_1 + \lambda_2 + \lambda_3} = \mathbf{P} \quad (3.9)$$

3.2.3 Drawback

There is also a drawback with this method: the combinatorics blow up with a high number of data points $\binom{N}{3}$. So for example with 200 data points (circle data and background) the number of triplets is

$$\binom{200}{3} = 1313400$$

and for 300:

$$\binom{300}{3} = 4455100$$

So the runtime of the algorithm is roughly in the order of $\mathcal{O}(N^3)$ which can be easily seen when taking the upper bound of $\binom{N}{k} \leq \frac{N^k}{k!}$ and since $k = 3$ then means $\frac{N^3}{3!}$ see figure 3.7.

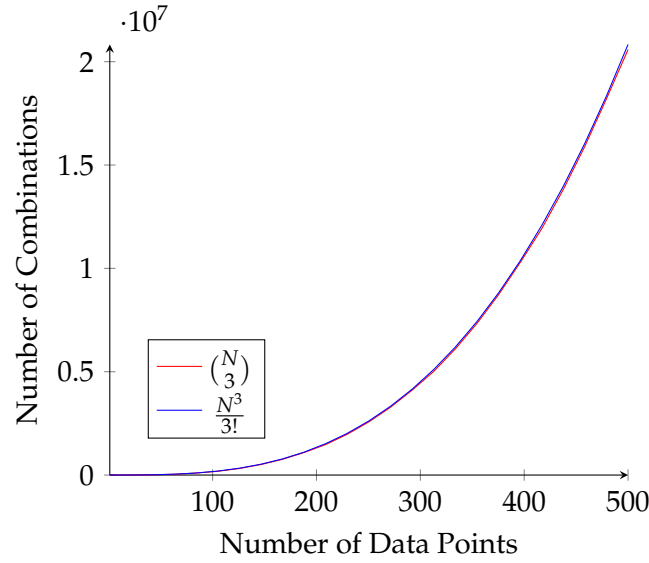


FIG. 3.7 – Scaling of the algorithm. Binomial Growth with $\binom{N}{3}$ compared with the approximation $\frac{N^3}{3!}$. So the algorithm runs in the order of $\mathcal{O}(n^3)$

Optimisation

As seen before this approach scales with $\binom{N}{3}$. This means that with 500 data points we have to create around 20 million triplets which are used for calculating radiuses and centers of circles. To qualify as a circle the algorithm needs a threshold to decide if a candidate is a circle or not. The threshold is defined as such that the minimum amount of points/circle has to be 10 in order to be considered as a circle candidate. This means that the threshold value is 120 ($\binom{10}{3} = 120$). This of course means that circles with less than 10 points will normally never be found unless another point that actually doesn't belong to the circle lies on the circle and contributes to the radius and center histogram pushing the circle above the threshold.

But not only the amount of triplets generated is a speed bump but also the creation of this triplets takes about $\frac{N^3}{3!}$ time. So if there was a way to improve not only the amount of total triplets but also the time needed to create them it would speed up the algorithm considerably.

This leads to the following idea: to split the original data set randomly into two lists. For each of these lists all the possible combinations of triplets is generated again and combined in one total list.

The problem with this approach is the possible loss of information. Since the algorithm has the threshold that defines how many entries a bin in the center histogram must have in order to be accepted as a radius/circle center. This threshold should be high enough that triplets that contain noise points do not contain to the circles but low enough that real circles with low point can still be found.

TAB. 3.1 – Example of ways to split points into 2 lists.

Pts in list 1	Pts in list 2
10	0
9	1
8	2
\vdots	\vdots
2	8
1	9
0	10

If now the data is randomly split in two lists there are only 2 ways where a circle with 10 hits will still be found namely that all the 10 points end up in the same half of the list.

So the question is what are the probabilities that splitting a data set with 10 or more points ends up with 1 list having more than 10 points. As soon as a circle has 20 points this becomes moot as always one list will have more than 10 points (see Figure 3.10).

From the figure it is clear that even if we split the lists there is a more than 50% chance that we lose no information once a circle has 13 points.

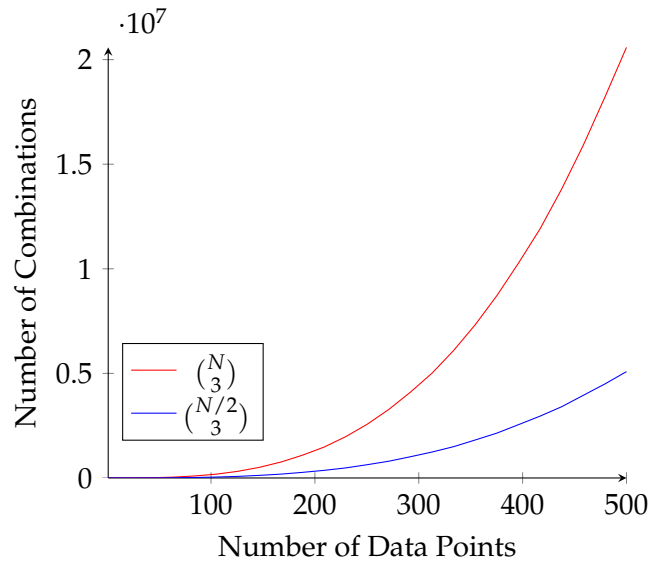


FIG. 3.8 – Number of combinations with $\binom{N}{3}$ compared to the number of combinations generated from $\binom{N/2}{3}$

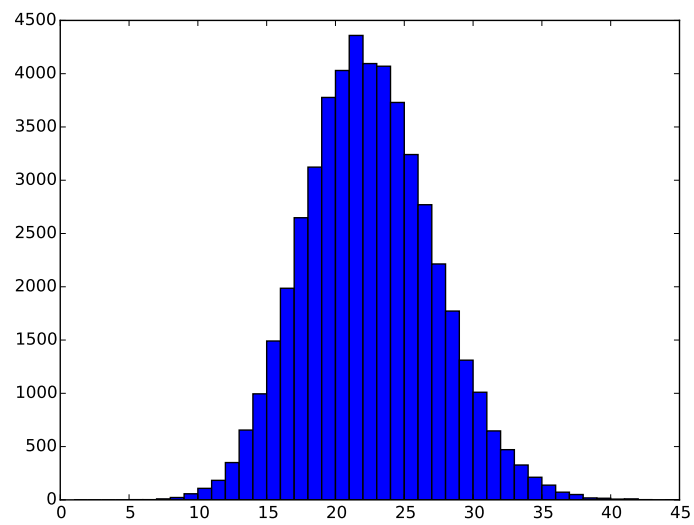


FIG. 3.9 – Distribution of points per circle.

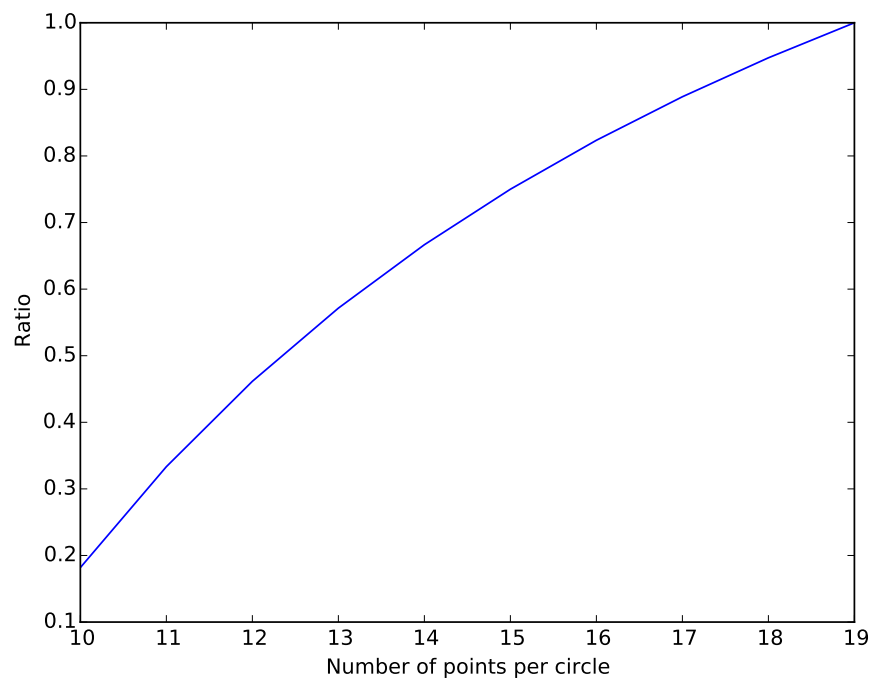


FIG. 3.10 – The probability when splitting randomly a list of x points into two that one list has more than 10 points.

3.2.4 Possible Optimisation: Average Radius of Random Circles In a Unit Square

An interesting property of calculating the radius of triplets generated from points that are distributed uniformly is that they always obey a certain shape.

First we calculate the expected area of a triangle formed by three points randomly chosen from the unit square¹. Let $A = (a_1, a_2)$, $B = (b_1, b_2)$, $C = (c_1, c_2)$ be the vertices of the random triangle T . We consider the case where $a_2 > b_2 > c_2$ which takes $\frac{1}{6}$ of the total "Volume". Fix a_2, b_2, c_2 for the moment and we can write.

$$b_2 = (1 - t)a_2 + tc_2, \quad 0 \leq t \leq 1.$$

The side AC of T intersects the horizontal level $y = b_2$ at the point $S = (s, b_2)$ with

$$s = s(a_1, c_1, t) = (1 - t)a_1 + tc_1 \quad (3.10)$$

The area X of T is then given by

$$X = \frac{1}{2}|b_1 - s|(c_2 - a_2)$$

We now start integrating with respect to our six variables. The innermost integral is with respect to b_1 and gives

$$\begin{aligned} X_1 &:= \int_0^1 X db_1 = \frac{1}{2}(c_2 - a_2) \left(\int_0^s (s - b_1) db_1 + \int_s^1 (b_1 - s) db_1 \right) \\ &= \frac{1}{4}(c_2 - a_2)(1 + 2s + 2s^2) \end{aligned}$$

Next we integrate over b_2 :

$$X_2 := \frac{1}{4} \int_0^1 \int_{a_2}^1 (c_2 - a_2)^2 dc_2 da_2 \times \int_0^1 \int_0^1 \int_0^1 (1 - 2s + 2s^2) dt dc_1 da_1$$

This gives

$$X_3 = \frac{1}{4} \cdot \frac{1}{12} \cdot \frac{11}{18} = \frac{11}{6 \cdot 144}$$

But generalizing our assumption at the beginning $a_2 < b_2 < c_2$ we multiply this result by 6 and obtain then $\frac{11}{144}$.

¹This prove is taken from [1]

4 Results

In this section results for the conventional 1D, 2D, 3D Hough Transform and the combinatorial approach are presented. 1D and 2D Hough Transform have no real application for the RICH detector since neither the center nor the radius is known. Nonetheless they are presented here as they offer a nice way of understanding how each extra dimension expands the algorithm and also shows the flaws with each added dimension.

For the 1D and 2D Hough Transform very simple data data was used. There were no physical constraints when generating the circles and their point/circle or also their radius distribution doesn't reflect the real data obtained by LHCb.

4.1 1D Hough Transform Results

For this section different data sets were tested.

- 1 circle and 600 background hits
- 2 circles and 0 background hits
- 5 circles and 30 background hits

For each set the radius score is shown and the final result of the algorithm. The algorithm has no problems to find any of the circles even with background. But this was expected as the algorithm only needs to search in one dimension and makes the whole process very easy.

4.1.1 Overview of the results

First an overview about different test cases. The event with 1 circle and 600 background hits means to test how robust the algorithm is with a lot of background hits. The second test case means to test if the algorithm can handle two circle objects and the third event is a mix between several circles and some background hits.

There is are different plots

- Radius score
- Resulting circle

The radius score is a 1D plot of the score function $f(r)$. The highest peak indicating the maximum score and its location telling the value of the radius. The resulting circle plot is the center (which was known) and the extracted radius combined, drawing the resulting circle. There is always the same plot again with center and radius taken directly from data to compare the two results.

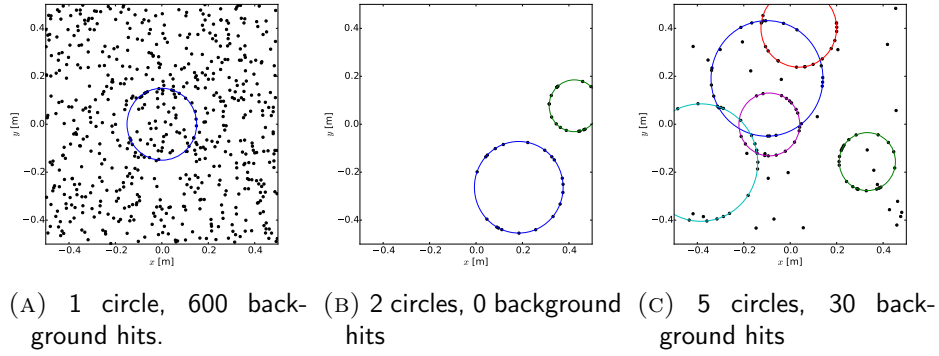


FIG. 4.1 – Circles found by the 1D Hough Transform. The circle in Figure 4.1a has its center in the origin so the algorithm did find the circle.


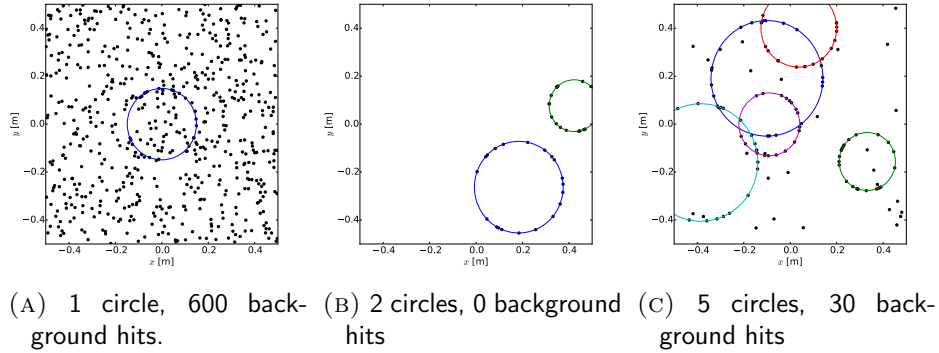



FIG. 4.2 – These are the circles as generated by the simulation. All of these examples were correctly solved by the 1D Hough Transform.

4.1.2 1D Hough Transform - 2 circles, 0 background

Two circle objects have to be found in this event with zero background. Each peaks is clearly visible in their respective radius score plots. The algorithm has no problems finding two distinct circles in the plane. A problem would then occur if

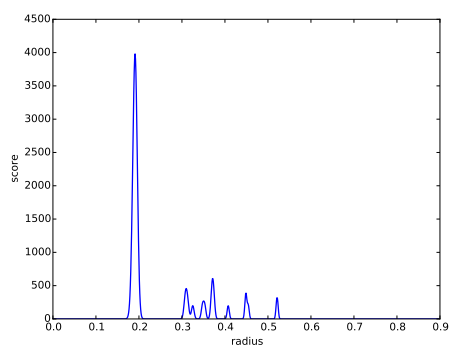

(A) 1 circle, 600 background hits.

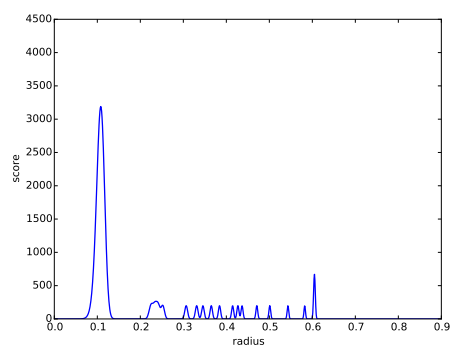

(B) 2 circles, 0 background hits

FIG. 4.3 – Radius score for the 1D Hough Transform for 2 circles with 0 background. The respective radii are 0.191 and 0.108

4.1.3 1D Hough Transform - 5 circles, 30 background hits

First we have the different radius scores for each known center. So the algorithm calculates the score for one center with all data points at a time and the radius with the highest score gets assigned to that center. Once done for all centers the algorithm is done. As expected the circles can be reconstructed

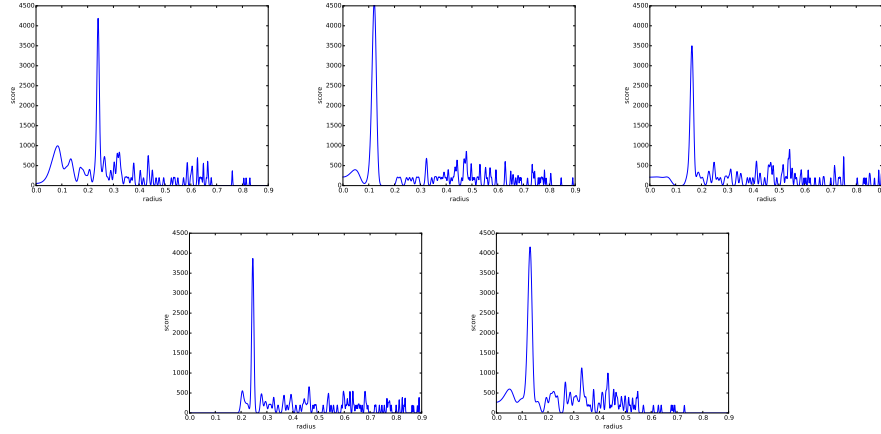


FIG. 4.4 – Radius scores for all the centers for an event with 5 circles.

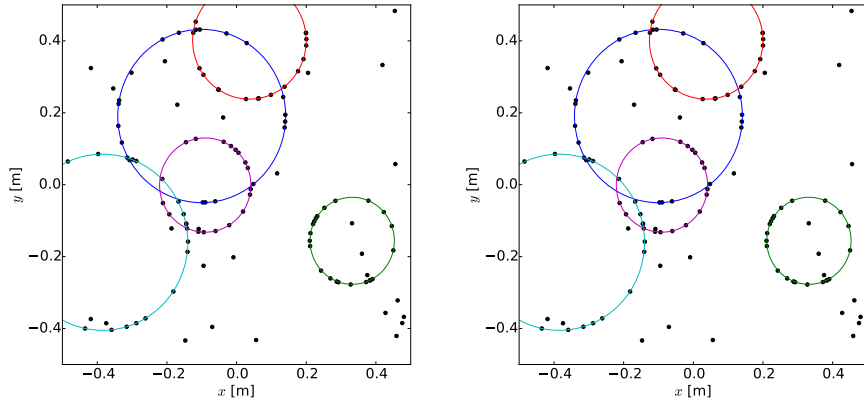


FIG. 4.5 – The reconstructed result on the left while the circles from the simulated data is on the right.

4.2 2D Hough Transform Results

The 2D Hough Transform searches in the x, y space for suitable circle centers that have a high score. The same events as for the 1D Hough Transform were investigated to make a comparison about reliability. In a first overview the algorithm performs quite well and finds all the circles.

Again among others there were some of the events tackled by the algorithm.

- 1 circle and 600 background hits
- 2 circles and 0 background hits
- 5 circles and 30 background hits

4.2.1 Overview of the results

As in subsection 4.1.1 in a first step an overview of the results. The same events as before but this time tested with the 2D Hough Transform. All the circles were found correctly but the example with 6 circles and 200 background hits shows that the algorithm can fail to find a circle.

As seen in the event with 6 circles and 200 background hits (Figure 4.8), the 2D Hough Transform fails. The reason is quite simple. Both, the yellow and magenta circle, have similar radii. Now the algorithm looks first for the magenta circle (because that happens to be the way the centers are arranged in the list) and since so many points of the yellow circle lie so close together it is easy for the magenta circle (who has a similar radius) to get a high score with these points, a higher score than it would get with its proper points. If the yellow points were more evenly distributed on the circle or if there were more magenta points this probably wouldn't happen but that is something that can't be controlled.

Theoretically it is also possible that the yellow circle gets fitted to the magenta points but since there are still enough yellow points left after the removal of the points assigned to the magenta circle they still have the highest score with their own points and the magenta circle goes unnoticed.

Also, if the yellow circle would be checked before magenta then the algorithm would find the proper circles as well. So it actually can depend on the order in which the circles are searched.

4.2.2 2D Hough Transform, 2 circles, 0 background hits

Two circle objects have to be found in this event with zero background. This poses no problem but as pointed out before if the two circles had a

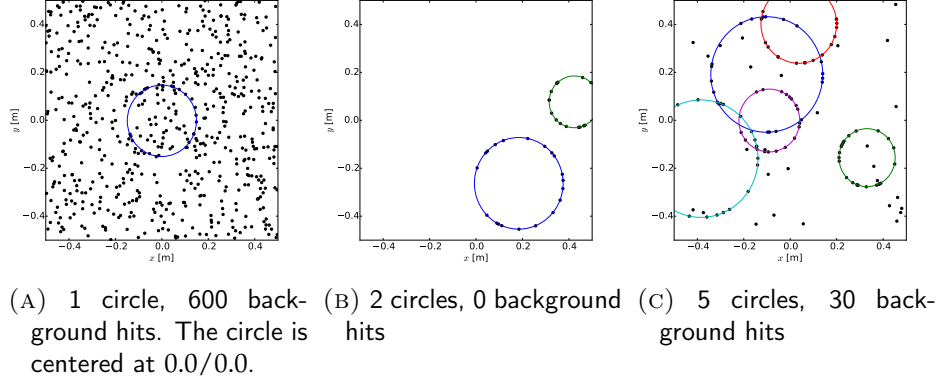


FIG. 4.6 – Circles found by the 2D Hough Transform. The circle in Figure 4.1a has its center in the origin so the algorithm did find the circle.

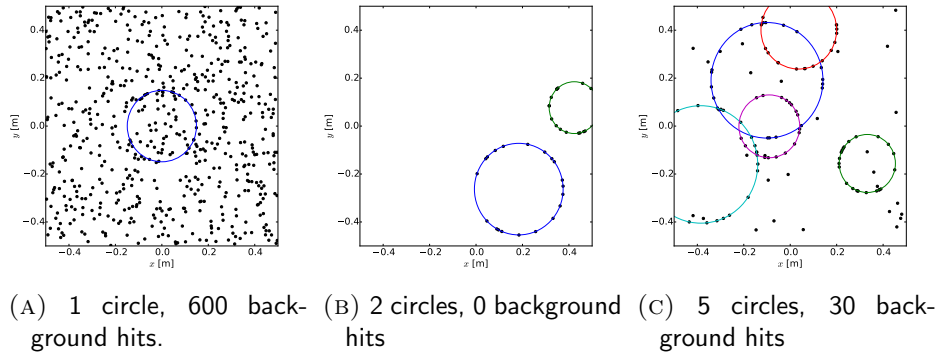


FIG. 4.7 – These are the circles as generated by the simulation. All of these examples were correctly solved by the 2D Hough Transform.

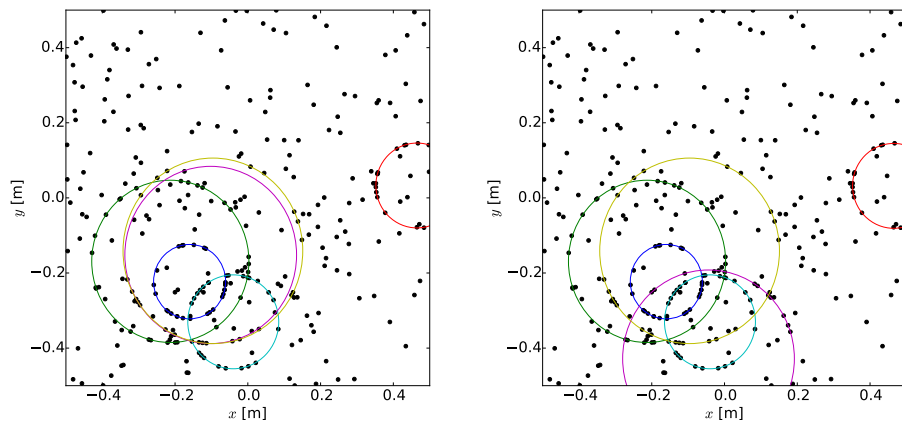


FIG. 4.8 – Circles found by the algorithm on the left and the correct results on the right. Here the 2D Hough Transform fails to find the magenta colored circle.

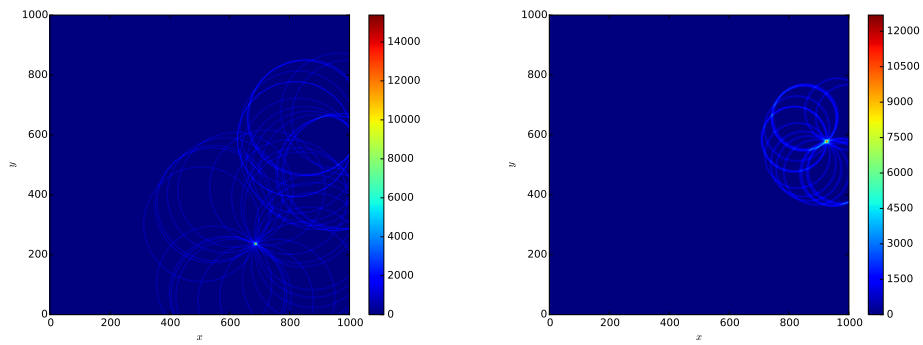


FIG. 4.9 – Center score for the 2D Hough Transform for 2 circles with 0 background.

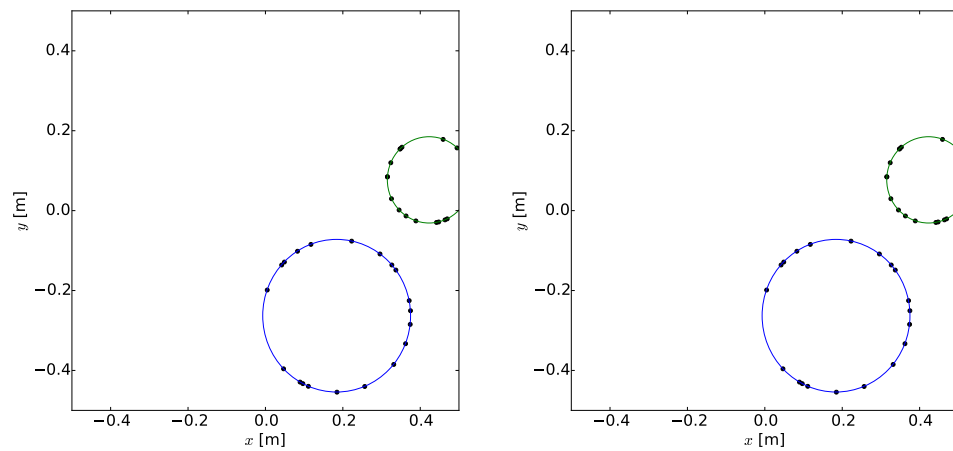


FIG. 4.10 – Although already shown before for completeness the 2 circle 2D Hough Transform result. Left side the result from the algorithm on the right side the correct result from data.

4.2.3 2D Hough Transform, 5 circles, 30 background hits

This event added more circles but also some background hits. Both were handled well by the algorithm and all the circles were found.

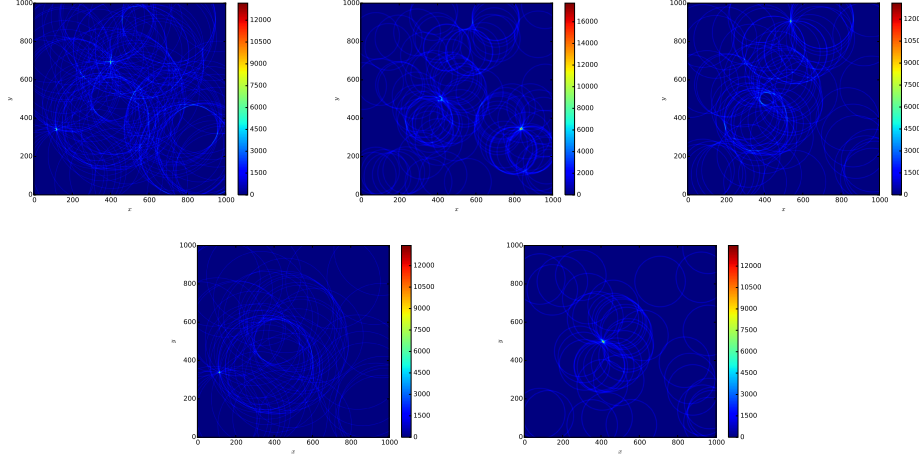


FIG. 4.11 – Center scores for all the centers for an event with 5 circles.

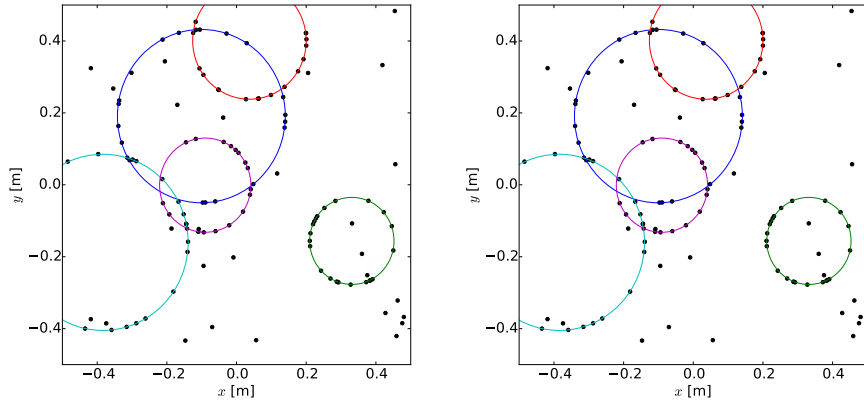


FIG. 4.12 – The reconstructed result on the left while the circles from the simulated data is on the right.

4.2.4 2D Hough Transform, 6 circles, 200 background hits

As briefly discussed in the overview the algorithm does make mistakes as seen in this next event. 6 circles were generated with 200 background hits. The interesting part is not that amount of circles or the amount of background hits posed a problem but the properties of the circles (center coordinate and radius). In this example there is a misidentification of a circle with points of another.

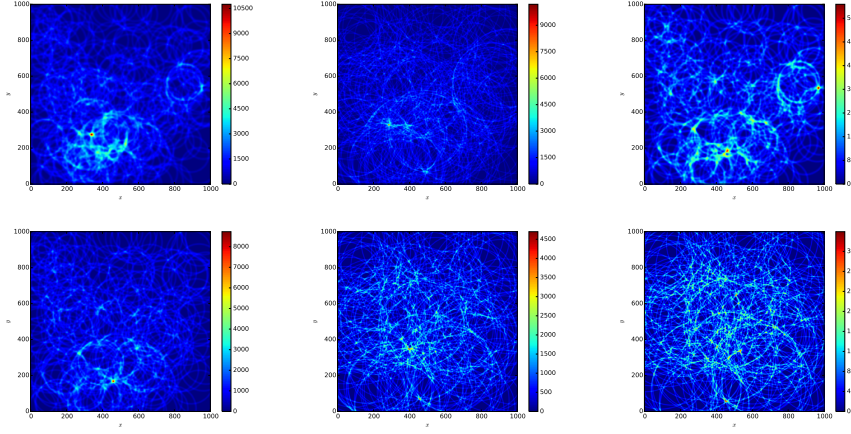


FIG. 4.13 – Center scores for 6 circles with 200 background hits. There is a lot more going on because of all the background hits that by accident contribute to a high score all over the grid.

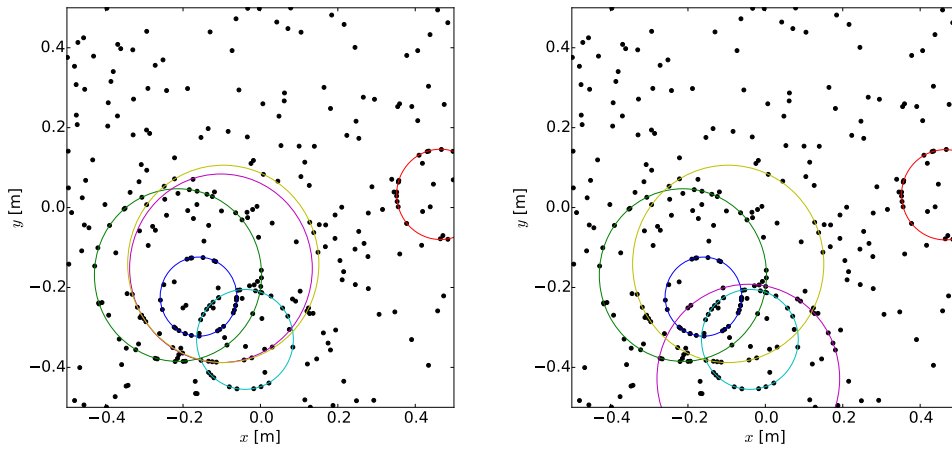


FIG. 4.14 – On the left side the wrong result obtained by the 2D Hough Transform and the correct one on the right side

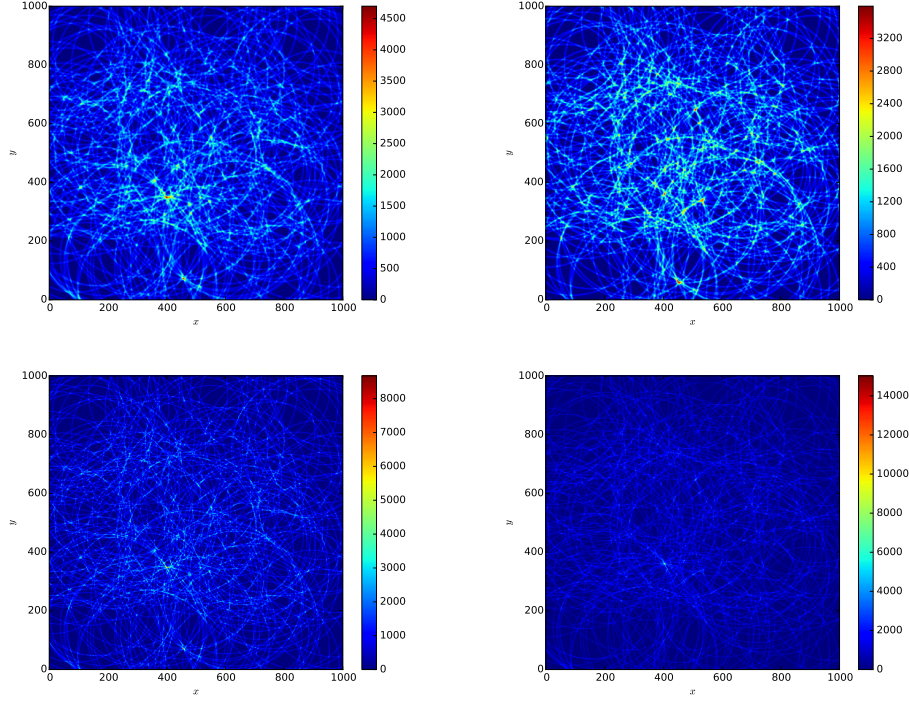


FIG. 4.15 – Old center score in the top row for circle 5 (magenta) and 6 (yellow). And below the same circles this time with the new $\sigma = 0.0005$. Something that quite clear is how big the influence of sigma is for the center score. With a σ of 0.001 just by eye there seem to be many similar maxima whereas with a $\sigma = 0.0005$ the maximas get much more distinct.

A possible way to fix this particular problem is to tune the parameters of the weight function namely reducing the standard deviation.

$$w(\eta) = \frac{1}{\sqrt{2\pi}\sigma} \exp\left(\frac{-\eta^2}{2\sigma^2}\right)$$

Having a higher σ means that a point that is a bit off of the circle still contributes a considerable value to the total score. The smaller the σ is the sharper the peak. However if the peak is too sharp then the algorithm might discard possible results because they are just a bit off the circle but since the peak is so narrow they don't contribute at all to the total score.

In the example before σ was equal to 0.001 while the space dimension was 1. So if the detector was 1 m per dimension a hit 1 mm off the perfect location contributes still more half of the score off the perfect location. If we set $\sigma = 0.0005$ a point 0.001 away from the perfect location it only contributes about 14% of the maximum score.

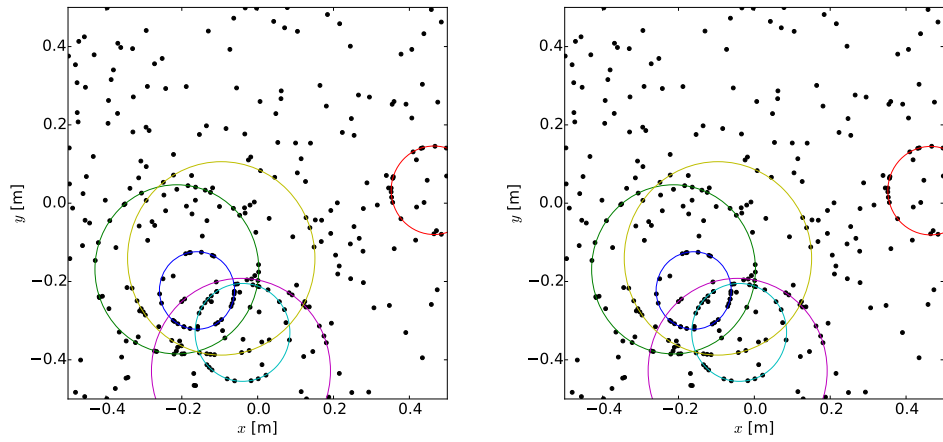


FIG. 4.16 – Again on the left the calculated result and the result taken from data on the right. With the new σ the algorithm is able to calculate all the circles correctly.

4.3 3D Hough Transform Results

4.4 Combinatorial Approach Results

5 Conclusions

This thesis was studying different Hough Transforms for circle detection. In a first approach a 1D Hough Transform was used and then extended to two and three dimensions. As a fourth and final approach a new method was developed for the circle detection.

Bibliography

- [1] Christian Blatter. *The expected area of a triangle formed by three points randomly chosen from the unit square*. Online. Apr. 2015. URL: <http://math.stackexchange.com/questions/1236958/the-expected-area-of-a-triangle-formed-by-three-points-randomly-chosen-from-the>.
- [2] LHCb Collaboration. *The LHCb Detector*. Online. URL: <http://lhcb-public.web.cern.ch/lhcb-public/en/Detector/Detector-en.html>.
- [3] Richard O. Duda and Peter E. Hart. "Use of the Hough Transformation to Detect Lines and Curves in Pictures". In: *Commun. ACM* 15.1 (Jan. 1972), pp. 11–15. ISSN: 0001-0782. DOI: 10.1145/361237.361242. URL: <http://doi.acm.org/10.1145/361237.361242>.
- [4] RICH LHCb. "Technical Design Report". In: *CERN/LHCC* 37 (2000), p. 2000.
- [5] A Powell. *Particle identification at LHCb*. Tech. rep. 2011.