

Task families

one example trajectory each — 5×5 grids

 empty  id 1  id 2  wall  id 4  id 5

Minds-free substrate

Physics — a body moves [physics]

(step v d)

val=4, dir=up



Desire — seek a goal [desire]

(optimize (neg_dist gv) av)

av=1, gv=2




Independent extension — fork / sync, no belief

Overlay — motion blur [overlay]

(fork (step v d) overlay)


val=4, dir=right

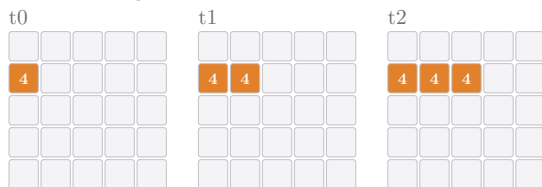

Registration — snap one object [registration]

(sync_to_world v)

val=4

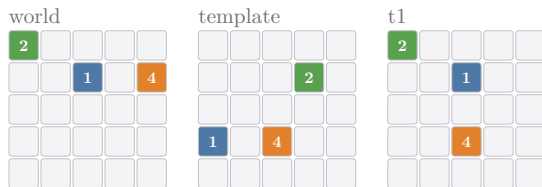


Belief — theory of mind

False belief — act on a stale map [belief]

(fork (compose (wall_at r c) (optimize (neg_dist gv) av)) (sync_to_world av))

av=1, gv=2, aw=5, gw=4, pw=(1, 3)

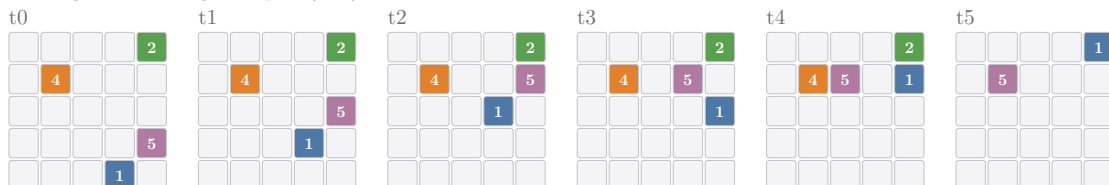


Symmetric corners — one minds-free task per cube axis

Flee — avoid a hazard [flee]

(optimize (distance hv) av)


av=1, hv=4

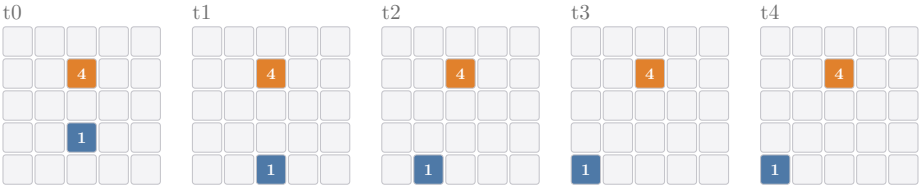

Deletion — punch one hole [deletion]

(clear_at r c)

val=1, cell=(1, 3)

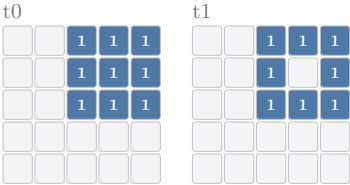

Denoise — drop a noise value [denoise]

(erase nv)


noise=4, signal=2



Perception — record into the map [perception]

(sync_to_model v)


val=4

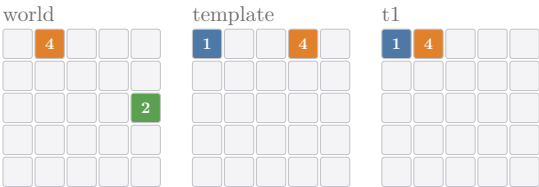

Multi-registration — snap all [multi_reg]

sync_all


vals=[1, 5]

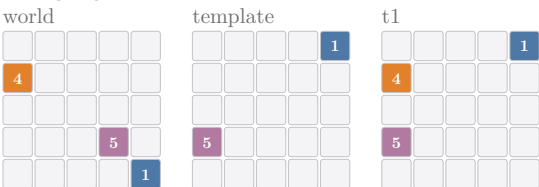


Registration-except — all but one [reg_except]

(sync_except a)

anchor=1

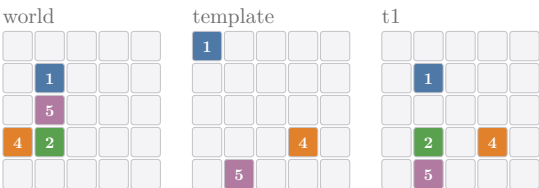

Inpainting — fill holes, keep pixels [inpaint]
underlay

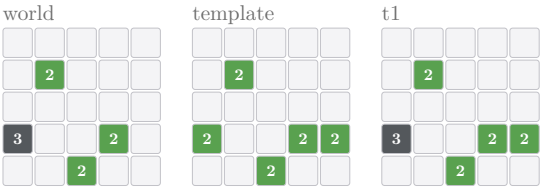

Readout — report the model [readout]
snd_gg

