

Post


The screenshot displays a REST client interface with the following details:

- URL:** `http://localhost:8080/pedidos/`
- Method:** **POST**
- Body Type:** **raw** (selected)
- Request Body (XML):**

```
1 <?xml version="1.0" encoding = "UTF-8"?>
2 <Pedido>
3   <produto>Iphone 8</produto>
4   <quantidade>100</quantidade>
5 </Pedido>
```
- Response:** **201 Created**
- Response Body (JSON):**

```
1 {
2   "id": 3,
3   "produto": "Iphone 8",
4   "quantidade": 0
5 }
```


Get all

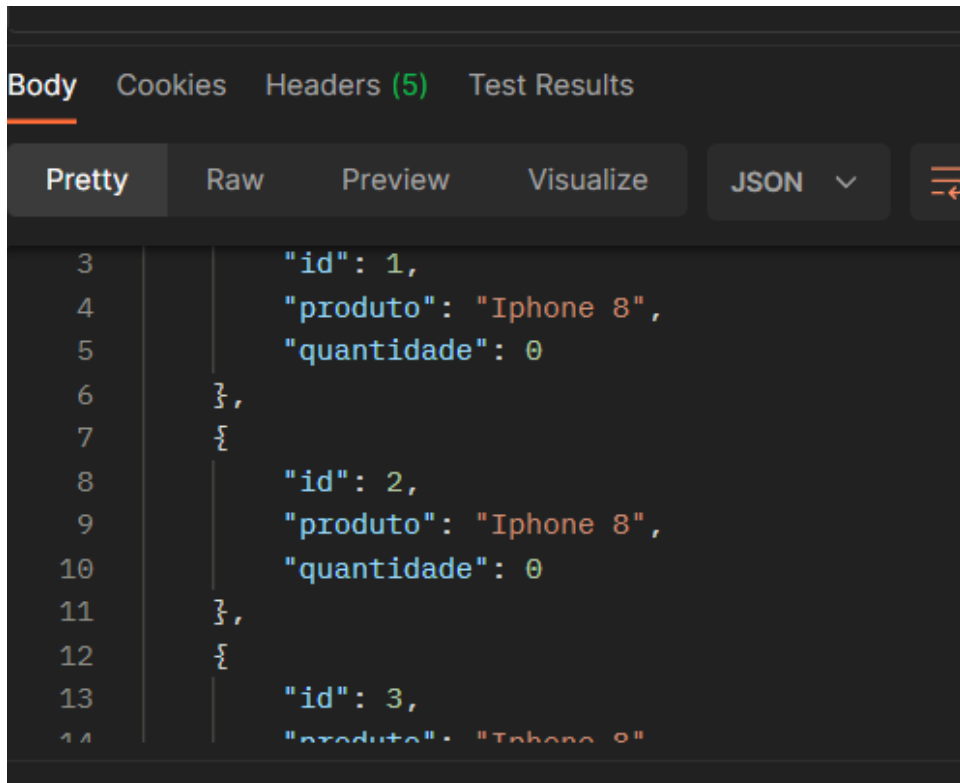

The screenshot shows a REST client interface with the 'Body' tab selected. The response is a JSON array of three objects, each representing a product. The objects are displayed in a 'Pretty' format with line numbers 3 through 14 on the left. The JSON structure is as follows:

```
3  {
4    "id": 1,
5    "produto": "Iphone 8",
6    "quantidade": 0
7  },
8  {
9    "id": 2,
10   "produto": "Iphone 8",
11   "quantidade": 0
12 },
13 {
14   "id": 3,
15   "produto": "Iphone 8"
```

Get por ID

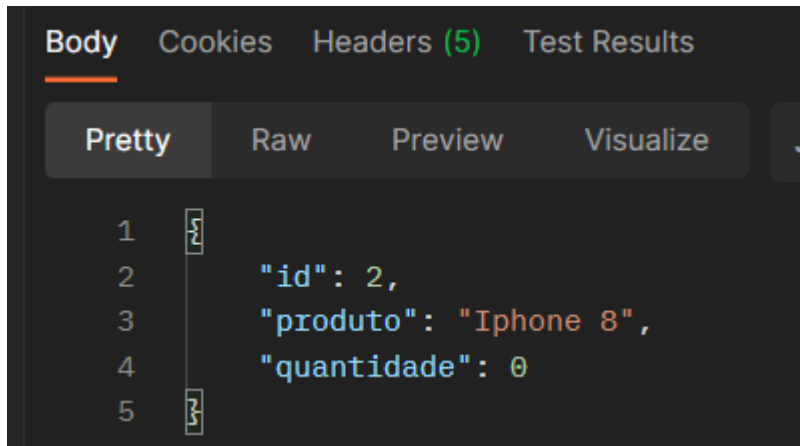

The screenshot shows a REST client interface with the 'Body' tab selected. The response is a single JSON object representing a product. The object is displayed in a 'Pretty' format with line numbers 1 through 5 on the left. The JSON structure is as follows:

```
1  {
2    "id": 2,
3    "produto": "Iphone 8",
4    "quantidade": 0
5  }
```

Put

The screenshot displays a REST client interface for a PUT request to `http://localhost:8080/pedidos/2`. The request body is XML, and the response is JSON.

Request Details:

- Method: PUT
- URL: `http://localhost:8080/pedidos/2`
- Body Type: XML
- Body Content:

```
1 <?xml version="1.0" encoding = "UTF-8"?>
2 <Pedido>
3   <produto>Iphone 8</produto>
4   <quantidade>100</quantidade>
5 </Pedido>
```

Response Details:

- Status: 200 OK
- Time: 14 ms
- Body Type: JSON
- Body Content:

```
1 {
2   "id": 2,
3   "produto": "Iphone 8",
4   "quantidade": 0
5 }
```

Delete

The screenshot shows a REST client interface with the following details:

- URL:** `http://localhost:8080/pedidos/2`
- Method:** `DELETE`
- Body:** XML format with the following content:

```
1 <?xml version="1.0" encoding="UTF-8"?>
2 <Pedido>
3   <produto>Iphone 8</produto>
4   <quantidade>100</quantidade>
5 </Pedido>
```
- Response:** `200 OK` with the message: `0 pedido foi excluido com sucesso.`