


Ruben Tomaz Exercicio 1


1. Servidor




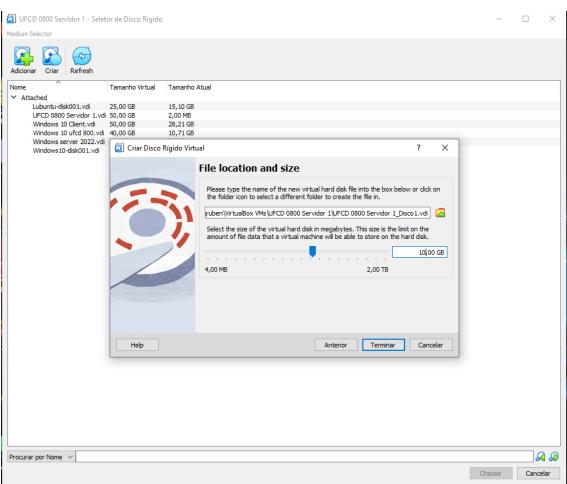

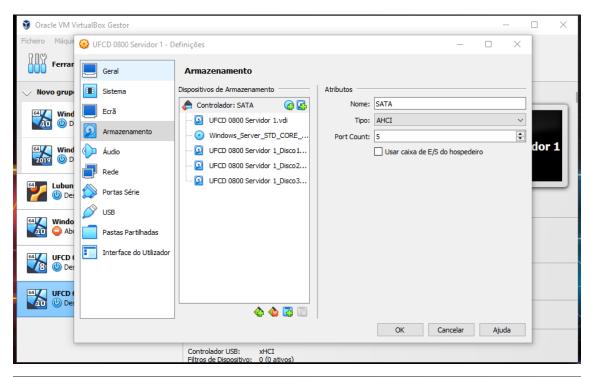

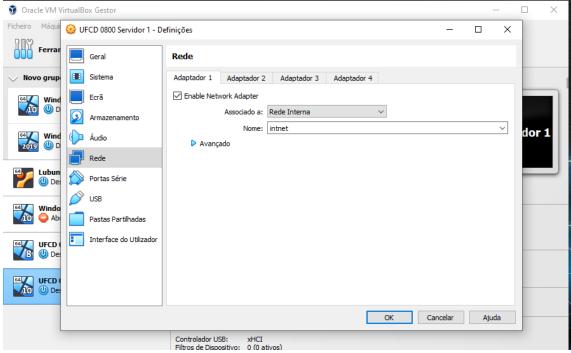

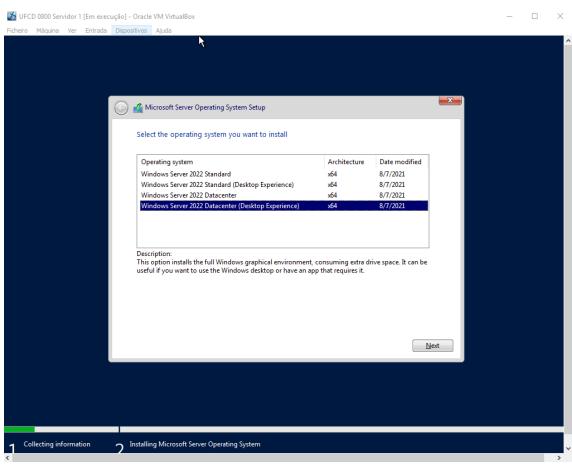

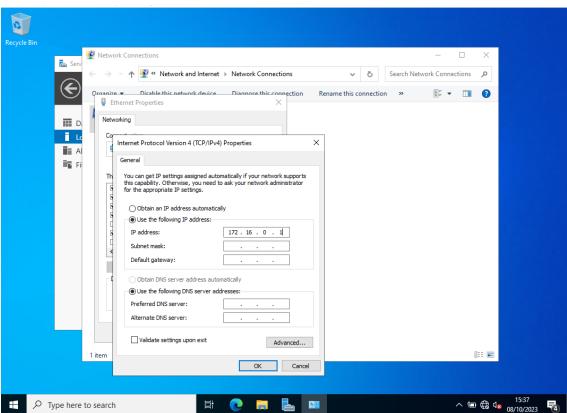

```
Ping statistics for 172.16.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),

C:\Users\Administrator>ping 172.16.0.10

Pinging 172.16.0.10 with 32 bytes of data:
Reply from 172.16.0.10: bytes=32 time=1ms TTL=128
Reply from 172.16.0.10: bytes=32 time<1ms TTL=128
Reply from 172.16.0.10: bytes=32 time<1ms TTL=128
Reply from 172.16.0.10: bytes=32 time<1ms TTL=128
Ping statistics for 172.16.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\Users\Administrator>__
```

6. Cliente

