

Available Fields

namespace where
all form fields
can be found

use Filament\Forms\Components

Amount

TextInput

The total amount

Checkbox ☐ Published ☐ Published

Toggle ☐ Is admin ☐ Is admin ☐ Is admin ☒ Is admin ☒ Is admin

CheckboxList

Planets

Select all

☐ Mercury ☒ Mercury ☒ Earth

☐ Venus ☐ Venus ☐ Mars

☐ Earth ☐ Mars

Radio

Like this post? ☒ Yes ☐ No

Like this post? ☒ Yes ☐ No

Like this post? ☒ Yes ☐ No

ColorPicker

Color

Textarea

Description

Learn how to use Filament components to write awesome applications

TagsInput

Tags

Select

Status

Domain 

MorphToSelect

Addressable



KeyValue

Meta

	Key	Value	
↑↓	description	Filament is a collection of Laravel packages	
↑↓	og:type	website	
↑↓	og:site_name	Filament	
Add row			

ToggleButtons

Status

Like this post?

Technologies

DateTimePicker

Published at



At

Date of birth



Date




Upload

Attachment

Drag & Drop your files or [Browse](#)

Slider

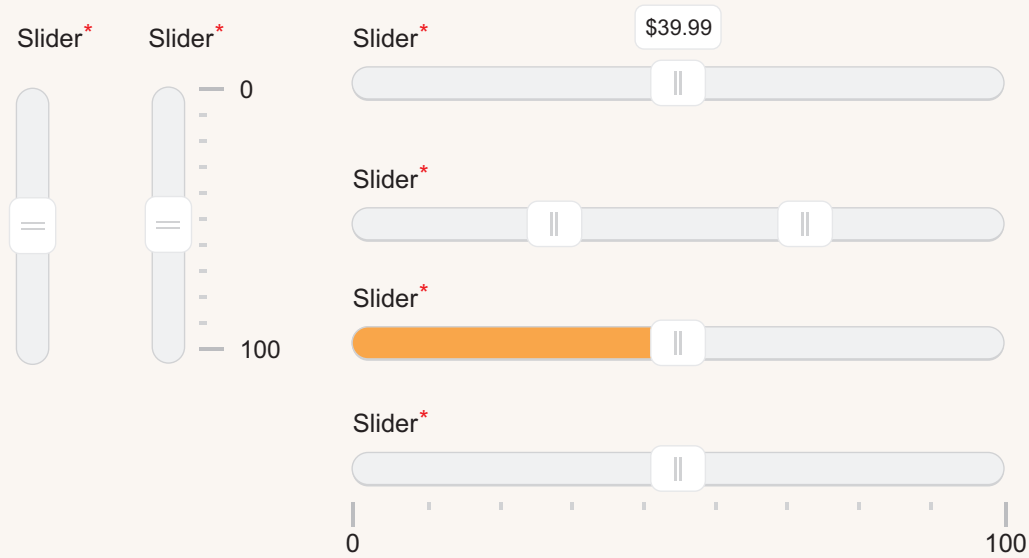


Code editor


Code

```
1  const fetchUser = async (id) => {
2      const res = await fetch ('https://api.example.com')
3
4      if (! res.ok) {
5          throw new Error('User not found')
6      }
7
8      return res.json()
9  }
10
```

Markdown editor

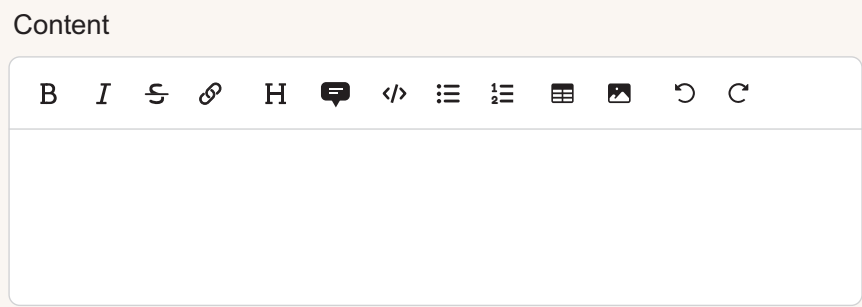

Rich Editor

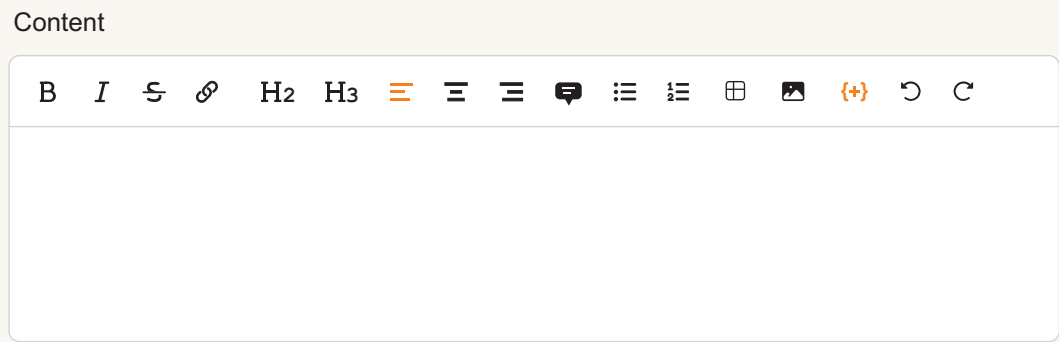

Content

↑↓ ↑ ↓ Heading 1

Heading*

Level*

Lorem ipsum dolor sit amet

Heading 2

↑↓ ↑ ↓ Paragraph 2

Paragraph*

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Maecenas metus sed nulla maximus consequat. Mauris risus, tempor sed dolor id, posuere pulvinar est.

↑↓ ↑ ↓ Image 3

Image*

Drag & Drop your files or Browse

Alt text*

Lorem ipsum dolor sit amet

Add to content

- ≡

Paragraph
- 🖼️

Image

Builder

Planets

↑↓ ↑ ↓

Name*

Moons

Earth

1

↑↓ ↑ ↓

Name*

Moons

Venus

0

↑↓ ↑ ↓

Name*

Moons

Add to planets

Repeater

Adding Extra Content to a Field

Fields contain many “slots” where content can be inserted in a child schema.

Slots available

->aboveLabel()

★ Content above the label

Name

->beforeLabel()

★ Name

->afterLabel()

Name ★ Content after the label

->belowLabel() and ->aboveContent()

Name

★ Content below the label

->beforeContent()

Name

->afterContent()

Name

->aboveErrorMessage()

Name *

★ Content above the field's error message

The name field is required.

->belowErrorMessage()

Name *

The name field is required.

★ Content below the field's error message

->belowContent()

Name *

★ Content below the field's content

Slots can accept

Text

`TextInput::make('name')`

`->belowContent('User\'s full name.')`

Any Schema Component

`TextInput::make('name')`

`->belowContent(`

`Text::make('User\'s full name.')`

`->weight(FontWeight::Bold)`

`)`

often a prime component is used for content

Actions & Actions Groups

`TextInput::make('name')`

`->belowContent(Action::make('generate'))`

Combination of content

`TextInput::make('name')`

`->belowContent([`

`Icon::make(Heroicon::InformationCircle),`

`'User\'s full name.',`

`Action::make('generate'),`

`])`

align the content in the slots

`TextInput::make('name')`

`->belowContent(Schema::end([`

`Icon::make(Heroicon::InformationCircle),`

`'User\'s full name.',`

`Action::make('generate'),`

`]))`

Align slot content

`Schema::start()` (default)

`Schema::end()`

`Schema::between()`

ColorPicker Field

```
use Filament\Forms\Components\ColorPicker;
```

pick a color from a range of formats

```
ColorPicker::make('color')
```

Methods

```
->hex()
->hsl()
->rgb()
->rgba()
```

— set the color format. Default: hex()

Color

#FF80C0

Textarea Field

```
use Filament\Forms\Components\Textarea;
```

multi-line text string

```
Textarea::make('description')
```

Methods

```
->trim()           trim whitespace
->autosize()       auto resize to fit the content
->rows(10)         textarea rows
->cols(20)         textarea columns
->readOnly()       make textarea read only
->disableGrammarly() if Grammarly is installed prevent it
                    from analyzing the contents
```

Description

Learn how to use Filament components to write awesome applications

Validation specific to Textarea

```
->minLength(2)
->maxLength(1024)
->length(100)
```

TagsInput Field

```
use Filament\Forms\Components\TagsInput;
```

also supports spatie/laravel-tags

interact with a list of tags

```
TagsInput::make('tags')
```

Methods

```
->suggestions([    add autocomplete suggestions
    'tailwindcss',
    'alpinejs',
])
->separator(',')   store tags in a separated string, instead of JSON
->splitKeys(['Tab', ' ']) map buttons to create a new tag. By default, pressing "Enter" button, creates a new tag
->tagSuffix('%')    add suffix to tags without modifying field state. Useful to display formatting without saving it
->tagPrefix('%')    and prefix to tags without modifying field state. Useful to display formatting without saving it
->reorderable()     allow the user to reorder tags
->color('danger')   change tag color. danger, gray, info, primary, success or warning
->trim()            automatically trim whitespace
```

Tags

New tag

Tailwind CSS ×

Alpine.js ×

by default, tags are stored in JSON

Validation specific to TagsInput

```
TagsInput::make('tags')
->nestedRecursiveRules([ ← add validation rules
    'max:255',           for each tag by passing
                        an array of rules
])
```



Add an array or json cast to the model property when using Eloquent

Utility Injection (Closure Customization)

Available utilities

Parameter	Description	Namespace
Field \$component	current field component instance	use Filament\Forms\Components\Field;
Livewire \$livewire	current Livewire component instance	use Livewire\Component as Livewire;
?Model \$record	current form record	use Illuminate\Database\Eloquent\Model;
?Model \$model	Eloquent model FQN for the current schema	use Illuminate\Database\Eloquent\Model;
Get \$get	retrieve the state (value) of another field	use Filament\Schemas\Components\Utilities\Get;
Set \$set	set the value of another field (useful in afterStateUpdated() method)	use Filament\Schemas\Components\Utilities\Set;
\$state	current state (value) of the field	-
\$rawState	current raw value, before state casts applied	-
\$old	old value of the field before it was updated (used with afterStateUpdate() method)	-
\$oldRaw	old value of the field, before state casts applied	-
\$search	current search query (used in modifyQueryUsing on relationship())	-
\$operation	current form operation (edit, create, view)	-

in standalone form, the form's operation can be set using the `operation()` method on the form definition

Closure with utility injection

```
use Filament\Forms\Components\Field;
```

```
function (Field $component) {
    // ...
}
```

Closure with multiple utility injection

```
use Livewire\Component as Livewire;
use Filament\Schemas\Components\Utilities\Get;
use Filament\Schemas\Components\Utilities\Set;
```

```
function (Livewire $livewire, Get $get, Set $set) {
    // ...
}
```

utility injection
(any order can be used)

Closure with Laravel's dependencies injection

```
use Illuminate\Http\Request;

function (Request $request, Set $set) {
    // ...
}
```

any dependencies from Laravel's container can also be injected

Type-safe retrieval of another field's state (Get \$get)

You may use a "typed" method on the Get utility to type-safe retrieve the state of another field:

```
$get->string('email', nullable: true);
$get->integer('age');
$get->float('price');
$get->boolean('is_admin');
$get->array('tags');
$get->date('published_at');
$get->enum('status', StatusEnum::class);
$get->filled('email');
$get->blank('email');
```

to force a nullable return type

Form action with utility injection

```
TextInput::make('cost')
    ->prefix('€')
    ->suffixAction(
        Action::make('copyCostToPrice')
            ->icon('heroicon-m-clipboard')
            ->requiresConfirmation()
            ->action(function (Set $set, $state) {
                $set('price', $state);
            })
    )
```

utility injection