

Dokumentacija

Filip Bondzulić 123/22

Lugx Gaming PHP sajt

Uvod......3

Koriscene tehnologije3
Link do templejta3
Moji folderi4
Dijagram Baze5
Funkcionalnosti6
Organizacija7
Organizacija sajta i funkcionalnosti na tim delovima
Kodovi29
PHP29
Index.php29
<u>Shop.php35</u>
product-details38
<u>Cart.php41</u>
Checkout process.php46
Footer, header. php47
<u>Contact.php48</u>
insertContact.php52
functions.php53
<u>register.php56</u>
check-form.php59
check-log-in.php61
logout.php62
remove product.php62
admin-panel.php63
addProduct.php68
<u>edit.php73</u>
confirmUpdate.php76

delete.php	77
edit-user.php	78
delete-user.php	80
author.php	81
JavaScript Kod	83
CSS Kod	87
Admin.css	87
Style.css	90
Mycss.css	95

Uvod

Koriscene tehnologije:


- -JavaScript
- -HTML
- -CSS
- -XML
- -Bootstrap
- -Jquery
- -AJAX
- -PHP

Link do templejta:

https://templatemo.com/tm-589-lugx-gaming

Dizajn samog templejta je malo menjan ali su dodate funkcionalnosti:


korpa,registracija I logovanje,admin panel samo za korisnik zabrana pristupa korpi dok se korosnik ne uloguje.

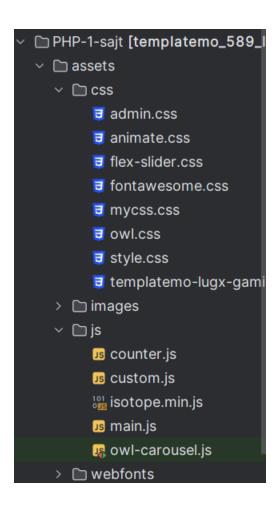

```
Methods
     php addProduct.php
     Php conn.php
     php functions.php
> 🗀 vendor
  <sub>Php</sub> 404.php
  Php admin-panel.php
  php cart.php
  php check-form.php
  php check-log-in.php
  php checkout_process.php
  Php confirmUpdate.php
  Php contact.php
  php delete.php
  php delete-user.php
  php edit.php
  php edit-user.php
  php footer.php
  php header.php
  php index.php
  php insertContact.php
  Php log-in.php
  Php logout.php
  php product-details.php
  Php register.php
  php remove_product.php
  Php search.php
  Php shop.php
```

Admin.css mycss I style.css su moji css folderi, jedini JavaScript folder koji sam ja pisao je main.js

Sve originalne html foldere sam promenio u php I dodao svoje koje sluze da se izvrse funckionalnosti na sajtu.

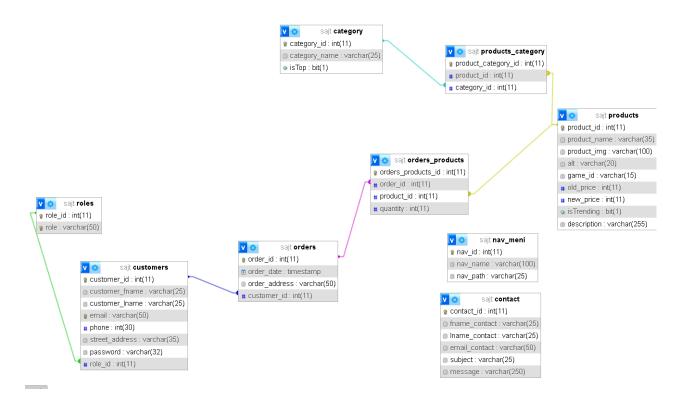

Dijagram baze. Tabela products sadrzi sve informacije o proizvodima I ona je u vezi vise prema vise sa tabelom orders zato imamo medju tabelu orders_products koja za svaki proizvod prikazuje njegovu kolicinu njegov id I id ordera. U orders tabeli se nalaze informacije o tome kada je porudzbina primljena adresa na koju treba da se dostavi I id kupca. Kupac moze poruciti neki proizvod samo ako je ulogovan. U tabeli role se nalaze samo 2 kolone user I admin. Svako ko se registruje na sajt ce automatski imati role user. Contact tabela prima podatke sa kontakt stranice. Iz nav_meni tabele se ispuje navigacioni meni. Takodje jedan proizvod moze imati vise kategorija.

Funkcionalnosti sajta:

Dohvatanje podataka iz baze I dinamicko ispisivanje istih.

Registracija I logovanje korisnika kao I logout.

Admin panel na koji moze da pristupi samo korisnik sa administratorskim kredencijalima. Na toj stranici admin moze da, menja postojece proizvode, brise proizvode (kada se proizvod obrise prvo se obrisu njegove kategorije u tabeli products_category) I da dodaje nove proizvode.

Korpi mogu pristupiti samo ulogovanu korisnic.

Paginacija odradjena u shopu I admin panelu za proizvode.


Kontakt stranica poruka korisnika se upisuje u bazu naravno prvo se provere vrednosti koje je korisnik uneo. Na admin panelu admin moze videti sve poruke koje su korisnici poslali. Ako je korisnik ulogovan njegovo ime prezime I email bice vec ispisani u poljima za kontakt (pamcenje sesije).

Kada korisnik kupi neki proizvod njegov quantity u bazi ce se promeniti, na sajtu su dinamicki ispisani 6 najprodavanijih proizvoda dakle kada se kupi odredjeni proizvod njegova kolicina(kupljenih proizvoda) se menja.

Takodje na admin panelu admin moze menjati korisnicke naloge ali ne I njihovu sifru.

Single page stranica za svaki proizvod kada se klikne na proizvod bilo gde na sajtu otvorice se stranica koja detaljnije objasnjava taj proizvod.

Organizacija

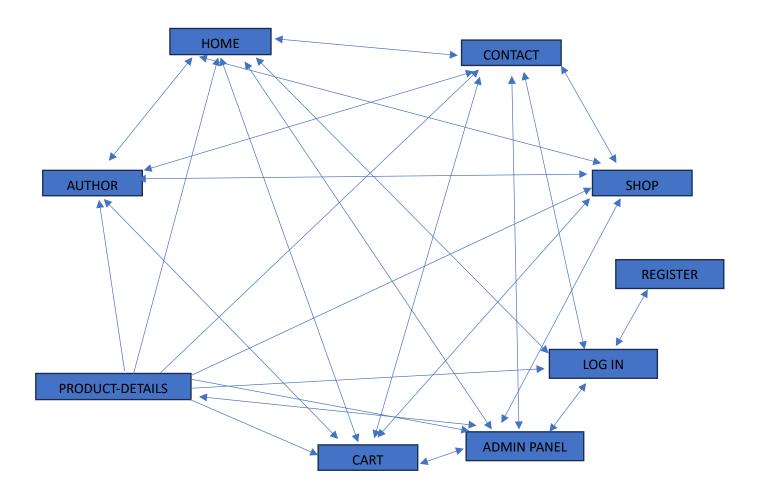

Organizacija sajta i funkcionalnosti na tim delovima

Header je napisan na jednoj stranici header php I samo sa include_once() iskoriscen na svakoj stranici.

Kod za header.php

```
$upit = "SELECT * FROM nav meni";
$nav meni = $conn->query($upit)->fetchAll();
<header class="header-area header-sticky">
           <div class="col-12">
style="width: 158px;">
                  </a>
                  <?php if($user->role=="admin"): ?>
                          <a href="admin-panel.php">Admin
panel</a>
                  <a class='menu-trigger'>
                      <span>Menu</span>
                  </a>
               </nav>
```

Admin Panel Home Our Shop Contact Us Log Out Author

Linkovi ispisani dinamicki iz baze.



Dinamicki prikaz proizvoda koji je na najvecem popustu.


Upit za prikaz tog proizvoda.


Trending Games












Rogue Company

Dinamicki prikaz trending proizvoda I njihovih kategorija. Proizvod je trending ako u bazi ima isTrending:1 u suprotnom nije trending. Takodje svim proizvodima na celom sajtu racuna se procenat popusta na osnovu stare I nove cene. Nova cena moze biti null ako je null procenat se nece prikazivati I prikazace se samo stara cena.

Kod za prikaz tih proizvoda:

```
?php foreach ($trendingProducts as $trend): ?>
              <a href="product-details.php?id=<?=$trend->product id?>"><imq</pre>
                  <span class="price">$<?=$trend->old price?></span>
                  <span class="price"><em>$<?=$trend-</pre>
>old price?></em>$<?=$trend->new price?></span>
          </div>
          <div class="down-content">
              <span class="category"><?=$trend->category names?></span>
              <h4><?=$trend->product name?></h4>
          </div>
      </div>
```

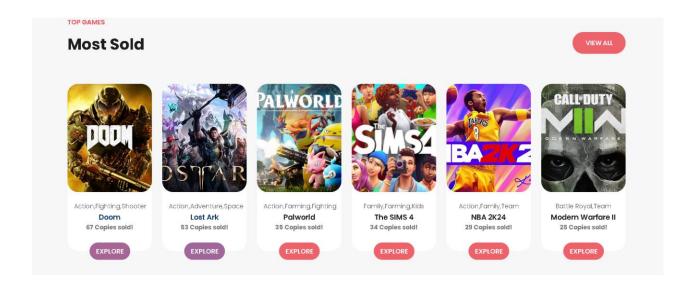

Ovde se prikazuje 6 najprodavanijih proizvoda kao i broj kopija koje su prodate.Broj kopija se dobija iz tabele orders_products, ako se na sajtu kupi neki proizvod I taj proizvod postane prodavaniji od nekog prikazanog ovde on ce se prikazati umesto tog proizvoda.


Upit za dobijanje tih proizvoda:

```
$upitZaNajprodavanije = "

SELECT p.product_id,p.product_name, p.product_img, p.alt,
GROUP_CONCAT(DISTINCT category.category_name) AS categories,
SUM(op.quantity) AS total_quantity
FROM products p
INNER JOIN products_category ON p.product_id = products_category.product_id
INNER JOIN category ON products_category.category_id = category.category_id
LEFT JOIN orders_products op ON p.product_id = op.product_id
GROUP BY p.product_id, p.product_name, p.product_img, p.alt
ORDER BY total_quantity DESC
LIMIT 6;
";
```

Kod za prikaz tih proizvoda je isti kao za trending proizvode, klasicna for petlja.

Zatim na Our Shop stranici uradjena je paginacija za prikaz 8 proizvoda po strani.

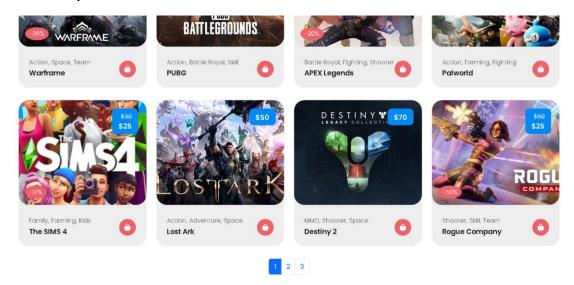


Kod za paginaciju:

```
$products = $conn->query($products_query)->fetchAll();
```

Stranica za detaljni prikaz proizvoda. Na ovu stranicu je omogucen prikaz svakog proizvoda slanjem njegovog id-a putem query stringa u url adresi.





Kod za dohvatanje tog proizvoda I njegovog id-a iz query stringa


```
$y->bindParam(":id",$id);
$y->execute();

$categories=$y->fetch();

$categoryNames = $categories->categories;


$categoryArray = explode(',', $categoryNames);
}else {
    redirect("404.php");
}
```

Sa ove stranice se moze dodati proizvod u korpu

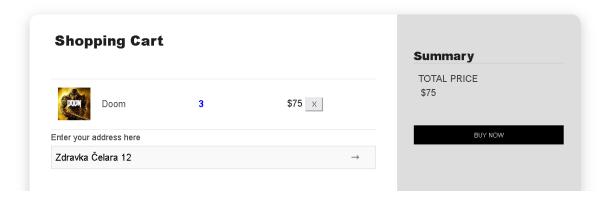


Ovako izgleda korpa. Klikom na dugme proizvod ce biti upisan u orders_products ili proizvodi moze ih biti I vise naravno. Adresa je ispisana kroz sesiju korisnik je naravno moze promeniti, adresa je ista kao ona uneta tokom registracije za tog korisnika.

Kontakt stranica u input polja su upisani podatci koje je korisnik uneo pri registraciji :

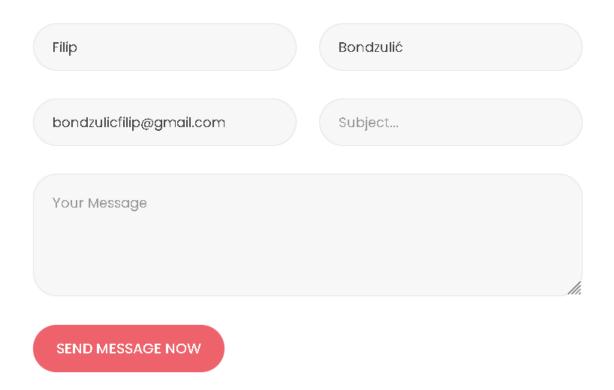

Sve uneseno ovde se prvo proveri pa ako su vrednosti ispravne podatci se unesu u contact tabelu u bazi.

Admin panel:

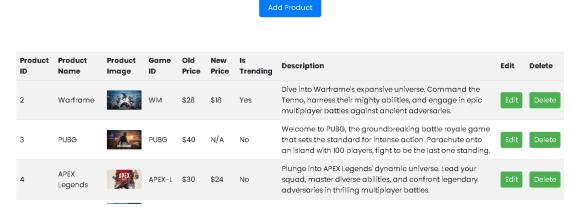


Admin panelu se moze pristupiti samo ako je korisnikov role "admin" funkcija za proveru da li je korisnik admin :

```
function isAdmin() {
   if (isset($_SESSION['user'])) {
     $role = $_SESSION['user']->role;

   if ($role !== 'admin') {
```

Na admin panelu admin moze dodavati novi proizvod evo kako to izgleda:

Product Image: assets/images/ Alt for Image: Game ID: Old Price:		
assets/images/ Alt for Image: Game ID: Old Price:	Product Name:	
assets/images/ Alt for Image: Game ID: Old Price:		
Alt for Image: Game ID: Old Price:	Product Image:	
Game ID: Old Price:	assets/images/	
Old Price:	Alt for Image:	
Old Price:		
	Game ID:	
New Price:	Old Price:	
New Price:		
	New Price:	

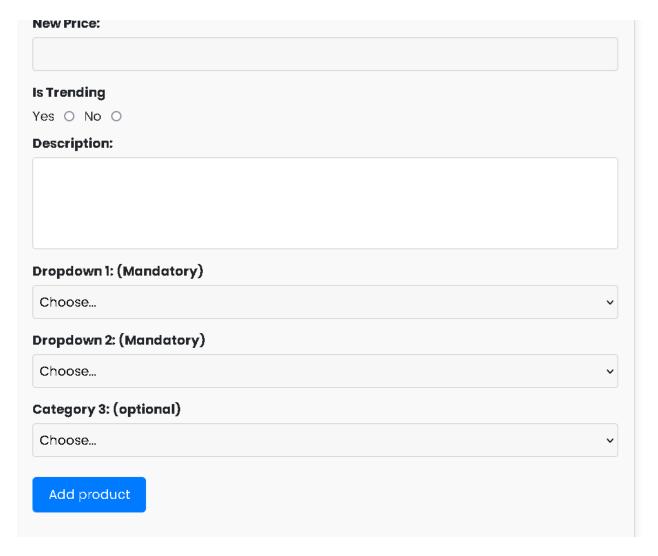

Znaci admin pri dodavanju proizvoda mora izabrati minimum 2 kategorije I da li je proizvod trending I sva ostala polja moraju imati vrednost. Unos ovih podatak je proveren regexima pre unosenja u bazu. Provera:


```
<?php
error_reporting(E_ALL);
ini_set('display_errors', 1);

session_start();
include_once("functions.php");
include_once("conn.php");
isAdmin();
global $conn;
$error = [];
try{
    if ($_SERVER["REQUEST_METHOD"] == "POST") {
        if (isset($_POST['isTrending'])) {
             $isTrending=$_POST['isTrending'];
        }
        else{
            $isTrending=null;</pre>
```

```
extract($ POST);
            if($isTrending==1 || $isTrending ==0 ){
$imageRegex="/^assets\/images\/[A-Za-z0-9_-
]{1,95}\.(jpg|jpeg|png|gif)$/";
                if($newPrice=="" || $newPrice==0){
                $isValid = array(
$productName),
                     'alt' => checkRegex($productNameRegex, $alt),
                     'gameId'=>checkRegex($productNameRegex,$gameId),
                     'oldPrice' => checkRegex($priceRegex, $oldPrice),
                if($newPrice==null){
                     if(!$value){
                if($isAllTrue){
                     $x->bindParam(":img", $productImage);
```


```
$x->execute();
    $query="SELECT * FROM category";
}catch (Exception $e) {
```

Takodje admin ima opciju da edituje proizvode

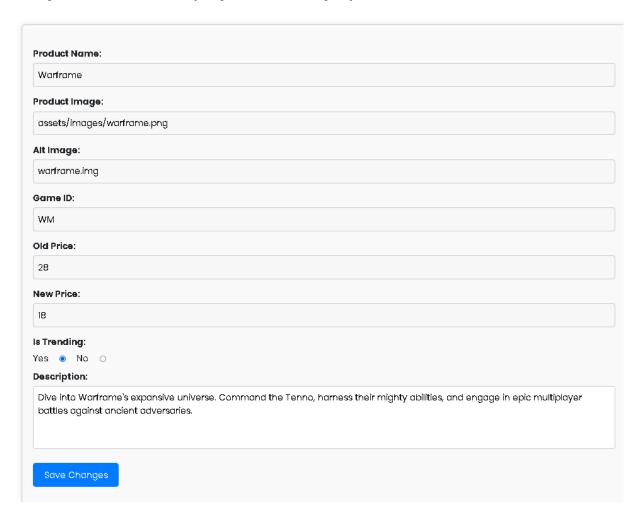

Sve je isto kao I dodavanje proizvoda samo su vrednosti vec unesene I mogu se menjati.

Takodje klikom na delete proizvod kao I njegove kategorije ce biti izbrisanje iz baze.




Paginacija je uradjena I ovde:



Customers

Customer ID	Name	Last Name	Email	Phone Number	Address	Role	Edit	Delete
1	Pera	Perić	pera21@gmail.com	1231231312	Zdravka Čelara 12	user	Edit	Delete
2	Mika	Mikić	miki@gmail.com	21515151	Cvijićeva	user	Edit	Delete
3	Žika	Žikic	žīks@gmail.com	2145125124	Ljube Didića	user	Edit	Delete
4	Pink	Panter	panter@gmail.com	2131231321	Zdravka	user	Edit	Delete
18	Perica	Pericc	pericaa@gmail.com	313213323	Zdravka	user	Edit	Delete
19	Miroslav	Mikicccc	miroslav@gmail.com	2147483647	Aloo	user	Edit	Delete
20	Sevo	Veselin	veselin@gmail.com	2147483647	Zdravka	user	Edit	Delete

Isto vazi I za korisnike samo u slucaju korisnika pri pokusaju da se korisnik izbrise ako je on porucio nesto to jest napravio order nece biti moguce izbrisati korisnika. Prikaz poruke kada nije dozvoljeno brisanje korisnika:



Messages

Message	Subject	First Name	Last Name	Email
Poruka od veselina	Poruka	Sevo	Veselin	veselin@gmail.com

I prikaz poruka u admin panelu, poruka koje su unete u kontakt stranici.

Takodje pri pokusaju pristupanja stranici kao na primer admin panel ako korisnik nije admin bice redirektovan na stranicu 404.php. Prikaz te stranice:

404 - Not Found

The page you are looking for might have been removed, had its name changed, or is temporarily unavailable.

Please click here to go to the homepage.

Za registraciju I logovanje korisnika uradjena je provera I na frontu I na beku.

Kod za proveru na frontu za registraciju I logovanje

```
let email = $("#email");
let address = $("#address");
let passwd=$("#password");
let isValid=true;
let emailRegex = /^\w+([\.-]?\w+)*@\w+([\.-]?\w+)*(\.\w{2,3})+$/;
let phoneRegex = /^(\d) \{8,30\}$/;
let addressRegex = /^[A-Za-z0-9\s\.,\#-]{1,35}$/;
if (!checkValue(nameRegex, fname.val())) {
    isValid=false;
    $("#fname-error").hide();
if (!checkValue(nameRegex, lname.val())) {
   isValid=false;
```

```
if (!checkValue(emailRegex, email.val())) {
            isValid=false;
        if (!checkValue(phoneRegex, phone.val())) {
digits").show();
            isValid=false;
        if (!checkValue(addressRegex, address.val())) {
            isValid=false;
        if (passwd.val()!=rpasswd.val()) {
            isValid=false;
        if(isValid) {
            let formData = {
                email: email.val(),
                phone: phone.val(),
                address: address.val(),
form.php", "POST", formData, function(response) {
                    fname.val('');
                    email.val('');
                    address.val('');
```

```
$ (document) .on ("click", "#btnLog", function (eventLog) {
        eventLog.preventDefault();
        let isValid=true;
        let emailRegex = /^\w+([\.-]?\w+)*@\w+([\.-]?\w+)*(\.\w{2,3})+$/;
        if (!checkValue(emailRegex, email.val())) {
            console.log(isValid)
            isValid=false;
            $("#email-errorLog").hide();
        console.log(isValid)
        if(isValid) {
            let dataForChecking={
                email:email.val(),
                passwd:passwd.val()
            console.log(dataForChecking);
in.php", "POST", dataForChecking, function (response) {
                    if (response.role === "admin") {
```

Provera registracije na beku:

```
<?php
session_start();
header("Content-type: application/json");

include_once("Methods/functions.php");
if (isPost()) {
   include_once("Methods/conn.php");

   try{
        $fname = $_POST['fname'];
        $lname = $_POST['lname'];
}</pre>
```


```
phoneRegex = '/^(d) \{8,30\}
            header("Location: register.php");
            $md5Passwd=md5($passwd);
$insertCustomer=insertCustomer($fname,$lname,$email,$phone,$address,$md5Pas
                echo json encode($response);
                http response code(200);
    catch (PDOException $exception) {
       var dump($exception);
       http response code (500);
   http response code (404);
```

}

Provera logovanja na beku:

```
\mbox{$md5Passwd} = \mbox{$md5(\passwd)$;}
} catch (PDOException $exception) {
```

Korisniku nakon logovanja ce se prikazati logout dugme u navigacionom meniju:



Klikom na Log Out izvrsice se ovaj kod:

```
<?php
session_start();
session_destroy();
header("Location: index.php");
exit;
?>
```

KODOVI

INDEX.PHP

```
$mostSoldProcuts=$conn->query($upitZaNajprodavanije)->fetchAll();
$trendingProducts = $conn->query($upit3)->fetchAll();
<!DOCTYPE html>
<html lang="en">
    <meta charset="utf-8">
    <meta name="viewport" content="width=device-width, initial-scale=1,</pre>
    ink
href="https://fonts.googleapis.com/css2?family=Poppins:wght@100;200;300;400
    <script
src="https://cdnjs.cloudflare.com/ajax/libs/jquery/3.7.1/jquery.min.js"
integrity="sha512-
2/4hpQINQ/g==" crossorigin="anonymous" referrerpolicy="no-
```

```
<link href="vendor/bootstrap/css/bootstrap.min.css" rel="stylesheet">
   <link rel="stylesheet" href="assets/css/templatemo-lugx-gaming.css">
   <link rel="stylesheet"href="https://unpkg.com/swiper@7/swiper-</pre>
</head>
<div class="main-banner">
   <div class="container">
        <div class="row">
                    <h2>BEST GAMING SITE EVER!</h2>
                    <div class="welcome-message">
                        At Lugx Gaming, we're passionate about gaming
just as much as you are. Step into a world where gaming transcends
unforgettable experiences.
                        Explore our vast collection of video games
curated for gamers of all ages and preferences. From action-packed
adventures to immersive role-playing epics, we have something for
everyone.
                    </div>
                </div>
                <div class="right-image">
>new price?></span>
                    <span class="offer">-<?=$finalProcentage?>%</span>
               </div>
```

```
</div>
        </div>
    </div>
</div>
    <div class="container">
                 <a href="#">
                         <div class="image">
style="max-width: 44px;">
                         </div>
                         <h4>Free Storage</h4>
                     </div>
                 </a>
            </div>
            <div class="col-lg-3 col-md-6">
                     <div class="item">
                             <img src="assets/images/featured-02.png" alt=""</pre>
style="max-width: 44px;">
                         </div>
                         <h4>User More</h4>
                     </div>
                 </a>
                 <a href="#">
                         <div class="image">
style="max-width: 44px;">
                         </div>
                         <h4>Reply Ready</h4>
                     </div>
                 </a>
            </div>
            <div class="col-lq-3 col-md-6">
                 <a href="#">
                             <img src="assets/images/featured-04.png" alt=""</pre>
style="max-width: 44px;">
                         </div>
                         <h4>Easy Layout</h4>
                     </div>
                 </a>
            </div>
        </div>
    </div>
</div>
   <div class="container">
```

```
<div class="section-heading">
                     <h6>Trending</h6>
                     <h2>Trending Games</h2>
                 </div>
            </div>
            <div class="col-lq-6">
                     <a href="shop.php">View All</a>
            <?php foreach ($trendingProducts as $trend): ?>
                     <div class="item">
                         <div class="thumb">
                             <a href="product-details.php?id=<?=$trend-</pre>
>product id?>"><imq src="<?=$trend->product img?>" alt="<?=$trend-
>alt?>"></a>
                                 <span class="price">$<?=$trend-</pre>
                                 <span class="price"><em>$<?=$trend-</pre>
>old price?></em>$<?=$trend->new price?></span>
                         </div>
                         <div class="down-content">
>category names?></span>
                             <a href="product-details.php?id=<?=$trend-</pre>
                         </div>
                     </div>
                 </div>
        </div>
    </div>
</div>
        <div class="row">
            <div class="col-lq-6">
                     <h6>TOP GAMES</h6>
                     <h2>Most Sold</h2>
                 </div>
            </div>
            <div class="col-lq-6">
                <div class="main-button">
                    <a href="shop.php">View All</a>
```

```
</div>
            </div>
                     <div class="item">
>alt?>"></a>
                        </div>
                         <div class="down-content">
                             <span class="category"><?=$products-</pre>
sold!</span></strong>
                             <a href="product-details.php?id=<?=$products-</pre>
>product id?>">Explore</a>
                         </div>
                     </div>
                </div>
        </div>
    </div>
</div>
<div class="section cta">
    <div class="container">
                    <div class="row">
                         <div class="col-lq-12">
                                 <h2>Go Pre-Order Buy & Get Best
<em>Prices For You!</h2>
                             </div>
                             Lorem ipsum dolor consectetur adipiscing,
sed do eiusmod tempor incididunt.
                             </div>
                         </div>
                    </div>
                </div>
            </div>
        </div>
    </div>
</div>
```

```
<script src="vendor/jquery/jquery.min.js"></script>
<script src="vendor/bootstrap/js/bootstrap.min.js"></script>
<script src="assets/js/isotope.min.js"></script>
<script src="assets/js/owl-carousel.js"></script>
<script src="assets/js/counter.js"></script>
<script src="assets/js/custom.js"></script>
<script src="assets/js/custom.js"></script>
<script src="assets/js/main.js"></script>
</body>
</html>
```

SHOP.PHP

```
session start();
$total products query = "SELECT COUNT(*) as total FROM products";
$total pages = ceil($total products / $results per page);
$products query = "SELECT
```

```
<!DOCTYPE html>
    ink
    <title>Lugx Gaming - Shop Page</title>
    <link href="vendor/bootstrap/css/bootstrap.min.css" rel="stylesheet">
    <link rel="stylesheet" href="assets/css/fontawesome.css">
    <link rel="stylesheet" href="assets/css/templatemo-lugx-gaming.css">
    <link rel="stylesheet" href="assets/css/owl.css">
    <div class="container">
            <div class="col-lg-12">
                < h3 > Our Shop < /h3 >
Shop</span>
            </div>
        </div>
    </div>
</div>
    <div class="container">
```

```
<div class="col-lq-3 col-md-6 align-self-center mb-30</pre>
                   <div class="item">
                       <div class="thumb">
                           <a href="product-
details.php?id=<?=urlencode($product->product id)?>"><img src="<?=$product-
>product img?>" alt=""></a>
                           <?php if($product->new price == null): ?>
                               <span class="price">$<?=$product-</pre>
                               <span class="price"><em>$<?=$product-</pre>
>old price?></em>$<?=$product->new price?></span>
                       </div>
                       <div class="down-content">
>category names?></span>
                           <a href="product-details.php?id=<?=$product-</pre>
                       </div>
                   </div>
               </div>
       </div>
   </div>
</div>
<nav aria-label="Page navigation">
           </nav>
<script src="vendor/jquery/jquery.min.js"></script>
<script src="vendor/bootstrap/js/bootstrap.min.js"></script>
<script src="assets/js/isotope.min.js"></script>
<script src="assets/js/owl-carousel.js"></script>
<script src="assets/js/counter.js"></script>
<script src="assets/js/main.js"></script>
```

PRODUCT-DETAILS.PHP

```
$upit="SELECT * FROM products WHERE product id=:id";
        $x->bindParam(":id",$id);
       $product=$x->fetch();
        $upit2="SELECT GROUP CONCAT(category name) as categories FROM
                                    WHERE p.product id=:id";
        $y->execute();
        $categories=$y->fetch();
        $categoryArray = explode(',', $categoryNames);
<!DOCTYPE html>
```

```
<meta charset="utf-8">
    ink
    <title>Lugx Gaming - Product Detail</title>
    <link href="vendor/bootstrap/css/bootstrap.min.css" rel="stylesheet">
    <link rel="stylesheet" href="assets/css/owl.css">
    <link rel="stylesheet" href="assets/css/animate.css">
    <link rel="stylesheet"href="https://unpkq.com/swiper@7/swiper-</pre>
</head>
<div class="page-heading header-text">
    <div class="container">
            <div class="col-lg-12">
                <span class="breadcrumb"><a href="#">Home</a> > <a</pre>
href="#">Shop</a> > <?=$product->product name?></span>
            </div>
        </div>
    </div>
</div>
        <div class="row">
            <div class="col-lq-6">
                    <imq src="<?=$product->product imq?>" alt="<?=$product-</pre>
>alt?>" class="slika">
                </div>
            </div>
                <?php if($product->new price!=null): ?>
```

```
<span class="price"><em>$<?=$product->old price?></em>
$<?=$product->new price?></span>
                    <span class="price">$<?=$product->old price?></span>
                <?=$product->description?>
                <form id="qty" action="cart.php" method="GET">
                    <input type="hidden" name="product id"</pre>
                    <input type="number" name="quantity" class="form-</pre>
control" id="quantityInput" aria-describedby="quantity" value="1" min="1"
                    <button type="submit" id="addToCartBtn"><i class="fa</pre>
                </form>
                    <span>Game ID:</span> <?=$product->qame id?>
                    <span>Genre:</span>
                    </div>
            <div class="col-lq-12">
                <div class="sep"></div>
            </div>
        </div>
   </div>
</div>
<script src="vendor/bootstrap/js/bootstrap.min.js"></script>
<script src="assets/js/isotope.min.js"></script>
<script src="assets/js/owl-carousel.js"></script>
<script src="assets/js/main.js"></script>
</body>
</html>
```

CART.PHP

```
if(isset($ SESSION['user'])){
$cartProducts = array();
                    FROM products WHERE product id=:id";
        $stmt->execute();
        $cartProduct = $stmt->fetch();
```

```
$totalPrice += intval($cartItem['product']->old price) *
intval($cartItem['quantity']);
if(isset($ GET['message'])){
<!DOCTYPE html>
<html lang="en">
    <meta charset="utf-8">
    <meta name="viewport" content="width=device-width, initial-scale=1,</pre>
    link
href="https://fonts.googleapis.com/css2?family=Poppins:wght@100;200;300;400
    <link href="vendor/bootstrap/css/bootstrap.min.css" rel="stylesheet">
    <link rel="stylesheet" href="assets/css/fontawesome.css">
    <link rel="stylesheet" href="https://unpkg.com/swiper@7/swiper-</pre>
href="https://stackpath.bootstrapcdn.com/bootstrap/4.3.1/css/bootstrap.min.
    link
href="https://stackpath.bootstrapcdn.com/bootstrap/4.3.1/js/bootstrap.bundl
    nk
href="https://cdnjs.cloudflare.com/ajax/libs/jquery/3.2.1/jquery.min.js"/>
    <link href="https://cdnjs.cloudflare.com/ajax/libs/font-</pre>
```

```
<link href="assets/css/mycss.css" rel="stylesheet" type="text/css"/>
</head>
       <span class="dot"></span>
       <div class="dots">
           <span></span>
           <span></span>
           <span></span>
       </div>
    </div>
</div>
<div class="page-heading header-text">
       <div class="row">
           <div class="col-lq-12">
               <h3>Cart</h3>
               <span class="breadcrumb"><a href="#">Home</a> > <a</pre>
href="#">Shop</a> > Cart</span>
           </div>
        </div>
   </div>
</div>
   <div class="row">
               </div>
           </div>
               <?=$error?>
           <?php endif; ?>
method="POST">
                               </div>
                               <div class="col">
                               </div>
                               <div class="col">
                                   <a class="quantity-label" >
```

```
</a>
                                 </div>
== null): ?>
                                     <div class="col">$ <?=
                                         <button class="close-button"</pre>
style="width: 30px" data-index="<?= $index ?>">X</button>
                                     </div>
                                     <div class="col">$<?=
                                         <button class="close-button"</pre>
style="width: 30px" data-index="<?= $index ?>">X</button>
                                     </div>
                                 <?php endif; ?>
                            </div>
                        </div>
                    <?php endif; ?>
                Enter your address here
                <input id="code" name="address" placeholder="Enter your</pre>
address" value="<?= $user->street address ?>">
href="shop.php">← < span class="text-muted">Back to
shop</span></a></div>
            </form>
        </div>
            <div><h5><b>Summary</b></h5></div>
            <div>
            </div>
            <div class="row" style="border-top: 1px solid rgba(0,0,0,.1);</pre>
padding: 2vh 0;">
                <div class="col">TOTAL PRICE</div>
                    <span name="totalPrice">$0</span>
                    <span name="totalPrice">$<?=$totalPrice?></span>
            </div>
            <button type="submit" form="checkoutForm" class="btn">BUY
NOW</button>
        </div>
    </div>
<?php if(isset($ GET['error'])): ?>
```

CHECKOUT_PROCESS.PHP

```
include once("Methods/conn.php");
           header("Location: cart.php?error=Your cart is empty.");
           unset($ SESSION['cart']);
```

FOOTER.PHP

HEADER.PHP

```
include_once("Methods/conn.php");
global $conn;
$upit = "SELECT * FROM nav_meni";
$nav_meni = $conn->query($upit)->fetchAll();

if (isset($_SESSION['user'])) {
    $loginText = "Log Out";
    $loginLink = "logout.php";
} else {
    $loginText = "Log In";
    $loginLink = "log-in.php";
}
```

```
<div class="row">
                     <div class="col-12">
style="width: 158px;">
                                    </a>
panel</a>
if(basename($ SERVER['PHP SELF']) == "$nav->nav path") echo
                                    <span>Menu</span>
                                    </a>
                             </nav>
                     </div>
              </div>
       </div>

<
```

CONTACT.PHP

```
<?php
session_start();
$errors = isset($_GET['errors']) ? $_GET['errors'] : [];

$user = isset($_SESSION['user']) ? $_SESSION['user'] : (object)[];
?>
```

```
<!DOCTYPE html>
   <meta charset="utf-8">
   ink
href="https://fonts.googleapis.com/css2?family=Poppins:wght@100;200;300;400
   <title>Lugx Gaming Template - Contact Page</title>
   <link rel="stylesheet" href="assets/css/templatemo-lugx-gaming.css">
   <link rel="stylesheet" href="assets/css/owl.css">
   <link rel="stylesheet" href="assets/css/animate.css">
 </head>
   <div class="container">
          <h3>Contact Us</h3>
          <span class="breadcrumb"><a href="#">Home</a> > Contact
Us</span>
        </div>
      </div>
   </div>
  </div>
    <div class="container">
      <div class="row">
           <div class="section-heading">
```

```
<h6>Contact Us</h6>
             <h2>Say Hello!</h2>
           </div>
               Welcome to our Contact Us page! We value your feedback,
inquiries, and suggestions. Whether you have a question about an order,
need assistance with a product, or simply want to share your thoughts, our
           <l
             <span>Address</span> Sunny Isles Beach, FL 33160, United
States
             <span>Phone</span> +123 456 7890
             <span>Email</span> lugx@contact.com
           </div>
       </div>
       <div class="col-lq-6">
         <div class="right-content">
           <div class="row">
             <div class="col-lq-12">
               <div id="map">
                 <iframe
src="https://www.google.com/maps/embed?pb=!1m18!1m12!1m3!1d12469.7764933326
border-radius: 23px;" allowfullscreen=""></iframe>
               </div>
             </div>
                     <div class="container mt-5">
?>
                     </div>
method="post">
                 <div class="row">
                   <div class="col-lq-6">
                     <fieldset>
                       <input type="text" name="name" id="name"</pre>
placeholder="Your Name..." autocomplete="on" value="<?=$user-
                     </fieldset>
                   </div>
                     <fieldset>
```

```
<input type="text" name="surname" id="surname"</pre>
placeholder="Your Surname..." autocomplete="on" value="<?=$user-</pre>
                       </fieldset>
                       <fieldset>
                         <input type="text" name="email" id="email"</pre>
pattern="[^ @]*@[^ @]*" placeholder="Your E-mail..." value="<?=$user-
                       </fieldset>
                     <div class="col-lq-6">
                       <fieldset>
                         <input type="text" name="subject" id="subject"</pre>
placeholder="Subject..." autocomplete="on" >
                       </fieldset>
                     <div class="col-lq-12">
                       <fieldset>
                         <textarea name="message" id="message"</pre>
placeholder="Your Message"></textarea>
                       </fieldset>
                     </div>
                     <div class="col-lg-12">
                       <fieldset>
                         <button type="submit" id="form-submit"</pre>
class="orange-button">Send Message Now</button>
                       </fieldset>
                     </div>
                   </div>
                 </form>
                           <div class="alert alert-danger" role="alert">
                           </div>
                   </div>
              </div>
            </div>
          </div>
        </div>
      </div>
    </div>
  </div>
  <script src="vendor/bootstrap/js/bootstrap.min.js"></script>
  <script src="assets/js/isotope.min.js"></script>
  <script src="assets/js/owl-carousel.js"></script>
  <script src="assets/js/counter.js"></script>
```

INSERTCONTACT.PHP

```
exit();
$query="INSERT INTO contact
$stmt->bindParam(':message', $message);
```

```
$stmt->execute();
    redirect("contact.php?message=Your message has been recived");
} else {
    redirect("404.php");
}
```

FUNCTIONS.PHP

```
$prepare->bindParam(":role", $roleId);
```

```
Squery="SELECT * FROM customers c JOIN roles r ON c.role id=r.role id
                      WHERE c.email=:email AND c.password=:passwd";
$query = "SELECT product id FROM products";
   $productIds = $stmt->fetchAll();
} catch (PDOException $exception) {
   $x->execute();
    $lastInsertedId = $conn->lastInsertId();
catch (PDOException $exception) {
```

```
function insertOrderDetails($productId,$quantity,$orderId){
   $x=$conn->prepare($query);
    $x->bindParam(":orderID", $orderId);
            exit();
       header("Location: 404.php");
   header("Location: $url");
```

REGISTER.PHP

```
<link href="assets/css/style.css" type="text/css" rel="stylesheet"/>
    link
    <title>Lugx Gaming Shop HTML5 Template</title>
    <link rel="stylesheet" href="assets/css/fontawesome.css">
    <link rel="stylesheet" href="assets/css/animate.css">
    <script
    <link rel="stylesheet" href="assets/css/mycss.css" type="text/css">
</head>
<div class="page-heading header-text">
    <div class="container">
                <h3>Register</h3>
                <span class="breadcrumb"><a href="#">Home</a> >
Register</span>
            </div>
        </div>
    </div>
</div>
                <h2 class="">Register now</h2>
                    Register to Access Your Cart Page and Start Shopping!
                </div>
            <div class="formbold-input-flex">
```

```
<div>
                   <label for="firstname" class="formbold-form-label">
                       First name
                   </label>
                   <input
                       type="text"
style="color:red">
               </div>
               <div>
                   <label for="lastname" class="formbold-form-label"> Last
name </label>
                       type="text"
                       class="formbold-form-input"
                   style="color:red">
               </div>
           </div>
           <div class="formbold-input-flex">
               <div>
                   <label for="email" class="formbold-form-label"> Email
</label>
                   <input
                       type="email"
style="color:red">
               </div>
               <div>
                   <label for="phone" class="formbold-form-label"> Phone
number </label>
                   <input
                       type="text"
               </div>
           </div>
           <div class="formbold-mb-3">
               <label for="address" class="formbold-form-label">
                   Street Address
               </label>
```

```
<input
                    type="text"
                    class="formbold-form-input"
            </div>
                    <label for="state" class="formbold-form-label">
Password </label>
                    <input
                        type="password"
style="color:red">
                </div>
                <div>
                    <label for="country" class="formbold-form-label">
Repeat password </label>
                    <input
                        type="password"
                </div>
            </div>
            <button class="formbold-btn" id="btn" type="submit">Register
Now</button>
        </form>
    </div>
</div>
<script src="vendor/jquery/jquery.min.js"></script>
<script src="vendor/bootstrap/js/bootstrap.min.js"></script>
<script src="assets/js/isotope.min.js"></script>
<script src="assets/js/counter.js"></script>
<script src="assets/js/main.js"></script>
```

CHECK-FROM.PHP

```
<?php
session_start();</pre>
```

```
include once("Methods/functions.php");
    include once("Methods/conn.php");
        if(!checkRegex($nameRegex,$fname)){
            $md5Passwd=md5($passwd);
            if($insertCustomer){
```

```
}
}
catch (PDOException $exception) {
    var_dump($exception);
    http_response_code(500);
}

else {
    http_response_code(404);
}
```

CHECK-LOGIN.PHP

```
your credentials."]);
     catch (PDOException $exception) {
```

```
error_log("Database error: " . $exception->getMessage());
    echo json_encode(["error" => "Internal Server Error"]);
    http_response_code(500);
}
else {
    echo json_encode(["error" => "Method Not Allowed"]);
    http_response_code(405);
}
?>
```

LOGOUT.PHP

```
<?php
session_start();
session_destroy();
header("Location: index.php");
exit;
?>
```

REMOVE_PRODUCT.PHP

```
missing');
    echo json_encode($response);
}
?>
```

ADMIN-PANEL.PHP

```
include once("Methods/functions.php");
include once("Methods/conn.php");
global $conn;
$total products query = "SELECT COUNT(*) as total FROM products";
$total products = $total products result->fetch(PDO::FETCH ASSOC)['total'];
c.role id=r.role id";
} elseif(isset($ GET['error'])) {
$query3="SELECT * FROM contact";
<!DOCTYPE html>
    <link href="assets/css/style.css" type="text/css" rel="stylesheet"/>
    ink
```

```
<title>Lugx Gaming Shop HTML5 Template</title>
   <link href="vendor/bootstrap/css/bootstrap.min.css" rel="stylesheet">
   <link rel="stylesheet" href="assets/css/fontawesome.css">
   <link rel="stylesheet" href="assets/css/templatemo-lugx-gaming.css">
   <script
</head>
   <div class="container">
       <div class="row">
           <div class="col-lq-12">
               <h3>ADMIN PANEL</h3>
               <span class="breadcrumb"><a href="#">Home</a> > Admin
Panel</span>
           </div>
       </div>
   </div>
</div>
<div class="centered-container">
   <div class="add-product-button">
       <button><a href="Methods/addProduct.php">Add Product</a></button>
   </div>
</div>
       Product ID
       Product Name
       Product Image
       Game ID
       Old Price
```

```
New Price
     Is Trending
     Description
     Edit
     Delete
  </thead>
     <?=$product->game id?>
     <?=$product->description?>
        <button><a href="edit.php?id=<?=$product-</pre>
>product id?>">Edit</a></button>
  <nav aria-label="Page navigation">
           <a class="page-link" href="?page=<?php echo $page;</pre>
?>"><?php echo $page; ?></a>
        </nav>
     <h2>Customers</h2>
  </div>
</div>
Customer ID
     Name
```

```
Last Name
      Email
      Phone Number
      Address
      Role
      Edit
      Delete
   </thead>
   <?= $customer->customer lname ?>
         <?= $customer->street address ?>
         <?= $customer->role ?>
            <button><a href="edit-user.php?id=<?= $customer-</pre>
         <button><a href="delete-user.php?id=<?= $customer-</pre>
         <div class="container">
   <div class="row">
         <?php if(isset($successMessage)): ?>
      </div>
   </div>
</div>
<div class="centered-container">
      <h2>Messages</h2>
   </div>
```

```
</div>
      Message
      Subject
      Last Name
      Email
   </thead>
         <:= $message->message?>
         <?= $message->subject?>
      <script src="assets/js/isotope.min.js"></script>
<script src="assets/js/owl-carousel.js"></script>
<script src="assets/js/counter.js"></script>
<script src="assets/js/main.js"></script>
</body>
```

ADDPRODUCT.PHP

```
<?php
error_reporting(E_ALL);
ini_set('display_errors', 1);
session_start();</pre>
```

```
isAdmin();
        extract($ POST);
            if($isTrending==1 || $isTrending ==0 ){
                    $newPrice=null;
$productName),
                    'image' => checkRegex($imageRegex, $productImage),
                    'gameId'=>checkRegex($productNameRegex,$gameId),
                    'oldPrice' => checkRegex($priceRegex, $oldPrice),
                if($newPrice==null){
                    if(!$value){
                if($isAllTrue){
```

```
$x->bindParam(":desc", $description);
$x->execute();
$productId=$conn->lastInsertId();
    $y = $conn->prepare($query2);
    $y->execute();
```

```
}catch (Exception $e) {
  . $e->getMessage()]);
<!DOCTYPE html>
<html lang="en">
    <link href="../assets/css/style.css" type="text/css" rel="stylesheet"/>
    ink
href="https://fonts.googleapis.com/css2?family=Poppins:wght@100;200;300;400
;500;600;700;800;900&display=swap" rel="stylesheet">
    <title>Lugx Gaming Shop HTML5 Template</title>
    <link rel="stylesheet" href="../assets/css/templatemo-lugx-gaming.css">
    <script
src="../https://ajax.googleapis.com/ajax/libs/jquery/3.6.0/jquery.min.js">
/script>
</head>
<div class="page-heading header-text">
    <div class="container">
                <h3>ADD PRODUCT</h3>
                <span class="breadcrumb"><a href="../admin-panel.php">Admin
Panel</a> > Add product</span>
            </div>
        </div>
    </div>
</div>
        <input type="hidden" name="productId" >
```

```
<input type="text" id="productName" name="productName"</pre>
Image:</label>
        <input type="text" id="productImage" name="productImage"</pre>
        <label for="alt" class="input-label">Alt for Image:</label>
        <input type="text" id="alt" name="alt" class="input-field" >
        <label for="gameId" class="input-label">Game ID:</label>
        <input type="text" id="gameId" name="gameId" class="input-field">
        <label for="oldPrice" class="input-label">Old Price:</label>
        <input type="text" id="oldPrice" name="oldPrice" class="input-</pre>
        <label for="newPrice" class="input-label">New Price:</label>
        <input type="text" id="newPrice" name="newPrice" class="input-</pre>
        <label for="Yes" class="input-label">Is Trending</label>
            <label for="Yes" class="radio-label">Yes</label>
            <input type="radio" id="Yes" name="isTrending" class="input-</pre>
field radio" value="1">
            <label for="No" class="radio-label">No</label>
            <input type="radio" id="No" name="isTrending" class="input-</pre>
        </div>
        <label for="description" class="input-label">Description:</label>
        <textarea id="description" name="description" class="input-field"</pre>
rows="4"></textarea>
        <label for="dropdown1" class="input-label">Dropdown 1:
(Mandatory) </label>
            <option value="0">Choose...</option>
                <option value="<?=$category->category id?>"><?=$category-</pre>
        </select>
        <label for="dropdown2" class="input-label">Dropdown 2:
(Mandatory) </label>
            <option value="0">Choose...
```

```
</select>
        <label for="dropdown3" class="input-label">Category 3:
(optional) </label>
            <option value="0">Choose...</option>
                <option value="<?=$category->category id?>"><?=$category-</pre>
        </select>
            <button id="add">Add product
       </div>
    </form>
</div>
<script src="../vendor/jquery/jquery.min.js"></script>
<script src="../assets/js/isotope.min.js"></script>
<script src="../assets/js/owl-carousel.js"></script>
<script src="../assets/js/counter.js"></script>
<script src="../assets/js/custom.js"></script>
<script src="../assets/js/main.js"></script>
</html>
```

EDIT.PHP

```
<?php
session_start();
include_once("Methods/functions.php");
include_once("Methods/conn.php");
isAdmin();
if(isset($_GET['id'])){
    $id=$_GET['id'];
}</pre>
```

```
$query="SELECT * FROM products WHERE product id=:id";
$x=$conn->prepare($query);
$x->bindParam(":id",$id);
$x->execute();
$product=$x->fetch();
<!DOCTYPE html>
<html lang="en">
    <link href="assets/css/style.css" type="text/css" rel="stylesheet"/>
    link
href="https://fonts.googleapis.com/css2?family=Poppins:wght@100;200;300;400
    <title>Lugx Gaming Shop HTML5 Template</title>
    <link href="vendor/bootstrap/css/bootstrap.min.css" rel="stylesheet">
    <link rel="stylesheet" href="assets/css/fontawesome.css">
    <link rel="stylesheet" href="assets/css/templatemo-lugx-gaming.css">
    <link rel="stylesheet" href="assets/css/owl.css">
    <link rel="stylesheet"href="https://unpkq.com/swiper@7/swiper-</pre>
    <script
    <link rel="stylesheet" href="assets/css/admin.css" type="text/css">
</head>
<div class="page-heading header-text">
        <div class="row">
                <h3>EDIT PRODUCT</h3>
product</span>
            </div>
        </div>
    </div>
</div>
```

```
<input type="hidden" name="productId" value="<?=$product-</pre>
        <label for="productName" class="input-label">Product Name:</label>
        <input type="text" id="productName" name="productName"</pre>
        <label for="productImage" class="input-label">Product
Image:</label>
        <input type="text" id="productImage" name="productImage"</pre>
        <label for="productAlt" class="input-label">Alt Image:
        <input type="text" id="productAlt" name="alt" class="input-field"</pre>
value="<?=$product->alt?>">
        <label for="gameId" class="input-label">Game ID:</label>
        <input type="text" id="gameId" name="gameId" class="input-field"</pre>
        <label for="oldPrice" class="input-label">Old Price:</label>
        <input type="text" id="oldPrice" name="oldPrice" class="input-</pre>
        <label for="newPrice" class="input-label">New Price:</label>
        <input type="text" id="newPrice" name="newPrice" class="input-</pre>
        <label class="input-label">Is Trending:</label>
        <div class="radio-container">
            <label for="Yes" class="radio-label">Yes</label>
            <input type="radio" id="Yes" name="isTrending" class="input-</pre>
field radio" value="1" <?=$product->isTrending==1 ? "checked" : "" ?>>
            <label for="No" class="radio-label">No</label>
            <input type="radio" id="No" name="isTrending" class="input-</pre>
field radio" value="0" <?=$product->isTrending==0 ? "checked" : "" ?>>
        </div>
        <label for="description" class="input-label">Description:</label>
            <button type="submit">Save Changes
        </div>
    </form>
</div>
<script src="vendor/jquery/jquery.min.js"></script>
```

```
<script src="vendor/bootstrap/js/bootstrap.min.js"></script>
<script src="assets/js/isotope.min.js"></script>
<script src="assets/js/owl-carousel.js"></script>
<script src="assets/js/counter.js"></script>
<script src="assets/js/custom.js"></script>
<script src="assets/js/main.js"></script>
</script src="assets/js/main.js"></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></scrip
```

CONFIRMUPDATE.PHP

```
session start();
include once("Methods/conn.php");
       extract($ POST);
            $newPrice = null;
        $isTrending2 = intval($isTrending);
             WHERE product id=:id";
```

```
$x->bindParam(":gameId", $gameId);
                  WHERE customer id=:id";
      $stmt->bindParam(":id", $customerId);
      $stmt->execute();
catch (Exception $e) {
  echo "An error occurred: " . $e->getMessage();
```

DELETE.PHP

```
<?php
session_start();
include_once ("Methods/functions.php");</pre>
```

```
$query="DELETE FROM products category WHERE product id=:id";
$x->bindParam(":id",$id);
$x->execute();
$query="DELETE FROM products WHERE product id=:id";
$x->bindParam(":id",$id);
$x->execute();
if($x){
```

EDIT-USER.PHP

```
<?php
session_start();
include_once("Methods/functions.php");
include_once("Methods/conn.php");
isAdmin();
if(isset($_GET['id'])){
        $id=$_GET['id'];
}
global $conn;

$query="SELECT * FROM customers WHERE customer_id=:id";
$x=$conn->prepare($query);
$x->bindParam(":id",$id);
```

```
$x->execute();
$customer=$x->fetch();
if(isset($ GET['customerError'])){
<!DOCTYPE html>
    <link href="assets/css/style.css" type="text/css" rel="stylesheet"/>
    ink
    <title>Lugx Gaming Shop HTML5 Template</title>
    <link href="vendor/bootstrap/css/bootstrap.min.css" rel="stylesheet">
    <link rel="stylesheet" href="assets/css/fontawesome.css">
    <link rel="stylesheet" href="assets/css/animate.css">
    <link rel="stylesheet"href="https://unpkq.com/swiper@7/swiper-</pre>
    <script
<div class="page-heading header-text">
    <div class="container">
            <div class="col-lg-12">
                <h3>EDIT PRODUCT</h3>
product</span>
            </div>
        </div>
    </div>
</div>
<div class="edit-product-container">
```

```
<form action="confirmUpdate.php?type=customer" method="POST">
        <input type="hidden" name="customerId" value="<?=$customer-</pre>
        <input type="text" id="productName" name="customerName"</pre>
class="input-field" value="<?=$customer->customer fname?>">
Name:</label>
        <input type="text" id="productImage" name="customerLname"</pre>
class="input-field" value="<?=$customer->customer lname?>">
        <label for="gameId" class="input-label">Email</label>
        <input type="text" id="gameId" name="email" class="input-field"</pre>
value="<?=$customer->email?>">
        <label for="oldPrice" class="input-label">Phone Number/label>
        <input type="text" id="oldPrice" name="phone" class="input-field"</pre>
        <label for="newPrice" class="input-label">Address</label>
        <input type="text" id="newPrice" name="address" class="input-field"</pre>
value="<?=$customer->street address?>">
        <div class="button-container">
            <button type="submit">Save Changes
    </form>
</div>
<?php include once("footer.php") ?>
<script src="vendor/jquery/jquery.min.js"></script>
<script src="vendor/bootstrap/js/bootstrap.min.js"></script>
<script src="assets/js/isotope.min.js"></script>
<script src="assets/js/owl-carousel.js"></script>
<script src="assets/js/counter.js"></script>
<script src="assets/js/custom.js"></script>
<script src="assets/js/main.js"></script>
</body>
</html>
```

DELETE-USER.PHP

```
<?php
if(isset($_GET['id'])) {
    include_once ("Methods/conn.php");
    include_once ("Methods/functions.php");
    global $conn;
    $customerId = $_GET['id'];</pre>
```

```
$queryCheckOrders = "SELECT * FROM orders WHERE customer_id = :id";
$stmtCheckOrders = $conn->prepare($queryCheckOrders);
$stmtCheckOrders->bindParam(":id", $customerId);
$stmtCheckOrders->execute();

if($stmtCheckOrders->rowCount() > 0) {
    redirect("admin-panel.php?error=Customer has orders. Cannot

delete.");
    exit();
}
$queryDeleteCustomer = "DELETE FROM customers WHERE customer_id = :id";
$stmtDeleteCustomer = $conn->prepare($queryDeleteCustomer);
$stmtDeleteCustomer->bindParam(":id", $customerId);
$stmtDeleteCustomer->execute();

redirect("admin-panel.php?success=Customer deleted successfully.");
} else {
    redirect("404.php");
}
```

AUTHOR.PHP

```
<link rel="stylesheet" href="assets/css/mycss.css" type="text/css">
</head>
                <h3>Author</h3>
                <span class="breadcrumb"><a href="#">Home</a> >
Author</span>
            </div>
        </div>
    </div>
</div>
<div class="container mt-5">
        <div class="col-md-4">
class="author-image img-fluid">
        </div>
        <div class="col-md-8">
            <h1>Filip Bondzulic 123/22</h1>
        </div>
    </div>
</div>
<script src="vendor/jquery/jquery.min.js"></script>
<script src="assets/js/isotope.min.js"></script>
<script src="assets/js/owl-carousel.js"></script>
<script src="assets/js/counter.js"></script>
<script src="assets/js/custom.js"></script>
<script src="assets/js/main.js"></script>
</html>
```

JAVASCRIPT KOD

MAIN.JS

```
(document).ready(function(){
    $ (document).on("click", "#btn", function(event) {
        event.preventDefault();
        let email = $("#email");
        let phone = $("#phone");
        let address = $("#address");
        let passwd=$("#password");
        let rpasswd=$("#rpassword");
        let isValid=true;
        let nameRegex = /^[A-Z][a-z]\{1,24\}$/;
        let emailRegex = /^\w+([\.-]?\w+)*@\w+([\.-]?\w+)*(\.\w{2,3})+$/;
        if (!checkValue(nameRegex, fname.val())) {
letter and contain 2-25 characters (letters only)").show();
            isValid=false;
        if (!checkValue(nameRegex, lname.val())) {
            isValid=false;
            $("#lname-error").hide();
        if (!checkValue(emailRegex, email.val())) {
            isValid=false;
            $("#email-error").hide();
        if (!checkValue(phoneRegex, phone.val())) {
            isValid=false;
            $("#phone-error").hide();
        if (!checkValue(addressRegex, address.val())) {
            isValid=false;
```

```
$("#passwd-error").text("Passwords do not match").show();
            isValid=false;
        if(isValid) {
            let formData = {
                lname: lname.val(),
                phone: phone.val(),
                address: address.val(),
                passwd: passwd.val(),
form.php", "POST", formData, function(response) {
                    email.val('');
                    passwd.val('');
});
$ (document) .ready (function() {
    $ (document).on("click", "#btnLog", function(eventLog) {
        eventLog.preventDefault();
        let passwd=$("#passwdLog");
        let isValid=true;
        let emailRegex = /^\w+([\.-]?\w+)*@\w+([\.-]?\w+)*(\.\w{2,3})+$/;
            console.log(isValid)
            $("#email-errorLog").text("Email is not valid").show();
            isValid=false;
        console.log(isValid)
```

```
let dataForChecking={
                email:email.val(),
                passwd:passwd.val()
            console.log(dataForChecking);
in.php", "POST", dataForChecking, function(response) {
                if (response && response.role) {
                    if (response.role === "admin") {
    return regex.test(string);
    function ajaxCallBack(url, method, data, result) {
            url: url,
            success:result,
                console.log(xhr);
                if (xhr.status === 404) {
                else if (xhr.status === 401) {
credentials.");
        var index = $(this).data('index');
function(response) {
            console.log(response);
            if(response.status === 'success') {
```

CSS KOD

ADMIN.CSS

```
/* General styles */
table {
    margin: auto;
    margin-top: 5%;
    width: 80%;
    border-collapse: collapse;
    overflow-x: auto; /* Enable horizontal scrolling for small screens */
}
th, td {
    padding: 8px;
    text-align: left;
    border-bottom: 1px solid #ddd;
}
```

```
max-width: 100px;
   border: none;
button:hover {
   border: none;
   margin-bottom: 10px; /* Add some margin at the bottom */
```

```
font-size: 14px; /* Decrease button font size for small screens */
   color:#fff;
   margin: auto;
   margin-top: 5%;
   box-shadow: 0 0 10px rgba(0, 0, 0, 0.1);
.input-label {
   display: block;
   margin-bottom: 5px;
.input-field {
   padding: 8px;
   margin-bottom: 15px;
   border-radius: 4px;
   box-sizing: border-box;
   margin-top: 10px;
   text-align: center;
   padding: 10px 20px;
   color: #fff;
   border: none;
   border-radius: 5px;
.button-container button:hover {
```

```
margin-top: 5%;
.add-product-button button {
   padding: 10px 20px;
.add-product-button button:hover {
.even-row {
   white-space: normal !important;
   word-wrap: break-word;
```

STYLE.CSS

```
margin: 0;
  padding: 0;
  box-sizing: border-box;

body {
    font-family: 'Inter', sans-serif;
}
.formbold-mb-3 {
    margin-bottom: 15px;
}
.formbold-relative {
    position: relative;
}
.formbold-opacity-0 {
    opacity: 0;
}
```

```
.formbold-stroke-current {
#supportCheckbox:checked ~ div span {
.formbold-main-wrapper {
   display: flex;
   justify-content: center;
    padding: 48px;
.formbold-form-wrapper {
   margin: 0 auto;
   max-width: 570px;
   background: white;
    padding: 40px;
.formbold-img {
   margin-bottom: 45px;
.formbold-form-title {
.formbold-form-title h2 {
    color: #07074d;
   color: #536387;
   margin-top: 12px;
.formbold-input-flex {
   gap: 20px;
   margin-bottom: 15px;
.formbold-input-flex > div {
.formbold-form-input {
    font-size: 16px;
```

```
resize: none;
.formbold-form-input:focus {
   color: #536387;
   font-size: 14px;
   line-height: 24px;
.formbold-checkbox-label {
   display: flex;
   cursor: pointer;
   user-select: none;
   color: #536387;
.formbold-checkbox-label a {
   margin-left: 5px;
   color: #6a64f1;
.formbold-input-checkbox {
   padding: 0;
   margin: -1px;
   overflow: hidden;
   border-width: 0;
.formbold-checkbox-inner {
   display: flex;
   margin-right: 16px;
   margin-top: 2px;
   font-size: 16px;
   border-radius: 5px;
   padding: 14px 25px;
   color: white;
```

```
.formbold-btn:hover {
   box-shadow: 0px 3px 8px rgba(0, 0, 0, 0.05);
   margin-bottom: 5vh;
.card{
   margin: auto;
   margin-top:10%;
   box-shadow: 0 6px 20px 0 rgba(0, 0, 0, 0.19);
   border-radius: 1rem;
@media(max-width:767px) {
   .card{
       margin: 3vh auto;
   background-color: #fff;
   padding: 4vh 5vh;
   .cart{
        padding: 4vh;
.summary{
   background-color: #ddd;
   border-top-right-radius: 1rem;
@media(max-width:767px) {
   .summary{
.summary .col-2{
```

```
padding: 0;
    padding: 0;
    font-size: 1.5rem;
   margin: 0;
   padding: 2vh 0;
   padding: 0 1vh;
    padding: 0 1vh;
    font-size: 0.7rem;
.back-to-shop{
   margin-top: 4.5rem;
h5{
   margin-top: 4vh;
hr{
form{
    padding: 1.5vh 1vh;
   margin-bottom: 4vh;
    width: 100%;
    background-color: rgb(247, 247, 247);
input{
   margin-bottom: 4vh;
   outline: none;
input:focus::-webkit-input-placeholder
```

```
.btn{
   background-color: #000;
   border-color: #000;
   width: 100%;
   margin-top: 4vh;
.btn:focus{
   outline: none;
   box-shadow: none;
   color: white;
    -webkit-box-shadow: none;
    -webkit-user-select: none;
.btn:hover{
   color: white;
   color: black;
a:hover{
    color: black;
#code{
    background-image: linear-gradient(to left, rgba(255, 255, 255, 0.253),
rgba(255, 255, 255, 0.185)),
    background-repeat: no-repeat;
    background-position-x: 95%;
    background-position-y: center;
.quantity-label {
    text-decoration: underline;
```

MYCSS.CSS

```
#main-product{
    color: #fff;
    background-color: rgba(255, 255, 255, 0.10);
    text-align: center;
    border-radius: 15px;
    margin-bottom: 10px;
}
#main-price{
```

```
display:block;
.discount {
   position: absolute;
   color:red;
.alert {
   margin: 0 auto; /* This centers the element horizontally */
.search-input {
   margin:auto;
   margin-top: 20px;
   box-sizing: border-box;
#search{
   margin:auto;
   margin-bottom: 5%;
.author-image {
   max-width: 100%;
```