

Test Automation

Backend

1st edition

Module 3: Scripts and CI/CD

Bruno Machado

Auth

Authentication → confirms who you are



Authorization

Defines what you can do

```
{  
  "error": "Unauthorized"  
}
```

Env variables

We are using environment variables to store and reuse important data during our API tests, such as authentication tokens. This helps us avoid hardcoding sensitive information, makes our requests more dynamic, and allows us to build automated flows where one request can support the next.

env exemple

Fork | 0Share

Variable		Value	Q ...
authToken		eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJzdWIiOiIxliwib3duZXJJZCI6MSwidXNlcm5hbWUiOiJkZ...	
username			
password			
Add variable			

How to set

```
1  var jsonData = pm.response.json();  
2  
3  pm.test("SET TOKEN", function () {  
4      pm.expect(jsonData.token).to.exist;  
5      pm.environment.set("authToken", jsonData.token);  
6  });  
7
```


How to use

Headers 👁 9 hidden

Key	Value	Description	Bulk Edit	Presets ▾	...
✓ Content-Type	application/json				
✓ Authorization	Bearer {{authToken}}				
Key	Value	Description			

Collection Variables

Adventurers

Publish docs

Run

Share

0

0

Overview

Authorization


Scripts

Variables


Runs

Variable	Value	
charName	Bruno The Barbarian	
charID	1956	
Add variable		

How to set

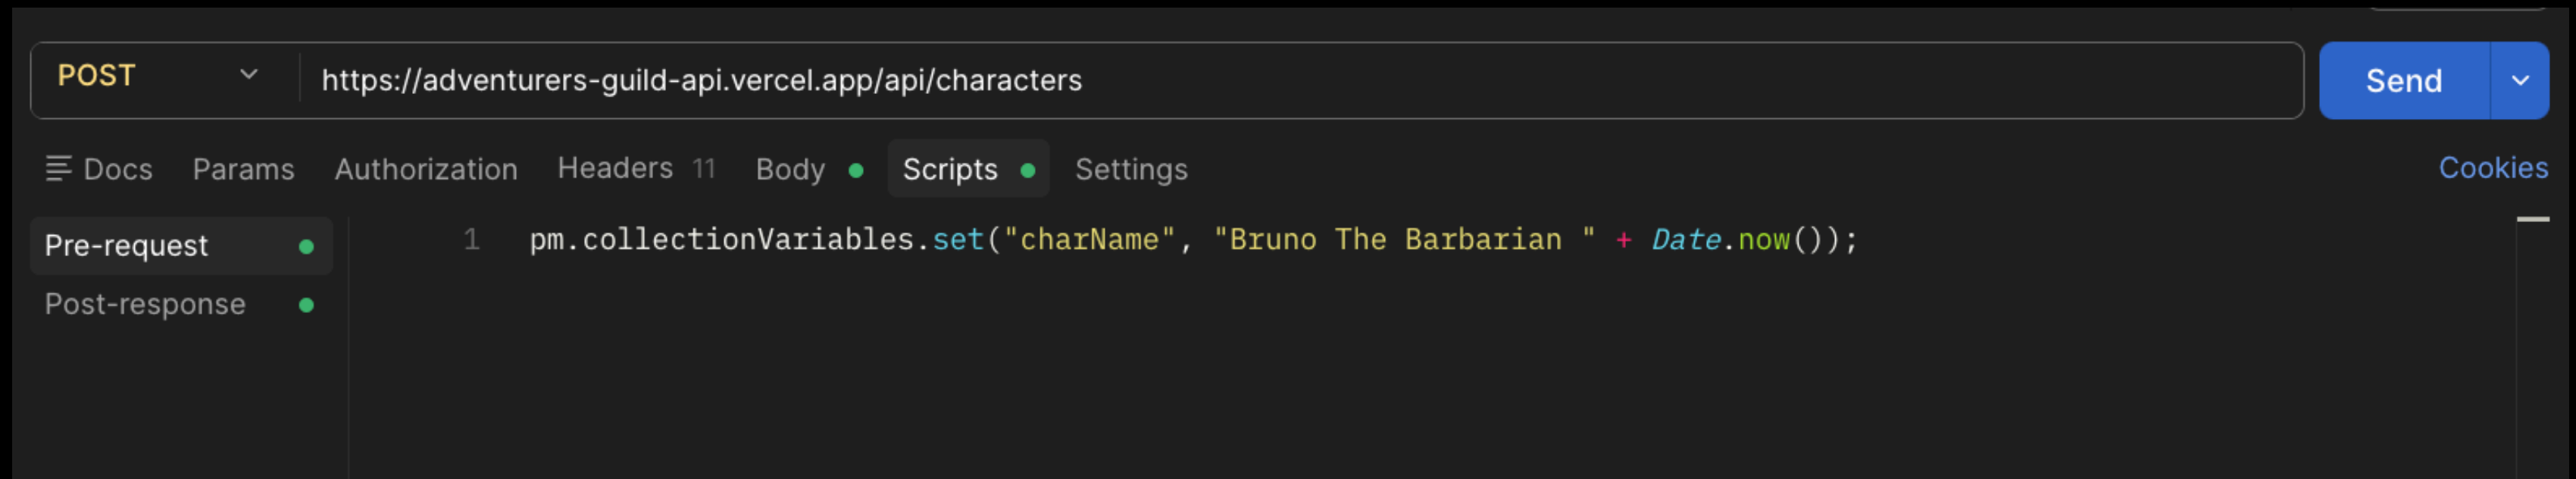

How to use

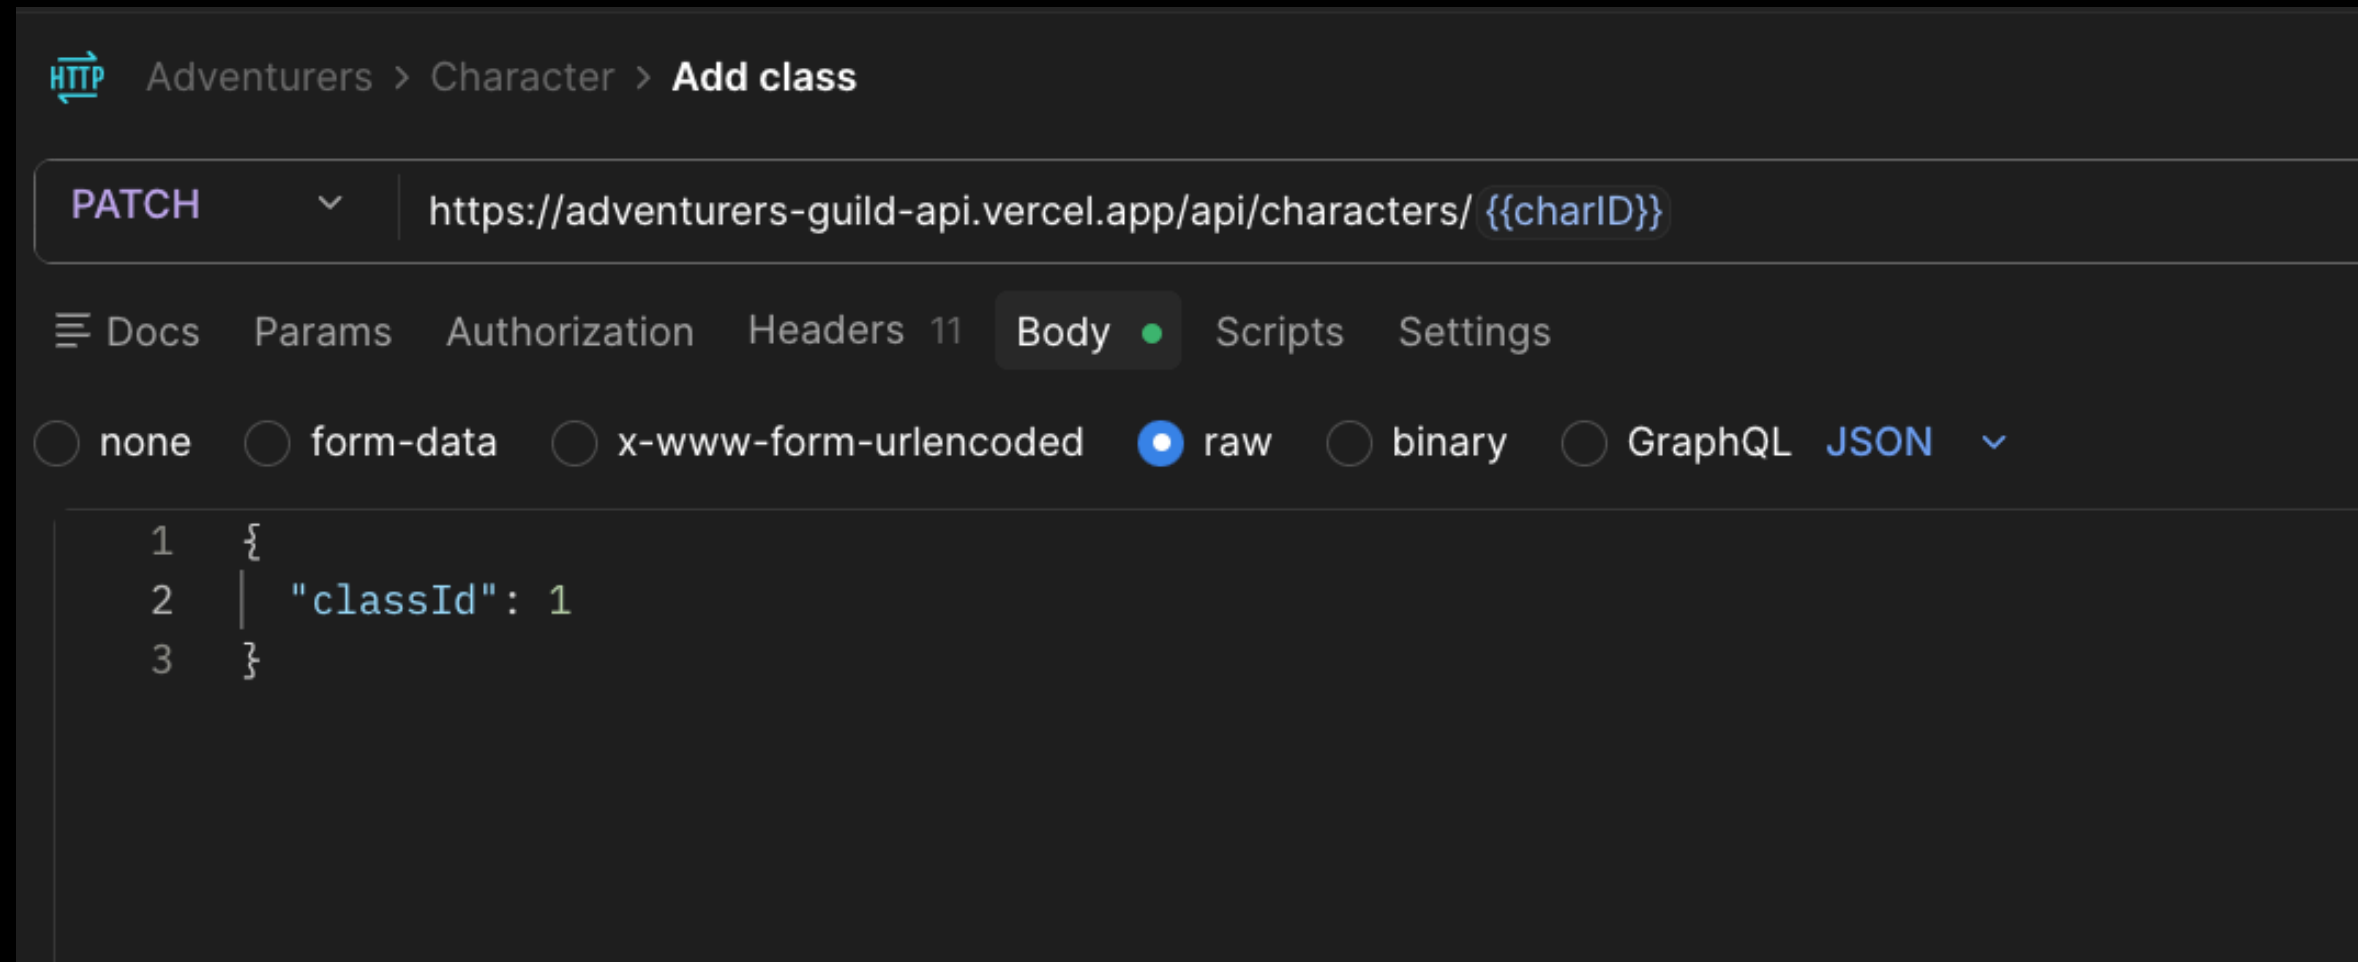

Newman

CLI runner for Postman collections

	executed	failed
iterations	1	0
requests	10	0
test-scripts	15	0
prerequisite-scripts	11	0
assertions	39	0
total run duration: 7.3s		
total data received: 70.49kB (approx)		
average response time: 716ms [min: 243ms, max: 1127ms, s.d.: 337ms]		