

3. Go

A)

```
Press Esc to move out of the editor.
1 package main
2
3 import "fmt"
4
5 func main() {
6     var b byte = 255
7     b++
8     fmt.Println(b)
9 }
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24


0

Program exited.
```

B) Detectado na compilação

4. Java

A)

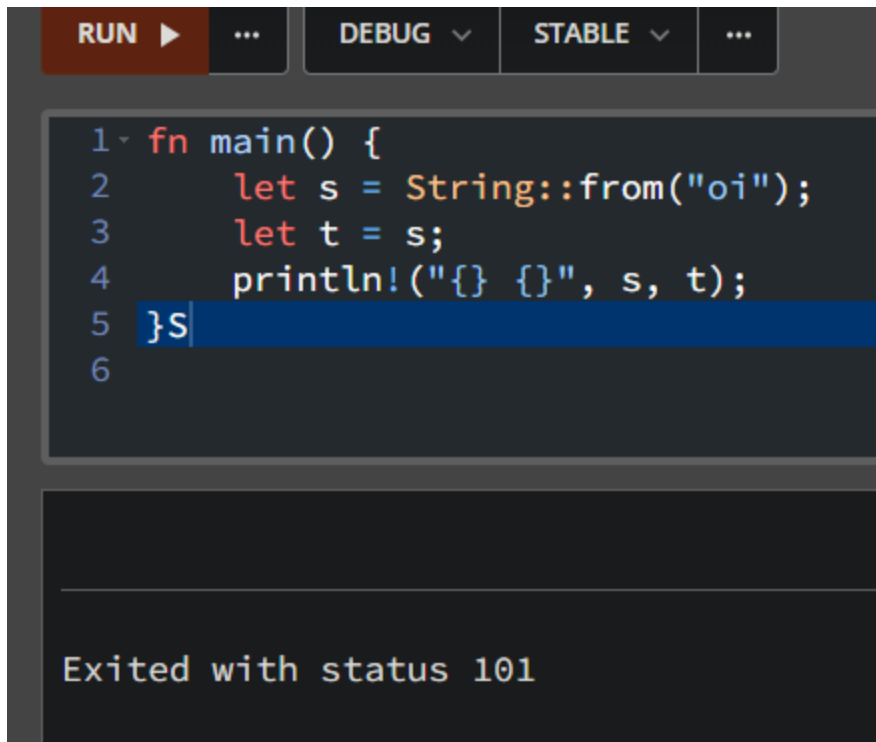

The screenshot shows a Rust IDE with a code editor and a console. The code in the editor is:


```
1 fn main() {  
2     let s = String::from("oi");  
3     let t = s;  
4     println!("{}", s, t);  
5 }S  
6
```

The console output at the bottom reads: "Exited with status 101".

B) Detectado na execução

5. Rust

A)

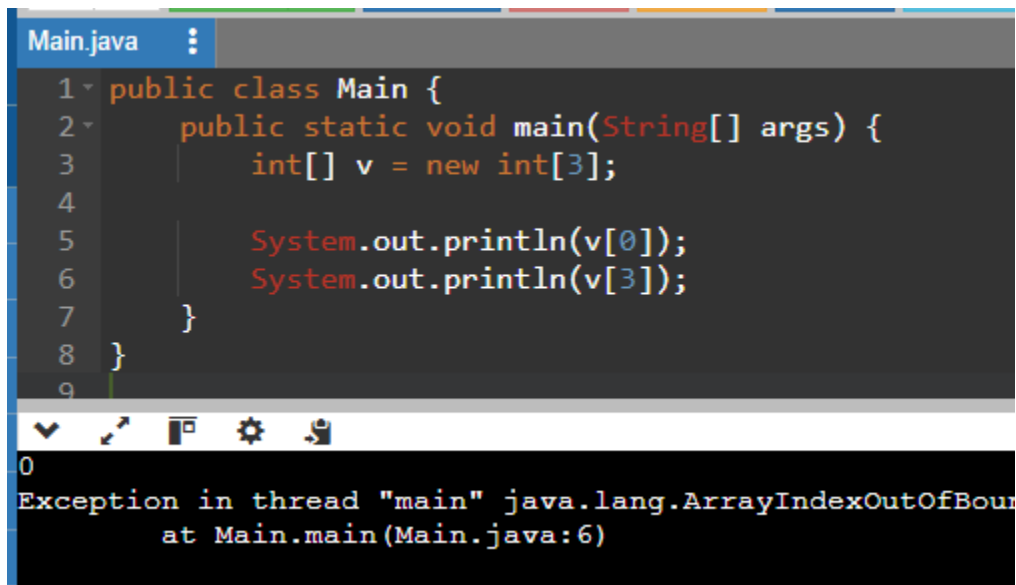

The screenshot shows a Java IDE with a code editor and a console. The code in the editor is:

```
1 public class Main {  
2     public static void main(String[] args) {  
3         int[] v = new int[3];  
4  
5         System.out.println(v[0]);  
6         System.out.println(v[3]);  
7     }  
8 }  
9
```

The console output at the bottom reads: "Exception in thread "main" java.lang.ArrayIndexOutOfBoundsException at Main.main(Main.java:6)".

B) Detectado na compilação