HR_for_properties Entities

Objects

- COUNTRIES
- COUNTRIES_HR
- DEPARTMENT
- DMC PROJECT DIAGRAMS
- DMC PROJECTS
- DRIVER
- driver license
- DRIVER RACE MAP
- EMPLOYEE
- JOB
- JOB HISTORY
- LOCATION
- MV_EMP_DETAILS_VIEW
- OPENFLIGHTS AIRPORTS
- OPENFLIGHTS CITIES
- OPENFLIGHTS ROUTES
- OSDDMW DIAGRAMS
- Project
- RACE
- REGIONS
- TABLE 13
- TABLE 14
- TABLE 15
- TEAM

Properties

- Used User defined properties

Diagrams

- Logical - SubView_1
- Logical

© Data Test Company

HR_for_properties Entities

Design: HR_for_properties

Logical: 24 entities

11/12/2026, 10:20:00 AM

COUNTRIES

Description and Notes

country table. References with locations table.

Mapped Tables

Relational Model	Table Name
Demo for release	HR.COUNTRIES

Attributes

No	Attribute Name	Keys	M	Data Type	Domain Name	Formula (Default Value)	Preferred Abbreviation	Synonyms
1	COUNTRY ID	P	Y	CHAR(2)				
2	COUNTRY NAME			VARCHAR(60)				
3	REGION ID			NUMERIC				

Attributes Comments

No	Attribute Name	Description	Notes
1	COUNTRY ID	Primary key of countries table.	
2	COUNTRY NAME	Country name	
3	REGION ID	Region ID for the country. Foreign key to region_id column in the departments table.	

Identifiers

Name	Status	Attributes	Comment	Notes
COUNTRY C ID PK	PK	COUNTRY ID		

Relationships

Name	Other Entity	Role	Other Role	Cardinality	Identifying	Non Transferable
COUNTR_REG_FK	REGIONS			0:* / 0:1		
LOC_C_ID_FK	LOCATION			0:1 / 0:*		

Used In Diagrams

- Logical

© Data Test Company

COUNTRIES_HR

Mapped Tables

Relational Model	Table Name
Demo for release	COUNTRIES_HR

Attributes

No	Attribute Name	Keys	M	Data Type	Domain Name	Formula (Default Value)	Preferred Abbreviation	Synonyms
1	COUNTRY_ID	P	Y	CHAR(2)				
2	COUNTRY_NAME			VARCHAR(40)				
3	REGION_ID			NUMERIC				

Identifiers

Name	Status	Attributes	Comment	Notes
COUNTRY_C_ID_PK	PK	COUNTRY_ID		

Relationships

Name	Other Entity	Role	Other Role	Cardinality	Identifying	Non Transferable
MV_EMP_DETAILS_VIEW_COUN_FK	MV_EMP_DETAILS_VIEW			0:1 / 0:*		

Used In Diagrams

- Logical

© Data Test Company

DEPARTMENT

Entity

Property	Value
Classification Type Name	Dimension

Description and Notes

Departments table that shows details of departments where employees work. references with locations, employees, and job_history tables.

Mapped Tables

Relational Model	Table Name
Demo for release	HR.DEPARTMENTS

Attributes

No	Attribute Name	Keys	M	Data Type	Domain Name	Formula (Default Value)	Preferred Abbreviation	Synonyms
1	DEPARTMENT ID	P	Y	NUMERIC(4,0)				
2	DEPARTMENT NAME		Y	VARCHAR(30)				
3	MANAGER ID			NUMERIC(6)				
4	LOCATION ID			NUMERIC(4,0)				

Attributes Comments

No	Attribute Name	Description	Notes
1	DEPARTMENT ID	Primary key column of departments table.	
2	DEPARTMENT NAME	A not null column that shows name of a department. Administration, Marketing, Purchasing, Human Resources, Shipping, IT, Executive, Public Relations, Sales, Finance, and Accounting.	
3	MANAGER ID	Manager_id of a department. Foreign key to employee_id column of employees table. The manager_id column of the employee table references this column.	
4	LOCATION ID	Location id where a department is located. Foreign key to location_id column of locations table.	

Identifiers

Name	Status	Attributes	Comment	Notes
DEPT ID PK	PK	DEPARTMENT ID		

Relationships

Name	Other Entity	Role	Other Role	Cardinality	Identifying	Non Transferable
DEPT_LOC_FK	LOCATION			0:* / 0:1		
DEPT_MGR_FK	EMPLOYEE	mamaged by	head of	0:* / 0:1		
EMP_DEPT_FK	EMPLOYEE	consist of	member of	0:1 / 0:*		
JHIST_DEPT_FK	JOB HISTORY			0:1 / 0:*		

Used In Diagrams

- Logical - SubView 1
- Logical

DMC PROJECT DIAGRAMS

Mapped Tables

Relational Model	Table Name
Demo for release	HR.DMC_PROJECT_DIAGRAMS

Attributes

No	Attribute Name	Keys	M	Data Type	Domain Name	Formula (Default Value)	Preferred Abbreviation	Synonyms
1	DIAGRAM ID	P	Y	VARCHAR(36)				
2	PROJECT ID		Y	VARCHAR(36)				
3	DIAGRAM NAME		Y	VARCHAR(200)				
4	DESCRIPTION			VARCHAR(4000)				
5	THUMBNAIL SVG			CLOB(4000)				
6	CONTENT GUID		Y	VARCHAR(36)				
7	DMCD CONTENT			JSON				
8	CREATED AT		Y	Timestamp(6)		SYSTIMESTAMP		
9	UPDATED AT		Y	Timestamp(6)		SYSTIMESTAMP		
10	DB TYPE		Y	NUMERIC(4)		0		

Identifiers

Name	Status	Attributes	Comment	Notes
DMC PROJECT DIAGRAMS PK	PK	DIAGRAM ID		

Relationships

Name	Other Entity	Role	Other Role	Cardinality	Identifying	Non Transferable
DMC_PROJECT_DIAGRAMS_PROJECT_FK	DMC PROJECTS			1:* / 1:1		

Used In Diagrams

- Logical

DMC PROJECTS

Mapped Tables

Relational Model	Table Name
Demo for release	HR.DMC_PROJECTS

Attributes

No	Attribute Name	Keys	M	Data Type	Domain Name	Formula (Default Value)	Preferred Abbreviation	Synonyms
1	PROJECT ID	P	Y	VARCHAR(36)				
2	PARENT PROJECT ID			VARCHAR(36)				
3	PROJECT NAME		Y	VARCHAR(200)				
4	DESCRIPTION			VARCHAR(4000)				
5	CONTENT GUID		Y	VARCHAR(36)				
6	CREATED AT		Y	Timestamp(6)		SYSTIMESTAMP		
7	UPDATED AT		Y	Timestamp(6)		SYSTIMESTAMP		
8	OBJECTS			JSON				

Identifiers

Name	Status	Attributes	Comment	Notes
DMC PROJECTS PK	PK	PROJECT ID		

Relationships

Name	Other Entity	Role	Other Role	Cardinality	Identifying	Non Transferable
DMC_PROJECT_DIAGRAMS_PROJECT_FK	DMC PROJECT DIAGRAMS			1:1 / 1:*		
DMC_PROJECTS_PARENT_FK	DMC PROJECTS			0:* / 0:1		

Used In Diagrams

- Logical

© Data Test Company

DRIVER

Mapped Tables

Relational Model	Table Name
Demo for release	HR.DRIVER

Attributes

No	Attribute Name	Keys	M	Data Type	Domain Name	Formula (Default Value)	Preferred Abbreviation	Synonyms
1	DRIVER ID	P	Y	NUMERIC(*,0)				
2	NAME	U	Y	VARCHAR(255)				
3	POINTS		Y	NUMERIC(*,0)				
4	TEAM ID			NUMERIC(*,0)				

Identifiers

Name	Status	Attributes	Comment	Notes
DRIVER NAME UN	UK	NAME		
DRIVER PK	PK	DRIVER ID		

Relationships

Name	Other Entity	Role	Other Role	Cardinality	Identifying	Non Transferable
DRIVER_FK	TEAM			0:* / 0:1		
DRIVER_RACE_MAP_FK2	DRIVER RACE MAP			0:1 / 1:*		

Used In Diagrams

- Logical

© Data Test Company

driver license

Mapped Tables

Relational Model	Table Name
Demo for release	driver_license

Attributes

No	Attribute Name	Keys	M	Data Type	Domain Name	Formula (Default Value)	Preferred Abbreviation	Synonyms
1	EMPLOYEE ID	P	Y	NUMERIC(6)				
2	driver license number	P	Y	VARCHAR(30)				
3	start date			Date				
4	end date			Date				

Identifiers

Name	Status	Attributes	Comment	Notes
driver license PK	PK	EMPLOYEE ID driver license number		

Relationships

Name	Other Entity	Role	Other Role	Cardinality	Identifying	Non Transferable
driver _icense	EMPLOYEE	belongs to	has	1:* / 0:1	Yes	Yes / Yes

Used In Diagrams

- Logical

DRIVER RACE MAP

Mapped Tables

Relational Model	Table Name
Demo for release	HR.DRIVER_RACE_MAP

Attributes

No	Attribute Name	Keys	M	Data Type	Domain Name	Formula (Default Value)	Preferred Abbreviation	Synonyms
1	DRIVER RACE MAP ID	P	Y	NUMERIC(*,0)				
2	RACE ID	U	Y	NUMERIC(*,0)				
3	DRIVER ID	U	Y	NUMERIC(*,0)				
4	POSITION			NUMERIC(*,0)				

Identifiers

Name	Status	Attributes	Comment	Notes
DRIVER RACE MAP PK	PK	DRIVER RACE MAP ID		
DRIVER RACE MAP UK	UK	RACE ID DRIVER ID		

Relationships

Name	Other Entity	Role	Other Role	Cardinality	Identifying	Non Transferable
DRIVER_RACE_MAP_FK1	RACE			1:* / 0:1		
DRIVER_RACE_MAP_FK2	DRIVER			1:* / 0:1		

Used In Diagrams

- Logical

© Data Test Company

EMPLOYEE

Description and Notes

employees table. References with departments,
jobs, job_history tables. Contains a self reference.

Mapped Tables

Relational Model	Table Name
Demo for release	HR.EMPLOYEES

Attributes

No	Attribute Name	Keys	M	Data Type	Domain Name	Formula (Default Value)	Preferred Abbreviation	Synonyms
1	EMPLOYEE ID	P	Y	NUMERIC(6)				
2	FIRST NAME			VARCHAR(20)				
3	LAST NAME		Y	VARCHAR(25)				
4	EMAIL	U	Y	VARCHAR(25)				
5	PHONE NUMBER			VARCHAR(20)				
6	HIRE DATE		Y	Date				
7	JOB ID		Y	VARCHAR(10)				
8	SALARY			NUMERIC(8,2)				
9	COMMISSION PCT			NUMERIC(2,2)				
10	MANAGER ID			NUMERIC(6,0)				
11	DEPARTMENT ID			NUMERIC(4,0)				
12	rank		Y	VARCHAR(10)		low		
13	Full Name			VARCHAR(50)		nvl(first_name,'') ||'' || last_name		

Attributes Comments

No	Attribute Name	Description	Notes
1	EMPLOYEE ID	Primary key of employees table.	
2	FIRST NAME	First name of the employee. A not null column.	
3	LAST NAME	Last name of the employee. A not null column.	
4	EMAIL	Email id of the employee	
5	PHONE NUMBER	Phone number of the employee; includes country code and area code	
6	HIRE DATE	Date when the employee started on this job. A not null column.	
7	JOB ID	Current job of the employee; foreign key to job_id column of the jobs table. A not null column.	
8	SALARY	Monthly salary of the employee. Must be greater than zero (enforced by constraint emp_salary_min)	
9	COMMISSION PCT	Commission percentage of the employee; Only employees in sales department eligible for commission percentage	
10	MANAGER ID	Manager id of the employee; has same domain as manager_id in departments table. Foreign key to employee_id column of employees table. (useful for reflexive joins and CONNECT BY query)	
11	DEPARTMENT ID	Department id where employee works; foreign key to department_id column of the departments table	

Identifiers

Name	Status	Attributes	Comment	Notes
EMP EMAIL UK	UK	EMAIL		
EMP EMP ID PK	PK	EMPLOYEE ID		

© Data Test Company

Constraints

Attribute	Definition	Domain Comment
SALARY	Generic Constraint: salary > 0 Oracle Database 21c: salary > 0	
rank	high - < 15 low - rank low >= 40 middle - between 15 and 40	

Relationships

Name	Other Entity	Role	Other Role	Cardinality	Identifying	Non Transferable
DEPT_MGR_FK	DEPARTMENT	head of	mamaged by	0:1 / 0:*		
driver _icense	driver license	has	belongs to	0:1 / 1:*	Yes	Yes / Yes
EMP_DEPT_FK	DEPARTMENT	member of	consist of	0:* / 0:1		
EMP_JOB_FK	JOB	has	for	1:* / 0:1		
EMP_MANAGER_FK	EMPLOYEE	reports to	manage	0:* / 0:1		
Employees and Projects	Project	participate in	has assigned	0:* / 1:*		
JHIST_EMP_FK	JOB HISTORY			0:1 / 1:*	Yes	

Relationship Attributes

Relationship	Attribute Name	M	Data Type	Domain	Formula (Default Value)
Employees and Projects	Role	Y	VARCHAR(100)		
	Start of Assignment	Y	Date		
	End of Assignment	Y	Date		

Dynamic Properties

Name	Value	Presentation Name	UDP
education	bachelor	education	Y
mainEnt	true	main entity	
UDP_2	1010	UDP_2	

Used In Diagrams

- Logical - SubView_1
- Logical

JOB

Description and Notes

jobs table with job titles and salary ranges.
References with employees and job_history table.

Mapped Tables

Relational Model	Table Name
Demo for release	HR.JOBS

Attributes

No	Attribute Name	Keys	M	Data Type	Domain Name	Formula (Default Value)	Preferred Abbreviation	Synonyms
1	JOB ID	P	Y	VARCHAR(10)				
2	JOB TITLE		Y	VARCHAR(35)				
3	MIN SALARY			NUMERIC(6,0)				
4	MAX SALARY			NUMERIC(6,0)				

Attributes Comments

No	Attribute Name	Description	Notes
1	JOB ID	Primary key of jobs table.	
2	JOB TITLE	A not null column that shows job title, e.g. AD_VP, FI_ACCOUNTANT	
3	MIN SALARY	Minimum salary for a job title.	
4	MAX SALARY	Maximum salary for a job title	

Identifiers

Name	Status	Attributes	Comment	Notes
JOB ID PK	PK	JOB ID		

Relationships

Name	Other Entity	Role	Other Role	Cardinality	Identifying	Non Transferable
EMP_JOB_FK	EMPLOYEE	for	has	0:1 / 1:*		
JHIST_JOB_FK	JOB HISTORY			0:1 / 1:*		

Used In Diagrams

- Logical - SubView 1
- Logical

JOB HISTORY

Description and Notes

Table that stores job history of the employees. If an employee changes departments within the job or changes jobs within the department, new rows get inserted into this table with old job information of the employee. Contains a complex primary key: employee_id+start_date. References with jobs, employees, and departments tables.

Mapped Tables

Relational Model	Table Name
Demo for release	HR.JOB_HISTORY

Attributes

No	Attribute Name	Keys	M	Data Type	Domain Name	Formula (Default Value)	Preferred Abbreviation	Synonyms
1	EMPLOYEE ID	P	Y	NUMERIC(6)				
2	START DATE	P	Y	Date				
3	END DATE		Y	Date				
4	JOB ID		Y	VARCHAR(10)				
5	DEPARTMENT ID			NUMERIC(4,0)				

Attributes Comments

No	Attribute Name	Description	Notes
1	EMPLOYEE ID	A not null column in the complex primary key employee_id+start_date. Foreign key to employee_id column of the employee table	
2	START DATE	A not null column in the complex primary key employee_id+start_date. Must be less than the end_date of the job_history table. (enforced by constraint jhist_date_interval)	
3	END DATE	Last day of the employee in this job role. A not null column. Must be greater than the start_date of the job_history table. (enforced by constraint jhist_date_interval)	
4	JOB ID	Job role in which the employee worked in the past; foreign key to job_id column in the jobs table. A not null column.	
5	DEPARTMENT ID	Department id in which the employee worked in the past; foreign key to department_id column in the departments table	

Identifiers

Name	Status	Attributes	Comment	Notes
JHIST EMP ID ST DATE PK	PK	EMPLOYEE ID START DATE		

Relationships

Name	Other Entity	Role	Other Role	Cardinality	Identifying	Non Transferable
JHIST_DEPT_FK	DEPARTMENT			0:* / 0:1		
JHIST_EMP_FK	EMPLOYEE			1:* / 0:1	Yes	
JHIST_JOB_FK	JOB			1:* / 0:1		

Used In Diagrams

- Logical - SubView 1
- Logical

© Data Test Company

LOCATION

Description and Notes

Locations table that contains specific address of a specific office, warehouse, and/or production site of a company. Does not store addresses / locations of customers. references with the departments and countries tables.

Mapped Tables

Relational Model	Table Name
Demo for release	HR.LOCATIONS

Attributes

No	Attribute Name	Keys	M	Data Type	Domain Name	Formula (Default Value)	Preferred Abbreviation	Synonyms
1	LOCATION ID	P	Y	NUMERIC(4,0)				
2	STREET ADDRESS			VARCHAR(40)				
3	POSTAL CODE			VARCHAR(12)				
4	CITY		Y	VARCHAR(30)				
5	STATE PROVINCE			VARCHAR(25)				
6	COUNTRY ID			CHAR(2)				

Attributes Comments

No	Attribute Name	Description	Notes
1	LOCATION ID	Primary key of locations table	
2	STREET ADDRESS	Street address of an office, warehouse, or production site of a company. Contains building number and street name	
3	POSTAL CODE	Postal code of the location of an office, warehouse, or production site of a company.	
4	CITY	A not null column that shows city where an office, warehouse, or production site of a company is located.	
5	STATE PROVINCE	State or Province where an office, warehouse, or production site of a company is located.	
6	COUNTRY ID	Country where an office, warehouse, or production site of a company is located. Foreign key to country_id column of the countries table.	

Identifiers

Name	Status	Attributes	Comment	Notes
LOC ID PK	PK	LOCATION ID		

Relationships

Name	Other Entity	Role	Other Role	Cardinality	Identifying	Non Transferable
DEPT_LOC_FK	DEPARTMENT			0:1 / 0:*		
LOC_C_ID_FK	COUNTRIES			0:* / 0:1		

Used In Diagrams

- Logical

MV_EMP_DETAILS_VIEW

Entity

Property	Value
Classification Type Name	Summary

Attributes

No	Attribute Name	Keys	M	Data Type	Domain Name	Formula (Default Value)	Preferred Abbreviation	Synonyms
1	EMPLOYEE_ID	P	Y	NUMERIC				
2	JOB_ID		Y	VARCHAR(10)				
3	MANAGER_ID			NUMERIC(6,0)				
4	DEPARTMENT_ID			NUMERIC				
5	LOCATION_ID			NUMERIC(4,0)				
6	COUNTRY_ID			CHAR				
7	FIRST_NAME			VARCHAR(20)				
8	LAST_NAME		Y	VARCHAR(25)				
9	SALARY			NUMERIC(8,2)				
10	COMMISSION_PCT			NUMERIC(2,2)				
11	DEPARTMENT_NAME		Y	VARCHAR(30)				
12	JOB_TITLE		Y	VARCHAR(35)				
13	CITY		Y	VARCHAR(30)				
14	STATE_PROVINCE			VARCHAR(25)				
15	CCOUNTRY_NAME			VARCHAR(40)				
16	CREGION_NAME			VARCHAR(25)				
17	COUNTRY_ID1			CHAR(2)				

Identifiers

Name	Status	Attributes	Comment	Notes
MV_EMP_DETAILS_VIEW_TEST_PK	PK	EMPLOYEE_ID		

Relationships

Name	Other Entity	Role	Other Role	Cardinality	Identifying	Non Transferable
MV_EMP_DETAILS_VIEW_COUN_FK	COUNTRIES_HR			0:* / 0:1		

Used In Diagrams

- Logical

OPENFLIGHTS AIRPORTS

Mapped Tables

Relational Model	Table Name
Demo for release	HR.OPENFLIGHTS_AIRPORTS

Attributes

No	Attribute Name	Keys	M	Data Type	Domain Name	Formula (Default Value)	Preferred Abbreviation	Synonyms
1	ID	P	Y	NUMERIC				
2	NAME			VARCHAR(100)				
3	IATA			VARCHAR(10)				
4	ICAO			VARCHAR(10)				
5	LATITUDE			NUMERIC				
6	LONGITUDE			NUMERIC				
7	ALTITUDE			NUMERIC				
8	TIMEZONE			NUMERIC				
9	DST			VARCHAR(10)				
10	TZDBTIME			VARCHAR(100)				
11	AIRPORT TYPE			VARCHAR(100)				
12	SOURCE			VARCHAR(100)				
13	CITY ID			NUMERIC				

Identifiers

Name	Status	Attributes	Comment	Notes
OPENFLIGHTS AIRPORTS PK	PK	ID		

Relationships

Name	Other Entity	Role	Other Role	Cardinality	Identifying	Non Transferable
OPENFLIGHTS_ROUTES_DEST_AIRPORT_FK	OPENFLIGHTS ROUTES			0:1 / 0:*		
OPENFLIGHTS_ROUTES_SRC_AIRPORT_FK	OPENFLIGHTS ROUTES			0:1 / 0:*		

Used In Diagrams

- Logical

OPENFLIGHTS CITIES

Mapped Tables

Relational Model	Table Name
Demo for release	HR.OPENFLIGHTS_CITIES

Attributes

No	Attribute Name	Keys	M	Data Type	Domain Name	Formula (Default Value)	Preferred Abbreviation	Synonyms
1	ID	P	Y	NUMERIC				
2	COUNTRY			VARCHAR(100)				
3	CITY			VARCHAR(100)				

Identifiers

Name	Status	Attributes	Comment	Notes
OPENFLIGHTS CITIES PK	PK	ID		

Used In Diagrams

- Logical

OPENFLIGHTS ROUTES

Mapped Tables

Relational Model	Table Name
Demo for release	HR.OPENFLIGHTS_ROUTES

Attributes

No	Attribute Name	Keys	M	Data Type	Domain Name	Formula (Default Value)	Preferred Abbreviation	Synonyms
1	ID	P	Y	NUMERIC				
2	AIRLINE ID			NUMERIC				
3	SRC AIRPORT ID			NUMERIC				
4	DEST AIRPORT ID			NUMERIC				
5	CODESHARE			VARCHAR(100)				
6	STOPS			NUMERIC				
7	EQUIPMENT			VARCHAR(100)				
8	DISTANCE IN KM			NUMERIC				
9	DISTANCE IN MI			NUMERIC				

Identifiers

Name	Status	Attributes	Comment	Notes
OPENFLIGHTS ROUTES PK	PK	ID		

Relationships

Name	Other Entity	Role	Other Role	Cardinality	Identifying	Non Transferable
OPENFLIGHTS_ROUTES_DEST_AIRPORT_FK	OPENFLIGHTS AIRPORTS			0:* / 0:1		
OPENFLIGHTS_ROUTES_SRC_AIRPORT_FK	OPENFLIGHTS AIRPORTS			0:* / 0:1		

Used In Diagrams

- Logical

© Data Test Company

OSDDMW DIAGRAMS

Mapped Tables

Relational Model	Table Name
Demo for release	HR.OSDDMW_DIAGRAMS

Attributes

No	Attribute Name	Keys	M	Data Type	Domain Name	Formula (Default Value)	Preferred Abbreviation	Synonyms
1	ID	P	Y	NUMERIC				
2	NAME			VARCHAR(70)				
3	DESCRIPTION			VARCHAR(4000)				
4	LAST UPDATE			Timestamp(6)				
5	GLOBAL ID	U		VARCHAR(70)				
6	DESIGN ID	U		VARCHAR(70)				
7	DESIGN NAME			VARCHAR(256)				
8	MODEL ID	U		VARCHAR(70)				
9	MODEL NAME			VARCHAR(256)				
10	SUBVIEW ID	U		VARCHAR(70)				
11	SUBVIEW NAME			VARCHAR(256)				
12	PARENT ID			VARCHAR(70)				
13	DIAGRAM TYPE			VARCHAR(10)				
14	LAYOUT			BLOB(4000)				

Identifiers

Name	Status	Attributes	Comment	Notes
OSDDMW DIAGRAMS DESDIX	UK	DESIGN ID MODEL ID SUBVIEW ID		
OSDDMW DIAGRAMS PK	PK	ID		
OSDDMW DIAGRAMS UK GUID	UK	GLOBAL ID		

Used In Diagrams

- Logical

Project

Mapped Tables

Relational Model	Table Name
Demo for release	Project

Attributes

No	Attribute Name	Keys	M	Data Type	Domain Name	Formula (Default Value)	Preferred Abbreviation	Synonyms
1	Project id	P	Y	CHAR				
2	Name		Y	VARCHAR(100)				
3	Description		Y	VARCHAR(2000)				
4	Start		Y	Date				
5	End		Y	Date				

Identifiers

Name	Status	Attributes	Comment	Notes
Project PK	PK	Project id		

Relationships

Name	Other Entity	Role	Other Role	Cardinality	Identifying	Non Transferable
Employees and Projects	EMPLOYEE	has assigned	participate in	1:* / 0:*		

Relationship Attributes

Relationship	Attribute Name	M	Data Type	Domain	Formula (Default Value)
Employees and Projects	Role	Y	VARCHAR(100)		
	Start of Assignment	Y	Date		
	End of Assignment	Y	Date		

Used In Diagrams

- Logical

RACE

Mapped Tables

Relational Model	Table Name
Demo for release	HR.RACE

Attributes

No	Attribute Name	Keys	M	Data Type	Domain Name	Formula (Default Value)	Preferred Abbreviation	Synonyms
1	RACE ID	P	Y	NUMERIC(*,0)				
2	NAME	U	Y	VARCHAR(255)				
3	LAPS		Y	NUMERIC(*,0)				
4	RACE DATE			Date				
5	PODIUM			JSON(8200)				

Identifiers

Name	Status	Attributes	Comment	Notes
RACE NAME UN	UK	NAME		
RACE PK	PK	RACE ID		

Relationships

Name	Other Entity	Role	Other Role	Cardinality	Identifying	Non Transferable
DRIVER_RACE_MAP_FK1	DRIVER RACE MAP			0:1 / 1:*		

Used In Diagrams

- Logical

REGIONS

Description and Notes

Regions table that contains region numbers and names. references with the Countries table.

Mapped Tables

Relational Model	Table Name
Demo for release	HR.REGIONS

Attributes

No	Attribute Name	Keys	M	Data Type	Domain Name	Formula (Default Value)	Preferred Abbreviation	Synonyms
1	REGION ID	P	Y	NUMERIC				
2	REGION NAME			VARCHAR(25)				

Attributes Comments

No	Attribute Name	Description	Notes
1	REGION ID	Primary key of regions table.	
2	REGION NAME	Names of regions. Locations are in the countries of these regions.	

Identifiers

Name	Status	Attributes	Comment	Notes
REG ID PK	PK	REGION ID		

Relationships

Name	Other Entity	Role	Other Role	Cardinality	Identifying	Non Transferable
COUNTR_REG_FK	COUNTRIES			0:1 / 0:*		
TABLE_13_REGIONS_FK	TABLE 13			1:1 / 1:1	Yes	
TABLE_14_REGIONS_FK	TABLE 14			0:1 / 1:*		
TABLE_15_REGIONS_FK	TABLE 15			0:1 / 0:*		

Used In Diagrams

- Logical

© Data Test Company

TABLE 13

Mapped Tables

Relational Model	Table Name
Demo for release	TABLE_13

Attributes

No	Attribute Name	Keys	M	Data Type	Domain Name	Formula (Default Value)	Preferred Abbreviation	Synonyms
1	REGIONS REGION ID	P	Y	NUMERIC				

Identifiers

Name	Status	Attributes	Comment	Notes
TABLE 13 PK1	PK	REGIONS REGION ID		

Relationships

Name	Other Entity	Role	Other Role	Cardinality	Identifying	Non Transferable
TABLE_13_REGIONS_FK	REGIONS			1:1 / 1:1	Yes	

Used In Diagrams

- Logical

© Data Test Company

TABLE 14

Mapped Tables

Relational Model	Table Name
Demo for release	HR.TABLE_14

Attributes

No	Attribute Name	Keys	M	Data Type	Domain Name	Formula (Default Value)	Preferred Abbreviation	Synonyms
1	REGIONS REGION ID		Y	NUMERIC				

Relationships

Name	Other Entity	Role	Other Role	Cardinality	Identifying	Non Transferable
TABLE_14_REGIONS_FK	REGIONS			1:* / 0:1		

Used In Diagrams

- Logical

© Data Test Company

TABLE 15

Mapped Tables

Relational Model	Table Name
Demo for release	HR.TABLE_15

Attributes

No	Attribute Name	Keys	M	Data Type	Domain Name	Formula (Default Value)	Preferred Abbreviation	Synonyms
1	REGIONS REGION ID			NUMERIC				

Relationships

Name	Other Entity	Role	Other Role	Cardinality	Identifying	Non Transferable
TABLE_15_REGIONS_FK	REGIONS			0:* / 0:1		

Used In Diagrams

- Logical

TEAM

Mapped Tables

Relational Model	Table Name
Demo for release	HR.TEAM

Attributes

No	Attribute Name	Keys	M	Data Type	Domain Name	Formula (Default Value)	Preferred Abbreviation	Synonyms
1	TEAM ID	P	Y	NUMERIC(*,0)				
2	NAME	U	Y	VARCHAR(255)				
3	POINTS		Y	NUMERIC(*,0)				

Identifiers

Name	Status	Attributes	Comment	Notes
TEAM NAME UN	UK	NAME		
TEAM PK	PK	TEAM ID		

Relationships

Name	Other Entity	Role	Other Role	Cardinality	Identifying	Non Transferable
DRIVER_FK	DRIVER			0:1 / 0:*		


Used In Diagrams

- Logical


Used User defined properties

Name	Type	Presentation Name	Group	Values
education	List	education	Personal	associate bachelor professional master doctor

Logical - SubView_1

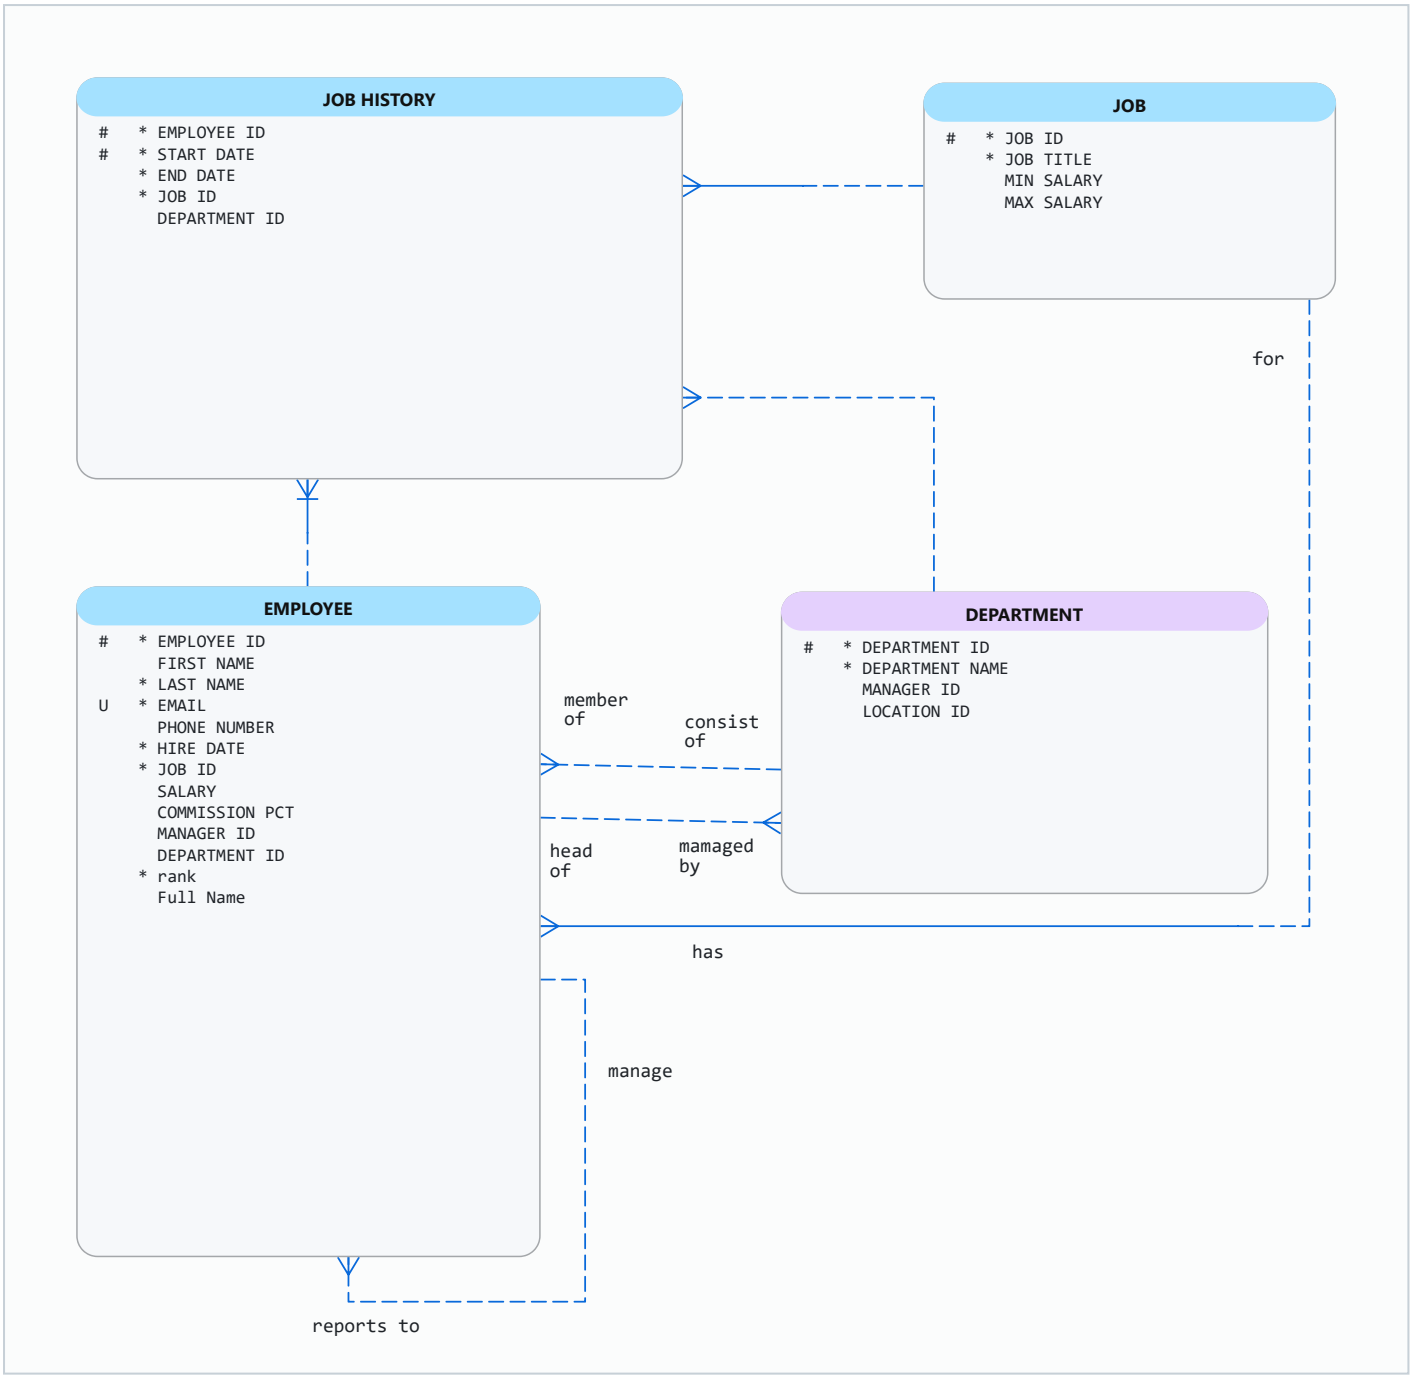

Logical

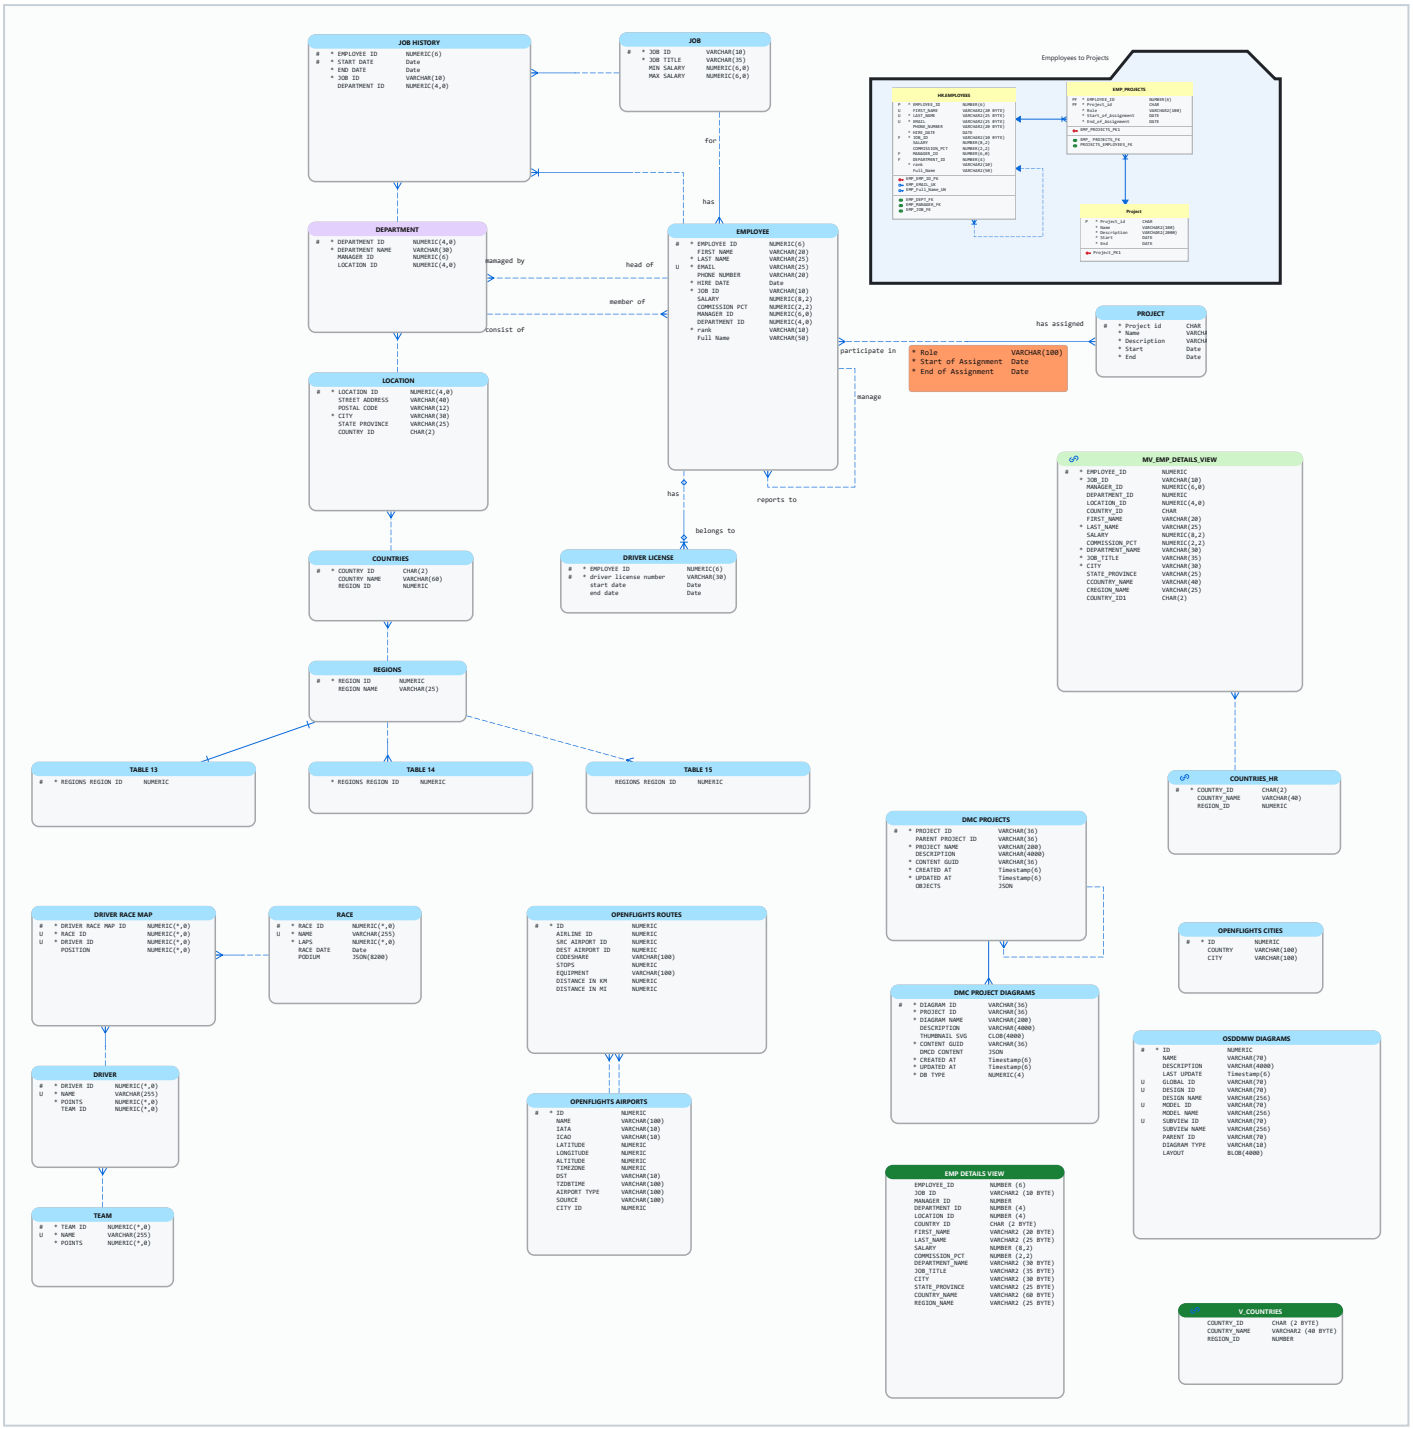
JOB HISTORY
JOB
DEPARTMENT
EMPLOYEE
LOCATION
COUNTRIES
REGIONS
DRIVER LICENSE
PROJECT
MV_EMP_DETAILS_VIEW
COUNTRIES_HR
DMC PROJECTS
DMC PROJECT DIAGRAMS
OSDDMW DIAGRAMS
OPENFLIGHTS CITIES
OPENFLIGHTS ROUTES
OPENFLIGHTS AIRPORTS
DRIVER RACE MAP
RACE
DRIVER
TEAM
TABLE 13
TABLE 14
TABLE 15
EMP DETAILS VIEW
V_COUNTRIES
Empployees to Projects
for
has
managed by
head of
member of
consist of
participate in
has assigned
manage
reports to
belongs to