Demo for release Tables

Objects

▼ **(No schema)**

- driver_license
- EMP_PROJECTS
- Project
- TABLE_13
- Test_Domains

▼ **HR**

- COLA_MARKETS_2
- COUNTRIES
- DEPARTMENTS
- DMC_PROJECT_DIAGRAMS
- DMC_PROJECTS
- DRIVER
- DRIVER_RACE_MAP
- EMPLOYEES
- J_PURCHASEORDER
- JOB_HISTORY
- JOBS
- LOCATIONS
- LONG_LAT_TABLE
- OPENFLIGHTS_AIRPORTS
- OPENFLIGHTS_CITIES
- OPENFLIGHTS_ROUTES
- OSDDMW_DIAGRAMS
- RACE
- RACE2
- REGIONS
- TABLE_14
- TABLE_15
- TEAM

▼ **SH**

- SALES
- TIMES

▼ **TESTM**

- COUNTRIES_HR
- DEPARTMENTS
- EMPLOYEES
- LOCATIONS

Properties

- Used User defined properties

Diagrams

- Demo for release
- Employees direct related
- Empployees to Projects
- Overview diagram

© Data Test Company

- Relational_1 - SubView_1

Demo for release Tables

Design: HR_for_properties

Demo for release: 34 table(s)

Nov 12, 2026, 10:22:24 AM

driver_license

Functional Name: driver license

Columns

No	Column Name	Keys	M	Data Type	Domain Name	Formula (Default Value)	Security
1	EMPLOYEE_ID	PF	Y	NUMBER(6)			
2	driver_license_number	P	Y	VARCHAR2(30)			
3	START_DATE			DATE			
4	END_DATE			DATE			

Unique keys

Name	Status	Columns	Comment	Notes
driver_license_PK1	PK	EMPLOYEE_ID driver_license_number		

Foreign Keys (Referring To)

Name	Referring To	M	Transferable	In Arc	Columns	Referred Columns	Delete Rule
driver_license_EMPLOYEES_FK	HR.EMPLOYEES	Y	Y		EMPLOYEE_ID	EMPLOYEE_ID	NO ACTION

Used In Diagrams

- Demo for release

EMP_PROJECTS

Columns

No	Column Name	Keys	M	Data Type	Domain Name	Formula (Default Value)	Security
1	EMPLOYEE_ID	PF	Y	NUMBER(6)			
2	Project_id	PF	Y	CHAR			
3	Role		Y	VARCHAR2(100)			
4	Start_of_Assignment		Y	DATE			
5	End_of_Assignment		Y	DATE			

Unique keys

Name	Status	Columns	Comment	Notes
EMP_PROJECTS_PK1	PK	EMPLOYEE_ID Project_id		

Foreign Keys (Referring To)

Name	Referring To	M	Transferable	In Arc	Columns	Referred Columns	Delete Rule
EMP_ PROJECTS_FK	Project	Y	Y		Project_id	Project_id	NO ACTION
PROJECTS_EMPLOYEES_FK	HR.EMPLOYEES	Y	Y		EMPLOYEE_ID	EMPLOYEE_ID	NO ACTION

Used In Diagrams

- Demo for release
- Empployees to Projects

HR.COLA_MARKETS_2

Columns

No	Column Name	Keys	M	Data Type	Domain Name	Formula (Default Value)	Security
1	MKT_ID	P	Y	NUMBER			
2	MARKET			MARKET_TYPE			

Unique keys

Name	Status	Columns	Comment	Notes
COLA_MARKETS_2_PK1	PK	MKT_ID		

Indexes

Name	State	Spatial	Expression	Columns	Sort Order
COLA_SPATIAL_IDX_2		Y	market.shape		

Used In Diagrams

- Demo for release

HR.COUNTRIES

Functional Name: COUNTRIES

Description and Notes

country table. References with locations table.

Columns

No	Column Name	Keys	M	Data Type	Domain Name	Formula (Default Value)	Security
1	COUNTRY_ID	P	Y	CHAR(2 BYTE)			
2	COUNTRY_NAME			VARCHAR2(60 BYTE)			
3	REGION_ID	F		NUMBER			

Columns Comments

No	Column Name	Description	Notes
1	COUNTRY_ID	Primary key of countries table.	
2	COUNTRY_NAME	Country name	
3	REGION_ID	Region ID for the country. Foreign key to region_id column in the departments table.	

Unique keys

Name	Status	Columns	Comment	Notes
COUNTRY_C_ID_PK	PK	COUNTRY_ID		

Foreign Keys (Referring To)

Name	Referring To	M	Transferable	In Arc	Columns	Referred Columns	Delete Rule
COUNTR_REG_FK	HR.REGIONS		Y		REGION_ID	REGION_ID	CASCADE

Foreign Keys (Referred From)

Name	Referred From	M	Transferable	In Arc	Columns	Referred Columns	Delete Rule
LOC_C_ID_FK	HR.LOCATIONS		Y		COUNTRY_ID	COUNTRY_ID	NO ACTION

Used In Diagrams

- Demo for release

HR.DEPARTMENTS

Functional Name: DEPARTMENT

Description and Notes

Departments table that shows details of departments where employees work. references with locations, employees, and job_history tables.

Columns

No	Column Name	Keys	M	Data Type	Domain Name	Formula (Default Value)	Security
1	DEPARTMENT_ID	P	Id,DoN	NUMBER(4)		seq_dept_id.NEXTVAL GENERATED BY DEFAULT NOCYCLE SEQUENCE seq_dept_id	
2	DEPARTMENT_NAME		Y	VARCHAR2(30 BYTE)			
3	MANAGER_ID	F		NUMBER(6,0)			
4	LOCATION_ID	F		NUMBER(4)			

Columns Comments

No	Column Name	Description	Notes
1	DEPARTMENT_ID	Primary key column of departments table.	
2	DEPARTMENT_NAME	A not null column that shows name of a department. Administration, Marketing, Purchasing, Human Resources, Shipping, IT, Executive, Public Relations, Sales, Finance, and Accounting.	
3	MANAGER_ID	Manager_id of a department. Foreign key to employee_id column of employees table. The manager_id column of the employee table references this column.	
4	LOCATION_ID	Location id where a department is located. Foreign key to location_id column of locations table.	

Unique keys

Name	Status	Columns	Comment	Notes
DEPT_ID_PK	PK	DEPARTMENT_ID		

Foreign Keys (Referring To)

Name	Referring To	M	Transferable	In Arc	Columns	Referred Columns	Delete Rule
DEPT_LOC_FK	HR.LOCATIONS		Y		LOCATION_ID	LOCATION_ID	NO ACTION
DEPT_MGR_FK	HR.EMPLOYEES		Y		MANAGER_ID	EMPLOYEE_ID	NO ACTION

Foreign Keys (Referred From)

Name	Referred From	M	Transferable	In Arc	Columns	Referred Columns	Delete Rule
EMP_DEPT_FK	HR.EMPLOYEES		Y		DEPARTMENT_ID	DEPARTMENT_ID	NO ACTION
JHIST_DEPT_FK	HR.JOB_HISTORY		Y		DEPARTMENT_ID	DEPARTMENT_ID	NO ACTION

Indexes

Name	State	Spatial	Expression	Columns	Sort Order
DEPT_ID_PK	UN			DEPARTMENT_ID	ASC
DEPT_LOCATION_IX				LOCATION_ID	ASC

Used In Diagrams

- Demo for release
- Employees direct related
- Relational_1 - SubView_1

HR.DMC_PROJECT_DIAGRAMS

Functional Name: DMC PROJECT DIAGRAMS

Columns

No	Column Name	Keys	M	Data Type	Domain Name	Formula (Default Value)	Security
1	DIAGRAM_ID	P	Y	VARCHAR2(36 BYTE)			
2	PROJECT_ID	F	Y	VARCHAR2(36 BYTE)			
3	DIAGRAM_NAME		Y	VARCHAR2(200 BYTE)			
4	DESCRIPTION			VARCHAR2(4000 BYTE)			
5	THUMBNAIL_SVG			CLOB			
6	CONTENT_GUID		Y	VARCHAR2(36 BYTE)			
7	DB_TYPE		Y,DoN	NUMBER(4)		0	
8	CREATED_AT		Y	TIMESTAMP(6)		SYSTIMESTAMP	
9	DMCD_CONTENT			JSON			
10	UPDATED_AT		Y	TIMESTAMP(6)		SYSTIMESTAMP	

Unique keys

Name	Status	Columns	Comment	Notes
DMC_PROJECT_DIAGRAMS_PK	PK	DIAGRAM_ID		

Foreign Keys (Referring To)

Name	Referring To	M	Transferable	In Arc	Columns	Referred Columns	Delete Rule
DMC_PROJECT_DIAGRAMS_PROJECT_FK	HR.DMC_PROJECTS	Y	Y		PROJECT_ID	PROJECT_ID	CASCADE

Indexes

Name	State	Spatial	Expression	Columns	Sort Order
DMC_PROJECT_DIAGRAMS_PK	UN			DIAGRAM_ID	ASC

Used In Diagrams

- Demo for release

HR.DMC_PROJECTS

Functional Name: DMC PROJECTS

Columns

No	Column Name	Keys	M	Data Type	Domain Name	Formula (Default Value)	Security
1	PROJECT_ID	P	Y	VARCHAR2(36 BYTE)			
2	PARENT_PROJECT_ID	F		VARCHAR2(36 BYTE)			
3	PROJECT_NAME		Y	VARCHAR2(200 BYTE)			
4	DESCRIPTION			VARCHAR2(4000 BYTE)			
5	CONTENT_GUID		Y	VARCHAR2(36 BYTE)			
6	OBJECTS			JSON			
7	CREATED_AT		Y	TIMESTAMP(6)		SYSTIMESTAMP	
8	UPDATED_AT		Y	TIMESTAMP(6)		SYSTIMESTAMP	

Unique keys

Name	Status	Columns	Comment	Notes
DMC_PROJECTS_PK	PK	PROJECT_ID		

Foreign Keys (Referring To)

Name	Referring To	M	Transferable	In Arc	Columns	Referred Columns	Delete Rule
DMC_PROJECTS_PARENT_FK	HR.DMC_PROJECTS		Y		PARENT_PROJECT_ID	PROJECT_ID	CASCADE

Foreign Keys (Referred From)

Name	Referred From	M	Transferable	In Arc	Columns	Referred Columns	Delete Rule
DMC_PROJECT_DIAGRAMS_PROJECT_FK	HR.DMC_PROJECT_DIAGRAMS	Y	Y		PROJECT_ID	PROJECT_ID	CASCADE
DMC_PROJECTS_PARENT_FK	HR.DMC_PROJECTS		Y		PARENT_PROJECT_ID	PROJECT_ID	CASCADE

Indexes

Name	State	Spatial	Expression	Columns	Sort Order
DMC_PROJECTS_PK	UN			PROJECT_ID	ASC

Used In Diagrams

- Demo for release

HR.DRIVER

Functional Name: DRIVER

Columns

No	Column Name	Keys	M	Data Type	Domain Name	Formula (Default Value)	Security
1	DRIVER_ID	P	Id,DoN	NUMBER(*,0)		GENERATED BY DEFAULT NOCYCLE CACHE 20 NOORDER	
2	NAME	U	Y	VARCHAR2(255 BYTE)			
3	POINTS		Y	NUMBER(*,0)			
4	TEAM_ID	F		NUMBER(*,0)			

Unique keys

Name	Status	Columns	Comment	Notes
DRIVER_PK	PK	DRIVER_ID		
DRIVER_NAME_UN	UK	NAME		

Foreign Keys (Referring To)

Name	Referring To	M	Transferable	In Arc	Columns	Referred Columns	Delete Rule
DRIVER_FK	HR.TEAM		Y		TEAM_ID	TEAM_ID	NO ACTION

Foreign Keys (Referred From)

Name	Referred From	M	Transferable	In Arc	Columns	Referred Columns	Delete Rule
DRIVER_RACE_MAP_FK2	HR.DRIVER_RACE_MAP	Y	Y		DRIVER_ID	DRIVER_ID	NO ACTION

Indexes

Name	State	Spatial	Expression	Columns	Sort Order
DRIVER_PK	UN			DRIVER_ID	ASC

Used In Diagrams

- Demo for release

HR.DRIVER_RACE_MAP

Functional Name: DRIVER RACE MAP

Columns

No	Column Name	Keys	M	Data Type	Domain Name	Formula (Default Value)	Security
1	DRIVER_RACE_MAP_ID	P	Id,DoN	NUMBER		GENERATED BY DEFAULT START WITH 10 INCREMENT BY 2 MINVALUE 10 MAXVALUE 999999999 NOCYCLE CACHE 50 NOORDER	
2	RACE_ID	UF	Y	NUMBER(*,0)			
3	DRIVER_ID	UF	Y	NUMBER(*,0)			
4	POSITION			NUMBER(*,0)			

Unique keys

Name	Status	Columns	Comment	Notes
DRIVER_RACE_MAP_PK	PK	DRIVER_RACE_MAP_ID		
DRIVER_RACE_MAP_UK	UK	RACE_ID DRIVER_ID		

Foreign Keys (Referring To)

Name	Referring To	M	Transferable	In Arc	Columns	Referred Columns	Delete Rule
DRIVER_RACE_MAP_FK1	HR.RACE	Y	Y		RACE_ID	RACE_ID	NO ACTION
DRIVER_RACE_MAP_FK2	HR.DRIVER	Y	Y		DRIVER_ID	DRIVER_ID	NO ACTION

Indexes

Name	State	Spatial	Expression	Columns	Sort Order
DRIVER_RACE_MAP_PK	UN			DRIVER_RACE_MAP_ID	ASC
DRIVER_RACE_MAP_UK	UN			RACE_ID DRIVER_ID	ASC ASC

Used In Diagrams

- Demo for release

HR.EMPLOYEES

Functional Name: EMPLOYEE

Classification Types

- Fact
- Type_6

Description and Notes

test for comments included in report:
employees table. References with departments,
jobs, job_history tables. Contains a self reference.

Notes

test - table containing important and sensitive info fro employees

Columns

No	Column Name	Keys	M	Data Type	Domain Name	Formula (Default Value)	Security
1	EMPLOYEE_ID	P	Id	NUMBER(6)		GENERATED BY DEFAULT MINVALUE 1 MAXVALUE 999999999 SEQUENCE seq_emp_id TRIGGER emp_id_sequence	
2	FIRST_NAME	U		VARCHAR2(20 BYTE)			
3	LAST_NAME	U	Y	VARCHAR2(25 BYTE)			
4	EMAIL	U	Y	VARCHAR2(25 BYTE)			PII / REGEXP
5	PHONE_NUMBER			VARCHAR2(20 BYTE)			PII / PARTIAL
6	HIRE_DATE		Y	DATE			
7	JOB_ID	F	Y	VARCHAR2(10 BYTE)			Sensitive / FULL
8	SALARY			NUMBER(8,2)			Sensitive / FULL
9	COMMISSION_PCT			NUMBER(2,2)			Sensitive / RANDOM
10	MANAGER_ID	F		NUMBER(6,0)			
11	DEPARTMENT_ID	F		NUMBER(4)			
12	rank		Y,DoN	VARCHAR2(10)		low	
13	Full_Name			VARCHAR2(50)		nvl(first_name,',') ||'' || last_name	

Columns Comments

No	Column Name	Description	Notes
1	EMPLOYEE_ID	new to comments: Primary key of employees table.	
2	FIRST_NAME	First name of the employee. A not null column.	
3	LAST_NAME	Last name of the employee. A not null column.	
4	EMAIL	Email id of the employee	
5	PHONE_NUMBER	Phone number of the employee; includes country code and area code	
6	HIRE_DATE	Date when the employee started on this job. A not null column.	
7	JOB_ID	Current job of the employee; foreign key to job_id column of the jobs table. A not null column.	
8	SALARY	assestment before change	please read comments
9	COMMISSION_PCT	Commission percentage of the employee; Only employees in sales department eligible for commission percentage	
10	MANAGER_ID	Manager id of the employee; has same domain as manager_id in departments table. Foreign key to employee_id column of employees table. (useful for reflexive joins and CONNECT BY query)	

No	Column Name	Description	Notes
11	DEPARTMENT_ID	Department id where employee works; foreign key to department_id column of the departments table	

Unique keys

Name	Status	Columns	Comment	Notes
EMP_EMP_ID_PK	PK	EMPLOYEE_ID		
EMP_EMAIL_UK	UK	EMAIL		
EMP_Full_Name_UN	UK	LAST_NAME FIRST_NAME	need full name to be unique	check why full name is not unique on error. Do we need a middle name?

Table Check Constraints

Name	Rule	In DDL	Comment	Notes
phone_constraint	phone_number <> 'XXXX' and phone_number <> 'CCCC' and phone_number <> 'BBBB'		fake rule to test reports	another fake rule
department_check	department_id >0	Y	fake dept check	note for fake dept check

Column Check Constraints

Column	Definition	In DDL	Comment	Notes
SALARY	**Rule** / **DB Type** salary > 0 — Generic Constraint salary > 0 — Oracle Database 21c salary > 0 and salary <100000 — SQL Server 2012	Y	variant to test reports	please keep that constraint untouched
rank	**Value** / **Description** high — < 15 low — rank low >= 40 middle — between 15 and 40	Y	define rank based on level they get - fake	define rank based on level they get

Foreign Keys (Referring To)

Name	Referring To	M	Transferable	In Arc	Columns	Referred Columns	Delete Rule
EMP_DEPT_FK	HR.DEPARTMENTS		Y		DEPARTMENT_ID	DEPARTMENT_ID	NO ACTION
EMP_MANAGER_FK	HR.EMPLOYEES		Y		MANAGER_ID	EMPLOYEE_ID	NO ACTION
EMP_JOB_FK	HR.JOBS	Y	Y		JOB_ID	JOB_ID	NO ACTION

Foreign Keys (Referred From)

Name	Referred From	M	Transferable	In Arc	Columns	Referred Columns	Delete Rule
DEPT_MGR_FK	HR.DEPARTMENTS		Y		MANAGER_ID	EMPLOYEE_ID	NO ACTION
PROJECTS_EMPLOYEES_FK	EMP_PROJECTS	Y	Y		EMPLOYEE_ID	EMPLOYEE_ID	NO ACTION
EMP_MANAGER_FK	HR.EMPLOYEES		Y		MANAGER_ID	EMPLOYEE_ID	NO ACTION
JHIST_EMP_FK	HR.JOB_HISTORY	Y	Y		EMPLOYEE_ID	EMPLOYEE_ID	NO ACTION
driver_license_EMPLOYEES_FK	driver_license	Y	Y		EMPLOYEE_ID	EMPLOYEE_ID	NO ACTION

Indexes

Name	State	Spatial	Expression	Columns	Sort Order
EMP_DEPARTMENT_IX				DEPARTMENT_ID	ASC
EMP_EMAIL_UK	UN			EMAIL	ASC
EMP_EMP_ID_PK	UN			EMPLOYEE_ID	ASC
EMP_JOB_IX				JOB_ID	ASC
EMP_MANAGER_IX				MANAGER_ID	ASC
EMP_NAME_IX				LAST_NAME FIRST_NAME	ASC ASC
EMP_ful_name_IDX			upper(first_name ||' '||last_name)		
EMPLOYEES_plain__IDX				FIRST_NAME LAST_NAME PHONE_NUMBER	ASC ASC DESC

Dynamic Properties

Name	Value	Presentation Name	UDP
Description	my new description	Description	Y
DynamicProperty_1	10	Number of restructurings	
DynamicProperty_2	contains PII and sensitive info	Security Info	
education	bachelor	education	Y
showInSubview	true	showInSubview	Y
UDP_2	1500	UDP_2	
UDP_3	2026-08-21	Last Update	Y

Used In Diagrams

- Demo for release
- Employees direct related
- Empployees to Projects
- Overview diagram
- Relational_1 - SubView_1

HR.J_PURCHASEORDER

Columns

No	Column Name	Keys	M	Data Type	Domain Name	Formula (Default Value)	Security
1	ID	P	Y	VARCHAR2(32 BYTE)			
2	DATE_LOADED			TIMESTAMP WITH TIME ZONE(6)			
3	DATA			JSON			

Unique keys

Name	Status	Columns	Comment	Notes
J_PURCHASEORDER_PK1	PK	ID		

Used In Diagrams

- Demo for release

HR.JOB_HISTORY

Functional Name: JOB HISTORY

Description and Notes

Table that stores job history of the employees. If an employee changes departments within the job or changes jobs within the department, new rows get inserted into this table with old job information of the employee. Contains a complex primary key: employee_id+start_date. References with jobs, employees, and departments tables.

Columns

No	Column Name	Keys	M	Data Type	Domain Name	Formula (Default Value)	Security
1	EMPLOYEE_ID	PF	Y	NUMBER(6,0)			
2	START_DATE	P	Y	DATE			
3	END_DATE		Y	DATE			
4	JOB_ID	F	Y	VARCHAR2(10 BYTE)			
5	DEPARTMENT_ID	F		NUMBER(4,0)			

Columns Comments

No	Column Name	Description	Notes
1	EMPLOYEE_ID	A not null column in the complex primary key employee_id+start_date. Foreign key to employee_id column of the employee table	
2	START_DATE	A not null column in the complex primary key employee_id+start_date. Must be less than the end_date of the job_history table. (enforced by constraint jhist_date_interval)	
3	END_DATE	Last day of the employee in this job role. A not null column. Must be greater than the start_date of the job_history table. (enforced by constraint jhist_date_interval)	
4	JOB_ID	Job role in which the employee worked in the past; foreign key to job_id column in the jobs table. A not null column.	
5	DEPARTMENT_ID	Department id in which the employee worked in the past; foreign key to department_id column in the departments table	

Unique keys

Name	Status	Columns	Comment	Notes
JHIST_EMP_ID_ST_DATE_PK	PK	EMPLOYEE_ID START_DATE		

Table Check Constraints

Name	Rule	In DDL	Comment	Notes
JHIST_DATE_INTERVAL	end_date > start_date	Y		

Foreign Keys (Referring To)

Name	Referring To	M	Transferable	In Arc	Columns	Referred Columns	Delete Rule
JHIST_EMP_FK	HR.EMPLOYEES	Y	Y		EMPLOYEE_ID	EMPLOYEE_ID	NO ACTION
JHIST_DEPT_FK	HR.DEPARTMENTS		Y		DEPARTMENT_ID	DEPARTMENT_ID	NO ACTION
JHIST_JOB_FK	HR.JOBS	Y	Y		JOB_ID	JOB_ID	NO ACTION

Indexes

Name	State	Spatial	Expression	Columns	Sort Order
JHIST_DEPARTMENT_IX				DEPARTMENT_ID	ASC
JHIST_EMP_ID_ST_DATE_PK	UN			EMPLOYEE_ID START_DATE	ASC ASC
JHIST_EMPLOYEE_IX				EMPLOYEE_ID	ASC
JHIST_JOB_IX				JOB_ID	ASC

Used In Diagrams

- Demo for release
- Employees direct related
- Relational_1 - SubView_1

HR.JOBS

Functional Name: JOB

Description and Notes

jobs table with job titles and salary ranges.
References with employees and job_history table.

Columns

No	Column Name	Keys	M	Data Type	Domain Name	Formula (Default Value)	Security
1	JOB_ID	P	Y	VARCHAR2(10 BYTE)			
2	JOB_TITLE		Y	VARCHAR2(35 BYTE)			
3	MIN_SALARY			NUMBER(6)			
4	MAX_SALARY			NUMBER(6,0)			

Columns Comments

No	Column Name	Description	Notes
1	JOB_ID	Primary key of jobs table.	
2	JOB_TITLE	A not null column that shows job title, e.g. AD_VP, FI_ACCOUNTANT	
3	MIN_SALARY	Minimum salary for a job title.	
4	MAX_SALARY	Maximum salary for a job title	

Unique keys

Name	Status	Columns	Comment	Notes
JOB_ID_PK	PK	JOB_ID		

Foreign Keys (Referred From)

Name	Referred From	M	Transferable	In Arc	Columns	Referred Columns	Delete Rule
EMP_JOB_FK	HR.EMPLOYEES	Y	Y		JOB_ID	JOB_ID	NO ACTION
JHIST_JOB_FK	HR.JOB_HISTORY	Y	Y		JOB_ID	JOB_ID	NO ACTION

Indexes

Name	State	Spatial	Expression	Columns	Sort Order
JOB_ID_PK	UN			JOB_ID	ASC

Used In Diagrams

- Demo for release
- Employees direct related

HR.LOCATIONS

Functional Name: LOCATION

Description and Notes

Locations table that contains specific address of a specific office, warehouse, and/or production site of a company. Does not store addresses / locations of customers. references with the departments and countries tables.

Columns

No	Column Name	Keys	M	Data Type	Domain Name	Formula (Default Value)	Security
1	LOCATION_ID	P	Y	NUMBER(4)			
2	STREET_ADDRESS			VARCHAR2(40 BYTE)			
3	POSTAL_CODE			VARCHAR2(12 BYTE)			
4	CITY		Y	VARCHAR2(30 BYTE)			
5	STATE_PROVINCE			VARCHAR2(25 BYTE)			
6	COUNTRY_ID	F		CHAR(2 BYTE)			

Columns Comments

No	Column Name	Description	Notes
1	LOCATION_ID	Primary key of locations table	
2	STREET_ADDRESS	Street address of an office, warehouse, or production site of a company. Contains building number and street name	
3	POSTAL_CODE	Postal code of the location of an office, warehouse, or production site of a company.	
4	CITY	A not null column that shows city where an office, warehouse, or production site of a company is located.	
5	STATE_PROVINCE	State or Province where an office, warehouse, or production site of a company is located.	
6	COUNTRY_ID	Country where an office, warehouse, or production site of a company is located. Foreign key to country_id column of the countries table.	

Unique keys

Name	Status	Columns	Comment	Notes
LOC_ID_PK	PK	LOCATION_ID		

Foreign Keys (Referring To)

Name	Referring To	M	Transferable	In Arc	Columns	Referred Columns	Delete Rule
LOC_C_ID_FK	HR.COUNTRIES		Y		COUNTRY_ID	COUNTRY_ID	NO ACTION

Foreign Keys (Referred From)

Name	Referred From	M	Transferable	In Arc	Columns	Referred Columns	Delete Rule
DEPT_LOC_FK	HR.DEPARTMENTS		Y		LOCATION_ID	LOCATION_ID	NO ACTION

Indexes

Name	State	Spatial	Expression	Columns	Sort Order
LOC_CITY_IX				CITY	ASC
LOC_COUNTRY_IX				COUNTRY_ID	ASC
LOC_ID_PK	UN			LOCATION_ID	ASC

Name	State	Spatial	Expression	Columns	Sort Order
LOC_STATE_PROVINCE_IX				STATE_PROVINCE	ASC

Used In Diagrams

- Demo for release
- Relational_1 - SubView_1

HR.LONG_LAT_TABLE

Columns

No	Column Name	Keys	M	Data Type	Domain Name	Formula (Default Value)	Security
1	LONGITUDE			NUMBER			
2	LATITUDE			NUMBER			
3	NAME			VARCHAR2(32 BYTE)			

Indexes

Name	State	Spatial	Expression	Columns	Sort Order
LONG_LAT_TABLE_IDX		Y	"HR"."GET_LONG_LAT_PT" ("LONGITUDE","LATITUDE")		

Used In Diagrams

- Demo for release
- Relational_1 - SubView_1

HR.OPENFLIGHTS_AIRPORTS

Functional Name: OPENFLIGHTS AIRPORTS

Columns

No	Column Name	Keys	M	Data Type	Domain Name	Formula (Default Value)	Security
1	ID	P	Y	NUMBER			
2	NAME			VARCHAR2(100 BYTE)			
3	IATA			VARCHAR2(10 BYTE)			
4	ICAO			VARCHAR2(10 BYTE)			
5	LATITUDE			NUMBER			
6	LONGITUDE			NUMBER			
7	ALTITUDE			NUMBER			
8	TIMEZONE			NUMBER			
9	DST			VARCHAR2(10 BYTE)			
10	TZDBTIME			VARCHAR2(100 BYTE)			
11	AIRPORT_TYPE			VARCHAR2(100 BYTE)			
12	SOURCE			VARCHAR2(100 BYTE)			
13	CITY_ID			NUMBER			

Unique keys

Name	Status	Columns	Comment	Notes
OPENFLIGHTS_AIRPORTS_PK	PK	ID		

Foreign Keys (Referred From)

Name	Referred From	M	Transferable	In Arc	Columns	Referred Columns	Delete Rule
OPENFLIGHTS_ROUTES_DEST_AIRPORT_FK	HR.OPENFLIGHTS_ROUTES		Y		DEST_AIRPORT_ID	ID	NO ACTION
OPENFLIGHTS_ROUTES_SRC_AIRPORT_FK	HR.OPENFLIGHTS_ROUTES		Y		SRC_AIRPORT_ID	ID	NO ACTION

Indexes

Name	State	Spatial	Expression	Columns	Sort Order
OPENFLIGHTS_AIRPORTS_PK	UN			ID	ASC

Used In Diagrams

- Demo for release

HR.OPENFLIGHTS_CITIES

Functional Name: OPENFLIGHTS CITIES

Columns

No	Column Name	Keys	M	Data Type	Domain Name	Formula (Default Value)	Security
1	ID	P	Y	NUMBER			
2	COUNTRY			VARCHAR2(100 BYTE)			
3	CITY			VARCHAR2(100 BYTE)			

Unique keys

Name	Status	Columns	Comment	Notes
OPENFLIGHTS_CITIES_PK	PK	ID		

Indexes

Name	State	Spatial	Expression	Columns	Sort Order
OPENFLIGHTS_CITIES_PK	UN			ID	ASC

Used In Diagrams

- Demo for release

HR.OPENFLIGHTS_ROUTES

Functional Name: OPENFLIGHTS ROUTES

Columns

No	Column Name	Keys	M	Data Type	Domain Name	Formula (Default Value)	Security
1	ID	P	Y	NUMBER			
2	AIRLINE_ID			NUMBER			
3	SRC_AIRPORT_ID	F		NUMBER			
4	DEST_AIRPORT_ID	F		NUMBER			
5	CODESHARE			VARCHAR2(100 BYTE)			
6	STOPS			NUMBER			
7	EQUIPMENT			VARCHAR2(100 BYTE)			
8	DISTANCE_IN_KM			NUMBER			
9	DISTANCE_IN_MI			NUMBER			

Unique keys

Name	Status	Columns	Comment	Notes
OPENFLIGHTS_ROUTES_PK	PK	ID		

Foreign Keys (Referring To)

Name	Referring To	M	Transferable	In Arc	Columns	Referred Columns	Delete Rule
OPENFLIGHTS_ROUTES_DEST_AIRPORT_FK	HR.OPENFLIGHTS_AIRPORTS		Y		DEST_AIRPORT_ID	ID	NO ACTION
OPENFLIGHTS_ROUTES_SRC_AIRPORT_FK	HR.OPENFLIGHTS_AIRPORTS		Y		SRC_AIRPORT_ID	ID	NO ACTION

Indexes

Name	State	Spatial	Expression	Columns	Sort Order
OPENFLIGHTS_ROUTES_PK	UN			ID	ASC

Used In Diagrams

- Demo for release

HR.OSDDMW_DIAGRAMS

Functional Name: OSDDMW DIAGRAMS

Columns

No	Column Name	Keys	M	Data Type	Domain Name	Formula (Default Value)	Security
1	ID	P	Y	NUMBER			
2	NAME			VARCHAR2(70 BYTE)			
3	DESCRIPTION			VARCHAR2(4000 BYTE)			
4	LAST_UPDATE			TIMESTAMP(6)			
5	GLOBAL_ID	U		VARCHAR2(70 BYTE)			
6	DESIGN_ID	U		VARCHAR2(70 BYTE)			
7	DESIGN_NAME			VARCHAR2(256 BYTE)			
8	MODEL_ID	U		VARCHAR2(70 BYTE)			
9	MODEL_NAME			VARCHAR2(256 BYTE)			
10	SUBVIEW_ID	U		VARCHAR2(70 BYTE)			
11	SUBVIEW_NAME			VARCHAR2(256 BYTE)			
12	PARENT_ID			VARCHAR2(70 BYTE)			
13	DIAGRAM_TYPE			VARCHAR2(10 BYTE)			
14	LAYOUT			BLOB			

Unique keys

Name	Status	Columns	Comment	Notes
OSDDMW_DIAGRAMS_PK	PK	ID		
OSDDMW_DIAGRAMS_DESDIX	UK	DESIGN_ID MODEL_ID SUBVIEW_ID		
OSDDMW_DIAGRAMS_UK_GUID	UK	GLOBAL_ID		

Indexes

Name	State	Spatial	Expression	Columns	Sort Order
OSDDMW_DIAGRAMS_DESDIX	UN			DESIGN_ID MODEL_ID SUBVIEW_ID	ASC ASC ASC
OSDDMW_DIAGRAMS_PK	UN			ID	ASC
OSDDMW_DIAGRAMS_UK_GUID	UN			GLOBAL_ID	ASC

Used In Diagrams

- Demo for release

HR.RACE

Functional Name: RACE

Columns

No	Column Name	Keys	M	Data Type	Domain Name	Formula (Default Value)	Security
1	RACE_ID	P	Id,DoN	NUMBER(*,0)		GENERATED BY DEFAULT NOCYCLE CACHE 20 NOORDER	
2	NAME	U	Y	VARCHAR2(255 BYTE)			
3	LAPS		Y	NUMBER(*,0)			
4	RACE_DATE			DATE			
5	PODIUM			JSON			

Unique keys

Name	Status	Columns	Comment	Notes
RACE_PK	PK	RACE_ID		
RACE_NAME_UN	UK	NAME		

Foreign Keys (Referred From)

Name	Referred From	M	Transferable	In Arc	Columns	Referred Columns	Delete Rule
DRIVER_RACE_MAP_FK1	HR.DRIVER_RACE_MAP	Y	Y		RACE_ID	RACE_ID	NO ACTION

Indexes

Name	State	Spatial	Expression	Columns	Sort Order
RACE_PK	UN			RACE_ID	ASC

Used In Diagrams

- Demo for release

HR.RACE2

Columns

No	Column Name	Keys	M	Data Type	Domain Name	Formula (Default Value)	Security
1	RACE_ID	P	Id,DoN	NUMBER(*)		GENERATED BY DEFAULT NOCYCLE CACHE 20 NOORDER	
2	NAME	U	Y	VARCHAR2(255 BYTE)			
3	LAPS		Y	NUMBER(*,0)			
4	RACE_DATE			DATE			
5	PODIUM			JSON			

Unique keys

Name	Status	Columns	Comment	Notes
RACE2_PK	PK	RACE_ID		
RACE2_NAME_UN	UK	NAME		

Column Check Constraints

<table>
<tr><th>Column</th><th>Definition</th><th>In DDL</th><th>Comment</th><th>Notes</th></tr>
<tr><td>PODIUM</td><td>
<table>
<tr><th>Rule</th><th>DB Type</th></tr>
<tr><td>podium is json validate '{
"type": "object",
"properties": {
"winner": {
"type": "object",
"properties": {
"name": {
"type": "string"
},
"time": {
"type": "string"
}
}
},
"firstRunnerUp": {
"type": "object",
"properties": {
"name": {
"type": "string"
},
"time": {
"type": "string"
}
}
},
"secondRunnerUp": {
"type": "object",
"properties": {
"name": {
"type": "string"
},
"time": {
"type": "string"
}
}
}
}
}'</td><td>Generic Constraint</td></tr>
<tr><td>podium is json validate '{
"type": "object",
"properties": {
"winner": {
"type": "object",
"properties": {
"name": {
"type": "string"
},
"time": {
"type": "string"
}
}
},
"firstRunnerUp": {
"type": "object",
"properties": {
"name": {
"type": "string"
},
"time": {
"type": "string"
}
}
},
"secondRunnerUp": {
"type": "object",
"properties": {
"name": {
"type": "string"
},
"time": {
"type": "string"
}
}
}
}
}'</td><td>Oracle Database 21c</td></tr>
</table>
</td><td>Y</td><td>JSON schema to restrict json to underlying tables structure</td><td>update JSON schema when underlying tables are changed</td></tr>
</table>

Indexes

Name	State	Spatial	Expression	Columns	Sort Order
RACE2_PK	UN			RACE_ID	ASC

Used In Diagrams

- Demo for release
- Relational_1 - SubView_1

HR.REGIONS

Functional Name: REGIONS

Description and Notes

Regions table that contains region numbers and names. references with the Countries table.

Columns

No	Column Name	Keys	M	Data Type	Domain Name	Formula (Default Value)	Security
1	REGION_ID	P	Y	NUMBER			
2	REGION_NAME			VARCHAR2(25 BYTE)			

Columns Comments

No	Column Name	Description	Notes
1	REGION_ID	Primary key of regions table.	
2	REGION_NAME	Names of regions. Locations are in the countries of these regions.	

Unique keys

Name	Status	Columns	Comment	Notes
REG_ID_PK	PK	REGION_ID		

Foreign Keys (Referred From)

Name	Referred From	M	Transferable	In Arc	Columns	Referred Columns	Delete Rule
TABLE_13_REGIONS_FK	TABLE_13	Y	Y		REGIONS_REGION_ID	REGION_ID	CASCADE
TABLE_15_REGIONS_FK	HR.TABLE_15		Y		REGIONS_REGION_ID	REGION_ID	SET NULL
COUNTR_REG_FK	HR.COUNTRIES		Y		REGION_ID	REGION_ID	CASCADE
TABLE_14_REGIONS_FK	HR.TABLE_14	Y	Y		REGIONS_REGION_ID	REGION_ID	NO ACTION

Indexes

Name	State	Spatial	Expression	Columns	Sort Order
REG_ID_PK	UN			REGION_ID	ASC

Used In Diagrams

- Demo for release

HR.TABLE_14

Functional Name: TABLE 14

Columns

No	Column Name	Keys	M	Data Type	Domain Name	Formula (Default Value)	Security
1	REGIONS_REGION_ID	F	Y	NUMBER			

Foreign Keys (Referring To)

Name	Referring To	M	Transferable	In Arc	Columns	Referred Columns	Delete Rule
TABLE_14_REGIONS_FK	HR.REGIONS	Y	Y		REGIONS_REGION_ID	REGION_ID	NO ACTION

Indexes

Name	State	Spatial	Expression	Columns	Sort Order
TABLE_14_REGIONS_REGION_ID_IDX				REGIONS_REGION_ID	ASC

Used In Diagrams

- Demo for release

HR.TABLE_15

Functional Name: TABLE 15

Columns

No	Column Name	Keys	M	Data Type	Domain Name	Formula (Default Value)	Security
1	REGIONS_REGION_ID	F		NUMBER			

Foreign Keys (Referring To)

Name	Referring To	M	Transferable	In Arc	Columns	Referred Columns	Delete Rule
TABLE_15_REGIONS_FK	HR.REGIONS		Y		REGIONS_REGION_ID	REGION_ID	SET NULL

Indexes

Name	State	Spatial	Expression	Columns	Sort Order
TABLE_15_REGIONS_REGION_ID_IDX				REGIONS_REGION_ID	ASC

Used In Diagrams

- Demo for release

HR.TEAM

Functional Name: TEAM

Columns

No	Column Name	Keys	M	Data Type	Domain Name	Formula (Default Value)	Security
1	TEAM_ID	P	Id,DoN	NUMBER(*,0)		GENERATED BY DEFAULT NOCYCLE CACHE 20 NOORDER	
2	NAME	U	Y	VARCHAR2(255 BYTE)			
3	POINTS		Y	NUMBER(*,0)			

Unique keys

Name	Status	Columns	Comment	Notes
TEAM_PK	PK	TEAM_ID		
TEAM_NAME_UN	UK	NAME		

Foreign Keys (Referred From)

Name	Referred From	M	Transferable	In Arc	Columns	Referred Columns	Delete Rule
DRIVER_FK	HR.DRIVER		Y		TEAM_ID	TEAM_ID	NO ACTION

Indexes

Name	State	Spatial	Expression	Columns	Sort Order
TEAM_PK	UN			TEAM_ID	ASC

Used In Diagrams

- Demo for release

Project

Functional Name: Project

Columns

No	Column Name	Keys	M	Data Type	Domain Name	Formula (Default Value)	Security
1	Project_id	P	Y	CHAR			
2	Name		Y	VARCHAR2(100)			
3	Description		Y	VARCHAR2(2000)			
4	Start		Y	DATE			
5	End		Y	DATE			

Unique keys

Name	Status	Columns	Comment	Notes
Project_PK1	PK	Project_id		

Foreign Keys (Referred From)

Name	Referred From	M	Transferable	In Arc	Columns	Referred Columns	Delete Rule
EMP_ PROJECTS_FK	EMP_PROJECTS	Y	Y		Project_id	Project_id	NO ACTION

Used In Diagrams

- Demo for release
- Empployees to Projects

SH.SALES

Description and Notes

facts table, without a primary key; all rows are uniquely identified by the combination of all foreign keys

Columns

No	Column Name	Keys	M	Data Type	Domain Name	Formula (Default Value)	Security
1	PROD_ID		Y	NUMBER(6,0)			
2	CUST_ID		Y	NUMBER			
3	TIME_ID	F	Y	DATE			
4	CHANNEL_ID		Y	NUMBER(1,0)			
5	PROMO_ID		Y	NUMBER(6,0)			
6	QUANTITY_SOLD		Y	NUMBER(3,0)			
7	AMOUNT_SOLD		Y	NUMBER(10,2)			

Columns Comments

No	Column Name	Description	Notes
1	PROD_ID	FK to the products dimension table	
2	CUST_ID	FK to the customers dimension table	
3	TIME_ID	FK to the times dimension table	
4	CHANNEL_ID	FK to the channels dimension table	
5	PROMO_ID	promotion identifier, without FK constraint (intentionally) to show outer join optimization	
6	QUANTITY_SOLD	product quantity sold with the transaction	
7	AMOUNT_SOLD	invoiced amount to the customer	

Foreign Keys (Referring To)

Name	Referring To	M	Transferable	In Arc	Columns	Referred Columns	Delete Rule
SALES_TIME_FK	SH.TIMES	Y	Y		TIME_ID	TIME_ID	NO ACTION

Indexes

Name	State	Spatial	Expression	Columns	Sort Order
SALES_CHANNEL_BIX				CHANNEL_ID	ASC
SALES_CUST_BIX				CUST_ID	ASC
SALES_PROD_BIX				PROD_ID	ASC
SALES_PROMO_BIX				PROMO_ID	ASC
SALES_TIME_BIX				TIME_ID	ASC

Used In Diagrams

- Demo for release

SH.TIMES

Description and Notes

Time dimension table to support multiple hierarchies and materialized views

Columns

No	Column Name	Keys	M	Data Type	Domain Name	Formula (Default Value)	Security
1	TIME_ID	P	Y	DATE			
2	DAY_NAME		Y	VARCHAR2(9 BYTE)			
3	DAY_NUMBER_IN_WEEK		Y	NUMBER(1,0)			
4	DAY_NUMBER_IN_MONTH		Y	NUMBER(2,0)			
5	CALENDAR_WEEK_NUMBER		Y	NUMBER(2,0)			
6	FISCAL_WEEK_NUMBER		Y	NUMBER(2,0)			
7	WEEK_ENDING_DAY		Y	DATE			
8	WEEK_ENDING_DAY_ID		Y	NUMBER			
9	CALENDAR_MONTH_NUMBER		Y	NUMBER(2,0)			
10	FISCAL_MONTH_NUMBER		Y	NUMBER(2,0)			
11	CALENDAR_MONTH_DESC		Y	VARCHAR2(8 BYTE)			
12	CALENDAR_MONTH_ID		Y	NUMBER			
13	FISCAL_MONTH_DESC		Y	VARCHAR2(8 BYTE)			
14	FISCAL_MONTH_ID		Y	NUMBER			
15	DAYS_IN_CAL_MONTH		Y	NUMBER			
16	DAYS_IN_FIS_MONTH		Y	NUMBER			
17	END_OF_CAL_MONTH		Y	DATE			
18	END_OF_FIS_MONTH		Y	DATE			
19	CALENDAR_MONTH_NAME		Y	VARCHAR2(9 BYTE)			
20	FISCAL_MONTH_NAME		Y	VARCHAR2(9 BYTE)			
21	CALENDAR_QUARTER_DESC		Y	CHAR(7 BYTE)			
22	CALENDAR_QUARTER_ID		Y	NUMBER			
23	FISCAL_QUARTER_DESC		Y	CHAR(7 BYTE)			
24	FISCAL_QUARTER_ID		Y	NUMBER			
25	DAYS_IN_CAL_QUARTER		Y	NUMBER			
26	DAYS_IN_FIS_QUARTER		Y	NUMBER			
27	END_OF_CAL_QUARTER		Y	DATE			
28	END_OF_FIS_QUARTER		Y	DATE			
29	CALENDAR_QUARTER_NUMBER		Y	NUMBER(1,0)			
30	FISCAL_QUARTER_NUMBER		Y	NUMBER(1,0)			
31	CALENDAR_YEAR		Y	NUMBER(4,0)			
32	CALENDAR_YEAR_ID		Y	NUMBER			
33	FISCAL_YEAR		Y	NUMBER(4,0)			
34	FISCAL_YEAR_ID		Y	NUMBER			
35	DAYS_IN_CAL_YEAR		Y	NUMBER			
36	DAYS_IN_FIS_YEAR		Y	NUMBER			
37	END_OF_CAL_YEAR		Y	DATE			
38	END_OF_FIS_YEAR		Y	DATE			

Columns Comments

No	Column Name	Description	Notes
1	TIME_ID	primary key; day date, finest granularity, CORRECT ORDER	
2	DAY_NAME	Monday to Sunday, repeating	

No	Column Name	Description	Notes
3	DAY_NUMBER_IN_WEEK	1 to 7, repeating	
4	DAY_NUMBER_IN_MONTH	1 to 31, repeating	
5	CALENDAR_WEEK_NUMBER	1 to 53, repeating	
6	FISCAL_WEEK_NUMBER	1 to 53, repeating	
7	WEEK_ENDING_DAY	date of last day in week, CORRECT ORDER	
9	CALENDAR_MONTH_NUMBER	1 to 12, repeating	
10	FISCAL_MONTH_NUMBER	1 to 12, repeating	
11	CALENDAR_MONTH_DESC	e.g. 1998-01, CORRECT ORDER	
13	FISCAL_MONTH_DESC	e.g. 1998-01, CORRECT ORDER	
15	DAYS_IN_CAL_MONTH	e.g. 28,31, repeating	
16	DAYS_IN_FIS_MONTH	e.g. 25,32, repeating	
17	END_OF_CAL_MONTH	last day of calendar month	
18	END_OF_FIS_MONTH	last day of fiscal month	
19	CALENDAR_MONTH_NAME	January to December, repeating	
20	FISCAL_MONTH_NAME	January to December, repeating	
21	CALENDAR_QUARTER_DESC	e.g. 1998-Q1, CORRECT ORDER	
23	FISCAL_QUARTER_DESC	e.g. 1999-Q3, CORRECT ORDER	
25	DAYS_IN_CAL_QUARTER	e.g. 88,90, repeating	
26	DAYS_IN_FIS_QUARTER	e.g. 88,90, repeating	
27	END_OF_CAL_QUARTER	last day of calendar quarter	
28	END_OF_FIS_QUARTER	last day of fiscal quarter	
29	CALENDAR_QUARTER_NUMBER	1 to 4, repeating	
30	FISCAL_QUARTER_NUMBER	1 to 4, repeating	
31	CALENDAR_YEAR	e.g. 1999, CORRECT ORDER	
33	FISCAL_YEAR	e.g. 1999, CORRECT ORDER	
35	DAYS_IN_CAL_YEAR	365,366 repeating	
36	DAYS_IN_FIS_YEAR	e.g. 355,364, repeating	
37	END_OF_CAL_YEAR	last day of cal year	
38	END_OF_FIS_YEAR	last day of fiscal year	

Unique keys

Name	Status	Columns	Comment	Notes
TIMES_PK	PK	TIME_ID		

Foreign Keys (Referred From)

Name	Referred From	M	Transferable	In Arc	Columns	Referred Columns	Delete Rule
SALES_TIME_FK	SH.SALES	Y	Y		TIME_ID	TIME_ID	NO ACTION

Indexes

Name	State	Spatial	Expression	Columns	Sort Order
TIMES_PK	UN			TIME_ID	ASC

Used In Diagrams

- Demo for release

TABLE_13

Functional Name: TABLE 13

Columns

No	Column Name	Keys	M	Data Type	Domain Name	Formula (Default Value)	Security
1	REGIONS_REGION_ID	PF	Y	NUMBER			

Unique keys

Name	Status	Columns	Comment	Notes
TABLE_13_PK1	PK	REGIONS_REGION_ID		

Foreign Keys (Referring To)

Name	Referring To	M	Transferable	In Arc	Columns	Referred Columns	Delete Rule
TABLE_13_REGIONS_FK	HR.REGIONS	Y	Y		REGIONS_REGION_ID	REGION_ID	CASCADE

Indexes

Name	State	Spatial	Expression	Columns	Sort Order
TABLE_13_REGIONS_REGION_ID_IDX	UN			REGIONS_REGION_ID	ASC

Used In Diagrams

- Demo for release

Test_Domains

Columns

No	Column Name	Keys	M	Data Type	Domain Name	Formula (Default Value)	Security
1	Column_1			Test_domain	Test_domain		
2	Column_2			check_bool	check_bool		
3	Column_3			day_of_week	day_of_week		

Column Check Constraints

Column	Definition	In DDL	Comment	Notes
Column_1	Rule: a=1 or b=2 — DB Type: Generic Constraint Rule: a=1 or b=2 — DB Type: SQL Server 2012	Y		
Column_2	Rule: %COLUMN% IN (0,1) — DB Type: Generic Constraint	Y		
Column_3	Value / Description: FRI — Friday MON — Monday SAT — Saturday SUN — Sunday TUE — Tuesday WED — Wednesday	Y		

Used In Diagrams

- Demo for release

TESTM.COUNTRIES_HR

Functional Name: COUNTRIES_HR

Description and Notes

Notes

test for update

Columns

No	Column Name	Keys	M	Data Type	Domain Name	Formula (Default Value)	Security
1	COUNTRY_ID	P	Y	CHAR(2 BYTE)			
2	COUNTRY_NAME			VARCHAR2(40 BYTE)			
3	REGION_ID			NUMBER			
4	Country_description			CLOB			

Unique keys

Name	Status	Columns	Comment	Notes
COUNTRY_C_ID_PK	PK	COUNTRY_ID		

Foreign Keys (Referred From)

Name	Referred From	M	Transferable	In Arc	Columns	Referred Columns	Delete Rule
LOC_C_ID_FK	TESTM.LOCATIONS		Y		COUNTRY_ID	COUNTRY_ID	NO ACTION

Indexes

Name	State	Spatial	Expression	Columns	Sort Order
COUNTRIES_HR_REGION_ID_IDX				REGION_ID	ASC

Used In Diagrams

- Demo for release
- Relational_1 - SubView_1

TESTM.DEPARTMENTS

Columns

No	Column Name	Keys	M	Data Type	Domain Name	Formula (Default Value)	Security
1	DEPARTMENT_ID	P	Y	NUMBER(4,0)			
2	DEPARTMENT_NAME		Y	VARCHAR2(30 BYTE)			
3	MANAGER_ID	F		NUMBER(6,0)			
4	LOCATION_ID	F		NUMBER(4,0)			
5	TT_ID	U		NUMBER			

Unique keys

Name	Status	Columns	Comment	Notes
DEPT_ID_PK	PK	DEPARTMENT_ID		
DEPARTMENTS__UN	UK	TT_ID		

Foreign Keys (Referring To)

Name	Referring To	M	Transferable	In Arc	Columns	Referred Columns	Delete Rule
DEPT_MGR_FK	TESTM.EMPLOYEES		Y		MANAGER_ID	EMPLOYEE_ID	NO ACTION
DEPT_LOC_FK	TESTM.LOCATIONS		Y		LOCATION_ID	LOCATION_ID	NO ACTION

Foreign Keys (Referred From)

Name	Referred From	M	Transferable	In Arc	Columns	Referred Columns	Delete Rule
EMP_DEPT_FK	TESTM.EMPLOYEES		Y		DEPARTMENT_ID	DEPARTMENT_ID	NO ACTION

Indexes

Name	State	Spatial	Expression	Columns	Sort Order
DEPARTMENTS_MANAGER_ID_IDX				MANAGER_ID	ASC
DEPARTMENTS__UN	UN			TT_ID	ASC
DEPT_ID_PK	UN			DEPARTMENT_ID	ASC
DEPT_LOCATION_IX				LOCATION_ID	ASC

Used In Diagrams

- Demo for release
- Relational_1 - SubView_1

TESTM.EMPLOYEES

Columns

No	Column Name	Keys	M	Data Type	Domain Name	Formula (Default Value)	Security
1	EMPLOYEE_ID	P	Y	NUMBER(6,0)			
2	FIRST_NAME			VARCHAR2(20 BYTE)			
3	LAST_NAME		Y	VARCHAR2(25 BYTE)			
4	EMAIL	U	Y	VARCHAR2(25 BYTE)			
5	PHONE_NUMBER			VARCHAR2(20 BYTE)			
6	HIRE_DATE		Y	DATE			
7	JOB_ID		Y	VARCHAR2(10 BYTE)			
8	SALARY			NUMBER(8,2)			
9	COMMISSION_PCT			NUMBER(2,2)			
10	MANAGER_ID	F		NUMBER(6,0)			
11	DEPARTMENT_ID	F		NUMBER(4,0)			

Unique keys

Name	Status	Columns	Comment	Notes
EMP_EMP_ID_PK	PK	EMPLOYEE_ID		
EMP_EMAIL_UK	UK	EMAIL		

Column Check Constraints

Column	Definition	In DDL	Comment	Notes
SALARY	Rule: salary > 0 — DB Type: Generic Constraint Rule: salary > 0 — DB Type: Oracle Database 21c	Y		

Foreign Keys (Referring To)

Name	Referring To	M	Transferable	In Arc	Columns	Referred Columns	Delete Rule
EMP_MANAGER_FK	TESTM.EMPLOYEES		Y		MANAGER_ID	EMPLOYEE_ID	NO ACTION
EMP_DEPT_FK	TESTM.DEPARTMENTS		Y		DEPARTMENT_ID	DEPARTMENT_ID	NO ACTION

Foreign Keys (Referred From)

Name	Referred From	M	Transferable	In Arc	Columns	Referred Columns	Delete Rule
DEPT_MGR_FK	TESTM.DEPARTMENTS		Y		MANAGER_ID	EMPLOYEE_ID	NO ACTION
EMP_MANAGER_FK	TESTM.EMPLOYEES		Y		MANAGER_ID	EMPLOYEE_ID	NO ACTION

Indexes

Name	State	Spatial	Expression	Columns	Sort Order
EMP_DEPARTMENT_IX				DEPARTMENT_ID	ASC
EMP_EMAIL_UK	UN			EMAIL	ASC
EMP_EMP_ID_PK	UN			EMPLOYEE_ID	ASC
EMP_JOB_IX				JOB_ID	ASC

Name	State	Spatial	Expression	Columns	Sort Order
EMP_MANAGER_IX				MANAGER_ID	ASC
EMP_NAME_IX				LAST_NAME FIRST_NAME	ASC ASC

Used In Diagrams

- Demo for release
- Relational_1 - SubView_1

TESTM.LOCATIONS

Columns

No	Column Name	Keys	M	Data Type	Domain Name	Formula (Default Value)	Security
1	LOCATION_ID	P	Y	NUMBER(4,0)			
2	STREET_ADDRESS			VARCHAR2(40 BYTE)			
3	POSTAL_CODE			VARCHAR2(12 BYTE)			
4	CITY		Y	VARCHAR2(30 BYTE)			
5	STATE_PROVINCE			VARCHAR2(25 BYTE)			
6	COUNTRY_ID	F		CHAR(2 BYTE)			

Unique keys

Name	Status	Columns	Comment	Notes
LOC_ID_PK	PK	LOCATION_ID		

Foreign Keys (Referring To)

Name	Referring To	M	Transferable	In Arc	Columns	Referred Columns	Delete Rule
LOC_C_ID_FK	TESTM.COUNTRIES_HR		Y		COUNTRY_ID	COUNTRY_ID	NO ACTION

Foreign Keys (Referred From)

Name	Referred From	M	Transferable	In Arc	Columns	Referred Columns	Delete Rule
DEPT_LOC_FK	TESTM.DEPARTMENTS		Y		LOCATION_ID	LOCATION_ID	NO ACTION

Indexes

Name	State	Spatial	Expression	Columns	Sort Order
LOC_CITY_IX				CITY	ASC
LOC_COUNTRY_IX				COUNTRY_ID	ASC
LOC_ID_PK	UN			LOCATION_ID	ASC
LOC_STATE_PROVINCE_IX				STATE_PROVINCE	ASC


Used In Diagrams

- Demo for release
- Relational_1 - SubView_1


Used User defined properties

Name	Type	Presentation Name	Group	Values
Description	Text	Description		
education	List	education	Personal	associate bachelor professional master doctor
showInSubview	List	showInSubview	drawing	* true false
UDP_3	Date	Last Update	UDPGroup_1	


Demo for release

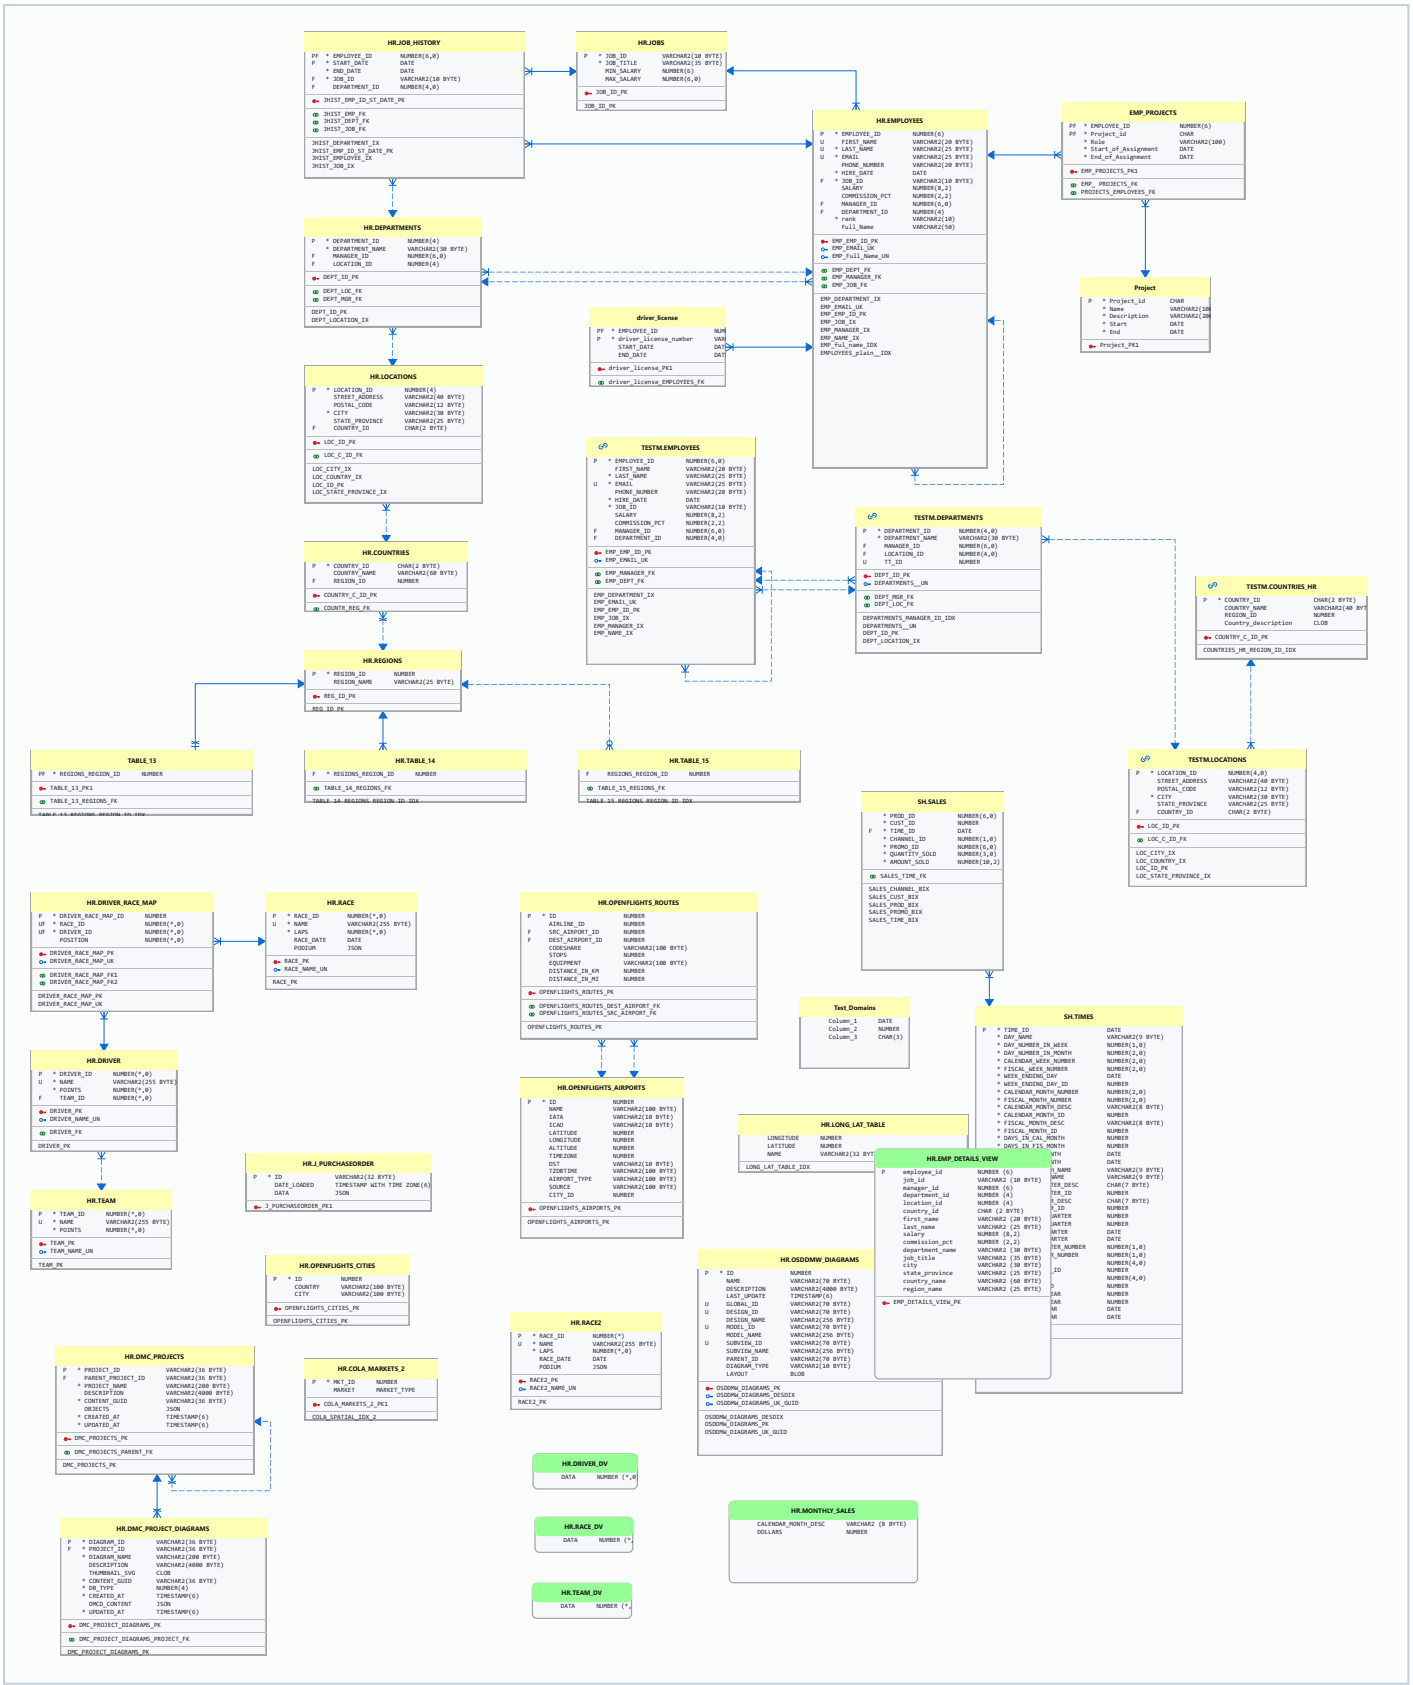

Employees direct related

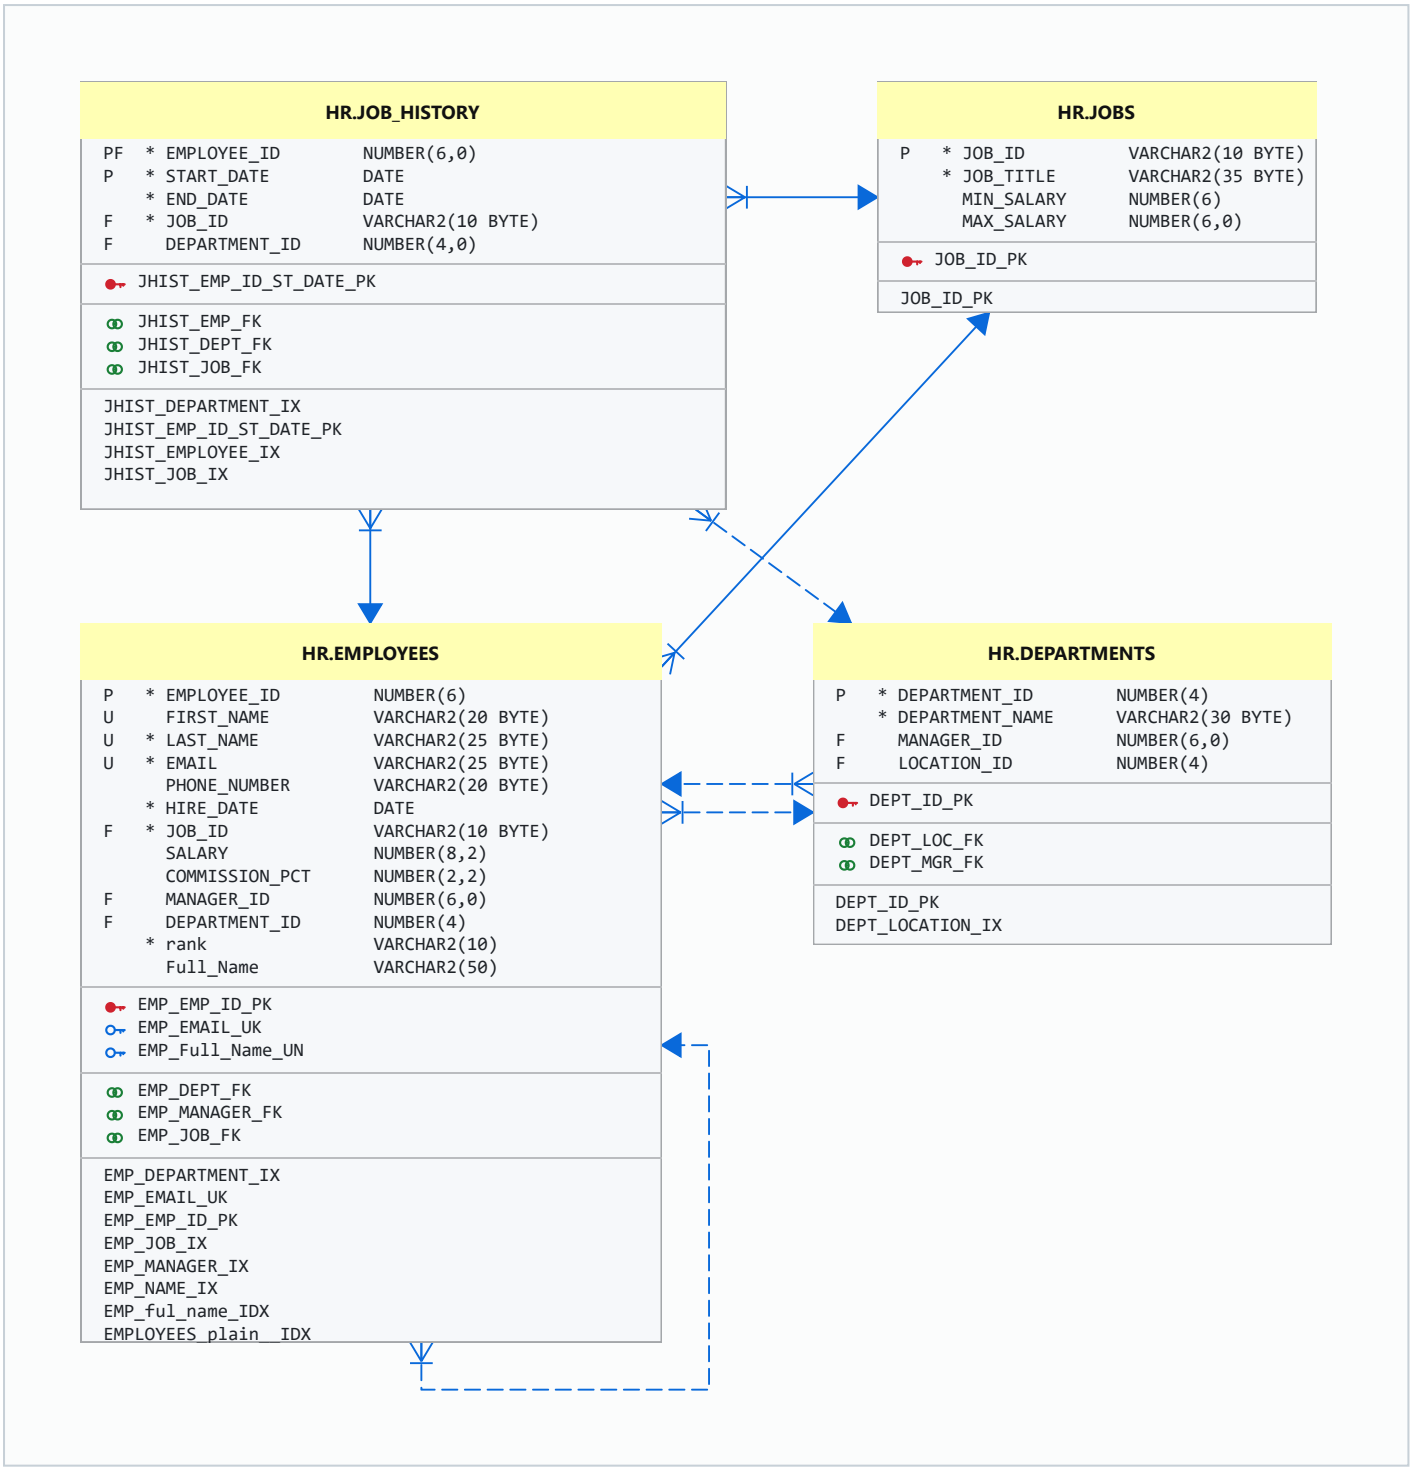


Empployees to Projects

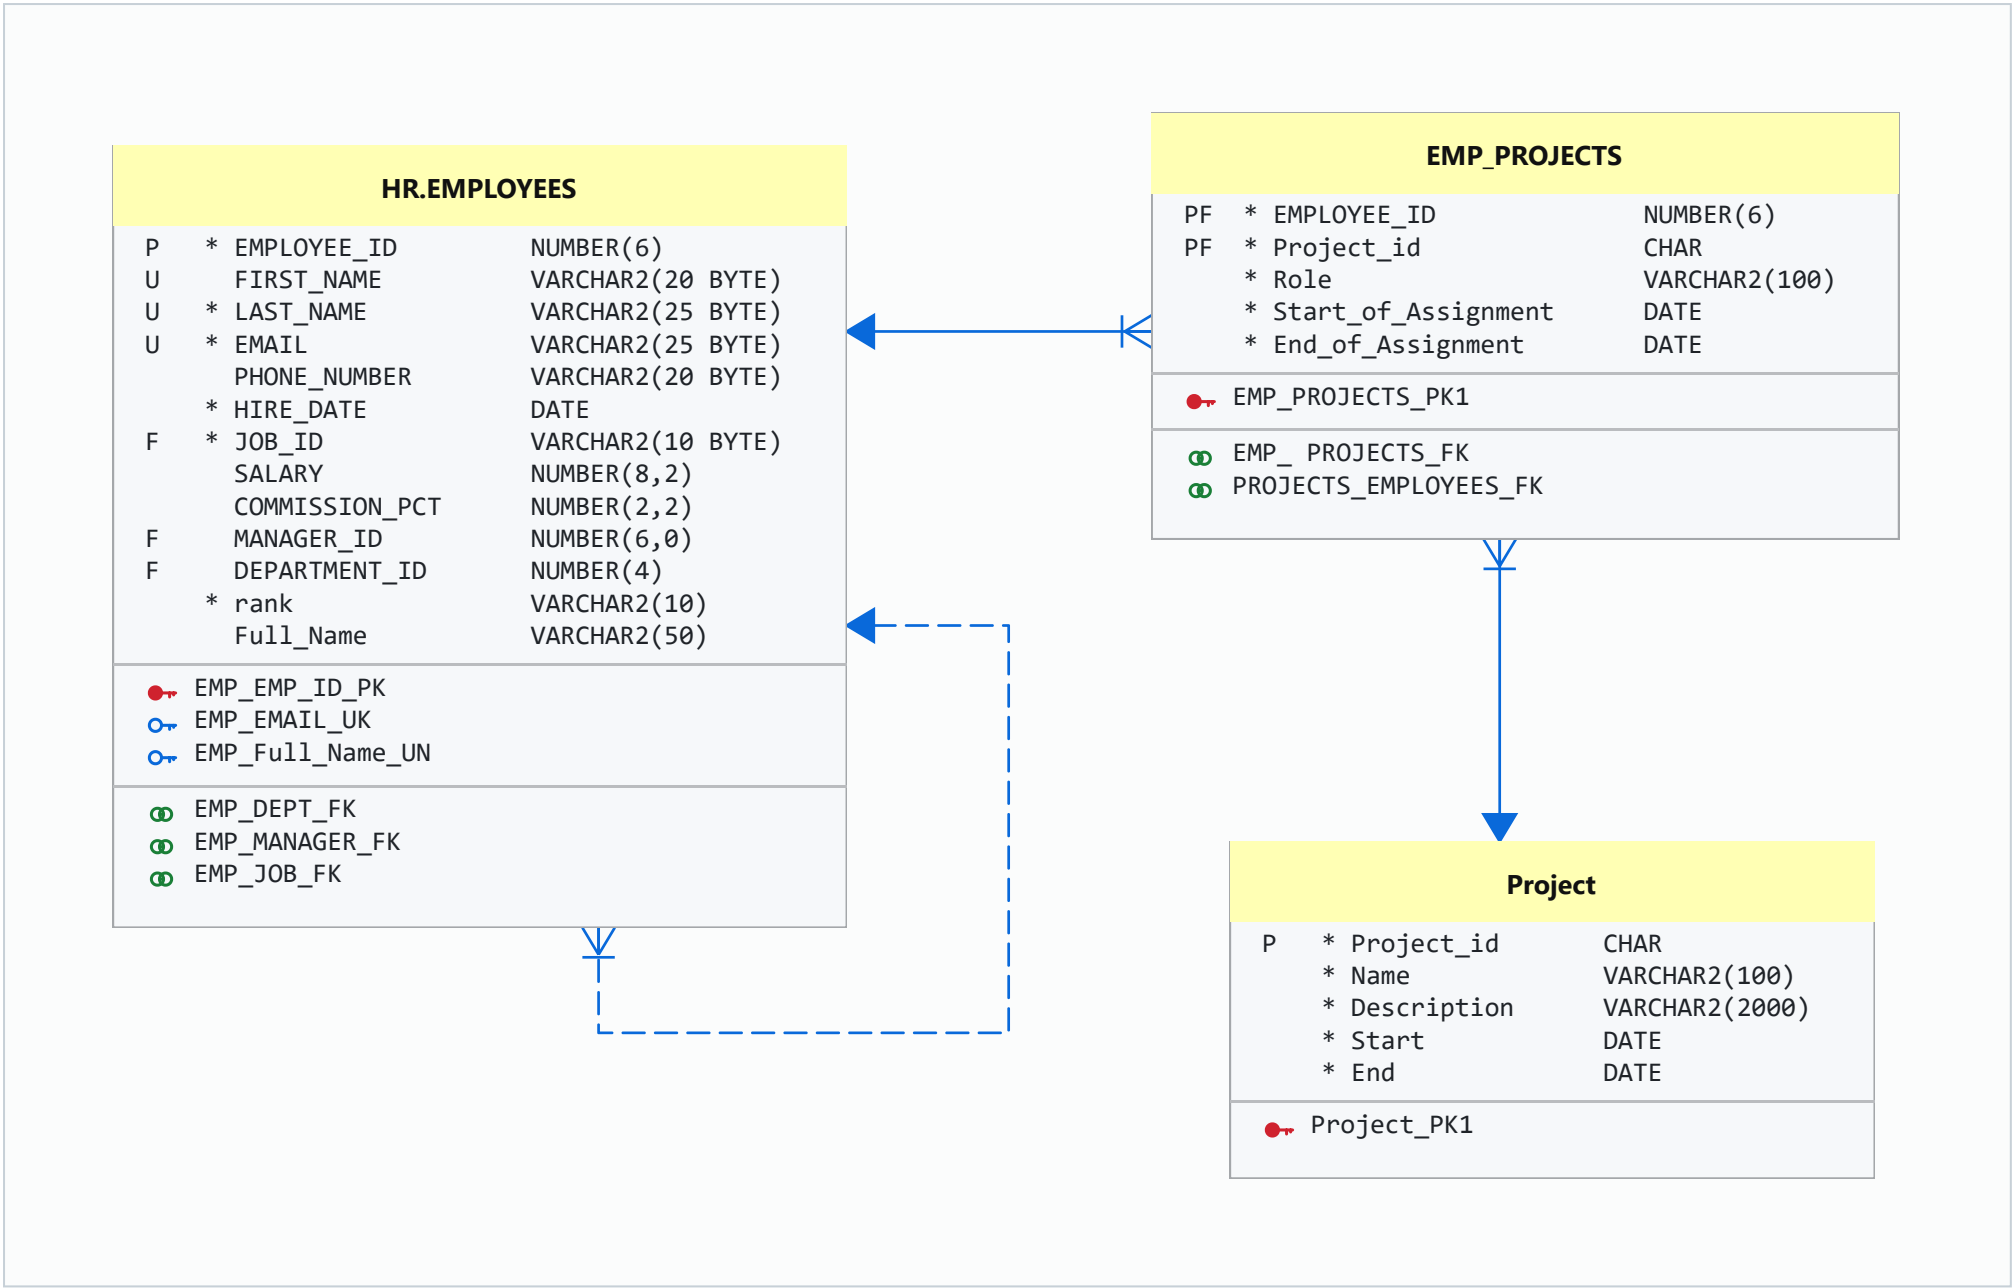

© Data Test Company

Overview diagram

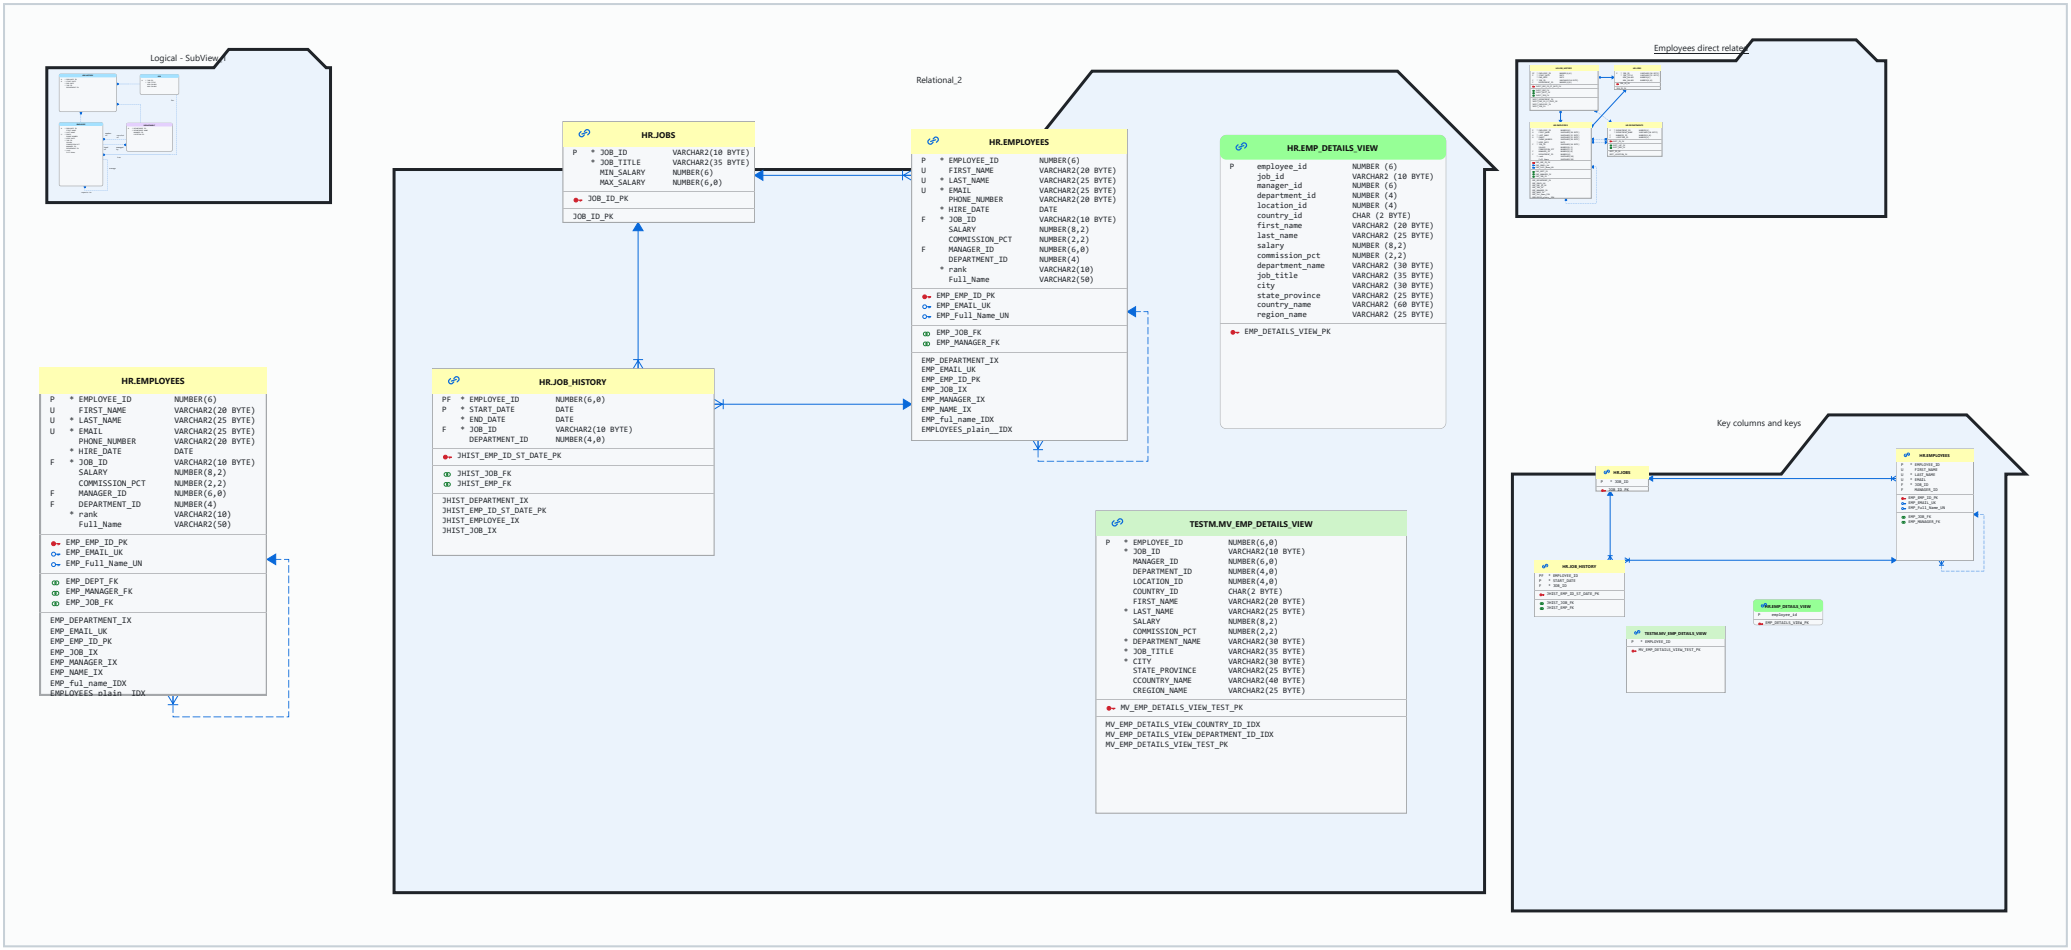

Relational_1 - SubView_1

