3D Gaussian Splatting for Real-Time Radiance Field Rendering

BERNHARD KERBL*, Inria, Université Côte d'Azur, France
GEORGIOS KOPANAS*, Inria, Université Côte d'Azur, France
THOMAS LEIMKÜHLER, Max-Planck-Institut für Informatik, Germany
GEORGE DRETTAKIS, Inria, Université Côte d'Azur, France

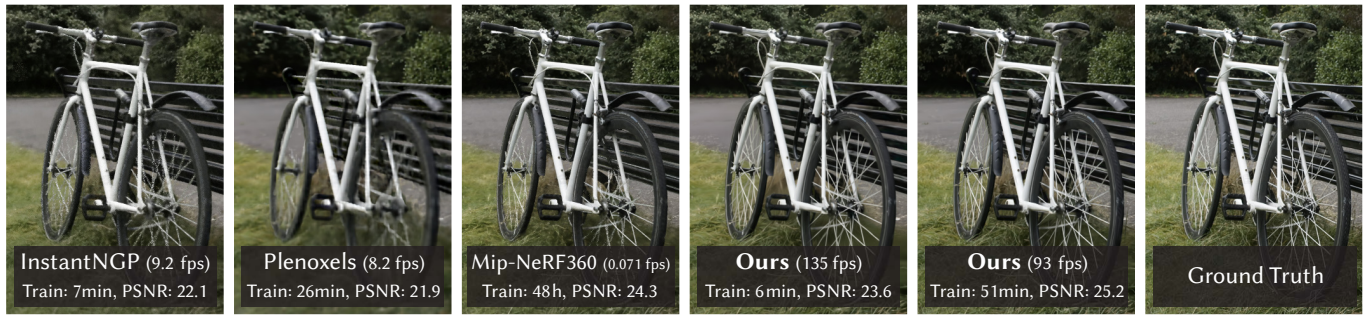

Fig. 1. Our method achieves real-time rendering of radiance fields with quality that equals the previous method with the best quality [Barron et al. 2022], while only requiring optimization times competitive with the fastest previous methods [Fridovich-Keil and Yu et al. 2022; Müller et al. 2022]. Key to this performance is a novel 3D Gaussian scene representation coupled with a real-time differentiable renderer, which offers significant speedup to both scene optimization and novel view synthesis. Note that for comparable training times to InstantNGP [Müller et al. 2022], we achieve similar quality to theirs; while this is the maximum quality they reach, by training for 51min we achieve state-of-the-art quality, even slightly better than Mip-NeRF360 [Barron et al. 2022].

Radiance Field methods have recently revolutionized novel-view synthesis of scenes captured with multiple photos or videos. However, achieving high visual quality still requires neural networks that are costly to train and render, while recent faster methods inevitably trade off speed for quality. For unbounded and complete scenes (rather than isolated objects) and 1080p resolution rendering, no current method can achieve real-time display rates. We introduce three key elements that allow us to achieve state-of-the-art visual quality while maintaining competitive training times and importantly allow high-quality real-time (≥ 30 fps) novel-view synthesis at 1080p resolution. First, starting from sparse points produced during camera calibration, we represent the scene with 3D Gaussians that preserve desirable properties of continuous volumetric radiance fields for scene optimization while avoiding unnecessary computation in empty space; Second, we perform interleaved optimization/density control of the 3D Gaussians, notably optimizing anisotropic covariance to achieve an accurate representation of the scene; Third, we develop a fast visibility-aware rendering algorithm that supports anisotropic splatting and both accelerates training and allows real-time rendering. We demonstrate state-of-the-art visual quality and real-time rendering on several established datasets.

CCS Concepts: • **Computing methodologies** → **Rendering**; **Point-based models**; **Rasterization**; **Machine learning approaches**.

*Both authors contributed equally to the paper.

Authors' addresses: Bernhard Kerbl, bernhard.kerbl@inria.fr, Inria, Université Côte d'Azur, France; Georgios Kopanas, georgios.kopanas@inria.fr, Inria, Université Côte d'Azur, France; Thomas Leimkühler, thomas.leimkuehler@mpi-inf.mpg.de, Max-Planck-Institut für Informatik, Germany; George Drettakis, george.drettakis@inria.fr, Inria, Université Côte d'Azur, France.

Publication rights licensed to ACM. ACM acknowledges that this contribution was authored or co-authored by an employee, contractor or affiliate of a national government. As such, the Government retains a nonexclusive, royalty-free right to publish or reproduce this article, or to allow others to do so, for Government purposes only.
© 2018 Copyright held by the owner/author(s). Publication rights licensed to ACM.
0730-0301/2018/0-ART0 $15.00
https://doi.org/XXXXXXX.XXXXXXX

Additional Key Words and Phrases: novel view synthesis, radiance fields, 3D gaussians, real-time rendering

ACM Reference Format:
Bernhard Kerbl, Georgios Kopanas, Thomas Leimkühler, and George Drettakis. 2018. 3D Gaussian Splatting for Real-Time Radiance Field Rendering. *ACM Trans. Graph.* 0, 0, Article 0 (2018), 14 pages. https://doi.org/XXXXXXX.XXXXXXX

1 INTRODUCTION

Meshes and points are the most common 3D scene representations because they are explicit and are a good fit for fast GPU/CUDA-based rasterization. In contrast, recent Neural Radiance Field (NeRF) methods build on continuous scene representations, typically optimizing a Multi-Layer Perceptron (MLP) using volumetric ray-marching for novel-view synthesis of captured scenes. Similarly, the most efficient radiance field solutions to date build on continuous representations by interpolating values stored in, e.g., voxel [Fridovich-Keil and Yu et al. 2022] or hash [Müller et al. 2022] grids or points [Xu et al. 2022]. While the continuous nature of these methods helps optimization, the stochastic sampling required for rendering is costly and can result in noise. We introduce a new approach that combines the best of both worlds: our 3D Gaussian representation allows optimization with state-of-the-art (SOTA) visual quality and competitive training times, while our tile-based splatting solution ensures real-time rendering at SOTA quality for 1080p resolution on several previously published datasets [Barron et al. 2022; Hedman et al. 2018; Knapitsch et al. 2017] (see Fig. 1).

Our goal is to allow real-time rendering for scenes captured with multiple photos, and create the representations with optimization times as fast as the most efficient previous methods for typical real scenes. Recent methods achieve fast training [Fridovich-Keil

中文导读 / 原文第 1 页

先理解目标，不急着看公式

任务是什么

输入同一场景的多张照片和已知相机，学习一个三维表示，再从新的相机位置合成照片。不是从一句文字生成物体，也不是直接生成三角网格。

三个关键点

用三维高斯表示场景；训练时增加、拆分、删除高斯；用可求梯度的快速渲染器把高斯画到屏幕。三个环节共同构成 baseline。

如何看图1

画质、训练时间与渲染速度是不同维度。图上的数字是作者特定设备和设置的结果，不能当成我们的实验结果。

文献版本提醒

这是作者网站提供的论文 PDF。首页引用模板残留 2018 和 XXXX 等占位内容；实际工作发表于 2023 年，DOI 为 10.1145/3592433。中文侧栏为本项目学习批注，不是作者原文。

and Yu et al. 2022; Müller et al. 2022], but struggle to achieve the visual quality obtained by the current SOTA NeRF methods, i.e., Mip-NeRF360 [Barron et al. 2022], which requires up to 48 hours of training time. The fast – but lower-quality – radiance field methods can achieve interactive rendering times depending on the scene (10-15 frames per second), but fall short of real-time rendering at high resolution.

Our solution builds on three main components. We first introduce *3D Gaussians* as a flexible and expressive scene representation. We start with the same input as previous NeRF-like methods, i.e., cameras calibrated with Structure-from-Motion (SfM) [Snavely et al. 2006] and initialize the set of 3D Gaussians with the sparse point cloud produced for free as part of the SfM process. In contrast to most point-based solutions that require Multi-View Stereo (MVS) data [Aliev et al. 2020; Kopanas et al. 2021; Rückert et al. 2022], we achieve high-quality results with only SfM points as input. Note that for the NeRF-synthetic dataset, our method achieves high quality even with random initialization. We show that 3D Gaussians are an excellent choice, since they are a differentiable volumetric representation, but they can also be rasterized very efficiently by projecting them to 2D, and applying standard α-blending, using an equivalent image formation model as NeRF. The second component of our method is optimization of the properties of the 3D Gaussians – 3D position, opacity α, anisotropic covariance, and spherical harmonic (SH) coefficients – interleaved with adaptive density control steps, where we add and occasionally remove 3D Gaussians during optimization. The optimization procedure produces a reasonably compact, unstructured, and precise representation of the scene (1-5 million Gaussians for all scenes tested). The third and final element of our method is our real-time rendering solution that uses fast GPU sorting algorithms and is inspired by tile-based rasterization, following recent work [Lassner and Zollhofer 2021]. However, thanks to our 3D Gaussian representation, we can perform anisotropic splatting that respects visibility ordering – thanks to sorting and α-blending – and enable a fast and accurate backward pass by tracking the traversal of as many sorted splats as required.

To summarize, we provide the following contributions:

- The introduction of anisotropic 3D Gaussians as a high-quality, unstructured representation of radiance fields.
- An optimization method of 3D Gaussian properties, interleaved with adaptive density control that creates high-quality representations for captured scenes.
- A fast, differentiable rendering approach for the GPU, which is visibility-aware, allows anisotropic splatting and fast backpropagation to achieve high-quality novel view synthesis.

Our results on previously published datasets show that we can optimize our 3D Gaussians from multi-view captures and achieve equal or better quality than the best quality previous implicit radiance field approaches. We also can achieve training speeds and quality similar to the fastest methods and importantly provide the first *real-time rendering* with high quality for novel-view synthesis.

2 RELATED WORK

We first briefly overview traditional reconstruction, then discuss point-based rendering and radiance field work, discussing their similarity; radiance fields are a vast area, so we focus only on directly related work. For complete coverage of the field, please see the excellent recent surveys [Tewari et al. 2022; Xie et al. 2022].

2.1 Traditional Scene Reconstruction and Rendering

The first novel-view synthesis approaches were based on light fields, first densely sampled [Gortler et al. 1996; Levoy and Hanrahan 1996] then allowing unstructured capture [Buehler et al. 2001]. The advent of Structure-from-Motion (SfM) [Snavely et al. 2006] enabled an entire new domain where a collection of photos could be used to synthesize novel views. SfM estimates a sparse point cloud during camera calibration, that was initially used for simple visualization of 3D space. Subsequent multi-view stereo (MVS) produced impressive full 3D reconstruction algorithms over the years [Goesele et al. 2007], enabling the development of several view synthesis algorithms [Chaurasia et al. 2013; Eisemann et al. 2008; Hedman et al. 2018; Kopanas et al. 2021]. All these methods *re-project* and *blend* the input images into the novel view camera, and use the geometry to guide this re-projection. These methods produced excellent results in many cases, but typically cannot completely recover from unreconstructed regions, or from "over-reconstruction", when MVS generates inexistent geometry. Recent neural rendering algorithms [Tewari et al. 2022] vastly reduce such artifacts and avoid the overwhelming cost of storing all input images on the GPU, outperforming these methods on most fronts.

2.2 Neural Rendering and Radiance Fields

Deep learning techniques were adopted early for novel-view synthesis [Flynn et al. 2016; Zhou et al. 2016]; CNNs were used to estimate blending weights [Hedman et al. 2018], or for texture-space solutions [Riegler and Koltun 2020; Thies et al. 2019]. The use of MVS-based geometry is a major drawback of most of these methods; in addition, the use of CNNs for final rendering frequently results in temporal flickering.

Volumetric representations for novel-view synthesis were initiated by Soft3D [Penner and Zhang 2017]; deep-learning techniques coupled with volumetric ray-marching were subsequently proposed [Henzler et al. 2019; Sitzmann et al. 2019] building on a continuous differentiable density field to represent geometry. Rendering using volumetric ray-marching has a significant cost due to the large number of samples required to query the volume. Neural Radiance Fields (NeRFs) [Mildenhall et al. 2020] introduced importance sampling and positional encoding to improve quality, but used a large Multi-Layer Perceptron negatively affecting speed. The success of NeRF has resulted in an explosion of follow-up methods that address quality and speed, often by introducing regularization strategies; the current state-of-the-art in image quality for novel-view synthesis is Mip-NeRF360 [Barron et al. 2022]. While the rendering quality is outstanding, training and rendering times remain extremely high; we are able to equal or in some cases surpass this quality while providing fast training and real-time rendering.

The most recent methods have focused on faster training and/or rendering mostly by exploiting three design choices: the use of spatial data structures to store (neural) features that are subsequently interpolated during volumetric ray-marching, different encodings,

中文导读 / 原文第 2 页

这篇论文处在什么位置

传统重建

SfM 从多图估计相机和稀疏点；网格方法进一步构建表面。3DGS 使用稀疏点起步，但最终保存的是高斯集合，而不是封闭表面。

和 NeRF 的直观区别

经典 NeRF 通常沿每个像素的射线采样并查询神经网络；3DGS 显式保存大量高斯，再把它们投影到图像。两者都做新视角合成，但表示和主要计算路径不同。

贡献不是单一公式

高斯本身并非首次出现。论文强调可优化表示、密度控制与高效可微渲染的结合。答辩时应解释整个流程。

阅读优先级

Related Work 先掌握问题背景即可；第一遍可以跳到第4页概览，理解流水线后再回来看这些方法。

and MLP capacity. Such methods include different variants of space discretization [Chen et al. 2022b,a; Fridovich-Keil and Yu et al. 2022; Garbin et al. 2021; Hedman et al. 2021; Reiser et al. 2021; Takikawa et al. 2021; Wu et al. 2022; Yu et al. 2021], codebooks [Takikawa et al. 2022], and encodings such as hash tables [Müller et al. 2022], allowing the use of a smaller MLP or foregoing neural networks completely [Fridovich-Keil and Yu et al. 2022; Sun et al. 2022].

Most notable of these methods are InstantNGP [Müller et al. 2022] which uses a hash grid and an occupancy grid to accelerate computation and a smaller MLP to represent density and appearance; and Plenoxels [Fridovich-Keil and Yu et al. 2022] that use a sparse voxel grid to interpolate a continuous density field, and are able to forgo neural networks altogether. Both rely on Spherical Harmonics: the former to represent directional effects directly, the latter to encode its inputs to the color network. While both provide outstanding results, these methods can still struggle to represent empty space effectively, depending in part on the scene/capture type. In addition, image quality is limited in large part by the choice of the structured grids used for acceleration, and rendering speed is hindered by the need to query many samples for a given ray-marching step. The unstructured, explicit GPU-friendly 3D Gaussians we use achieve faster rendering speed and better quality *without* neural components.

2.3 Point-Based Rendering and Radiance Fields

Point-based methods efficiently render disconnected and unstructured geometry samples (i.e., point clouds) [Gross and Pfister 2011]. In its simplest form, point sample rendering [Grossman and Dally 1998] rasterizes an unstructured set of points with a fixed size, for which it may exploit natively supported point types of graphics APIs [Sainz and Pajarola 2004] or parallel software rasterization on the GPU [Laine and Karras 2011; Schütz et al. 2022]. While true to the underlying data, point sample rendering suffers from holes, causes aliasing, and is strictly discontinuous. Seminal work on high-quality point-based rendering addresses these issues by "splatting" point primitives with an extent larger than a pixel, e.g., circular or elliptic discs, ellipsoids, or surfels [Botsch et al. 2005; Pfister et al. 2000; Ren et al. 2002; Zwicker et al. 2001b].

There has been recent interest in *differentiable* point-based rendering techniques [Wiles et al. 2020; Yifan et al. 2019]. Points have been augmented with neural features and rendered using a CNN [Aliev et al. 2020; Rückert et al. 2022] resulting in fast or even real-time view synthesis; however they still depend on MVS for the initial geometry, and as such inherit its artifacts, most notably over- or under-reconstruction in hard cases such as featureless/shiny areas or thin structures.

Point-based α-blending and NeRF-style volumetric rendering share essentially the same image formation model. Specifically, the color C is given by volumetric rendering along a ray:

$$C = \sum_{i=1}^{N} T_i(1 - \exp(-\sigma_i\delta_i))\mathbf{c}_i \quad \text{with} \quad T_i = \exp\left(-\sum_{j=1}^{i-1}\sigma_j\delta_j\right), \tag{1}$$

where samples of density σ, transmittance T, and color $\mathbf{c}$ are taken along the ray with intervals δ_i. This can be re-written as

$$C = \sum_{i=1}^{N} T_i\alpha_i\mathbf{c}_i, \tag{2}$$

with

$$\alpha_i = (1 - \exp(-\sigma_i\delta_i)) \text{ and } T_i = \prod_{j=1}^{i-1}(1 - \alpha_i).$$

A typical neural point-based approach (e.g., [Kopanas et al. 2022, 2021]) computes the color C of a pixel by blending $\mathcal{N}$ ordered points overlapping the pixel:

$$C = \sum_{i\in\mathcal{N}} c_i\alpha_i\prod_{j=1}^{i-1}(1 - \alpha_j), \tag{3}$$

where $\mathbf{c}_i$ is the color of each point and α_i is given by evaluating a 2D Gaussian with covariance Σ [Yifan et al. 2019] multiplied with a learned per-point opacity.

From Eq. 2 and Eq. 3, we can clearly see that the image formation model is the same. However, the rendering algorithm is very different. NeRFs are a continuous representation implicitly representing empty/occupied space; expensive random sampling is required to find the samples in Eq. 2 with consequent noise and computational expense. In contrast, points are an unstructured, discrete representation that is flexible enough to allow creation, destruction, and displacement of geometry similar to NeRF. This is achieved by optimizing opacity and positions, as shown by previous work [Kopanas et al. 2021], while avoiding the shortcomings of a full volumetric representation.

Pulsar [Lassner and Zollhofer 2021] achieves fast *sphere* rasterization which inspired our tile-based and sorting renderer. However, given the analysis above, we want to maintain (approximate) conventional α-blending on sorted splats to have the advantages of volumetric representations: Our rasterization respects visibility order in contrast to their order-independent method. In addition, we backpropagate gradients on all splats in a pixel and rasterize anisotropic splats. These elements all contribute to the high visual quality of our results (see Sec. 7.3). In addition, previous methods mentioned above also use CNNs for rendering, which results in temporal instability. Nonetheless, the rendering speed of Pulsar [Lassner and Zollhofer 2021] and ADOP [Rückert et al. 2022] served as motivation to develop our fast rendering solution.

While focusing on specular effects, the diffuse point-based rendering track of Neural Point Catacaustics [Kopanas et al. 2022] overcomes this temporal instability by using an MLP, but still required MVS geometry as input. The most recent method [Zhang et al. 2022] in this category does not require MVS, and also uses SH for directions; however, it can only handle scenes of one object and needs masks for initialization. While fast for small resolutions and low point counts, it is unclear how it can scale to scenes of typical datasets [Barron et al. 2022; Hedman et al. 2018; Knapitsch et al. 2017]. We use 3D Gaussians for a more flexible scene representation, avoiding the need for MVS geometry and achieving real-time rendering thanks to our tile-based rendering algorithm for the projected Gaussians.

中文导读 / 原文第 3 页

公式1到3：为什么需要透明混合

沿射线累积

想象从相机朝场景看，光先遇到前面的物体，再遇到后面的物体。越靠前且越不透明的贡献，越会挡住后面的颜色。

读公式3

每个颜色贡献是 c_i × alpha_i × 前方剩余透过率。前方透过率是所有更近贡献的 (1−alpha_j) 的乘积。顺序不可随意交换。

一个数字例子

黑背景下，前方红色 alpha=0.5，后方蓝色 alpha=0.8：红贡献为0.5，蓝贡献为 (1−0.5)×0.8=0.4，剩余0.1由背景提供。

别混淆两个量

每个高斯存储的 opacity 是一个参数；某个像素处的 alpha 还乘上投影二维高斯的权重。越远离椭圆中心，通常贡献越小。

A recent approach [Xu et al. 2022] uses points to represent a radiance field with a radial basis function approach. They employ point pruning and densification techniques during optimization, but use volumetric ray-marching and cannot achieve real-time display rates.

In the domain of human performance capture, 3D Gaussians have been used to represent captured human bodies [Rhodin et al. 2015; Stoll et al. 2011]; more recently they have been used with volumetric ray-marching for vision tasks [Wang et al. 2023]. Neural volumetric primitives have been proposed in a similar context [Lombardi et al. 2021]. While these methods inspired the choice of 3D Gaussians as our scene representation, they focus on the specific case of reconstructing and rendering a single isolated object (a human body or face), resulting in scenes with small depth complexity. In contrast, our optimization of *anisotropic* covariance, our interleaved optimization/density control, and efficient depth sorting for rendering allow us to handle complete, complex scenes including background, both indoors and outdoors and with large depth complexity.

3 OVERVIEW

The input to our method is a set of images of a static scene, together with the corresponding cameras calibrated by SfM [Schönberger and Frahm 2016] which produces a sparse point cloud as a side-effect. From these points we create a set of 3D Gaussians (Sec. 4), defined by a position (mean), covariance matrix and opacity α, that allows a very flexible optimization regime. This results in a reasonably compact representation of the 3D scene, in part because highly anisotropic volumetric splats can be used to represent fine structures compactly. The directional appearance component (color) of the radiance field is represented via spherical harmonics (SH), following standard practice [Fridovich-Keil and Yu et al. 2022; Müller et al. 2022]. Our algorithm proceeds to create the radiance field representation (Sec. 5) via a sequence of optimization steps of 3D Gaussian parameters, i.e., position, covariance, α and SH coefficients interleaved with operations for adaptive control of the Gaussian density. The key to the efficiency of our method is our tile-based rasterizer (Sec. 6) that allows α-blending of anisotropic splats, respecting visibility order thanks to fast sorting. Out fast rasterizer also includes a fast backward pass by tracking accumulated α values, without a limit on the number of Gaussians that can receive gradients. The overview of our method is illustrated in Fig. 2.

4 DIFFERENTIABLE 3D GAUSSIAN SPLATTING

Our goal is to optimize a scene representation that allows high-quality novel view synthesis, starting from a sparse set of (SfM) points without normals. To do this, we need a primitive that inherits the properties of differentiable volumetric representations, while at the same time being unstructured and explicit to allow very fast rendering. We choose 3D Gaussians, which are differentiable and can be easily projected to 2D splats allowing fast α-blending for rendering.

Our representation has similarities to previous methods that use 2D points [Kopanas et al. 2021; Yifan et al. 2019] and assume each point is a small planar circle with a normal. Given the extreme sparsity of SfM points it is very hard to estimate normals. Similarly, optimizing very noisy normals from such an estimation would be very challenging. Instead, we model the geometry as a set of 3D Gaussians that do not require normals. Our Gaussians are defined by a full 3D covariance matrix Σ defined in world space [Zwicker et al. 2001a] centered at point (mean) μ:

$$G(x) = e^{-\frac{1}{2}(x)^T \Sigma^{-1}(x)} \tag{4}$$

. This Gaussian is multiplied by α in our blending process.

However, we need to project our 3D Gaussians to 2D for rendering. Zwicker et al. [2001a] demonstrate how to do this projection to image space. Given a viewing transformation W the covariance matrix Σ' in camera coordinates is given as follows:

$$\Sigma' = JW \Sigma W^T J^T \tag{5}$$

where J is the Jacobian of the affine approximation of the projective transformation. Zwicker et al. [2001a] also show that if we skip the third row and column of Σ', we obtain a 2×2 variance matrix with the same structure and properties as if we would start from planar points with normals, as in previous work [Kopanas et al. 2021].

An obvious approach would be to directly optimize the covariance matrix Σ to obtain 3D Gaussians that represent the radiance field. However, covariance matrices have physical meaning only when they are positive semi-definite. For our optimization of all our parameters, we use gradient descent that cannot be easily constrained to produce such valid matrices, and update steps and gradients can very easily create invalid covariance matrices.

As a result, we opted for a more intuitive, yet equivalently expressive representation for optimization. The covariance matrix Σ of a 3D Gaussian is analogous to describing the configuration of an ellipsoid. Given a scaling matrix S and rotation matrix R, we can find the corresponding Σ:

$$\Sigma = RSS^T R^T \tag{6}$$

To allow independent optimization of both factors, we store them separately: a 3D vector s for scaling and a quaternion q to represent rotation. These can be trivially converted to their respective matrices and combined, making sure to normalize q to obtain a valid unit quaternion.

To avoid significant overhead due to automatic differentiation during training, we derive the gradients for all parameters explicitly. Details of the exact derivative computations are in appendix A.

This representation of anisotropic covariance – suitable for optimization – allows us to optimize 3D Gaussians to adapt to the geometry of different shapes in captured scenes, resulting in a fairly compact representation. Fig. 3 illustrates such cases.

5 OPTIMIZATION WITH ADAPTIVE DENSITY CONTROL OF 3D GAUSSIANS

The core of our approach is the optimization step, which creates a dense set of 3D Gaussians accurately representing the scene for free-view synthesis. In addition to positions p, α, and covariance Σ, we also optimize SH coefficients representing color c of each Gaussian to correctly capture the view-dependent appearance of the scene. The optimization of these parameters is interleaved with steps that control the density of the Gaussians to better represent the scene.

中文导读 / 原文第 4 页

公式4到6：高斯怎样变成椭圆

三维高斯是什么

把它想成可以移动、拉长、旋转的半透明彩色小云团。中心控制位置，协方差控制各方向的大小和朝向。这里不要求像概率密度一样积分为1。

公式4的坐标

原文为了简洁采用以高斯中心为原点的局部坐标。写在世界坐标里时，应使用 x-mu，而不是忘掉中心 mu。

为什么分解协方差

公式6写成 R S S^T R^T。代码优化对数尺度和四元数，经 exp 与归一化得到合法尺度/旋转，避免直接随意优化矩阵破坏有效性。

公式5的意义

W把世界转到相机坐标；J是透视投影在高斯中心的局部线性近似。变换后的二维协方差描述屏幕椭圆。它不是精确投影所有三维体积。

源码对应

scene/gaussian_model.py 保存与变换参数；gaussian_renderer/__init__.py 调用 CUDA 光栅器。详细符号见 BASELINE_GUIDE 第5至8节。

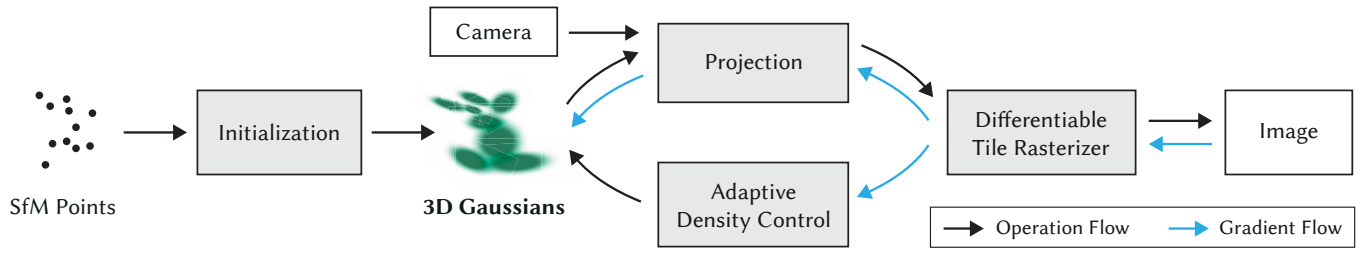

Fig. 2. Optimization starts with the sparse SfM point cloud and creates a set of 3D Gaussians. We then optimize and adaptively control the density of this set of Gaussians. During optimization we use our fast tile-based renderer, allowing competitive training times compared to SOTA fast radiance field methods. Once trained, our renderer allows real-time navigation for a wide variety of scenes.

Fig. 3. We visualize the 3D Gaussians after optimization by shrinking them 60% (far right). This clearly shows the anisotropic shapes of the 3D Gaussians that compactly represent complex geometry after optimization. Left the actual rendered image.

5.1 Optimization

The optimization is based on successive iterations of rendering and comparing the resulting image to the training views in the captured dataset. Inevitably, geometry may be incorrectly placed due to the ambiguities of 3D to 2D projection. Our optimization thus needs to be able to *create* geometry and also *destroy* or *move* geometry if it has been incorrectly positioned. The quality of the parameters of the covariances of the 3D Gaussians is critical for the compactness of the representation since large homogeneous areas can be captured with a small number of large anisotropic Gaussians.

We use Stochastic Gradient Descent techniques for optimization, taking full advantage of standard GPU-accelerated frameworks, and the ability to add custom CUDA kernels for some operations, following recent best practice [Fridovich-Keil and Yu et al. 2022; Sun et al. 2022]. In particular, our fast rasterization (see Sec. 6) is critical in the efficiency of our optimization, since it is the main computational bottleneck of the optimization.

We use a sigmoid activation function for α to constrain it in the $[0-1)$ range and obtain smooth gradients, and an exponential activation function for the scale of the covariance for similar reasons.

We estimate the initial covariance matrix as an isotropic Gaussian with axes equal to the mean of the distance to the closest three points. We use a standard exponential decay scheduling technique similar to Plenoxels [Fridovich-Keil and Yu et al. 2022], but for positions only. The loss function is $\mathcal{L}_1$ combined with a D-SSIM term:

$$\mathcal{L} = (1-\lambda)\mathcal{L}_1 + \lambda\mathcal{L}_{\text{D-SSIM}} \tag{7}$$

We use $\lambda = 0.2$ in all our tests. We provide details of the learning schedule and other elements in Sec. 7.1.

5.2 Adaptive Control of Gaussians

We start with the initial set of sparse points from SfM and then apply our method to adaptively control the number of Gaussians and their density over unit volume[1], allowing us to go from an initial sparse set of Gaussians to a denser set that better represents the scene, and with correct parameters. After optimization warm-up (see Sec. 7.1), we densify every 100 iterations and remove any Gaussians that are essentially transparent, i.e., with α less than a threshold ϵ_α.

Our adaptive control of the Gaussians needs to populate empty areas. It focuses on regions with missing geometric features ("under-reconstruction"), but also in regions where Gaussians cover large areas in the scene (which often correspond to "over-reconstruction"). We observe that both have *large* view-space positional gradients. Intuitively, this is likely because they correspond to regions that are not yet well reconstructed, and the optimization tries to move the Gaussians to correct this.

Since both cases are good candidates for densification, we densify Gaussians with an average magnitude of view-space position gradients above a threshold τ_{pos}, which we set to 0.0002 in our tests.

We next present details of this process, illustrated in Fig. 4.

For small Gaussians that are in under-reconstructed regions, we need to cover the new geometry that must be created. For this, it is preferable to clone the Gaussians, by simply creating a copy of the same size, and moving it in the direction of the positional gradient.

On the other hand, large Gaussians in regions with high variance need to be split into smaller Gaussians. We replace such Gaussians by two new ones, and divide their scale by a factor of $\phi = 1.6$ which we determined experimentally. We also initialize their position by using the original 3D Gaussian as a PDF for sampling.

In the first case we detect and treat the need for increasing both the total volume of the system and the number of Gaussians, while in the second case we conserve total volume but increase the number of Gaussians. Similar to other volumetric representations, our optimization can get stuck with floaters close to the input cameras; in our case this may result in an unjustified increase in the Gaussian density. An effective way to moderate the increase in the number of Gaussians is to set the α value close to zero every $N = 3000$

[1]Density of Gaussians should not be confused of course with density σ in the NeRF literature.

中文导读 / 原文第 5 页

图2和损失：训练究竟做什么

读图2的闭环

稀疏点初始化高斯 → 从训练相机渲染 → 与真实图比较 → 反向传播 → 更新参数 → 适时调整高斯数量，循环执行。

公式7

代码损失为 0.8×L1 + 0.2×(1-SSIM)。L1 看像素误差，SSIM 补充局部结构差异；二者共同给参数更新提供信号。

实际被优化的量

位置、尺度、旋转、opacity 和球谐颜色系数。当前固定版本不优化相机姿态；不是在训练一个大型通用生成模型。

为什么需要增密

起始 SfM 点太稀疏，有些细节表示不够。密度控制在误差相关信号较强的区域增加表示能力，同时清除贡献很小的高斯。

源码入口

train.py 中 loss.backward() 计算梯度；优化器更新连续参数；GaussianModel 的 densify_and_prune 执行离散结构调整。

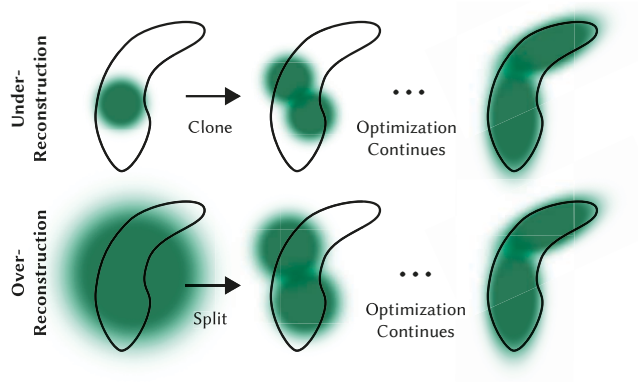

Fig. 4. Our adaptive Gaussian densification scheme. *Top row (under-reconstruction)*: When small-scale geometry (black outline) is insufficiently covered, we clone the respective Gaussian. *Bottom row (over-reconstruction)*: If small-scale geometry is represented by one large splat, we split it in two.

iterations. The optimization then increases the α for the Gaussians where this is needed while allowing our culling approach to remove Gaussians with α less than ϵ_α as described above. Gaussians may shrink or grow and considerably overlap with others, but we periodically remove Gaussians that are very large in worldspace and those that have a big footprint in viewspace. This strategy results in overall good control over the total number of Gaussians. The Gaussians in our model remain primitives in Euclidean space at all times; unlike other methods [Barron et al. 2022; Fridovich-Keil and Yu et al. 2022], we do not require space compaction, warping or projection strategies for distant or large Gaussians.

6 FAST DIFFERENTIABLE RASTERIZER FOR GAUSSIANS

Our goals are to have fast overall rendering and fast sorting to allow approximate α-blending – including for anisotropic splats – and to avoid hard limits on the number of splats that can receive gradients that exist in previous work [Lassner and Zollhofer 2021].

To achieve these goals, we design a tile-based rasterizer for Gaussian splats inspired by recent software rasterization approaches [Lassner and Zollhofer 2021] to pre-sort primitives for an entire image at a time, avoiding the expense of sorting per pixel that hindered previous α-blending solutions [Kopanas et al. 2022, 2021]. Our fast rasterizer allows efficient backpropagation over an arbitrary number of blended Gaussians with low additional memory consumption, requiring only a constant overhead per pixel. Our rasterization pipeline is fully differentiable, and given the projection to 2D (Sec. 4) can rasterize anisotropic splats similar to previous 2D splatting methods [Kopanas et al. 2021].

Our method starts by splitting the screen into 16×16 tiles, and then proceeds to cull 3D Gaussians against the view frustum and each tile. Specifically, we only keep Gaussians with a 99% confidence interval intersecting the view frustum. Additionally, we use a guard band to trivially reject Gaussians at extreme positions (i.e., those with means close to the near plane and far outside the view frustum), since computing their projected 2D covariance would be unstable. We then instantiate each Gaussian according to the number of tiles they overlap and assign each instance a key that combines view space depth and tile ID. We then sort Gaussians based on these keys using a single fast GPU Radix sort [Merrill and Grimshaw 2010]. Note that there is no additional per-pixel ordering of points, and blending is performed based on this initial sorting. As a consequence, our α-blending can be approximate in some configurations. However, these approximations become negligible as splats approach the size of individual pixels. We found that this choice greatly enhances training and rendering performance without producing visible artifacts in converged scenes.

After sorting Gaussians, we produce a list for each tile by identifying the first and last depth-sorted entry that splats to a given tile. For rasterization, we launch one thread block for each tile. Each block first collaboratively loads packets of Gaussians into shared memory and then, for a given pixel, accumulates color and α values by traversing the lists front-to-back, thus maximizing the gain in parallelism both for data loading/sharing and processing. When we reach a target saturation of α in a pixel, the corresponding thread stops. At regular intervals, threads in a tile are queried and the processing of the entire tile terminates when all pixels have saturated (i.e., α goes to 1). Details of sorting and a high-level overview of the overall rasterization approach are given in Appendix C.

During rasterization, the saturation of α is the only stopping criterion. In contrast to previous work, we do not limit the number of blended primitives that receive gradient updates. We enforce this property to allow our approach to handle scenes with an arbitrary, varying depth complexity and accurately learn them, without having to resort to scene-specific hyperparameter tuning. During the backward pass, we must therefore recover the full sequence of blended points per-pixel in the forward pass. One solution would be to store arbitrarily long lists of blended points per-pixel in global memory [Kopanas et al. 2021]. To avoid the implied dynamic memory management overhead, we instead choose to traverse the per-tile lists again; we can reuse the sorted array of Gaussians and tile ranges from the forward pass. To facilitate gradient computation, we now traverse them back-to-front.

The traversal starts from the last point that affected any pixel in the tile, and loading of points into shared memory again happens collaboratively. Additionally, each pixel will only start (expensive) overlap testing and processing of points if their depth is lower than or equal to the depth of the last point that contributed to its color during the forward pass. Computation of the gradients described in Sec. 4 requires the accumulated opacity values at each step during the original blending process. Rather than trasversing an explicit list of progressively shrinking opacities in the backward pass, we can recover these intermediate opacities by storing only the total accumulated opacity at the end of the forward pass. Specifically, each point stores the final accumulated opacity α in the forward process; we divide this by each point's α in our back-to-front traversal to obtain the required coefficients for gradient computation.

7 IMPLEMENTATION, RESULTS AND EVALUATION

We next discuss some details of implementation, present results and the evaluation of our algorithm compared to previous work and ablation studies.

中文导读 / 原文第 6 页

图4与瓦片渲染：质量和速度

克隆与拆分

小高斯但位置梯度大时复制；大高斯且梯度大时拆成更小的高斯。低 opacity 等条件触发删除。数量不是从头到尾固定。

论文与固定代码的差别

论文描述克隆后沿位置梯度移动；固定的 2023 代码在 clone 时直接复制参数，没有显式的这一步位移。拆分则按尺度采样位置。请以实际源码记录实验。

16×16瓦片

先找每个高斯覆盖哪些小图块，把高斯-瓦片对按瓦片编号与深度排序，再由瓦片内的像素累积颜色，避免每个像素遍历整个场景。

排序是近似

深度顺序不等于对每条像素射线精确求高斯交叠关系，因此会有遮挡近似与视角变化时的伪影。

反向传播为何重要

渲染器不仅要输出图像，还要把像素误差传回高斯参数。只有能传梯度，渲染器才能参与训练。

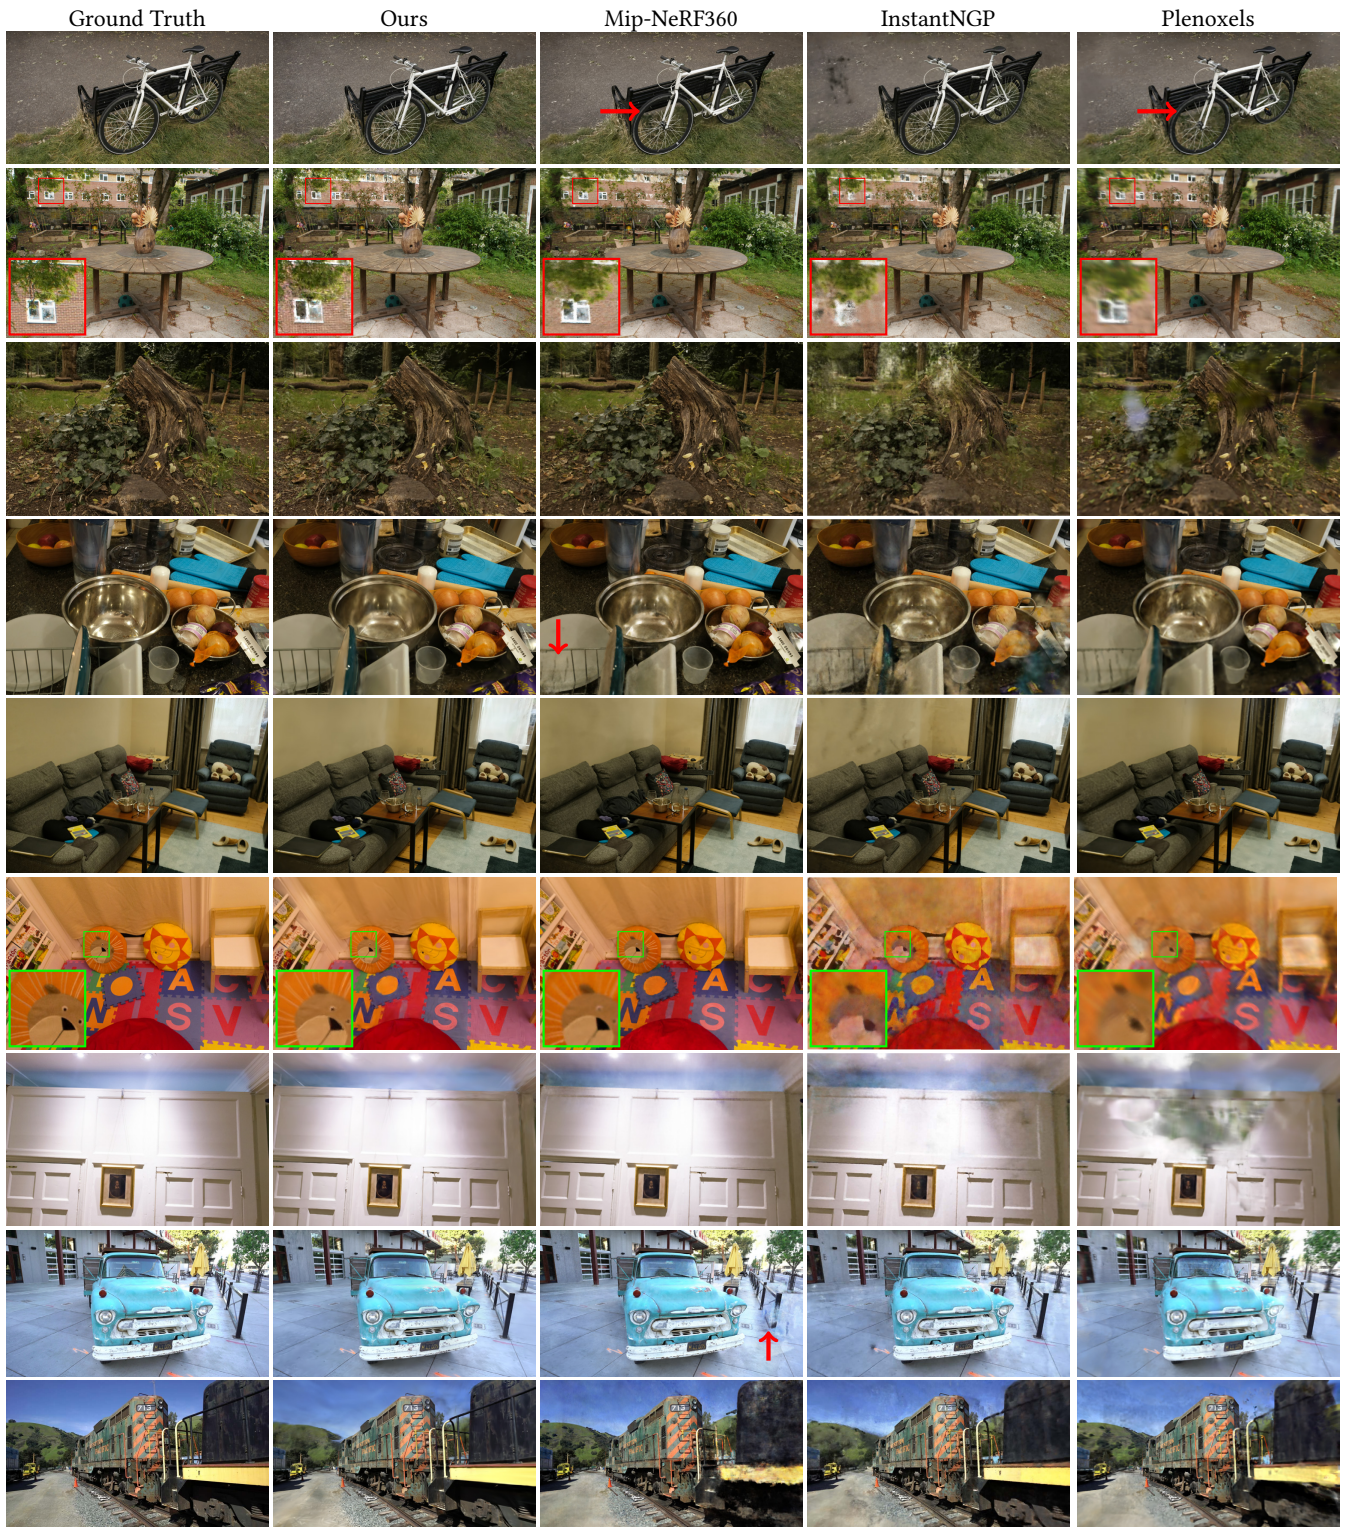

Fig. 5. We show comparisons of ours to previous methods and the corresponding ground truth images from held-out test views. The scenes are, from the top down: Bicycle, Garden, Stump, Counter and Room from the Mip-NeRF360 dataset; Playroom, DrJohnson from the Deep Blending dataset [Hedman et al. 2018] and Truck and Train from Tanks&Temples. Non-obvious differences in quality highlighted by arrows/insets.

中文导读 / 原文第 7 页

定性结果：比较什么，不能证明什么

如何看图5

对照真实图像 GT，关注细线、纹理、镜面反射附近和背景边缘。模糊、漂浮碎片与缺失细节通常比整图观感更容易在放大区域看出来。

必须使用留出视角

训练照片上的好看结果不足以说明新视角能力。我们的 `--eval` 按固定规则留出测试相机，其照片不进入训练光度损失。

SfM输入的边界

预处理 SfM 可能由完整图像集生成。应明确这与把测试照片用于优化光度损失是两回事，并如实写进实验协议。

你们需要保存什么

保存同一测试视角的 GT 与渲染图、对应指标和配置。不要挑一张最好看的图片替代整个测试集的统计。

Table 1. Quantitative evaluation of our method compared to previous work, computed over three datasets. Results marked with dagger † have been directly adopted from the original paper, all others were obtained in our own experiments.

Dataset	Mip-NeRF360						Tanks&Temples						Deep Blending					
Method|Metric	*SSIM*↑	*PSNR*↑	*LPIPS*↓	Train	FPS	Mem	*SSIM*↑	*PSNR*↑	*LPIPS*↓	Train	FPS	Mem	*SSIM*↑	*PSNR*↑	*LPIPS*↓	Train	FPS	Mem
Plenoxels	0.626	23.08	0.463	25m49s	6.79	2.1GB	0.719	21.08	0.379	25m5s	13.0	2.3GB	0.795	23.06	0.510	27m49s	11.2	2.7GB
INGP-Base	0.671	25.30	0.371	5m37s	11.7	13MB	0.723	21.72	0.330	5m26s	17.1	13MB	0.797	23.62	0.423	6m31s	3.26	13MB
INGP-Big	0.699	25.59	0.331	7m30s	9.43	48MB	0.745	21.92	0.305	6m59s	14.4	48MB	0.817	24.96	0.390	8m	2.79	48MB
M-NeRF360	0.792†	27.69†	0.237†	48h	0.06	8.6MB	0.759	22.22	0.257	48h	0.14	8.6MB	0.901	29.40	0.245	48h	0.09	8.6MB
Ours-7K	0.770	25.60	0.279	6m25s	160	523MB	0.767	21.20	0.280	6m55s	197	270MB	0.875	27.78	0.317	4m35s	172	386MB
Ours-30K	0.815	27.21	0.214	41m33s	134	734MB	0.841	23.14	0.183	26m54s	154	411MB	0.903	29.41	0.243	36m2s	137	676MB

Fig. 6. For some scenes (above) we can see that even at 7K iterations (~5min for this scene), our method has captured the train quite well. At 30K iterations (~35min) the background artifacts have been reduced significantly. For other scenes (below), the difference is barely visible; 7K iterations (~8min) is already very high quality.

Table 2. PSNR scores for Synthetic NeRF, we start with 100K randomly initialized points. Competing metrics extracted from respective papers.

	Mic	Chair	Ship	Materials	Lego	Drums	Ficus	Hotdog	Avg.
Plenoxels	33.26	33.98	29.62	29.14	34.10	25.35	31.83	36.81	31.76
INGP-Base	36.22	35.00	31.10	29.78	36.39	26.02	33.51	37.40	33.18
Mip-NeRF	36.51	35.14	30.41	30.71	35.70	25.48	33.29	37.48	33.09
Point-NeRF	35.95	35.40	30.97	29.61	35.04	26.06	36.13	37.30	33.30
Ours-30K	35.36	35.83	30.80	30.00	35.78	26.15	34.87	37.72	33.32

7.1 Implementation

We implemented our method in Python using the PyTorch framework and wrote custom CUDA kernels for rasterization that are extended versions of previous methods [Kopanas et al. 2021], and use the NVIDIA CUB sorting routines for the fast Radix sort [Merrill and Grimshaw 2010]. We also built an interactive viewer using the open-source SIBR [Bonopera et al. 2020], used for interactive viewing. We used this implementation to measure our achieved frame rates. The source code and all our data are available at: https://repo-sam.inria.fr/fungraph/3d-gaussian-splatting/

Optimization Details. For stability, we "warm-up" the computation in lower resolution. Specifically, we start the optimization using 4 times smaller image resolution and we upsample twice after 250 and 500 iterations.

SH coefficient optimization is sensitive to the lack of angular information. For typical "NeRF-like" captures where a central object is observed by photos taken in the entire hemisphere around it, the optimization works well. However, if the capture has angular regions missing (e.g., when capturing the corner of a scene, or performing an "inside-out" [Hedman et al. 2016] capture) completely incorrect values for the zero-order component of the SH (i.e., the base or diffuse color) can be produced by the optimization. To overcome this problem we start by optimizing only the zero-order component, and then introduce one band of the SH after every 1000 iterations until all 4 bands of SH are represented.

7.2 Results and Evaluation

Results. We tested our algorithm on a total of 13 real scenes taken from previously published datasets and the synthetic Blender dataset [Mildenhall et al. 2020]. In particular, we tested our approach on the full set of scenes presented in Mip-Nerf360 [Barron et al. 2022], which is the current state of the art in NeRF rendering quality, two scenes from the Tanks&Temples dataset [2017] and two scenes provided by Hedman et al. [Hedman et al. 2018]. The scenes we chose have very different capture styles, and cover both bounded indoor scenes and large unbounded outdoor environments. We use the same hyperparameter configuration for all experiments in our evaluation. All results are reported running on an A6000 GPU, except for the Mip-NeRF360 method (see below).

In supplemental, we show a rendered video path for a selection of scenes that contain views far from the input photos.

Real-World Scenes. In terms of quality, the current state-of-the-art is Mip-Nerf360 [Barron et al. 2021]. We compare against this method as a quality benchmark. We also compare against two of the most recent fast NeRF methods: InstantNGP [Müller et al. 2022] and Plenoxels [Fridovich-Keil and Yu et al. 2022].

We use a train/test split for datasets, using the methodology suggested by Mip-NeRF360, taking every 8th photo for test, for consistent and meaningful comparisons to generate the error metrics, using the standard PSNR, L-PIPS, and SSIM metrics used most frequently in the literature; please see Table 1. All numbers in the table are from our own runs of the author's code for all previous methods, except for those of Mip-NeRF360 on their dataset, in which we copied the numbers from the original publication to avoid confusion about the current SOTA. For the images in our figures, we used our own run of Mip-NeRF360: the numbers for these runs are in Appendix D. We also show the average training time, rendering speed, and memory used to store optimized parameters. We report results for a basic configuration of InstantNGP (Base) that run for 35K iterations as well as a slightly larger network suggested by the authors (Big), and two configurations, 7K and 30K iterations for ours. We show

中文导读 / 原文第 8 页

表1：论文成绩不是本项目成绩

三个画质指标

PSNR 越高越好；SSIM 越高越好；LPIPS 越低越好。它们评价角度不同，没有一个指标等价于所有人眼感知。

7k与30k

这是优化迭代数，不是图像张数。本工程正式配置为30k，1k低分辨率配置只测试流程能否跑通，不能混为正式结果。

速度与内存口径

作者 FPS 使用其查看器和设备。本项目另附 Python/CUDA-event 渲染计时，两者实现和计时范围不同，不应直接宣称复现作者 FPS。模型文件大小也不等于训练显存峰值。

重要实现差异

论文文字描述先以四分之一分辨率开始、每250步提高分辨率；固定 2023 源码没有该逐步分辨率调度，按加载分辨率训练。文档与代码不完全相同要说明。

当前实验状态

代码准备完成不代表已复现数值。只有在云端训练、渲染、评测成功后，才能填写属于你们的指标。

Table 3. PSNR Score for ablation runs. For this experiment, we manually downsampled high-resolution versions of each scene's input images to the established rendering resolution of our other experiments. Doing so reduces random artifacts (e.g., due to JPEG compression in the pre-downscaled Mip-NeRF360 inputs).

	Truck-5K	Garden-5K	Bicycle-5K	Truck-30K	Garden-30K	Bicycle-30K	Average-5K	Average-30K
Limited-BW	14.66	22.07	20.77	13.84	22.88	20.87	19.16	19.19
Random Init	16.75	20.90	19.86	18.02	22.19	21.05	19.17	20.42
No-Split	18.31	23.98	22.21	20.59	26.11	25.02	21.50	23.90
No-SH	22.36	25.22	22.88	24.39	26.59	25.08	23.48	25.35
No-Clone	22.29	25.61	22.15	24.82	27.47	25.46	23.35	25.91
Isotropic	22.40	25.49	22.81	23.89	27.00	24.81	23.56	25.23
Full	22.71	25.82	23.18	24.81	27.70	25.65	23.90	26.05

the difference in visual quality for our two configurations in Fig. 6. In many cases, quality at 7K iterations is already quite good.

The training times vary over datasets and we report them separately. Note that image resolutions also vary over datasets. In the project website, we provide all the renders of test views we used to compute the statistics for all the methods (ours and previous work) on all scenes. Note that we kept the native input resolution for all renders.

The table shows that our fully converged model achieves quality that is on par and sometimes slightly better than the SOTA Mip-NeRF360 method; note that on the same hardware, their average training time was 48 hours[2], compared to our 35-45min, and their rendering time is 10s/frame. We achieve comparable quality to InstantNGP and Plenoxels after 5-10m of training, but additional training time allows us to achieve SOTA quality which is not the case for the other fast methods. For Tanks & Temples, we achieve similar quality as the basic InstantNGP at a similar training time (~7min in our case).

We also show visual results of this comparison for a left-out test view for ours and the previous rendering methods selected for comparison in Fig. 5; the results of our method are for 30K iterations of training. We see that in some cases even Mip-NeRF360 has remaining artifacts that our method avoids (e.g., blurriness in vegetation – in Bicycle, Stump – or on the walls in Room). In the supplemental video and web page we provide comparisons of paths from a distance. Our method tends to preserve visual detail of well-covered regions even from far away, which is not always the case for previous methods.

Synthetic Bounded Scenes. In addition to realistic scenes, we also evaluate our approach on the synthetic *Blender* dataset [Mildenhall et al. 2020]. The scenes in question provide an exhaustive set of views, are limited in size, and provide exact camera parameters. In such scenarios, we can achieve state-of-the-art results even with random initialization: we start training from 100K uniformly random Gaussians inside a volume that encloses the scene bounds. Our approach quickly and automatically prunes them to about 6–10K meaningful Gaussians. The final size of the trained model after 30K iterations reaches about 200–500K Gaussians per scene. We report and compare our achieved PSNR scores with previous methods in Table 2 using a white background for compatibility. Examples can be seen in Fig. 10 (second image from the left) and in supplemental material. The trained synthetic scenes rendered at 180–300 FPS.

Compactness. In comparison to previous explicit scene representations, the anisotropic Gaussians used in our optimization are capable of modelling complex shapes with a lower number of parameters. We showcase this by evaluating our approach against the highly compact, point-based models obtained by [Zhang et al. 2022]. We start from their initial point cloud which is obtained by space carving with foreground masks and optimize until we break even with their reported PSNR scores. This usually happens within 2–4 minutes. We surpass their reported metrics using approximately one-fourth of their point count, resulting in an average model size of 3.8 MB, as opposed to their 9 MB. We note that for this experiment, we only used two degrees of our spherical harmonics, similar to theirs.

7.3 Ablations

We isolated the different contributions and algorithmic choices we made and constructed a set of experiments to measure their effect. Specifically we test the following aspects of our algorithm: initialization from SfM, our densification strategies, anisotropic covariance, the fact that we allow an unlimited number of splats to have gradients and use of spherical harmonics. The quantitative effect of each choice is summarized in Table 3.

Initialization from SfM. We also assess the importance of initializing the 3D Gaussians from the SfM point cloud. For this ablation, we uniformly sample a cube with a size equal to three times the extent of the input camera's bounding box. We observe that our method performs relatively well, avoiding complete failure even without the SfM points. Instead, it degrades mainly in the background, see Fig. 7. Also in areas not well covered from training views, the random initialization method appears to have more floaters that cannot be removed by optimization. On the other hand, the synthetic NeRF dataset does not have this behavior because it has no background and is well constrained by the input cameras (see discussion above).

Densification. We next evaluate our two densification methods, more specifically the clone and split strategy described in Sec. 5. We disable each method separately and optimize using the rest of the method unchanged. Results show that splitting big Gaussians is important to allow good reconstruction of the background as seen in Fig. 8, while cloning the small Gaussians instead of splitting them allows for a better and faster convergence especially when thin structures appear in the scene.

[2]We trained Mip-NeRF360 on a 4-GPU A100 node for 12 hours, equivalent to 48 hours on a single GPU. Note that A100's are faster than A6000 GPUs.

中文导读 / 原文第 9 页

消融：怎样判断某个设计有没有用

消融实验是什么

完整方法作对照，每次只去掉或替换一个组件，其他数据、训练预算和评测条件保持一致，然后观察差异。

本页关注的因素

SfM 初始化、各向异性、SH 颜色、克隆与拆分等都有各自作用。单看最终图片难以判断哪个组件带来提升。

不要一次改变太多

同时换分辨率、训练步数和渲染器，即使分数更好，也无法归因于你提出的扩展。先保留一个可信且固定的 `baseline`。

我们的当前范围

目前只准备官方原始算法的可复现实验封装，还没有选择或实现扩展；后续扩展要保留相同测试协议。

Fig. 7. Initialization with SfM points helps. Above: initialization with a random point cloud. Below: initialization using SfM points.

Fig. 8. Ablation of densification strategy for the two cases "clone" and "split" (Sec. 5).

Unlimited depth complexity of splats with gradients. We evaluate if skipping the gradient computation after the N front-most points will give us speed without sacrificing quality, as suggested in Pulsar [Lassner and Zollhofer 2021]. In this test, we choose N=10, which is two times higher than the default value in Pulsar, but it led to unstable optimization because of the severe approximation in the gradient computation. For the Truck scene, quality degraded by 11dB in PSNR (see Table 3, Limited-BW), and the visual outcome is shown in Fig. 9 for Garden.

Fig. 9. If we limit the number of points that receive gradients, the effect on visual quality is significant. Left: limit of 10 Gaussians that receive gradients. Right: our full method.

Anisotropic Covariance. An important algorithmic choice in our method is the optimization of the full covariance matrix for the 3D Gaussians. To demonstrate the effect of this choice, we perform an ablation where we remove anisotropy by optimizing a single scalar value that controls the radius of the 3D Gaussian on all three axes. The results of this optimization are presented visually in Fig. 10. We observe that the anisotropy significantly improves the quality of the 3D Gaussian's ability to align with surfaces, which in turn allows for much higher rendering quality while maintaining the same number of points.

Spherical Harmonics. Finally, the use of spherical harmonics improves our overall PSNR scores since they compensate for the view-dependent effects (Table 3).

7.4 Limitations

Our method is not without limitations. In regions where the scene is not well observed we have artifacts; in such regions, other methods also struggle (e.g., Mip-NeRF360 in Fig. 11). Even though the anisotropic Gaussians have many advantages as described above, our method can create elongated artifacts or "splotchy" Gaussians (see Fig. 12); again previous methods also struggle in these cases.

We also occasionally have popping artifacts when our optimization creates large Gaussians; this tends to happen in regions with view-dependent appearance. One reason for these popping artifacts is the trivial rejection of Gaussians via a guard band in the rasterizer. A more principled culling approach would alleviate these artifacts. Another factor is our simple visibility algorithm, which can lead to Gaussians suddenly switching depth/blending order. This could be addressed by antialiasing, which we leave as future work. Also, we currently do not apply any regularization to our optimization; doing so would help with both the unseen region and popping artifacts.

While we used the same hyperparameters for our full evaluation, early experiments show that reducing the position learning rate can be necessary to converge in very large scenes (e.g., urban datasets).

中文导读 / 原文第 10 页

失败案例比漂亮图片更有信息

初始化的影响

稀疏点给高斯一个合理的几何起点。随机初始化可能让优化更困难；这不是简单堆更多显存就能保证解决的问题。

克隆与拆分各管什么

不足的小结构需要增加局部表示；覆盖过大的高斯需要拆细。对照图8可以理解仅用其中一种操作为什么会有局限。

未观察区域

没有被照片充分看到的区域约束很弱，新视角可能出现空洞、漂浮块或拉长结构。新视角合成不是凭空获得真实世界所有几何。

视角变化伪影

高斯排序与裁剪存在近似，运动时可能出现突然变化。评测时除了静态图，也值得看一段平滑相机轨迹。

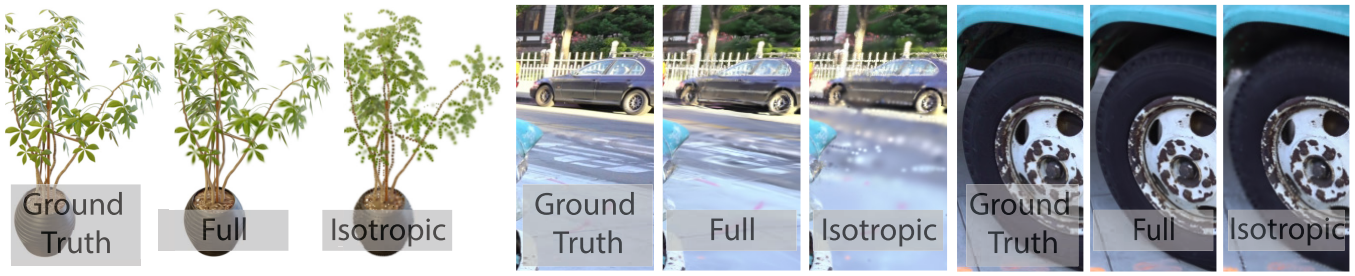

Fig. 10. We train scenes with Gaussian anisotropy disabled and enabled. The use of anisotropic volumetric splats enables modelling of fine structures and has a significant impact on visual quality. Note that for illustrative purposes, we restricted Ficus to use no more than 5k Gaussians in both configurations.

Even though we are very compact compared to previous point-based approaches, our memory consumption is significantly higher than NeRF-based solutions. During training of large scenes, peak GPU memory consumption can exceed 20 GB in our unoptimized prototype. However, this figure could be significantly reduced by a careful low-level implementation of the optimization logic (similar to InstantNGP). Rendering the trained scene requires sufficient GPU memory to store the full model (several hundred megabytes for large-scale scenes) and an additional 30–500 MB for the rasterizer, depending on scene size and image resolution. We note that there are many opportunities to further reduce memory consumption of our method. Compression techniques for point clouds is a well-studied field [De Queiroz and Chou 2016]; it would be interesting to see how such approaches could be adapted to our representation.

Fig. 11. Comparison of failure artifacts: Mip-NeRF360 has "floaters" and grainy appearance (left, foreground), while our method produces coarse, anisoptropic Gaussians resulting in low-detail visuals (right, background). Train scene.

Fig. 12. In views that have little overlap with those seen during training, our method may produce artifacts (right). Again, Mip-NeRF360 also has artifacts in these cases (left). DrJohnson scene.

8 DISCUSSION AND CONCLUSIONS

We have presented the first approach that truly allows real-time, high-quality radiance field rendering, in a wide variety of scenes and capture styles, while requiring training times competitive with the fastest previous methods.

Our choice of a 3D Gaussian primitive preserves properties of volumetric rendering for optimization while directly allowing fast splat-based rasterization. Our work demonstrates that – contrary to widely accepted opinion – a continuous representation is *not* strictly necessary to allow fast and high-quality radiance field training.

The majority (~80%) of our training time is spent in Python code, since we built our solution in PyTorch to allow our method to be easily used by others. Only the rasterization routine is implemented as optimized CUDA kernels. We expect that porting the remaining optimization entirely to CUDA, as e.g., done in InstantNGP [Müller et al. 2022], could enable significant further speedup for applications where performance is essential.

We also demonstrated the importance of building on real-time rendering principles, exploiting the power of the GPU and speed of software rasterization pipeline architecture. These design choices are the key to performance both for training and real-time rendering, providing a competitive edge in performance over previous volumetric ray-marching.

It would be interesting to see if our Gaussians can be used to perform mesh reconstructions of the captured scene. Aside from practical implications given the widespread use of meshes, this would allow us to better understand where our method stands exactly in the continuum between volumetric and surface representations.

In conclusion, we have presented the first real-time rendering solution for radiance fields, with rendering quality that matches the best expensive previous methods, with training times competitive with the fastest existing solutions.

ACKNOWLEDGMENTS

This research was funded by the ERC Advanced grant FUNGRAPH No 788065 http://fungraph.inria.fr. The authors are grateful to Adobe for generous donations, the OPAL infrastructure from Université Côte d'Azur and for the HPC resources from GENCI–IDRIS (Grant 2022-AD011013409). The authors thank the anonymous reviewers for their valuable feedback, P. Hedman and A. Tewari for proof-reading earlier drafts also T. Müller, A. Yu and S. Fridovich-Keil for helping with the comparisons.

中文导读 / 原文第 11 页

表示的边界与资源开销

各向异性

三个轴允许不同尺度，比只能膨胀成球更适合表示细长或近似平面的结构。但错误的大椭球也可能产生伪影。

三种内存别混用

磁盘模型文件、渲染工作内存、训练时参数/梯度/优化器状态不是同一件事。训练显存通常远大于最终模型文件大小。

有算力仍要规范实验

充足 GPU 可以帮助训练与做消融，但并不自动解决数据覆盖、标定误差、反光和动态对象。先确认输入和评测有效。

本项目可交付边界

当前输出应是一个场景的高斯模型、测试视角图像、真实指标与运行记录。不能把它直接称为高精度可编辑网格或真实物理材质。

REFERENCES

Kara-Ali Aliev, Artem Sevastopolsky, Maria Kolos, Dmitry Ulyanov, and Victor Lempitsky. 2020. Neural Point-Based Graphics. In *Computer Vision – ECCV 2020: 16th European Conference, Glasgow, UK, August 23–28, 2020, Proceedings, Part XXII*. 696–712.

Jonathan T Barron, Ben Mildenhall, Matthew Tancik, Peter Hedman, Ricardo Martin-Brualla, and Pratul P Srinivasan. 2021. Mip-nerf: A multiscale representation for anti-aliasing neural radiance fields. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*. 5855–5864.

Jonathan T. Barron, Ben Mildenhall, Dor Verbin, Pratul P. Srinivasan, and Peter Hedman. 2022. Mip-NeRF 360: Unbounded Anti-Aliased Neural Radiance Fields. *CVPR* (2022).

Sebastien Bonopera, Jerome Esnault, Siddhant Prakash, Simon Rodriguez, Theo Thonat, Mehdi Benadel, Gaurav Chaurasia, Julien Philip, and George Drettakis. 2020. sibr: A System for Image Based Rendering. https://gitlab.inria.fr/sibr/sibr_core

Mario Botsch, Alexander Hornung, Matthias Zwicker, and Leif Kobbelt. 2005. High-Quality Surface Splatting on Today's GPUs. In *Proceedings of the Second Eurographics / IEEE VGTC Conference on Point-Based Graphics* (New York, USA) *(SPBG'05)*. Eurographics Association, Goslar, DEU, 17–24.

Chris Buehler, Michael Bosse, Leonard McMillan, Steven Gortler, and Michael Cohen. 2001. Unstructured lumigraph rendering. In *Proc. SIGGRAPH*.

Gaurav Chaurasia, Sylvain Duchene, Olga Sorkine-Hornung, and George Drettakis. 2013. Depth synthesis and local warps for plausible image-based navigation. *ACM Transactions on Graphics (TOG)* 32, 3 (2013), 1–12.

Anpei Chen, Zexiang Xu, Andreas Geiger, Jingyi Yu, and Hao Su. 2022b. TensoRF: Tensorial Radiance Fields. In *European Conference on Computer Vision (ECCV)*.

Zhiqin Chen, Thomas Funkhouser, Peter Hedman, and Andrea Tagliasacchi. 2022a. MobileNeRF: Exploiting the Polygon Rasterization Pipeline for Efficient Neural Field Rendering on Mobile Architectures. *arXiv preprint arXiv:2208.00277* (2022).

Ricardo L De Queiroz and Philip A Chou. 2016. Compression of 3D point clouds using a region-adaptive hierarchical transform. *IEEE Transactions on Image Processing* 25, 8 (2016), 3947–3956.

Martin Eisemann, Bert De Decker, Marcus Magnor, Philippe Bekaert, Edilson De Aguiar, Naveed Ahmed, Christian Theobalt, and Anita Sellent. 2008. Floating textures. In *Computer graphics forum*, Vol. 27. Wiley Online Library, 409–418.

John Flynn, Ivan Neulander, James Philbin, and Noah Snavely. 2016. Deepstereo: Learning to predict new views from the world's imagery. In *CVPR*.

Fridovich-Keil and Yu, Matthew Tancik, Qinhong Chen, Benjamin Recht, and Angjoo Kanazawa. 2022. Plenoxels: Radiance Fields without Neural Networks. In *CVPR*.

Stephan J. Garbin, Marek Kowalski, Matthew Johnson, Jamie Shotton, and Julien Valentin. 2021. FastNeRF: High-Fidelity Neural Rendering at 200FPS. In *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*. 14346–14355.

Michael Goesele, Noah Snavely, Brian Curless, Hugues Hoppe, and Steven M Seitz. 2007. Multi-view stereo for community photo collections. In *ICCV*.

Steven J Gortler, Radek Grzeszczuk, Richard Szeliski, and Michael F Cohen. 1996. The lumigraph. In *Proceedings of the 23rd annual conference on Computer graphics and interactive techniques*. 43–54.

Markus Gross and Hanspeter (Eds) Pfister. 2011. *Point-based graphics*. Elsevier.

Jeff P. Grossman and William J. Dally. 1998. Point Sample Rendering. In *Rendering Techniques*.

Peter Hedman, Julien Philip, True Price, Jan-Michael Frahm, George Drettakis, and Gabriel Brostow. 2018. Deep blending for free-viewpoint image-based rendering. *ACM Trans. on Graphics (TOG)* 37, 6 (2018).

Peter Hedman, Tobias Ritschel, George Drettakis, and Gabriel Brostow. 2016. Scalable Inside-Out Image-Based Rendering. *ACM Transactions on Graphics (SIGGRAPH Asia Conference Proceedings)* 35, 6 (December 2016). http://www-sop.inria.fr/reves/Basilic/2016/HRDB16

Peter Hedman, Pratul P. Srinivasan, Ben Mildenhall, Jonathan T. Barron, and Paul Debevec. 2021. Baking Neural Radiance Fields for Real-Time View Synthesis. *ICCV* (2021).

Philipp Henzler, Niloy J Mitra, and Tobias Ritschel. 2019. Escaping plato's cave: 3d shape from adversarial rendering. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*. 9984–9993.

Arno Knapitsch, Jaesik Park, Qian-Yi Zhou, and Vladlen Koltun. 2017. Tanks and temples: Benchmarking large-scale scene reconstruction. *ACM Transactions on Graphics (ToG)* 36, 4 (2017), 1–13.

Georgios Kopanas, Thomas Leimkühler, Gilles Rainer, Clément Jambon, and George Drettakis. 2022. Neural Point Catacaustics for Novel-View Synthesis of Reflections. *ACM Transactions on Graphics (SIGGRAPH Asia Conference Proceedings)* 41, 6 (2022), 201. http://www-sop.inria.fr/reves/Basilic/2022/KLRJD22

Georgios Kopanas, Julien Philip, Thomas Leimkühler, and George Drettakis. 2021. Point-Based Neural Rendering with Per-View Optimization. *Computer Graphics Forum* 40, 4 (2021), 29–43. https://doi.org/10.1111/cgf.14339

Samuli Laine and Tero Karras. 2011. High-performance software rasterization on GPUs. In *Proceedings of the ACM SIGGRAPH Symposium on High Performance Graphics*. 79–88.

Christoph Lassner and Michael Zollhofer. 2021. Pulsar: Efficient Sphere-Based Neural Rendering. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*. 1440–1449.

Marc Levoy and Pat Hanrahan. 1996. Light field rendering. In *Proceedings of the 23rd annual conference on Computer graphics and interactive techniques*. 31–42.

Stephen Lombardi, Tomas Simon, Gabriel Schwartz, Michael Zollhoefer, Yaser Sheikh, and Jason Saragih. 2021. Mixture of volumetric primitives for efficient neural rendering. *ACM Transactions on Graphics (TOG)* 40, 4 (2021), 1–13.

Duane G Merrill and Andrew S Grimshaw. 2010. Revisiting sorting for GPGPU stream architectures. In *Proceedings of the 19th international conference on Parallel architectures and compilation techniques*. 545–546.

Ben Mildenhall, Pratul P. Srinivasan, Matthew Tancik, Jonathan T. Barron, Ravi Ramamoorthi, and Ren Ng. 2020. NeRF: Representing Scenes as Neural Radiance Fields for View Synthesis. In *ECCV*.

Thomas Müller, Alex Evans, Christoph Schied, and Alexander Keller. 2022. Instant Neural Graphics Primitives with a Multiresolution Hash Encoding. *ACM Trans. Graph.* 41, 4, Article 102 (July 2022), 15 pages. https://doi.org/10.1145/3528223.3530127

Eric Penner and Li Zhang. 2017. Soft 3D reconstruction for view synthesis. *ACM Transactions on Graphics (TOG)* 36, 6 (2017), 1–11.

Hanspeter Pfister, Matthias Zwicker, Jeroen van Baar, and Markus Gross. 2000. Surfels: Surface Elements as Rendering Primitives. In *Proceedings of the 27th Annual Conference on Computer Graphics and Interactive Techniques (SIGGRAPH '00)*. ACM Press/Addison-Wesley Publishing Co., USA, 335–342. https://doi.org/10.1145/344779.344936

Christian Reiser, Songyou Peng, Yiyi Liao, and Andreas Geiger. 2021. KiloNeRF: Speeding up Neural Radiance Fields with Thousands of Tiny MLPs. In *International Conference on Computer Vision (ICCV)*.

Liu Ren, Hanspeter Pfister, and Matthias Zwicker. 2002. Object Space EWA Surface Splatting: A Hardware Accelerated Approach to High Quality Point Rendering. *Computer Graphics Forum* 21 (2002).

Helge Rhodin, Nadia Robertini, Christian Richardt, Hans-Peter Seidel, and Christian Theobalt. 2015. A versatile scene model with differentiable visibility applied to generative pose estimation. In *Proceedings of the IEEE International Conference on Computer Vision*. 765–773.

Gernot Riegler and Vladlen Koltun. 2020. Free view synthesis. In *European Conference on Computer Vision*. Springer, 623–640.

Darius Rückert, Linus Franke, and Marc Stamminger. 2022. ADOP: Approximate Differentiable One-Pixel Point Rendering. *ACM Trans. Graph.* 41, 4, Article 99 (jul 2022), 14 pages. https://doi.org/10.1145/3528223.3530122

Miguel Sainz and Renato Pajarola. 2004. Point-based rendering techniques. *Computers and Graphics* 28, 6 (2004), 869–879. https://doi.org/10.1016/j.cag.2004.08.014

Johannes Lutz Schönberger and Jan-Michael Frahm. 2016. Structure-from-Motion Revisited. In *Conference on Computer Vision and Pattern Recognition (CVPR)*.

Markus Schütz, Bernhard Kerbl, and Michael Wimmer. 2022. Software Rasterization of 2 Billion Points in Real Time. *Proc. ACM Comput. Graph. Interact. Tech.* 5, 3, Article 24 (jul 2022), 17 pages. https://doi.org/10.1145/3543863

Vincent Sitzmann, Justus Thies, Felix Heide, Matthias Nießner, Gordon Wetzstein, and Michael Zollhofer. 2019. Deepvoxels: Learning persistent 3d feature embeddings. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 2437–2446.

Noah Snavely, Steven M Seitz, and Richard Szeliski. 2006. Photo tourism: exploring photo collections in 3D. In *Proc. SIGGRAPH*.

Carsten Stoll, Nils Hasler, Juergen Gall, Hans-Peter Seidel, and Christian Theobalt. 2011. Fast articulated motion tracking using a sums of gaussians body model. In *2011 International Conference on Computer Vision*. IEEE, 951–958.

Cheng Sun, Min Sun, and Hwann-Tzong Chen. 2022. Direct Voxel Grid Optimization: Super-fast Convergence for Radiance Fields Reconstruction. In *CVPR*.

Towaki Takikawa, Alex Evans, Jonathan Tremblay, Thomas Müller, Morgan McGuire, Alec Jacobson, and Sanja Fidler. 2022. Variable bitrate neural fields. In *ACM SIGGRAPH 2022 Conference Proceedings*. 1–9.

Towaki Takikawa, Joey Litalien, Kangxue Yin, Karsten Kreis, Charles Loop, Derek Nowrouzezahrai, Alec Jacobson, Morgan McGuire, and Sanja Fidler. 2021. Neural Geometric Level of Detail: Real-time Rendering with Implicit 3D Shapes. (2021).

Ayush Tewari, Justus Thies, Ben Mildenhall, Pratul Srinivasan, Edgar Tretschk, W Yifan, Christoph Lassner, Vincent Sitzmann, Ricardo Martin-Brualla, Stephen Lombardi, et al. 2022. Advances in neural rendering. In *Computer Graphics Forum*, Vol. 41. Wiley Online Library, 703–735.

Justus Thies, Michael Zollhöfer, and Matthias Nießner. 2019. Deferred neural rendering: Image synthesis using neural textures. *ACM Transactions on Graphics (TOG)* 38, 4 (2019), 1–12.

Angtian Wang, Peng Wang, Jian Sun, Adam Kortylewski, and Alan Yuille. 2023. VoGE: A Differentiable Volume Renderer using Gaussian Ellipsoids for Analysis-by-Synthesis. In *The Eleventh International Conference on Learning Representations*. https://openreview.net/forum?id=AdPJb9cud_Y

中文导读 / 原文第 12 页

参考文献怎样使用

按问题去追资料

不需要从头读完全部引用。遇到相机与稀疏点问题查 SfM/COLMAP；遇到颜色方向性查球谐；遇到渲染混合查体渲染与点渲染。

优先级建议

先看本仓库中文教程，再读本文概览、公式与算法，最后沿源码索引查实现。相关工作用于解释为什么采用这些设计。

学术表述

在报告中清楚区分作者的算法、我们写的工程封装、未来自己的改进。不把官方源码说成独立从零实现。

授权边界

源码保留官方研究用途许可；论文保留原文版权信息。仓库公开不改变第三方材料的授权，不能据此推断可任意再分发或商用。

Olivia Wiles, Georgia Gkioxari, Richard Szeliski, and Justin Johnson. 2020. Synsin: End-to-end view synthesis from a single image. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 7467–7477.
Xiuchao Wu, Jiamin Xu, Zihan Zhu, Hujun Bao, Qixing Huang, James Tompkin, and Weiwei Xu. 2022. Scalable Neural Indoor Scene Rendering. *ACM Transactions on Graphics (TOG)* (2022).
Yiheng Xie, Towaki Takikawa, Shunsuke Saito, Or Litany, Shiqin Yan, Numair Khan, Federico Tombari, James Tompkin, Vincent Sitzmann, and Srinath Sridhar. 2022. Neural fields in visual computing and beyond. In *Computer Graphics Forum*, Vol. 41. Wiley Online Library, 641–676.
Qiangeng Xu, Zexiang Xu, Julien Philip, Sai Bi, Zhixin Shu, Kalyan Sunkavalli, and Ulrich Neumann. 2022. Point-nerf: Point-based neural radiance fields. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 5438–5448.
Wang Yifan, Felice Serena, Shihao Wu, Cengiz Öztireli, and Olga Sorkine-Hornung. 2019. Differentiable surface splatting for point-based geometry processing. *ACM Transactions on Graphics (TOG)* 38, 6 (2019), 1–14.
Alex Yu, Ruilong Li, Matthew Tancik, Hao Li, Ren Ng, and Angjoo Kanazawa. 2021. PlenOctrees for Real-time Rendering of Neural Radiance Fields. In *ICCV*.
Qiang Zhang, Seung-Hwan Baek, Szymon Rusinkiewicz, and Felix Heide. 2022. Differentiable Point-Based Radiance Fields for Efficient View Synthesis. In *SIGGRAPH Asia 2022 Conference Papers* (Daegu, Republic of Korea) *(SA '22)*. Association for Computing Machinery, New York, NY, USA, Article 7, 12 pages. https://doi.org/10.1145/3550469.3555413
Tinghui Zhou, Shubham Tulsiani, Weilun Sun, Jitendra Malik, and Alexei A Efros. 2016. View synthesis by appearance flow. In *European conference on computer vision*. Springer, 286–301.
Matthias Zwicker, Hanspeter Pfister, Jeroen Van Baar, and Markus Gross. 2001a. EWA volume splatting. In *Proceedings Visualization, 2001. VIS'01.* IEEE, 29–538.
Matthias Zwicker, Hanspeter Pfister, Jeroen van Baar, and Markus Gross. 2001b. Surface Splatting. In *Proceedings of the 28th Annual Conference on Computer Graphics and Interactive Techniques (SIGGRAPH '01)*. Association for Computing Machinery, New York, NY, USA, 371–378. https://doi.org/10.1145/383259.383300

A DETAILS OF GRADIENT COMPUTATION

Recall that Σ/Σ' are the world/view space covariance matrices of the Gaussian, q is the rotation, and s the scaling, W is the viewing transformation and J the Jacobian of the affine approximation of the projective transformation. We can apply the chain rule to find the derivatives w.r.t. scaling and rotation:

$$\frac{d\Sigma'}{ds} = \frac{d\Sigma'}{d\Sigma}\frac{d\Sigma}{ds} \tag{8}$$

and

$$\frac{d\Sigma'}{dq} = \frac{d\Sigma'}{d\Sigma}\frac{d\Sigma}{dq} \tag{9}$$

Simplifying Eq. 5 using $U = JW$ and Σ' being the (symmetric) upper left 2×2 matrix of $U\Sigma U^T$, denoting matrix elements with subscripts, we can find the partial derivatives $\frac{\partial\Sigma'}{\partial\Sigma_{ij}} = \begin{pmatrix} U_{1,i}U_{1,j} & U_{1,i}U_{2,j} \\ U_{1,j}U_{2,i} & U_{2,i}U_{2,j} \end{pmatrix}$.

Next, we seek the derivatives $\frac{d\Sigma}{ds}$ and $\frac{d\Sigma}{dq}$. Since $\Sigma = RSS^TR^T$, we can compute $M = RS$ and rewrite $\Sigma = MM^T$. Thus, we can write $\frac{d\Sigma}{ds} = \frac{d\Sigma}{dM}\frac{dM}{ds}$ and $\frac{d\Sigma}{dq} = \frac{d\Sigma}{dM}\frac{dM}{dq}$. Since the covariance matrix Σ (and its gradient) is symmetric, the shared first part is compactly found by $\frac{d\Sigma}{dM} = 2M^T$. For scaling, we further have $\frac{\partial M_{i,j}}{\partial s_k} = \begin{Bmatrix} R_{i,k} & \text{if j = k} \\ 0 & \text{otherwise} \end{Bmatrix}$. To derive gradients for rotation, we recall the conversion from a unit quaternion q with real part q_r and imaginary parts q_i, q_j, q_k to a rotation matrix R:

$$R(q) = 2\begin{pmatrix} \frac{1}{2} - (q_j^2 + q_k^2) & (q_iq_j - q_rq_k) & (q_iq_k + q_rq_j) \\ (q_iq_j + q_rq_k) & \frac{1}{2} - (q_i^2 + q_k^2) & (q_jq_k - q_rq_i) \\ (q_iq_k - q_rq_j) & (q_jq_k + q_rq_i) & \frac{1}{2} - (q_i^2 + q_j^2) \end{pmatrix} \tag{10}$$

As a result, we find the following gradients for the components of q:

$$\frac{\partial M}{\partial q_r} = 2\begin{pmatrix} 0 & -s_yq_k & s_zq_j \\ s_xq_k & 0 & -s_zq_i \\ -s_xq_j & s_yq_i & 0 \end{pmatrix}, \quad \frac{\partial M}{\partial q_i} = 2\begin{pmatrix} 0 & s_yq_j & s_zq_k \\ s_xq_j & -2s_yq_i & -s_zq_r \\ s_xq_k & s_yq_r & -2s_zq_i \end{pmatrix}$$
$$\frac{\partial M}{\partial q_j} = 2\begin{pmatrix} -2s_xq_j & s_yq_i & s_zq_r \\ s_xq_i & 0 & s_zq_k \\ -s_xq_r & s_yq_k & -2s_zq_j \end{pmatrix}, \quad \frac{\partial M}{\partial q_k} = 2\begin{pmatrix} -2s_xq_k & -s_yq_r & s_zq_i \\ s_xq_r & -2s_yq_k & s_zq_j \\ s_xq_i & s_yq_j & 0 \end{pmatrix} \tag{11}$$

Deriving gradients for quaternion normalization is straightforward.

B OPTIMIZATION AND DENSIFICATION ALGORITHM

Our optimization and densification algorithms are summarized in Algorithm 1.

Algorithm 1 Optimization and Densification
w, h: width and height of the training images

```
M ← SfM Points                                   ▷ Positions
S, C, A ← InitAttributes()                       ▷ Covariances, Colors, Opacities
i ← 0                                            ▷ Iteration Count
while not converged do
    V, V̂ ← SampleTrainingView()                  ▷ Camera V and Image
    I ← Rasterize(M, S, C, A, V)                 ▷ Alg. 2
    L ← Loss(I, Î)                               ▷ Loss
    M, S, C, A ← Adam(∇L)                        ▷ Backprop & Step
    if IsRefinementIteration(i) then
        for all Gaussians (μ, Σ, c, α) in (M, S, C, A) do
            if α < ϵ or IsTooLarge(μ, Σ) then    ▷ Pruning
                RemoveGaussian()
            end if
            if ∇_p L > τ_p then                  ▷ Densification
                if ||S|| > τ_S then              ▷ Over-reconstruction
                    SplitGaussian(μ, Σ, c, α)
                else                             ▷ Under-reconstruction
                    CloneGaussian(μ, Σ, c, α)
                end if
            end if
        end for
    end if
    i ← i + 1
end while
```

C DETAILS OF THE RASTERIZER

Sorting. Our design is based on the assumption of a high load of small splats, and we optimize for this by sorting splats once for each frame using radix sort at the beginning. We split the screen into 16x16 pixel tiles (or bins). We create a list of splats per tile by instantiating each splat in each 16×16 tile it overlaps. This results in a moderate increase in Gaussians to process which however is amortized by simpler control flow and high parallelism of optimized GPU Radix sort [Merrill and Grimshaw 2010]. We assign a key for each splats instance with up to 64 bits where the lower 32 bits encode its projected depth and the higher bits encode the index of the overlapped tile. The exact size of the index depends on how many tiles fit the current resolution. Depth ordering is thus directly resolved for all splats in parallel with a single radix sort. After

中文导读 / 原文第 13 页

附录：从公式到训练伪代码

附录A的角色

这里给出协方差相关梯度：误差先传到屏幕椭圆，再通过坐标变换传回三维尺度与旋转。第一次阅读不必背每个偏导。

算法1

初始化 → 选相机 → 渲染 → 算损失 → 算梯度 → 更新参数 → 按条件增密/裁剪。请对照 `train.py` 看清先后顺序和分支条件。

固定代码时间表

每1000步提高 SH 阶数直到3；位置梯度用于增密；增密检查每100步一次且 500<iteration<15000；在相应阶段每3000步重置 opacity。

排序键

高位表示瓦片，低位编码深度。一次排序让相同瓦片的高斯相邻，并在瓦片内部形成前后顺序。

读代码入口

`train.py` → `scene/gaussian_model.py` → `gaussian_renderer/__init__.py` → `submodules/diff-gaussian-rasterization/cuda_rasterizer`。

sorting, we can efficiently produce per-tile lists of Gaussians to process by identifying the start and end of ranges in the sorted array with the same tile ID. This is done in parallel, launching one thread per 64-bit array element to compare its higher 32 bits with its two neighbors. Compared to [Lassner and Zollhofer 2021], our rasterization thus completely eliminates sequential primitive processing steps and produces more compact per-tile lists to traverse during the forward pass. We show a high-level overview of the rasterization approach in Algorithm 2.

Algorithm 2 GPU software rasterization of 3D Gaussians
w, h: width and height of the image to rasterize
M, S: Gaussian means and covariances in world space
C, A: Gaussian colors and opacities
V: view configuration of current camera

function RASTERIZE(w, h, M, S, C, A, V)
  CullGaussian(p, V) ▷ Frustum Culling
  $M', S' \leftarrow$ ScreenspaceGaussians(M, S, V) ▷ Transform
  $T \leftarrow$ CreateTiles(w, h)
  $L, K \leftarrow$ DuplicateWithKeys(M', T) ▷ Indices and Keys
  SortByKeys(K, L) ▷ Globally Sort
  $R \leftarrow$ IdentifyTileRanges(T, K)
  $I \leftarrow \mathbf{0}$ ▷ Init Canvas
  for all Tiles t **in** I **do**
    for all Pixels i **in** t **do**
      $r \leftarrow$ GetTileRange(R, t)
      $I[i] \leftarrow$ BlendInOrder(i, L, r, K, M', S', C, A)
    end for
  end for
  return I
end function

Numerical stability. During the backward pass, we reconstruct the intermediate opacity values needed for gradient computation by repeatedly dividing the accumulated opacity from the forward pass by each Gaussian's α. Implemented naïvely, this process is prone to numerical instabilities (e.g., division by 0). To address this, both in the forward and backward pass, we skip any blending updates with $\alpha < \epsilon$ (we choose ϵ as $\frac{1}{255}$) and also clamp α with 0.99 from above. Finally, **before** a Gaussian is included in the forward rasterization pass, we compute the accumulated opacity if we were to include it and stop front-to-back blending **before** it can exceed 0.9999.

D PER-SCENE ERROR METRICS

Tables 4–9 list the various collected error metrics for our evaluation over all considered techniques and real-world scenes. We list both the copied Mip-NeRF360 numbers and those of our runs used to generate the images in the paper; averages for these over the full Mip-NeRF360 dataset are PSNR 27.58, SSIM 0.790, and LPIPS 0.240.

Table 4. SSIM scores for Mip-NeRF360 scenes. † copied from original paper.

	bicycle	flowers	garden	stump	treehill	room	counter	kitchen	bonsai
Plenoxels	0.496	0.431	0.6063	0.523	0.509	0.8417	0.759	0.648	0.814
INGP-Base	0.491	0.450	0.649	0.574	0.518	0.855	0.798	0.818	0.890
INGP-Big	0.512	0.486	0.701	0.594	0.542	0.871	0.817	0.858	0.906
Mip-NeRF360†	0.685	0.583	0.813	0.744	0.632	0.913	0.894	0.920	**0.941**
Mip-NeRF360	0.685	0.584	0.809	0.745	0.631	0.910	0.892	0.917	0.938
Ours-7k	0.675	0.525	0.836	0.728	0.598	0.884	0.873	0.900	0.910
Ours-30k	**0.771**	**0.605**	**0.868**	**0.775**	**0.638**	**0.914**	**0.905**	**0.922**	0.938

Table 5. PSNR scores for Mip-NeRF360 scenes. † copied from original paper.

	bicycle	flowers	garden	stump	treehill	room	counter	kitchen	bonsai
Plenoxels	21.912	20.097	23.4947	20.661	22.248	27.594	23.624	23.420	24.669
INGP-Base	22.193	20.348	24.599	23.626	22.364	29.269	26.439	28.548	30.337
INGP-Big	22.171	20.652	25.069	23.466	22.373	29.690	26.691	29.479	30.685
Mip-NeRF360†	24.37	**21.73**	26.98	26.40	22.87	**31.63**	**29.55**	**32.23**	**33.46**
Mip-NeRF360	24.305	21.649	26.875	26.175	**22.929**	31.467	29.447	31.989	33.397
Ours-7k	23.604	20.515	26.245	25.709	22.085	28.139	26.705	28.546	28.850
Ours-30k	**25.246**	21.520	**27.410**	**26.550**	22.490	30.632	28.700	30.317	31.980

Table 6. LPIPS scores for Mip-NeRF360 scenes. † copied from original paper.

	bicycle	flowers	garden	stump	treehill	room	counter	kitchen	bonsai
Plenoxels	0.506	0.521	0.3864	0.503	0.540	0.4186	0.441	0.447	0.398
INGP-Base	0.487	0.481	0.312	0.450	0.489	0.301	0.342	0.254	0.227
INGP-Big	0.446	0.441	0.257	0.421	0.450	0.261	0.306	0.195	0.205
Mip-NeRF360†	0.301	0.344	0.170	0.261	0.339	**0.211**	**0.204**	**0.127**	**0.176**
Mip-NeRF360	0.305	0.346	0.171	0.265	0.347	0.213	0.207	0.128	0.179
Ours-7k	0.318	0.417	0.153	0.287	0.404	0.272	0.254	0.161	0.244
Ours-30k	**0.205**	**0.336**	**0.103**	**0.210**	**0.317**	0.220	**0.204**	0.129	0.205

Table 7. SSIM scores for Tanks&Temples and Deep Blending scenes.

	Truck	Train	Dr Johnson	Playroom
Plenoxels	0.774	0.663	0.787	0.802
INGP-Base	0.779	0.666	0.839	0.754
INGP-Big	0.800	0.689	0.854	0.779
Mip-NeRF360	0.857	0.660	**0.901**	0.900
Ours-7k	0.840	0.694	0.853	0.896
Ours-30k	**0.879**	**0.802**	0.899	**0.906**

Table 8. PSNR scores for Tanks&Temples and Deep Blending scenes.

	Truck	Train	Dr Johnson	Playroom
Plenoxels	23.221	18.927	23.142	22.980
INGP-Base	23.260	20.170	27.750	19.483
INGP-Big	23.383	20.456	28.257	21.665
Mip-NeRF360	24.912	19.523	**29.140**	29.657
Ours-7k	23.506	18.892	26.306	29.245
Ours-30k	**25.187**	**21.097**	28.766	**30.044**

Table 9. LPIPS scores for Tanks&Temples and Deep Blending scenes.

	Truck	Train	Dr Johnson	Playroom
Plenoxels	0.335	0.422	0.521	0.499
INGP-Base	0.274	0.386	0.381	0.465
INGP-Big	0.249	0.360	0.352	0.428
Mip-NeRF360	0.159	0.354	**0.237**	0.252
Ours-7k	0.209	0.350	0.343	0.291
Ours-30k	**0.148**	**0.218**	0.244	**0.241**

中文导读 / 原文第 14 页

算法2：渲染器的实际细节

每个像素的状态

从 T=1、颜色=0 开始，依次累积 T×alpha×颜色，再更新 T←T×(1-alpha)，最后加 T×背景颜色。

稳定性与提前结束

固定 CUDA 实现将 alpha 上限设为0.99，忽略小于1/255的贡献，并在透过率足够小时提前停止；这些是实际数值与性能策略。

反向时重建透过率

实现利用前向记录，反向遍历贡献，并通过除以 (1-alpha) 恢复有关透过率。不要把 opacity 参数、像素 alpha 和透过率 T 当成同一个量。

附录逐场景表

这是作者的逐场景结果，便于观察场景难度差异。我们的示例先选 Tanks and Temples 的 train 场景；单场景结果不能代表整套基准平均值。

现在可以做什么

在云端按 CLOUD.md 配环境并跑冒烟测试，再跑 30k，导出真实结果。跑完后回到本文，解释哪里成功、哪里失败以及可能的原因。