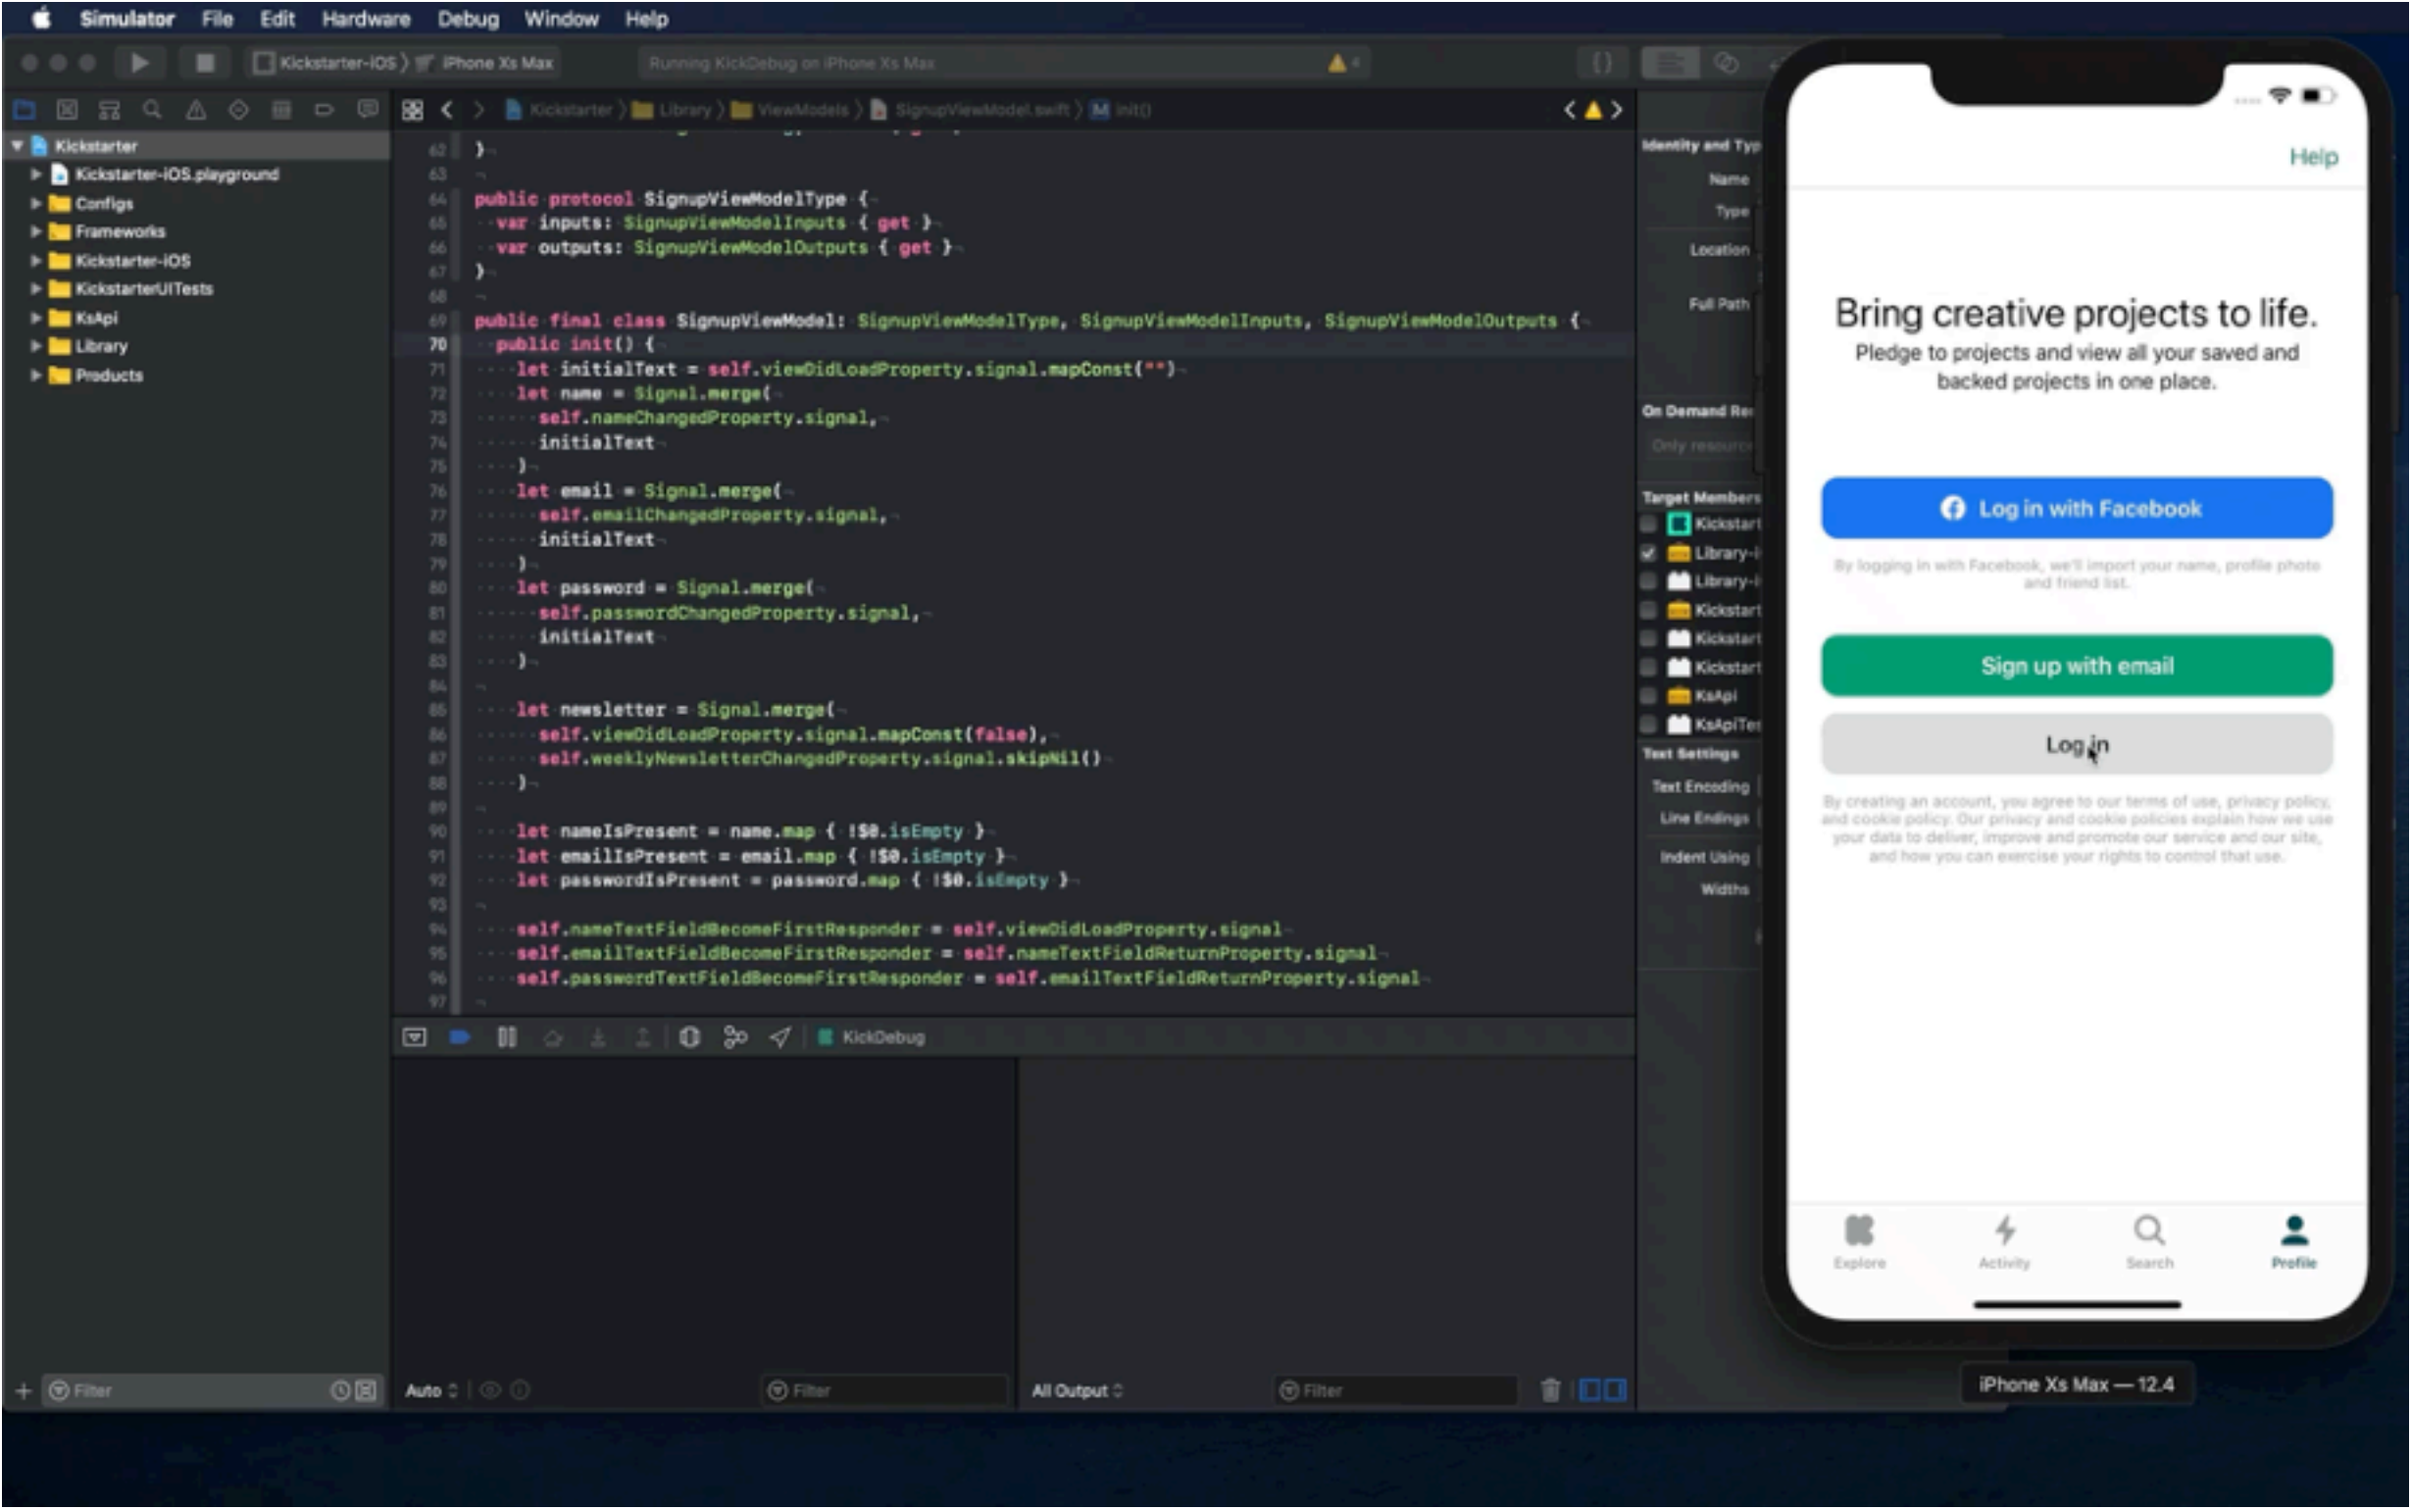
Simulator File Edit Hardware Debug Window Help
Kickstarter-iOS iPhone Xs Max
Running KickDebug on iPhone Xs Max
Kickstarter
Kickstarter-iOS.playground
Configs
Frameworks
Kickstarter-iOS
KickstarterUITests
KsApi
Library
Products
public protocol SignupViewModelType {
var inputs: SignupViewModelInputs { get }
var outputs: SignupViewModelOutputs { get }
}
public final class SignupViewModel: SignupViewModelType, SignupViewModelInputs, SignupViewModelOutputs {
public init() {
let initialText = self.viewDidLoadProperty.signal.mapConst("")
let name = Signal.merge(
self.nameChangedProperty.signal,
initialText
)
let email = Signal.merge(
self.emailChangedProperty.signal,
initialText
)
let password = Signal.merge(
self.passwordChangedProperty.signal,
initialText
)
let newsletter = Signal.merge(
self.viewDidLoadProperty.signal.mapConst(false),
self.weeklyNewsletterChangedProperty.signal.skipNil()
)
let nameIsPresent = name.map { !$0.isEmpty }
let emailIsPresent = email.map { !$0.isEmpty }
let passwordIsPresent = password.map { !$0.isEmpty }
self.nameTextFieldBecomeFirstResponder = self.viewDidLoadProperty.signal
self.emailTextFieldBecomeFirstResponder = self.nameTextFieldReturnProperty.signal
self.passwordTextFieldBecomeFirstResponder = self.emailTextFieldReturnProperty.signal
KickDebug
Help
Bring creative projects to life.
Pledge to projects and view all your saved and backed projects in one place.
Log in with Facebook
By logging in with Facebook, we'll import your name, profile photo and friend list.
Sign up with email
Log in
By creating an account, you agree to our terms of use, privacy policy, and cookie policy. Our privacy and cookie policies explain how we use your data to deliver, improve and promote our service and our site, and how you can exercise your rights to control that use.
Explore
Activity
Search
Profile
iPhone Xs Max — 12.4

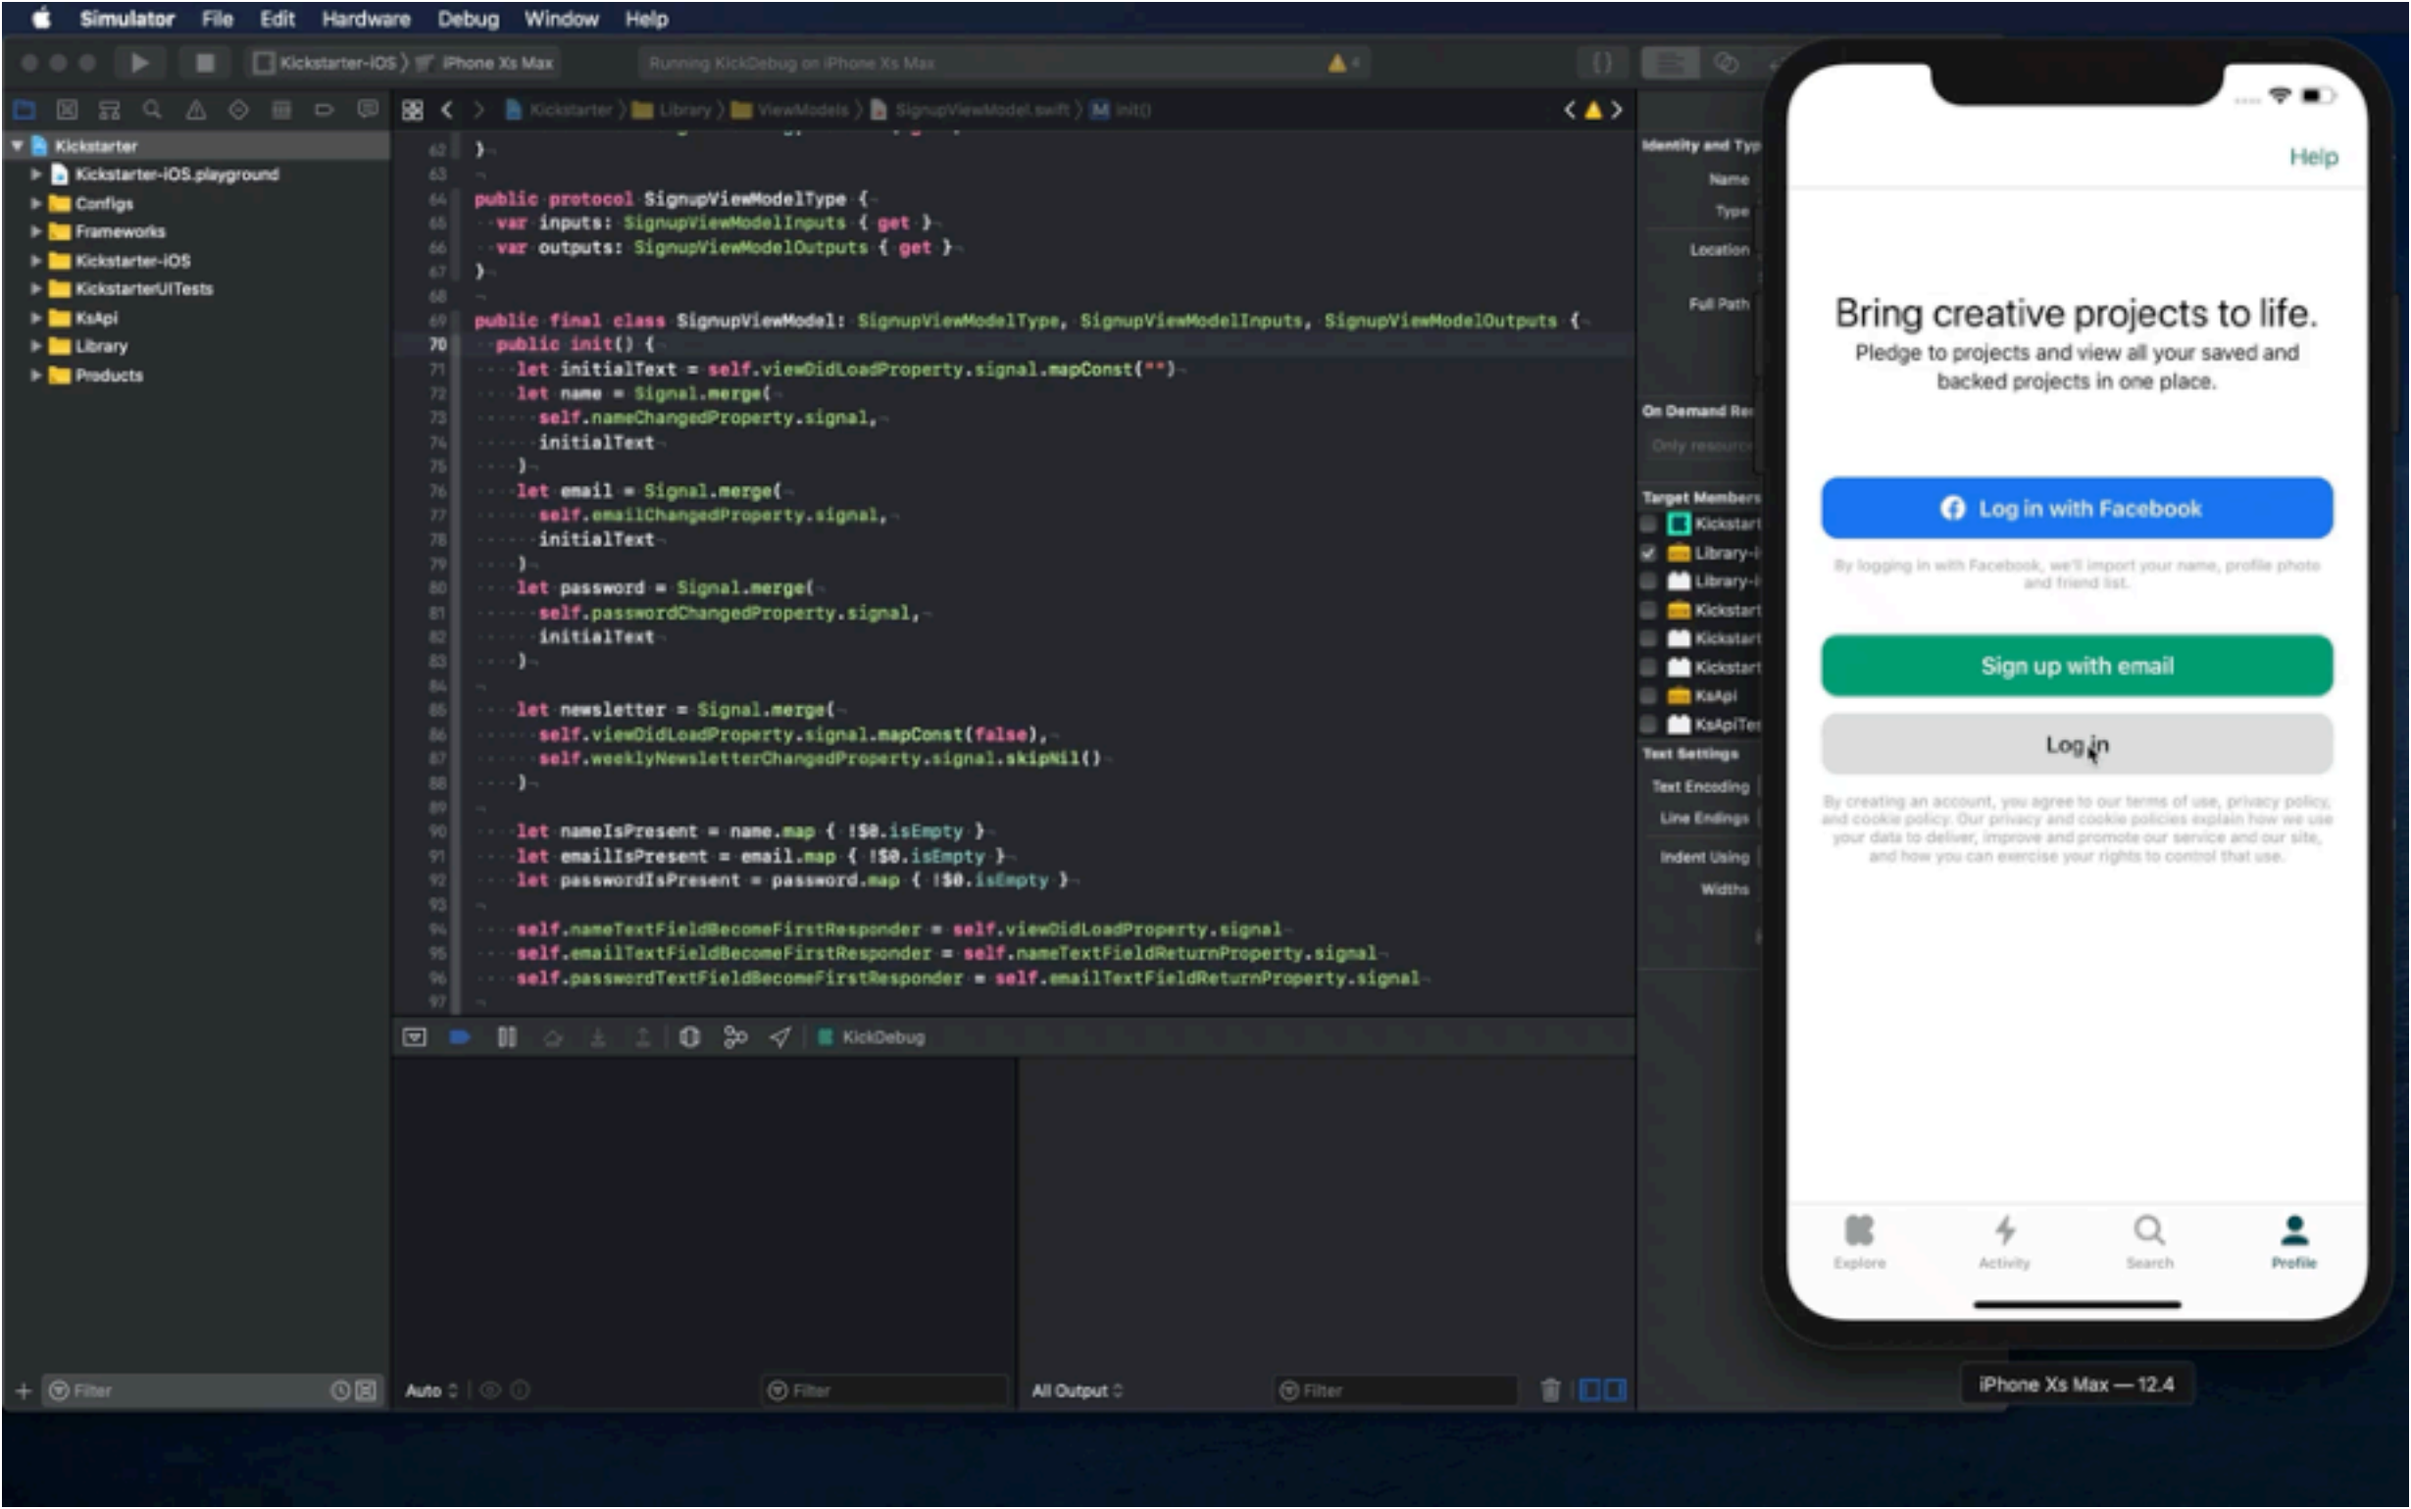
Simulator File Edit Hardware Debug Window Help
Kickstarter-iOS iPhone Xs Max
Running KickDebug on iPhone Xs Max
Kickstarter
Kickstarter-iOS.playground
Configs
Frameworks
Kickstarter-iOS
KickstarterUITests
KsApi
Library
Products
public protocol SignupViewModelType {
var inputs: SignupViewModelInputs { get }
var outputs: SignupViewModelOutputs { get }
}
public final class SignupViewModel: SignupViewModelType, SignupViewModelInputs, SignupViewModelOutputs {
public init() {
let initialText = self.viewDidLoadProperty.signal.mapConst("")
let name = Signal.merge(
self.nameChangedProperty.signal,
initialText
)
let email = Signal.merge(
self.emailChangedProperty.signal,
initialText
)
let password = Signal.merge(
self.passwordChangedProperty.signal,
initialText
)
let newsletter = Signal.merge(
self.viewDidLoadProperty.signal.mapConst(false),
self.weeklyNewsletterChangedProperty.signal.skipNil()
)
let nameIsPresent = name.map { !$0.isEmpty }
let emailIsPresent = email.map { !$0.isEmpty }
let passwordIsPresent = password.map { !$0.isEmpty }
self.nameTextFieldBecomeFirstResponder = self.viewDidLoadProperty.signal
self.emailTextFieldBecomeFirstResponder = self.nameTextFieldReturnProperty.signal
self.passwordTextFieldBecomeFirstResponder = self.emailTextFieldReturnProperty.signal
KickDebug
Help
Bring creative projects to life.
Pledge to projects and view all your saved and backed projects in one place.
Log in with Facebook
By logging in with Facebook, we'll import your name, profile photo and friend list.
Sign up with email
Log in
By creating an account, you agree to our terms of use, privacy policy, and cookie policy. Our privacy and cookie policies explain how we use your data to deliver, improve and promote our service and our site, and how you can exercise your rights to control that use.
Explore
Activity
Search
Profile
iPhone Xs Max — 12.4

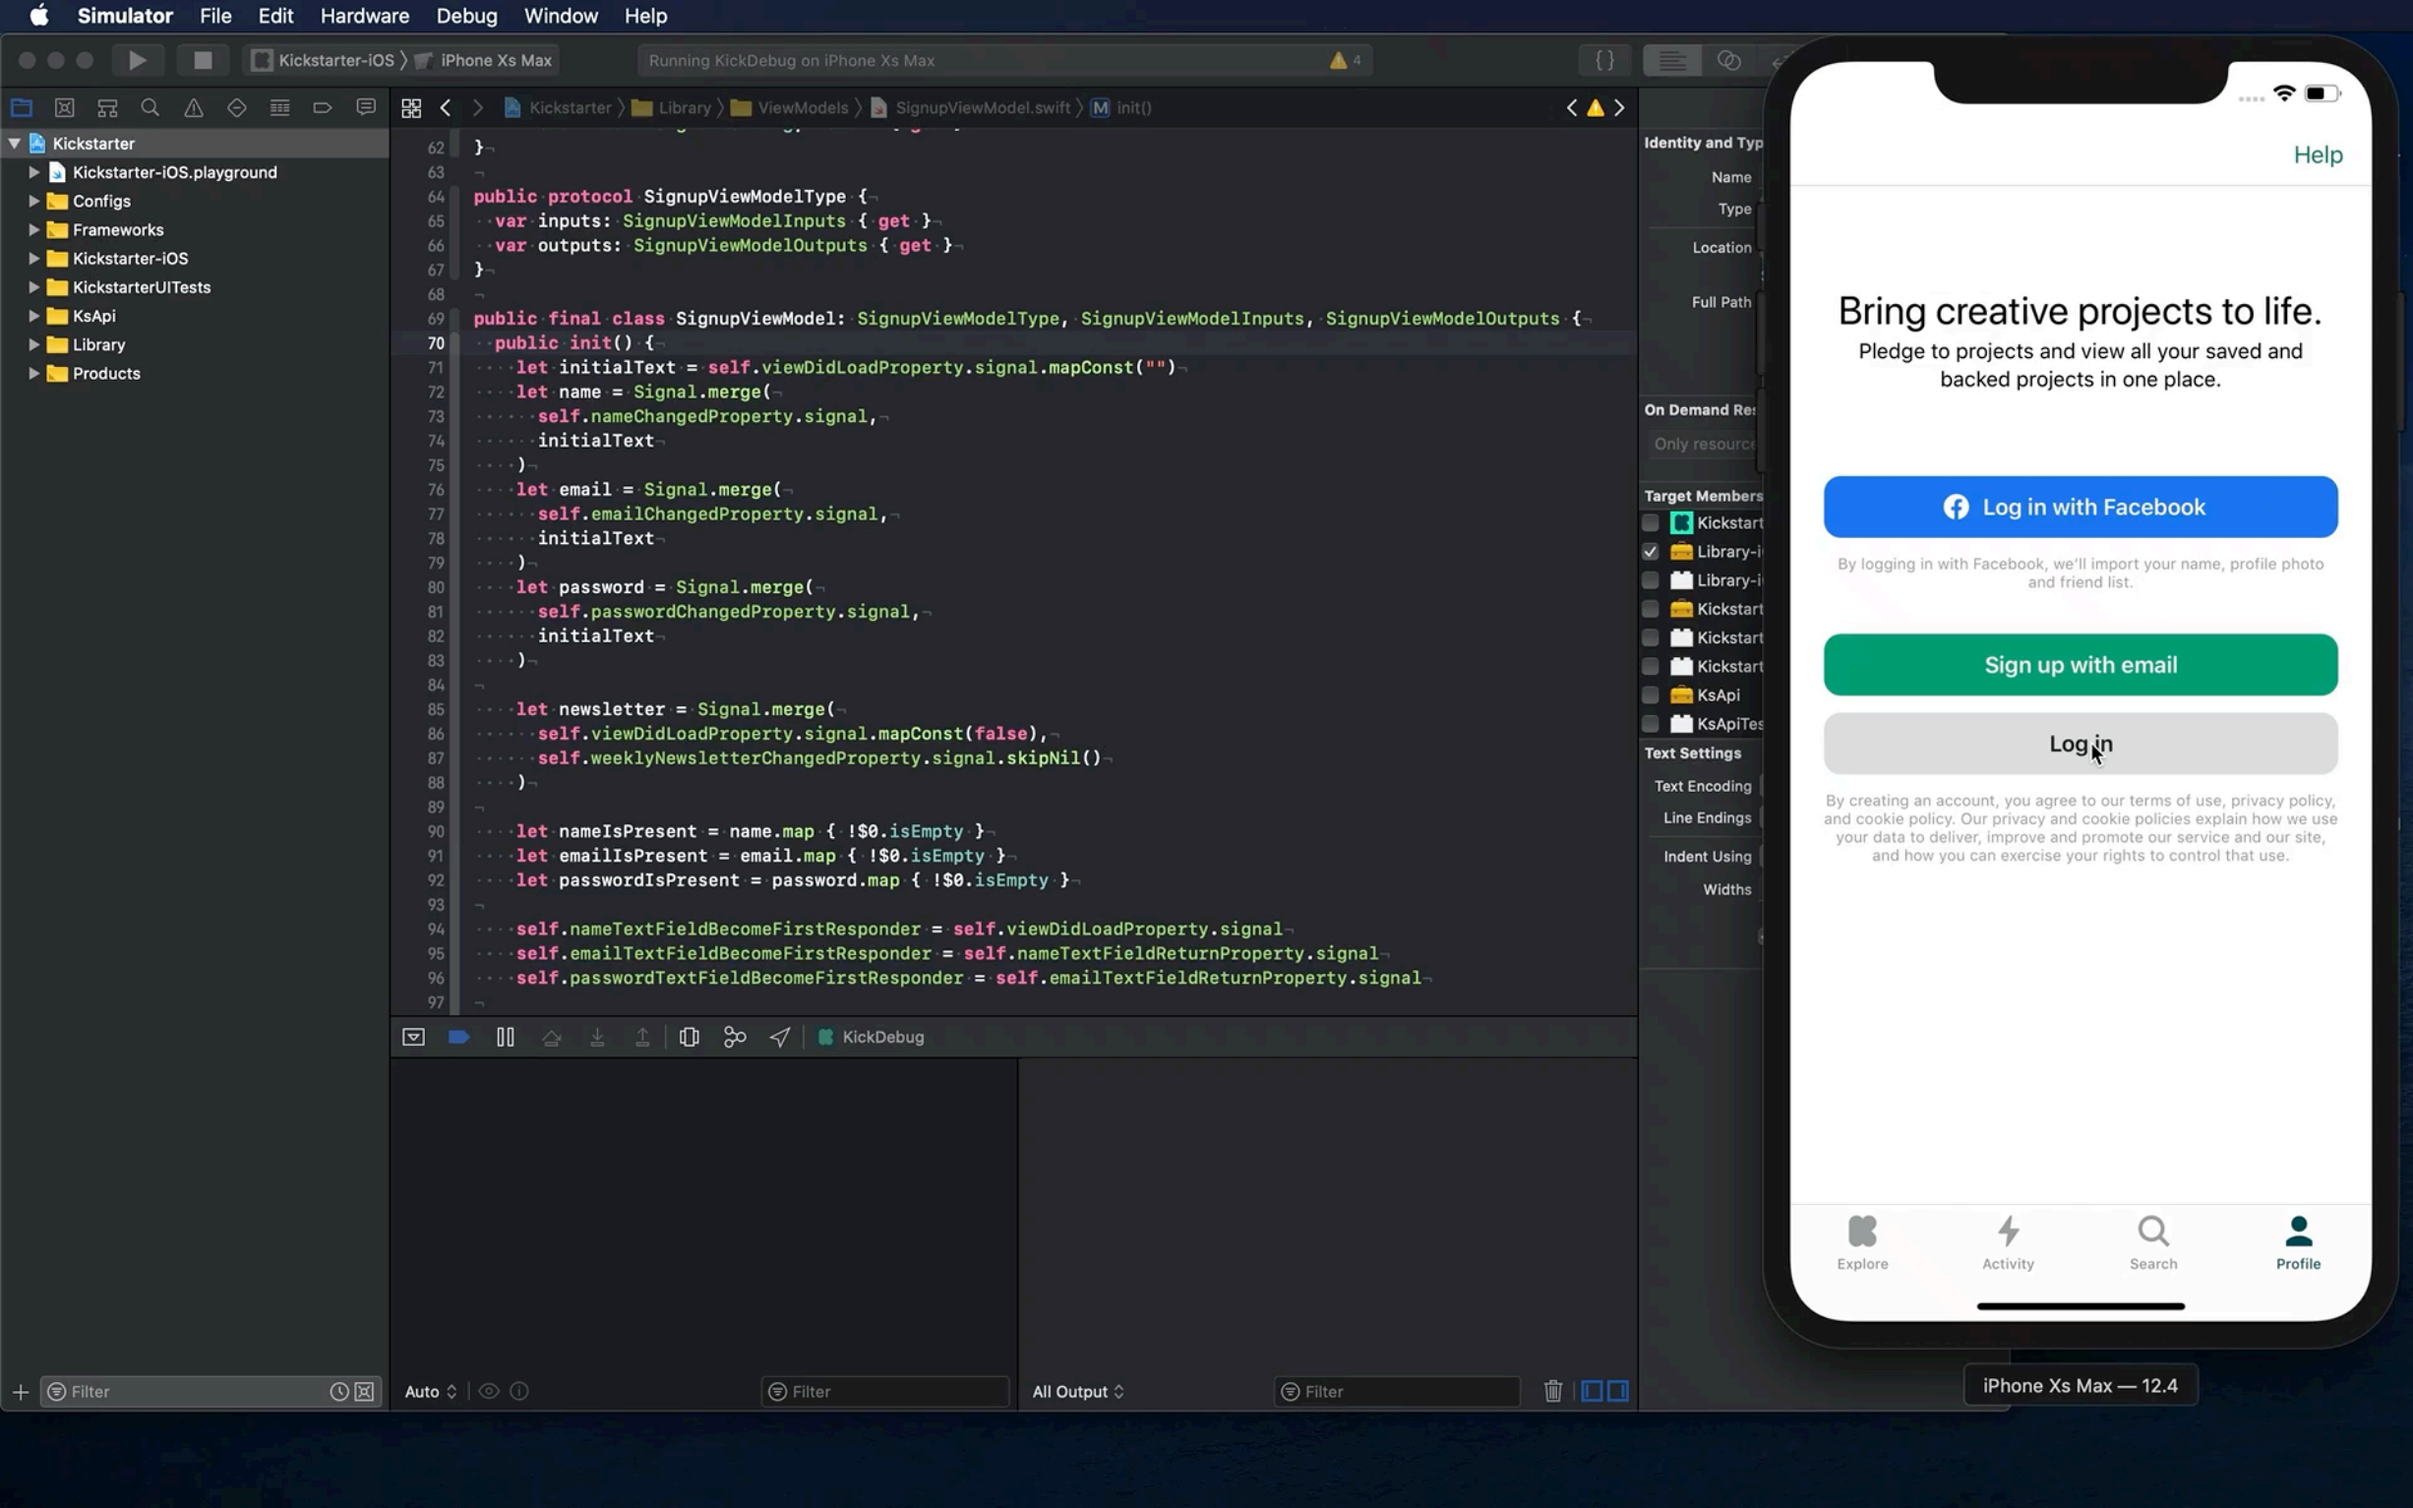
Simulator File Edit Hardware Debug Window Help
Kickstarter-iOS iPhone Xs Max
Running KickDebug on iPhone Xs Max
Kickstarter Library ViewModels SignupViewModel.swift init()
Kickstarter
Kickstarter-iOS.playground
Configs
Frameworks
Kickstarter-iOS
KickstarterUITests
KsApi
Library
Products
62 }
63
64 public protocol SignupViewModelType {
65 var inputs: SignupViewModelInputs { get }
66 var outputs: SignupViewModelOutputs { get }
67 }
68
69 public final class SignupViewModel: SignupViewModelType, SignupViewModelInputs, SignupViewModelOutputs {
70 public init() {
71 let initialText = self.viewDidLoadProperty.signal.mapConst("")
72 let name = Signal.merge(
73 self.nameChangedProperty.signal,
74 initialText
75)
76 let email = Signal.merge(
77 self.emailChangedProperty.signal,
78 initialText
79)
80 let password = Signal.merge(
81 self.passwordChangedProperty.signal,
82 initialText
83)
84
85 let newsletter = Signal.merge(
86 self.viewDidLoadProperty.signal.mapConst(false),
87 self.weeklyNewsletterChangedProperty.signal.skipNil()
88)
89
90 let nameIsPresent = name.map { !$0.isEmpty }
91 let emailIsPresent = email.map { !$0.isEmpty }
92 let passwordIsPresent = password.map { !$0.isEmpty }
93
94 self.nameTextFieldBecomeFirstResponder = self.viewDidLoadProperty.signal
95 self.emailTextFieldBecomeFirstResponder = self.nameTextFieldReturnProperty.signal
96 self.passwordTextFieldBecomeFirstResponder = self.emailTextFieldReturnProperty.signal
97
KickDebug
Identity and Type
Name
Type
Location
Full Path
On Demand Res
Only resource
Target Members
Kickstart
Library-i
Library-i
Kickstart
Kickstart
Kickstart
KsApi
KsApiTes
Text Settings
Text Encoding
Line Endings
Indent Using
Widths
Auto
All Output
Filter
Help
Bring creative projects to life.
Pledge to projects and view all your saved and backed projects in one place.
Log in with Facebook
By logging in with Facebook, we'll import your name, profile photo and friend list.
Sign up with email
Log in
By creating an account, you agree to our terms of use, privacy policy, and cookie policy. Our privacy and cookie policies explain how we use your data to deliver, improve and promote our service and our site, and how you can exercise your rights to control that use.
Explore
Activity
Search
Profile
iPhone Xs Max — 12.4

View Debugger

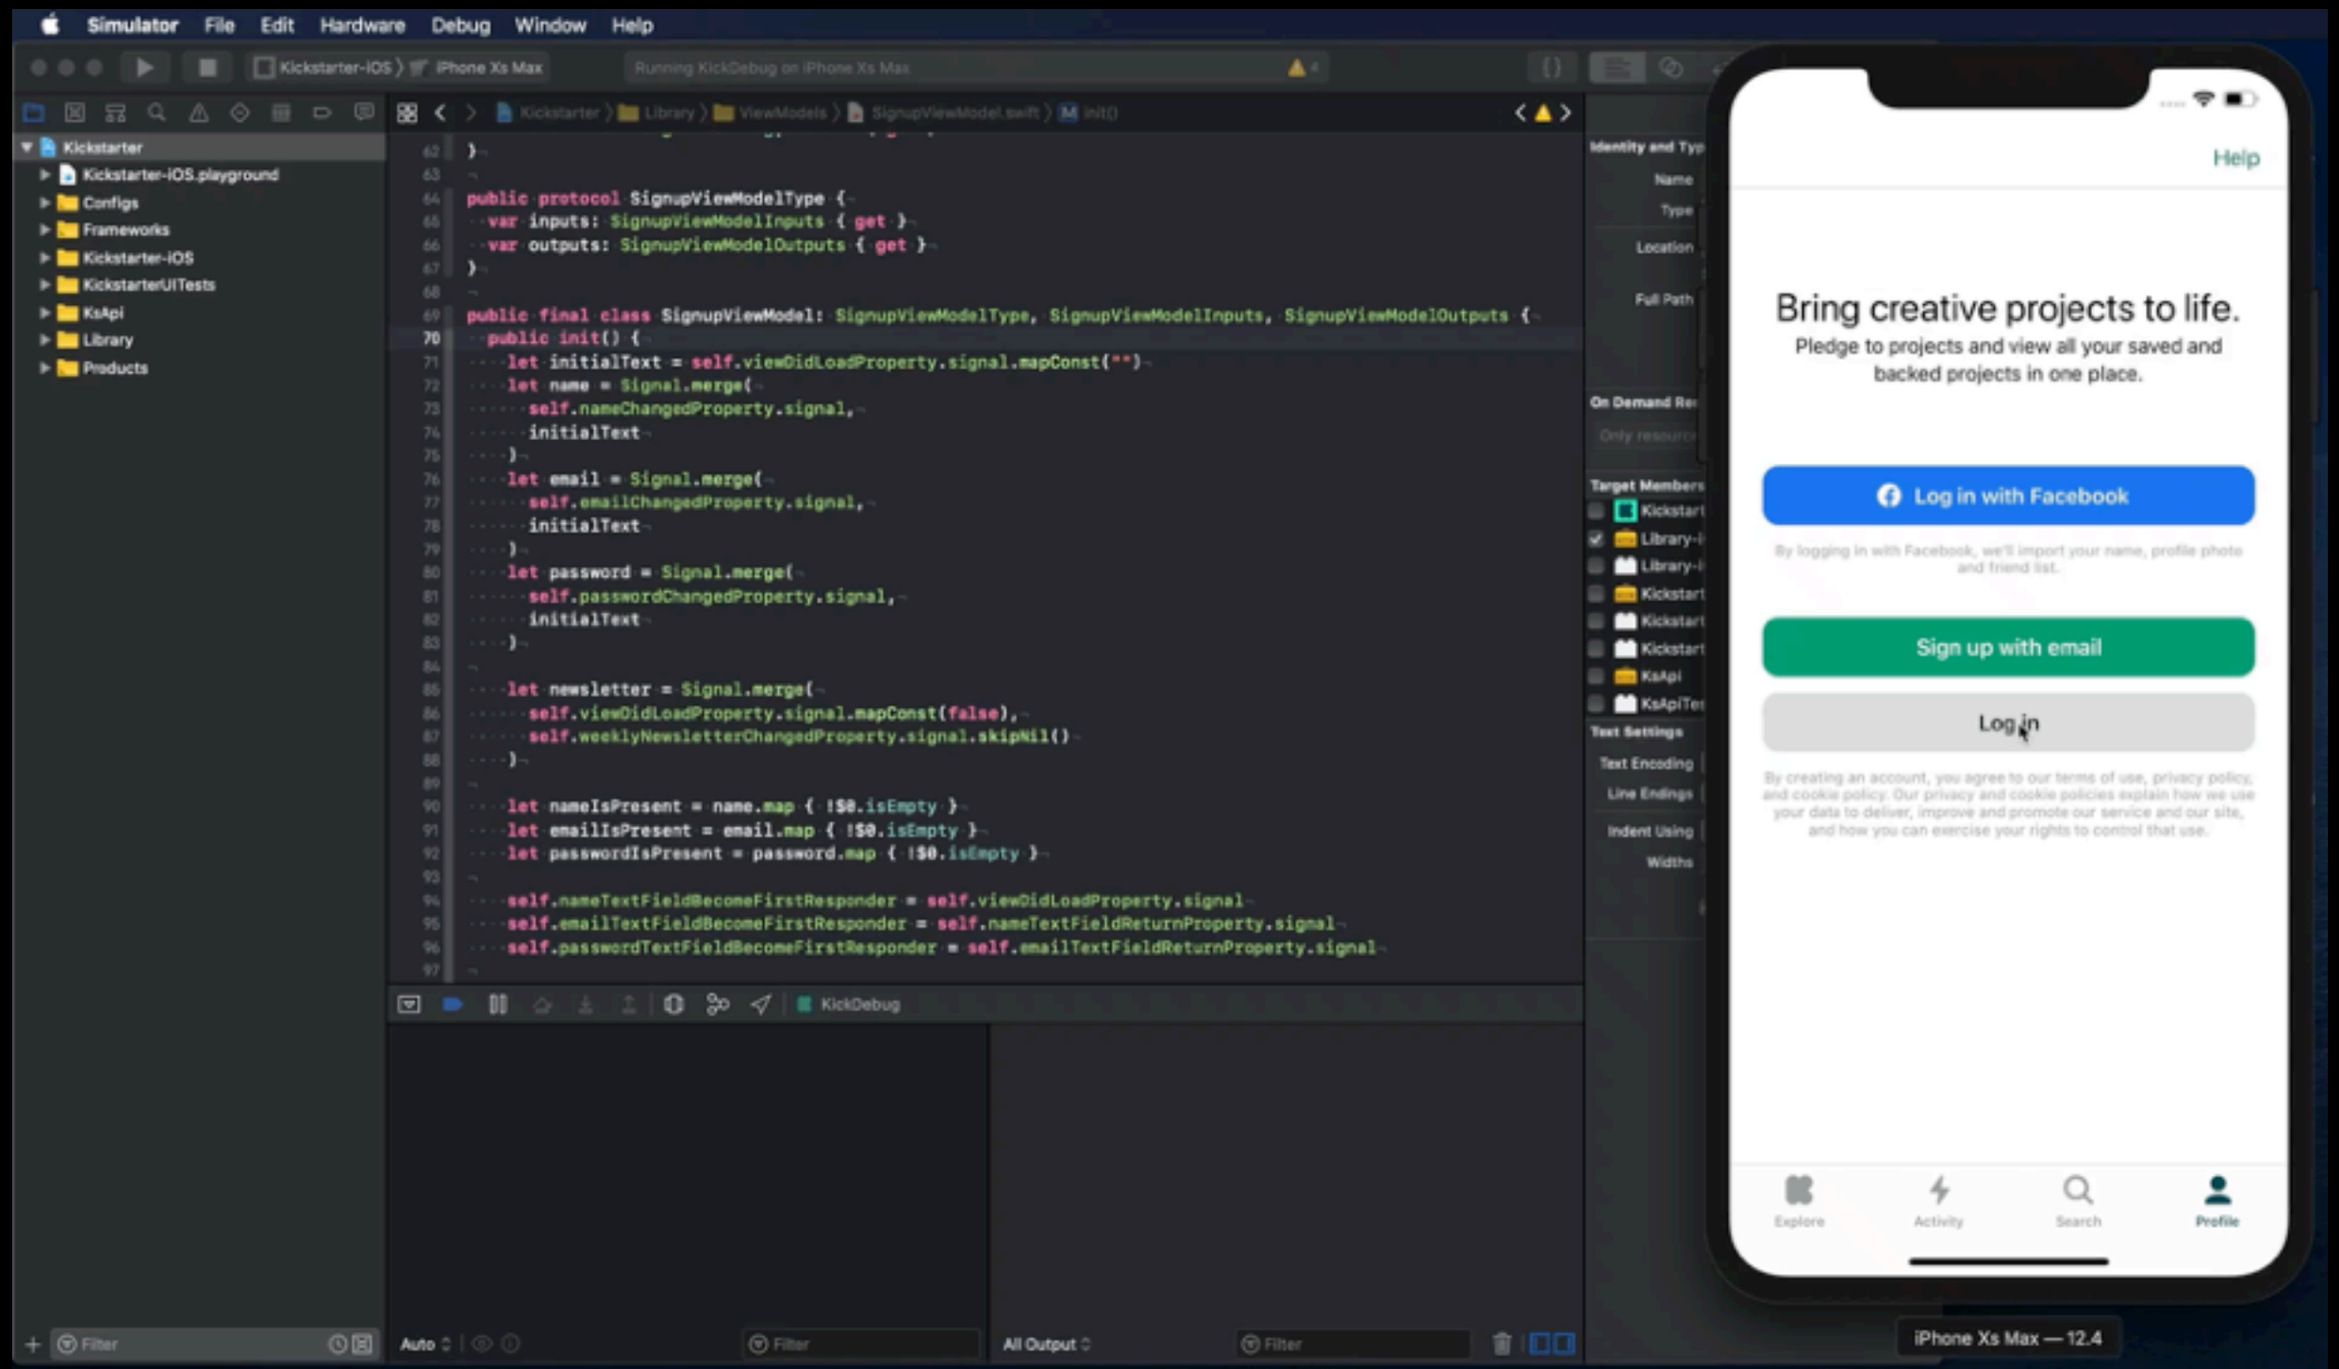

Summary

- Open Source
- Xcode Tips
- Ask questions!