

2021

MyData API documentation 1.7

Unauthorized access to third parties is prohibited. All rights belong to Primer Software P.C.

Introduction.....	2
MyData Activation	3
Company Activation.....	4
Product Activation	6
Response from the call.....	7
Send Invoices-Receipts (json).....	8
Sending Invoices-Receipts (html form).....	14
Sending the LOGO	17
Response from the call.....	17
Resending Email.....	20
Response from the call.....	21
Email status: Sent (or Not Sent)	21
Error Handling with the connection	21
Error Handling with the sending of invoices (json)	21
Storing the invoices.....	22
Prerequisites for constructors.....	22
Testing Environment	22
Error Handling with the sending of invoices (html)	22
GetInvoicesStatus Call.....	23
Procedure	23
Explanation of the body	23
Response from the call.....	24

Introduction

What MyData is about?

My Data (my Digital Accounting and Tax Application) is the name of the new electronic platform by which AADE introduces electronic books into the daily lives of businesses. Electronic Books is a very important step in the digital transformation of the State and the businesses. Our goal is primarily to serve businesses by providing an innovative digital platform for fulfilling their tax obligations, which will lead to the automation of tax declaration and will relieve them of their current obligations, such as Filing of Customers-Suppliers Lists.

My Data is the way of sending invoices to the Greek Government. The Greek government has specific coding for specific parts of the invoice.

Our API is connected directly to Mydata and can send to AADE the following information:

- data for the invoices it issues.
- income classification for the invoices it issues.
- Retrieve data of invoices issued for it and submitted by the respective issuers to AADE.
- expense classification data to AADE.

MyData API connection

In order to do all of the above it requires a specific connection to the API.

Firstly, it requires an application user who is connected to a specific company. This user's credentials are also used for authorization of all the calls that the API takes. User and company requires a first-time activation. The first four calls are required for using the all the functions that the API provides.

Then, the sending of documents will be feasible with two main calls (/send, /html). It requires both of these calls in order the document is sent successfully. The first one includes the mandatory data that AADE requires for a document and the second one is used to send a file in html form that describes all of the above

with a specific template that we will provide. All of the calls for this API can be found in this swagger: <https://wp-mydataapi.ddns.net/swagger>

MyData Activation

Introduction

The first thing that needs to be done is to activate the company and the product of the issuer. Furthermore, for each call that the issuer tries to do it should a basic authentication with the username and password that we give for each purchase.

First Time Activation

The first step is the first-time activation for the user. This call is a simple get-method call that gives the information that the successfully created user has not been connected yet to a company.

Procedure

The method of this call is: GET

The endpoint for this call is: <https://wp-mydataapi.ddns.net/v2/invoice/firstTimeActivation>

It also requires Basic Authorization with credentials:

Username: ***** (The username we provided)

Password: ***** (The password we provided)


The structure of the body must be empty.

Response from the call

“It has not been activated for first time, please send company's data”

MyData API Documentation

Example

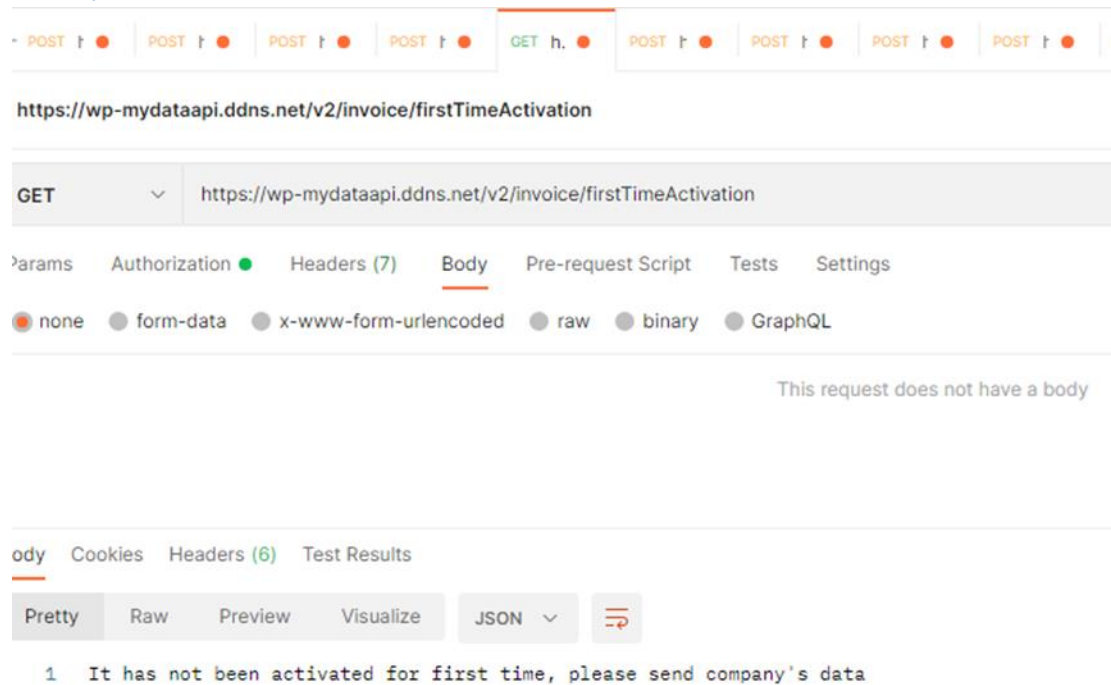

Company Activation

The first step is to activate the company of the issuer. This call activates the company and stores the data that the user inputs.

Procedure

The method of this call is: POST

The endpoint of this call is: <https://wp-mydataapi.ddns.net/v2/invoice/companyActivation>

It also requires Basic Authorization with credentials:

Username: ***** (The username from the first call)

Password: ***** (The password from the first call)

The structure of the body must be raw-json.

MyData API Documentation

The content of the body should have the following data:

```
{  
  "companyName": "*****",  
  "smallName": "*****",  
  "email": "*****",  
  "address": "*****",  
  "city": "*****",  
  "tk": "*****",  
  "activity": "*****",  
  "vatNumber": "*****",  
  "doy": "*****",  
  "phoneNumber": "*****",  
  "gemhNumber": "*****"  
  "representativeName": "*****",  
  "representativeSurname": "*****",  
  "representativeVatNumber": "*****"  
}
```

Explanation of the body data

All the above fields must be filled in, according to the issuer's company information that is declared to AADE.

(This information is necessary for creating and automating the legal contract procedure.)

MyData API Documentation

Example

The screenshot shows a REST client interface with the following details:

- Method:** POST
- URL:** https://wp-mydataapi.ddns.net/v2/invoice/companyActivation
- Body Type:** JSON
- Body Content:**

```
1 {
2   "companyName": "level up",
3   "smallName": "lvlup",
4   "email": "info@primer.gr",
5   "address": "Ηλεκτ 23",
6   "activity": "Προγ. Ηλεκ/κου υπολ.",
7   "vatNumber": "801507204",
8   "doy": "doy",
9   "phoneNumber": "6973621669",
10  "gemhNumber": "3456",
11  "city": "companyCity",
12  "tk": "companyTk",
13  "representativeName": "representativeName",
14  "representativeSurname": "representativeSurname",
15  "representativeVatNumber": "representativeVatNumber"
16 }
```

Response from the call

“It has been activated for first time, please proceed with product activation”

Product Activation

Next up, the product must be activated.

Procedure

The method of this call is: POST

The endpoint of this call is: <https://wp-mydataapi.ddns.net/v2/invoice/productActivation>

It also requires Basic Authorization with credentials:

Username: ***** (The username from the first call)

Password: ***** (The password from the first call)

The structure of the body must be raw-json.

MyData API Documentation

The content of the body should have only the serial number

```
{"serialNumber": "*****"}
```

Response from the call

The response from the call will describe every detail about the product the issuer bought

Example

The screenshot displays a REST client interface. At the top, the URL bar shows 'https://wp-mydataapi.ddns.net/v2/invoice/productActivation'. The request method is 'POST'. The 'Body' tab is selected, showing a JSON payload:

```
{ "serialNumber": "B18-H3F-2EH-BLH-G7D-L2H" }
```

. Below the request, the 'Response' tab is active, showing a detailed JSON object. The response status is 200 OK, with a time of 3.01 s and a size of 917 B. The JSON response includes fields such as 'wpEdition', 'myDataDuration', 'serialNumber', 'option', 'monthRemainingInvoices', 'startMonth', 'endMonth', 'startYear', 'endYear', 'monthlyInvoices', 'invoicesConsumed', 'companyName', 'companySmallName', 'vatNumber', 'companyAddress', 'companyPhoneNumber', 'companyActivity', 'gemh', 'saleDate', 'activationDate', 'productName', 'productOption', and 'wpModules'.

```
{  "wpEdition": "PRwplugin23-1123",  "myDataDuration": 12,  "serialNumber": "B18-H3F-2EH-BLH-G7D-L2H",  "option": null,  "monthRemainingInvoices": 500,  "startMonth": 11,  "endMonth": 11,  "startYear": 2021,  "endYear": 2022,  "monthlyInvoices": 500,  "invoicesConsumed": 0,  "companyName": "level left89990",  "companySmallName": "lv1118969",  "vatNumber": "800888081",  "companyAddress": "ΗΑελας 23",  "companyPhoneNumber": "6973621669",  "companyActivity": "Προγ. ΗΑελ/κρυ υπολ.",  "gemh": "345886457890",  "saleDate": "2021-11-02T12:11:50",  "activationDate": "Tue Nov 02 12:55:07 UTC 2021",  "productName": "PRIMER plugin (Gold Edition)",  "productOption": "My Data 500 ΚΟΙΤΟΙ: 50.00 € /ΜΗΝΑ 124.00 € (με ΦΠΑ)",  "wpModules": [    "11",    "12",    "13",    "1",  ]}
```


Send Invoices-Receipts (json)

Procedure

The method of this call is: POST

The endpoint of this call is: <https://wp-mydataapi.ddns.net/v2/invoices/send>

It also requires Basic Authorization with credentials:

Username: ***** (The username from the first call)

Password: ***** (The password from the first call)

The structure of the body must be raw-json.

The content of the body should have the following data:

```
{
  "invoice": [
    {
      "issuer": {
        "vatNumber": "*****",
        "country": "GR",
        "branch": "0"
      },
      "invoiceHeader": {
        "series": "*****",
        "aa": "*****",
        "invoiceType": "*****",
        "currency": "EUR",
```

```
"issueDate": "yyyy-mm-dd"
},
"invoiceDetails": [
  {
    "lineNumber": 1,
    "netValue": "*****",
    "vatCategory": "***",
    "vatAmount": "*****",
    "incomeClassification": [
      {
        "classificationCategory": "*****",
        "classificationType": "*****",
        "amount": "*****",
        "id": "1"
      }
    ]
  },
  {
    "quantity": **,
    "measurementUnit": **
  }
],
"paymentMethods": {
  "paymentMethodDetails": [
    {
      "type": ****,
```

```
        "amount": "*****"
      }
    ]
  },
  "invoiceSummary": {
    "totalNetValue": "*****",
    "totalVatAmount": "*****",
    "totalWithheldAmount": 0,
    "totalFeesAmount": 0,
    "totalStampDutyAmount": 0,
    "totalDeductionsAmount": 0,
    "totalOtherTaxesAmount": 0,
    "totalGrossValue": "*****",
    "incomeClassification": [
      {
        "classificationCategory": "*****",
        "classificationType": "*****",
        "amount": "*****",
        "id": "1"
      }
    ]
  }
}
```

}

Explanation for the body data

- “VatNumber” describes the Vat number of the company of the issuer
- “series” describes the series of the invoice
- “aa” describes the number of the invoice
- “issueDate” must be the current GREEK date, otherwise json will be rejected.
- “Invoice Type”, “classification_type”, “classification_category” are directly connected and describes the specifications of the invoice which can have the following parameters:

“Classification category	Invoice Type Name	Invoice Type Code	“Classification Type”	Product MyData Category Name
1_1	Greek receipt	11.1	E3_561_003	Retail Sales of Goods and Services – Private Client
1_1	Greek invoice	1.1	E3_561_001	Wholesale Sales of Goods and Services – for Traders
1_1	Receipt inside E.U.	11.1	E3_561_005	Intra-Community Foreign Sales of Goods and Services
1.95				
1_1	Invoice within E.U.	1.2	E3_561_005	Intra-Community Foreign Sales of Goods and Services
1_95	Invoice within E.U.	1.2		
1_1	Receipt outside E.U.	11.1	E3_561_006	Third Country Foreign Sales of Goods and Services
1_95	Receipt outside E.U.			
1_1	Invoice outside E.U.	1.3	E3_561_006	Third Country Foreign Sales of Goods and Services
1_95	Invoice outside E.U.			
1_3	Greek receipt for services	11.2	E3_561_003	Retail Sales of Goods and Services – Private Client
1_3	Greek invoice for services	2.1	E3_561_001	Wholesale Sales of Goods and Services – for Traders
1_3	Receipt for services within E.U.	11.2	E3_561_005	Intra-Community Foreign Sales of Goods and Services
1_3	Invoice for services, within E.U.	2.2	E3_561_005	Intra-Community Foreign Sales of Goods and Services
1_3	Receipt for services outside E.U.	11.2	E3_561_006	Third Country Foreign Sales of Goods and Services
1_3	Invoice for services outside E.U.	2.3	E3_561_006	Third Country Foreign Sales of Goods and Services
	Retail Sales Credit Note	11.4		

Credit Invoice/Non-
Associated

5.1

- “VatCategory” can have the following parameters:

- “Payment_type” can have the following parameters:

Description	type
Domestic Payments Account Number	1
Foreign Payments Account Number	2
Cash	3
Check	4
On credit	5

- "measurementUnit" can have the following parameters:

Description	MyData code
Pieces	1
Kg	2
Liters	3

Useful information

1. If the issuer
Greece

- A new
item:

Product VAT %	VatCategory
24%	1
17%	4
13%	2
9%	5
6%	3
4%	6
0%	7

wants to issue an invoice for outside
some changes must be done:

- VatCategory: 7 (0% VAT)
variable must be inserted in the line

"vatExemptionCategory": 7

- A new line item must be inserted which will reflect the vat amount for the invoice with classification_category: 1_95 (Other Income-related Information)

```

.....{
.....  "lineNumber": 2,
.....  "netValue": "24.00",
.....  "vatCategory": 7,
.....  "vatAmount": "0.00",
.....  "incomeClassification": [
.....    {
.....      "classificationCategory": "category1_95",
.....      "amount": "24"
.....    }
.....  ],
.....  "vatExemptionCategory": 7,
.....  "quantity": 1,
.....  "measurementUnit": 1
.....}

```

2. All the data that the issuer inserted into the "incomeClassification" array must be included in the "invoiceSummary" just like that:

```

.. "invoiceSummary": {
..... "totalNetValue": "124.00",
..... "totalVatAmount": "0.00",
..... "totalWithheldAmount": 0,
..... "totalFeesAmount": 0,
..... "totalStampDutyAmount": 0,
..... "totalDeductionsAmount": 0,
..... "totalOtherTaxesAmount": 0,
..... "totalGrossValue": "124.00",
..... "incomeClassification": [
.....   {
.....     "classificationCategory": "category1_1",
.....     "classificationType": "E3_561_005",
.....     "amount": "100"
.....   },
.....   {
.....     "classificationCategory": "category1_95",
.....     "amount": "24"
.....   }
..... ]
.....}
..

```

3. More clear examples for all the invoice categories can be found [here](#)

Response from the call

```
{
  "response": [
    {
      "index": 1,
      "invoiceUid": "*****",
      "invoiceMark": "*****",
      "classificationMark": null,
      "cancellationMark": null,
      "authenticationCode": "*****",
      "errors": {
        "error": []
      },
      "statusCode": "Success"
    }
  ]
}
```

Sending Invoices-Receipts (html form)

After the successful sending of the invoice in json form you will need to send also the html with a specific template. In order to send the html which is described below you will need to use the information of the invoice (mark, uid, auth code) from the last call which you must store.

Procedure

The method of this call is: POST

The endpoint of this call is: <https://wp-mydataapi.ddns.net/v2/invoice/html>

It also requires Basic Authorization with credentials:

Username: ***** (The username from the first call)

Password: ***** (The password from the first call)

The structure of the body must be form-data.

The content of the body should have the following data:

Body (form-data):

mark (Text): *****

type (Text): ZIP

invoiceFile (File): *****

photoID (Text): ***** (Optional)

email (Text): ***** (Optional)

sendEmail (Text): ***** (Optional, Boolean (true, false))

Explanation of the body data

- “Mark” is the number from the response of /invoices/send call
- “invoiceFile” is the zipped file that contains the html
- “photold” (optional) is the photold of the logo of the company which is explained below
- “email” is the email of the recipient who should receive the receipt
- “sendEmail” if it is true the email will be send, if it is false it will not be sent

HTML construction

As mentioned before you will need to structure an html with the invoice information in a specific template that can be found [here](#). In order to construct

the qr code you have to embed a link into the qr code which will redirect to our page where the html is stored so the customer and the constructor are able to see it anytime they want. The link must be structured this way:

<https://www.primer.gr/mydatasearch/{the uid of the invoice}>.

Example



ISSUER'S COMPANY NAME
 COMPANY ACTIVITY
 ADDRESS
 ΑΦΜ: 800434990
 ΔΟΥ: NEAS IONIAS

INVOICE TYPE	INVOICE NUMBER	DATE	TIME
WHOLESALE INVOICE	000956	14/09/2021	10:41

CUSTOMER ID : 2
 NAME : dimitris lalas
 ACTIVITY : jo
 VAT NUMBER : 800434990
 DOY : ΑΘΗΝΩΝ Ι'

CITY : ΕκείΠουΕίναιΤαΓκαφρα
 ADDRESS : χalkis Διαμέρισμα
 SHIPPING ADDRESS : χalkis Διαμέρισμα

PRODUCT ID	DESCRIPTION	PIECES	UNIT	PRICE PER UNIT	SALE	VAT %	PRICE BEFORE TAXES	TOTAL AMOUNT
930	Product Thirteen tax	1	PIECES	100	0	13	100	113

COMMENTS:

SUM OF UNITS: 1

TOTAL NO DISCOUNT	113.00 €
TOTAL DISCOUNT	0 €
TOTAL WITHOUT VAT	100 €
TAXES	13 €
TOTAL SUM	113.00 €
TOTAL PAYMENT	113.00 €



<https://primer.gr/searchinvoice>
 Provided by Primer Software P.C.

uid: 4C5C1EDEFD1A097844337168DE69508A53307974 mark: 400001838271676 authcode: E66E6C4EC7B9068E3E9A991B740A8897348C896C

Photo Id and LOGO of the company

As you saw from the picture it has a logo of a company at the top left corner. In order to accomplish that you need to do the following call.

Sending the LOGO

Procedure

The method of this call is: POST

The endpoint of this call is: <https://wp-mydataapi.ddns.net/v2/invoice/photo>

It also requires Basic Authorization with credentials:

Username: ***** (The username from the first call)

Password: ***** (The password from the first call)

The structure of the body must be raw-json.

The content of the body should have the following data:

String (A photo encoded in Base64)


Response from the call

photold: *****

MyData API Documentation

Example

<https://wp-mydataapi.ddns.net/v2/invoice/photo>

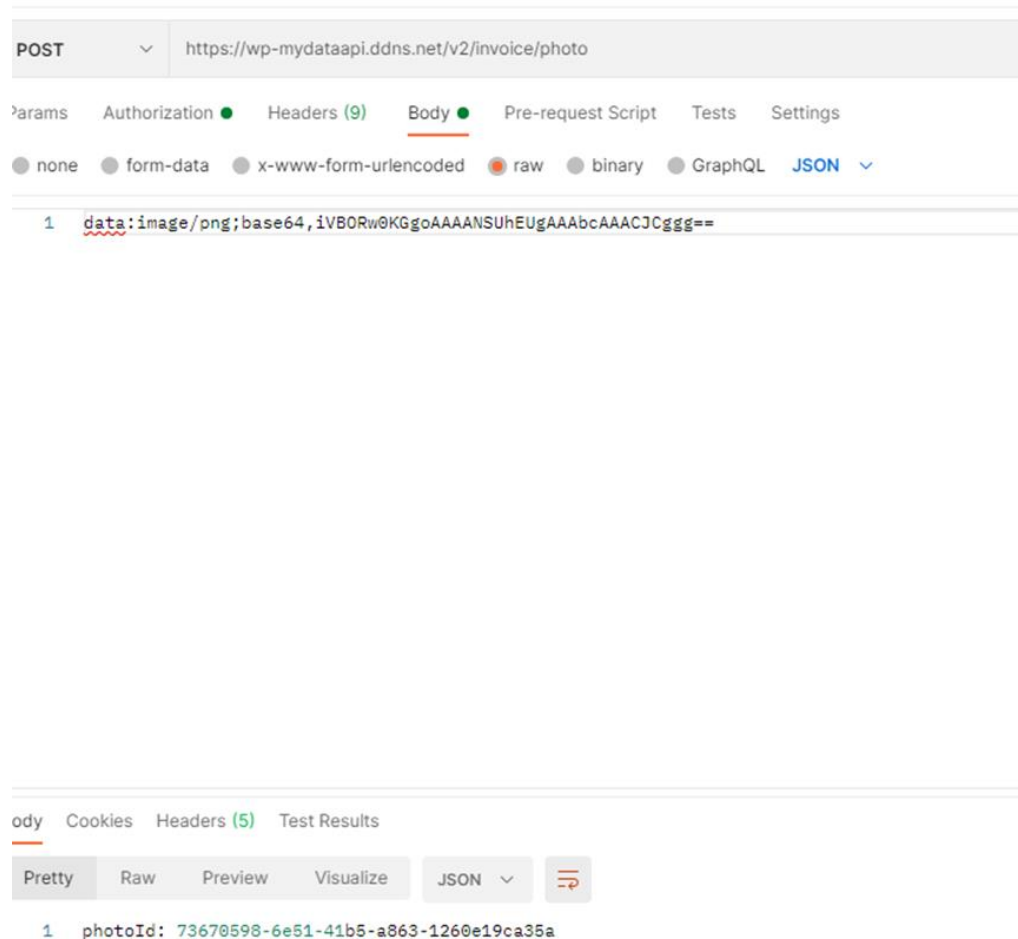

Sending the HTML with LOGO

After the successful sending of the photo, you have to store the `photoId` that you got as a response and implement that into the html instead of the actual LOGO in that way:

c1f7242b-57c9-429f-
a04d-5d93b8e064ce

ISSUER'S COMPANY NAME
COMPANY ACTIVITY
ADDRESS
ΑΦΜ: 800434990
ΔΟΥ: NEAS IONIAS

INVOICE TYPE	INVOICE NUMBER	DATE	TIME
WHOLESALE INVOICE	000966	17/09/2021	12:19

PRODUCT ID	DESCRIPTION	PIECES	UNIT	PRICE PER UNIT	SALE	VAT %	PRICE BEFORE TAXES	TOTAL AMOUNT
931	Product Nine tax	1	PIECES	100	0	9	100	109

ΕΝΔΕΙΧΝΕΤΑΙ ΤΟ ΛΟΓΟΤΥΠΟ ΤΗΣ ΕΤΑΙΡΕΙΑΣ

COMMENTS:



SUM OF UNITS: 1

TOTAL NO DISCOUNT	109.00 €
TOTAL DISCOUNT	0 €
TOTAL WITHOUT VAT	100 €
TAXES	9 €
TOTAL SUM	109.00 €
TOTAL PAYMENT	109.00 €

<https://primer.gr/searchinvoice>
Provided by Primer Software P.C.

uid: 1317C251449DB22A33F8D7D5F61EE134703E97DA mark: 400001838972470 authcode: 595F9D38A0A75B322E63F3CF3A0E6CB40803A133

Caution! This is the only form that the API accepts the html to be send especially if you want to use the company LOGO!

Resending Email

Procedure

The method of this call is: POST

The endpoint of this call is: <https://wp-mydataapi.ddns.net/v2/invoice/sendEmail>

It also requires Basic Authorization with credentials:

Username: ***** (The username from the first call)

Password: ***** (The password from the first call)

The structure of the body must be raw-json.

The content of the body should have the following data:

uid (String): ***** (The uid of the receipt)

mark (Long): ***** (The mark number of the receipt)

email (String): ***** (The email of the recipient)

Example:

```
{  
  "uid" : "90E754BE474CFF432DB3F15DC0FB04733A07860F",  
  "mark" : 400000198388211,  
  "email" : "tests@primer.gr"  
}
```

Response from the call

Email status: Sent (or Not Sent)

Error Handling with the connection

For every call you want to send to the Production API you must establish first a connection with a timeout of 3 seconds. If the Production API is down and doesn't respond to the connection there will be a Backup API for your needs. In order to establish connection to the Backup API you will have to change every endpoint to the other one. If in the meantime of sending an invoice you only sent the json to the Production API and it went down then the corresponding html must be sent only to the Production API when it is up again. The same principle is applied to the backup as well. The HTML should be sending to the same API that the corresponding JSON has been sent.

Error Handling with the sending of invoices (json)

If both of the APIs are down or your service is down and the issuer wants to issue an invoice from another day, he will be able to do that with a small modification. At the json for the call: /invoices/send you will have to add the "transmissionFailure":1 above the issuer array. With this method the invoice will be flagged and the API will send the invoice to AADE with the desired date.

CAUTION! You must be very careful and keep track of the correct numbering while you use this tool.

There is also a case when the constructor sends a json and in the meantime that the API connects with AADE there might be a connection problem and the constructor can't take a response back but the invoice is sent successfully to AADE. So, if you try to send this json later with the transmissionFailure tool you will get a response that this invoice already exists. In this case you should call the GetInvoicesStatus call which is described below and reconstruct the html with the data response from this call.

Storing the invoices

After a successful sent of an invoice with both calls: `/invoices/send`, `/invoices/html` it is possible to see the invoices from our service. Every invoice that the API gets is being stored to our website and you will be able to search every invoice you want with the uid or the mark in this [URL](#).

Prerequisites for constructors

Another thing you must provide is having at least the opportunity of sending the invoices in html form to your customers via email.

Testing Environment

At this time the Test API is enabled and you can test everything that is mentioned before. You have to replace “`https://wp-mydataapi.ddns.net`” to “`https://test-mydataapi.ddns.net`” for each call.

CAUTION! For testing purposes, you will have to add to your html file the “INVALID” header exactly as shown to the examples above.

Error Handling with the sending of invoices (html)

If for a specific invoice the json is sent successfully for the call `/invoices/send` and without the successful sending of the html the API will block the sending of other json with a descriptive error message until the correct html is send. In order to resend the html, you need to use another call `/invoices/getInvoicesStatus` described below. With that way you validate the data (mark, uid, auth code) of the invoice that you stored with the data (mark, uid, auth code) that the API has for this invoice. If the data differ you must use the data that the API has and restructure the html with this data. Additionally, in that case you have to send us an email to this address: mydataapi@primer.gr that describes exactly what happened. The content of the email must contain the following information regarding this example:

For Invoice with jsonCode: 19387 Mark number 400001838364909, uid 827DD308BC29F421E3E1C4B62D37C3CACCD80342 and auth code C9B86F3F94E66702C75487E4D23AB58889FB52F9 are different than the Mark number 400001838364908, uid

827DD308BC29F421E3E1C4B62D37C3CACCD80342, auth code C9B86F3F94E66702C75487E4D23AB58889FB52F9 received from the call 'GetInvoicesStatus'.

In addition, If the API responds with null for the data of the invoice you must use the data that you stored for the creation of the html and you must also send an email that describes this situation just as shown before.

Finally, If the API responds with null data and you have null data in your database for the current invoice then the API blocks every new invoice and you must contact us and also send us an email.

GetInvoicesStatus Call

Procedure

The method of this call is: POST

The endpoint of this call is `https://wp-mydataapi.ddns.net/v2/invoices/getInvoicesStatus`

It also requires Basic Authorization with credentials:

Username: ***** (The username from the first call)

Password: ***** (The password from the first call)

The structure of the body must be raw-json.

The content of the body should have the following data:

```
[{"jsonCode"}]
```

Explanation of the body

The jsonCode of each invoice has a specific structure:

```
{"date of  
invoice"}{"series"}{"aa"}{"invoicetype"}{"counterpartVat"}{"issuerVat"}{"totalGrossValue"}
```

If the invoice Type is retail receipt, then the counterpartVat gets a default value of "9999999999".

MyData API Documentation

Example:

```
["2021-10-15EMPTY1691.1999999999049185062124.00"]
```

Response from the call

```
{  
  "jsonCode": "*****",  
  "sent": true,  
  "uid": "*****",  
  "mark": "*****",  
  "authenticationCode": "*****"  
}
```