MDPI

Article

Seeing the Process Through the Worker's Eyes: Event Logs from Egocentric Factory Videos

Alessandro Berti [1,*] and Wil M. P. van der Aalst [1,2]

[1] Process and Data Science (PADS), RWTH Aachen University, Aachen, Germany; a.berti@pads.rwth-aachen.de (A.B.); wvdaalst@pads.rwth-aachen.de (W.M.P.v.d.A.)
[2] Celonis, Munich, Germany
* Correspondence: a.berti@pads.rwth-aachen.de

Abstract

Manual factory work often leaves few records in information systems. We present a construction design and data resource that connect egocentric video to retrospective process analysis. The design first narrates recordings, aggregates descriptions across workers, and induces shared factory vocabularies. It then assigns interval events using those vocabularies and consolidates the logs. Pretrained model parameters remain fixed, while the vocabulary adapts to each available factory corpus. Generation uses no task-specific fine-tuning or labeled event examples; assessment uses an author audit and an analyst-defined category map. The linked artifacts include 322 per-video logs with 10,698 events from 59 workers in six factories. All events have the required fields and permitted labels. An existing audit finds full transcript support for 36 of 42 sampled events and partial support for six; this does not establish accuracy against video. Descriptive calculations assign 10.8% of retained summed event duration in one factory to defect patching, already described in its report. They also show why a zero transport category can coexist with 101 recorded transport events: categories are assigned from process context. Worked examples explain how vocabulary, label assignment, event boundaries, and analytical mapping affect measurements. The inferred resource supports inspection and hypothesis generation; video accuracy, causal diagnoses, and intervention effects remain unmeasured.

Keywords: process mining; inferred event logs; egocentric video; measurement; data quality; manufacturing; foundation models

1. Introduction

Process mining uses timestamped event records to study operational processes [1]. Many manual factory tasks leave no such records. An information system may record an order or machine checkpoint while missing how a worker loads parts, moves material, checks a component, or switches tools. Video can make some of this work observable, but it does not directly provide the case identifiers, labels, and event boundaries that process mining needs [2].

Egocentric video records work from the camera wearer's perspective. The public Egocentric-10K resource provides factory recordings of this kind [3]. Figure 1 illustrates the viewpoint. Turning recordings into event logs requires decisions about what constitutes an event, which names to use, and how to interpret time. These are measurement decisions as well as extraction tasks. A well-formed log can still misrepresent the work if a behavior is omitted, a boundary is estimated poorly, or an analytical category hides a recorded action.

Received:
Revised:
Accepted:
Published:

Copyright: © 2026 by the authors. Submitted to *Systems* for possible open access publication under the terms and conditions of the Creative Commons Attri- bution (CC BY) license (https://creativecommons.org/licenses/by/4.0/).



Figure 1. Example frames from Build AI's Egocentric-10K resource [3]. They illustrate the camera viewpoint, rather than the accuracy of the derived event labels.

Video-to-log construction already includes language-model-based methods. Vid2log uses a pretrained vision-language model to interpret video and construct event data [4]. First-person workflow extraction also predates this study [5,6]. The question here is how to build a shared event representation from the available factory recordings and explain its consequences for process analysis. In particular, naming an activity, assigning an episode to that name, and mapping the label into a measurement category are separate decisions. A shared vocabulary makes within-factory comparison possible, but does not by itself make the resulting measurements accurate or comparable across tasks.

We study a five-stage pipeline that produces timestamped transcripts, worker summaries, factory reports and vocabularies, per-video events, and merged logs. It induces a vocabulary across the recorded workers in each factory before assigning event labels from their transcripts. Its application covers six factories, 59 worker identifiers, and 322 recordings. The resulting 10,698 events are inferred operational episodes. They do not provide a complete census of production cycles or manufactured items.

The paper makes three contributions:

- **A construction design.** We specify how descriptive narration, aggregation across workers, factory vocabulary induction, and vocabulary-constrained extraction produce interval events. The foundation-model parameters remain fixed; the representation adapts to the available factory corpus. Formal definitions and implementation checks make the event and case choices explicit.
- **A reusable resource.** We link narrations, worker summaries, factory vocabularies, inferred intervals, consolidated logs, and analysis artifacts. This collection supports inspection of the construction steps and reuse of the intermediate text. It is not an independently annotated ground-truth benchmark.
- **Findings about representation and measurement.** Existing examples show how event boundaries, case construction, and category maps affect duration and sequence descriptions. In factory 003, transport is recorded but disappears from the transport category under the chosen process map. We separate these findings from transcript consistency, visual accuracy, and operational claims that require further evidence.

This journal revision develops these contributions using existing outputs and author judgments. It adds no model runs, annotations, datasets, ablations, or discovery settings.

Appendix A of the Additional Material distinguishes new methodological substance from fuller reporting of the existing study.

Four research questions organize the paper. **RQ1:** How are the inferred logs constructed, and which structural properties do the released records satisfy? **RQ2:** How well do event timing and meaning agree with the generated transcripts? **RQ3:** Which descriptive analyses do the logs support, and what limits their operational interpretation? **RQ4:** What general measurement lessons follow from the representation, temporal rules, and shared evidence? Table 1 links each question to its evidence.

Table 1. Research questions, evidence, and limits. The full revision claim register is released in `paper/revision/claim_evidence.csv`.

Question and section	Supporting artifacts	Finding	Main limit
RQ1, Sections 4 and 7.1	Scripts, prompts, reports, all per-video CSVs	Fields, ordering, and vocabulary membership can be checked	Valid structure does not imply correct observation
RQ2, Section 7.2	Transcripts, logs, 84 archived audit judgments	Partial temporal and semantic consistency	No independent video reference; timestamp anomalies
RQ3, Section 7.4	Frozen events, process-category map, reports	Composition, sequence, and worker-profile descriptions	Unequal windows, task mixes, and category meanings
RQ4, Section 8	Worked examples, merge code, metric definitions	Aggregation can hide behavior; missing time has two-sided effects	Conceptual deductions do not estimate unknown errors

2. Background and Related Work

2.1. Unstructured observations as process data

König et al. [7] review how unstructured data enters process mining, including the construction of logs from text, images, and video. Diba et al. [8] distinguish extraction, correlation, and abstraction. These tasks require decisions about which observations become events, how events are grouped, and which concepts describe them. Andrews et al. [9] make data quality part of construction in RDB2Log, which helps analysts derive logs from relational data. Our setting adds a chain of inferred descriptions and labels before a log exists. We examine how choices along that chain affect the resulting measurements.

2.2. Video and first-person workflow understanding

Petersen et al. [5] model and track manual workflows from first-person video to support augmented-reality instructions and feedback during task execution. Pham and Xiao [6] extract assembly steps and operations with semantic descriptions, without pre-labeled training data or pre-trained classifiers. These studies establish first-person workflow understanding as an antecedent. Their goals include following a demonstrated task and recovering its steps.

Our objective is retrospective process analysis across recorded workers. We construct event data to describe time composition, changes between operational categories, and variation in recorded work. A shared vocabulary lets these descriptions use the same names within a factory. It does not establish that workers performed equivalent tasks or that a category transition was a physical interruption. Egocentric video provides access to the wearer's work; the analytical objective and event construction define its role here.

Video process mining also has several established designs. Knoch et al. [10] use hand trajectories and clustering at a camera-equipped assembly workstation. Kratsch et al. [2] develop a reference architecture, and Lepsien et al. [11] combine object tracking, action detection, and abstraction. SnapLog [12] uses pretrained visual representations, temporal

segmentation, and a classifier adapted with labeled examples. Its evaluation includes TUM Kitchen and egocentric EPIC-KITCHENS recordings. Thus, camera placement and supervision must be compared for individual methods. The sensor-data review by Brzychczy et al. [13] places these efforts within the broader problem of converting observations into process events.

2.2.1. From video descriptions to process events

Dense video captioning already combines temporal localization with natural-language descriptions [14]. Timestamped narration alone is therefore an established output. Process analysis requires further choices: reusable activity names across recordings, event granularity, selection of operationally relevant episodes, observational case identifiers, source links, and rules for interpreting durations and frequencies.

S1's instruction to merge stable repetition illustrates why these choices matter. Several repeated actions can become one narrated interval and later one event, so event frequency need not equal action frequency. Conversely, the existing foundry example in Section 7.3 turns one 31-second description into two events with shared factory labels and an inferred internal boundary. The added structure enables calculations, while changing what each row and duration represents.

2.3. Video-to-log and language-model-based construction

Gavric et al.'s Vid2log [4] is a close predecessor. It uses LLaVA to infer a domain and relevant activities from selected frames, obtains textual event information, and combines video-derived data with conventional logs through temporal and semantic matching. Both methods use natural language as an interface between visual observations and process event data. Our design first narrates recordings, aggregates descriptions by worker, and induces shared factory label lists before assigning events from the original transcripts. This ordering makes the available factory corpus part of the representation used to analyze it. Vid2log studies log richness and an assembly use case; our assessment examines transcript consistency and the consequences of event and category choices for duration and sequence analyses. These are specific design and assessment contributions, rather than a claim to introduce language-model-based video-to-log construction or to be the first to induce a shared vocabulary.

Kecht et al. [15] use pretrained natural language inference to assign supplied topics and activities to customer-service messages. They do not train a new language model, but use labeled messages to select classification thresholds and refine hypotheses. Message identifiers and timestamps are retained. Our method instead estimates episode boundaries from generated video descriptions and induces label lists from the factory material. Shirali et al. [16] also apply LLMs to physical observations: they abstract IoT readings into high-level events and integrate logs from multiple sensor sources. LLM use for physical-process data therefore predates this study. Work on process-mining assistants [17] and database-query generation [18] addresses neighboring tasks with different inputs and outputs.

Seeth et al. [19], an arXiv preprint, study fine-tuning for text-to-log generation. They pair generated reports with source traces, supply permitted activities and attributes, and evaluate both traces and discovered process models against source-log references. They report benefits from fine-tuning over zero-shot and few-shot prompting in that setting. Our models receive no task-specific parameter updates; adaptation takes place through staged context and a vocabulary induced from each factory corpus. A permitted label list is shared by both designs and is not itself the distinction. The studies differ in source material, reference data, and evaluation targets. Our assessment establishes what the

reported procedure supports, not that fine-tuning is generally unnecessary. Numerical scores from these studies cannot be ranked as equivalent measures of extraction accuracy.

Tables 2 and 3 compare the closest transformations using the same method rows. Table 9 separates the forms of model adaptation and human input in our study.

Table 2. Closest construction methods: purpose, input, vocabulary, adaptation, and output. "Not reported" identifies information not established by the inspected source, not an absent capability.

Method	Purpose and input	Vocabulary origin	Task-specific adaptation	Output
Vid2log [4]	Construction and enrichment from video, with conventional logs	Domain and activity prompts	Pretrained LLaVA; domain prompts; parameter updates not reported	Combined event log
Kecht et al. [15]	Construction from customer-service conversations	Supplied topics and activities	Pretrained NLI; labeled threshold calibration and hypothesis selection	XES log
SnapLog [12]	Event discovery from video	Classes supported by labeled examples	Pretrained visual models; classifier adaptation	Events with labels or label distributions
Seeth et al. [19]	Construction from textual reports	Allowed activities from source logs	Pretrained LLMs; supervised fine-tuning compared with prompting	XES traces
This resource	Construction from egocentric factory video	Shared lists induced from worker summaries	Fixed pretrained models; factory-specific context and labels	Interval CSVs and linked text

Table 3. Time, case relationships, and evaluation references for the same methods. A source timestamp, an estimated interval, and an artificial ordering carry different evidence.

Method	Origin of temporal information	Origin of case/entity relationships	Evaluation reference
Vid2log	Frame positions and prompted temporal relations	Temporal/semantic matching and resource-based case inference	Assembly case study and log-richness assessment
Kecht et al.	Recorded message timestamps	Supplied message and conversation identifiers	Labeled messages for classification; process discovery demonstration
SnapLog	Segmented frame sequences	Video sequences as traces	Video datasets with action and boundary annotations
Seeth et al.	Timestamps extracted from generated reports	Report-to-trace pairing from source logs	Source traces and process-level comparisons
This resource	Estimated video-relative intervals; S4 may split spans; synthetic S5 timeline	Source factory/worker/video metadata; chosen video or worker grouping	Generated transcripts and author audit; computations on inferred logs

2.4. Event abstraction and semantic consistency

The review by van Zelst et al. [20] explains how event abstraction changes process granularity and distinguishes methods by matters including supervision, input, and uncertainty. Here, three questions need separate treatment: where an episode begins and ends, which reusable activity classes exist, and which class is assigned to each episode. S1 mainly supplies candidate intervals, S2 and S3 construct the classes, and S4 assigns events and can revise boundaries. Section 4.1 maps these tasks to the implementation.

Inducing classes and assigning instances can fail in different ways. A useful concept can be missing from the vocabulary, or an available concept can be assigned incorrectly. A later category map can also hide a correctly recorded label. The activity and process fields are two label dimensions; the implementation does not establish a parent-child hierarchy.

This distinction is necessary to explain factory 003, where transport activities occur under process contexts that are mapped to other operational categories.

2.5. Construction, enrichment, and integration

Table 4. Neighboring event-data tasks, distinguished by their starting points and intended results. A system can perform more than one task.

Task	Starting point	Intended result
Construction	Observations or documents without a suitable log	An initial event representation
Enrichment	An existing log and additional information	Added or corrected events and attributes
Integration	Multiple sources describing related behavior	A combined representation with resolved correspondences

Text2EL+ [21] enriches existing logs with events and attributes extracted from text, using semantic and contextual validation and expert guidance. Sturm et al. [22] instantiate parsing, abstraction, extraction, integration, and enrichment using CRM data, email metadata, and call transcripts. Their evaluation involves a sales process and a domain expert. Table 4 separates the tasks these designs can combine.

Our main task is construction. S1 to S4 derive an initial representation; S5 consolidates it using source filenames, factory and worker identifiers, and a stated ordering rule (Section 5.4). It does not resolve product correspondences between independently recorded systems. Videos, narrations, and reports are successive representations of the same originating observations. Agreement among them does not provide the independent corroboration that separately recorded enterprise or sensor sources could supply.

2.6. Quality, uncertainty, and relational representations

Suriadi et al. [23] organize recurring event-log imperfections. Our contribution to this concern is an account of how narration, vocabulary construction, assignment, and consolidation can introduce or propagate them. Section 8.2 connects each transformation to an existing check or example and its measurement consequence.

Quality annotations and explicitly uncertain events serve different purposes. Goel et al. [24] retain data-quality information for use during analysis. Pegoraro et al. [25] represent uncertainty explicitly and compute conformance bounds. SnapLog can retain candidate-label distributions [12]. Our events instead have single-valued activity and process assignments. The audit records particular disagreements, and the five-second boundary tolerance is an evaluation rule. Neither provides calibrated event probabilities or bounds on total downstream error. Structured quality flags and explicit alternatives are possible extensions, with different evidence requirements.

Esser and Fahland [26] represent events and entities across multiple dimensions in graph databases. This complements the case-choice concerns of object-centric process mining [27]. Our worker and video relationships support alternative observational views. Product identities and cross-worker product trajectories require additional evidence; a change in storage format cannot establish them. Similarly, the range of industrial process-mining goals [28] makes it necessary to distinguish descriptions of recorded work from conclusions about production performance.

The question addressed here is how a shared representation, built from the available factory recordings before event assignment, supports retrospective analysis and shapes its results. RQ1 examines that construction and its structural properties. RQ2 checks the transcript-to-event transformation. RQ3 studies the supported calculations, and RQ4 explains their dependence on vocabulary, boundaries, case rules, and analytical categories.

Together, these questions connect the construction design, artifact release, and measurement findings to specific antecedents without claiming a comparative accuracy advantage.

3. Problem Definition

Let F be a set of factories, W_f the worker identifiers associated with factory f, and V_w the recordings associated with worker w. Each video v has an underlying duration D_v, which need not be available in the derived archive. A transcript T_v is an ordered collection of entries (s_i, e_i, x_i), where x_i describes the interval from s_i to e_i. These endpoints and descriptions are model outputs. They are not independent annotations of the source video.

For each factory, the pipeline induces an activity vocabulary A_f and a process vocabulary P_f. An interval event is

$$e = (v, w, f, t_s, t_e, a, p), \qquad a \in A_f, \quad p \in P_f. \tag{1}$$

The tuple makes provenance explicit: the CSV's path identifies v, while w and f are stored in each row. The estimated endpoints t_s, t_e are relative to the video. A case function $\kappa : E \to K$ groups events into traces; it is an analytical choice. The construction problem is to derive E, A_f, and P_f from the videos while retaining enough source information to inspect and interpret the result.

Table 5. Notation and intended meaning.

Symbol	Meaning
f, w, v	Factory, worker, and video identifiers; identifiers do not certify roles or task equivalence
D_v, T_v	Source duration and generated transcript; the former is unavailable in the released subset
A_f, P_f	Two separate permitted label lists for factory f
t_s, t_e, d_e	Estimated video-relative start, end, and duration $d_e = t_e - t_s$, in seconds
$\kappa(e)$	Selected case identifier, such as the source video
$g_f(p)$	Analyst's mapping from process label to operational category
C_v, S_v	Interval-union event duration and endpoint span used in coverage diagnostics

An event represents an operational episode. One episode may summarize many repeated actions, and several events may divide a single narrated interval. It need not be one item, one production cycle, or one complete process instance. Desirable properties include faithful descriptions, meaningful boundaries, appropriate labels, and sufficient coverage. The implementation enforces only a subset: parseable offsets, end not before start, required values, and membership in the separate vocabularies. Section 4.3 distinguishes these checks from intended properties.

3.1. Activity, process context, and analytical category

An *activity* answers what action is performed. A *process context* identifies the broader operation to which the extractor assigns it. An *operational category* answers how an analyst groups the action or context for a particular question. These concepts are separate. The implementation checks $a \in A_f$ and $p \in P_f$ independently. It does not enforce a compatibility relation $H_f \subseteq A_f \times P_f$ or a process-to-activity hierarchy.

The current time analysis uses $g_f(p)$, not an activity-based mapping. Thus, transport within surface finishing can receive the category assigned to finishing. Figure 2 gives an exact released example. An explicit compatibility relation or a category rule using (a, p) could improve future analyses, but neither was enforced in this extraction. Reclassifying all activities would define a different analysis and is not part of the present revision.

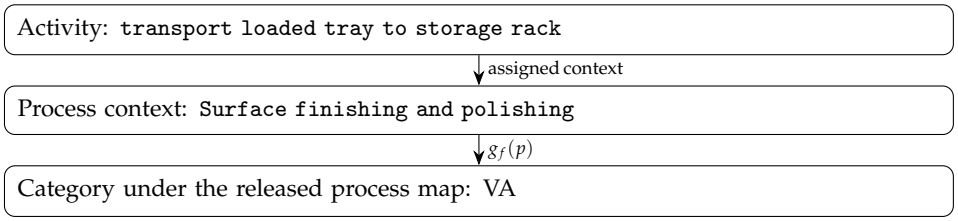


Figure 2. A transport action can contribute to VA time under a process-based category rule. Source: factory 003, worker 001, recording 00001, CSV data row 2, from 00:03:52 to 00:04:00 (8 seconds). The action is recorded; the category aggregation hides it.

4. Pipeline and Design Rationale

The released scripts implement five stages. S1 uses video and a transcription prompt. S2 combines a worker's transcripts. S3 combines a factory's worker summaries. S4 uses the original transcript again, together with the factory vocabularies and the compact worker entry from the S3 report. S5 merges the resulting CSVs. Figure 3 shows these dependencies. Reports and logs share evidence, so their agreement is not independent validation.

Adaptation takes place in the context and vocabulary, while the foundation-model parameters remain fixed. Each available factory corpus contributes to its own label lists through S2 and S3, and S4 then uses those lists to label recordings from that corpus. The six-factory assessment therefore applies the same construction procedure to six separately induced representations. It is a retrospective use of the available material, not an evaluation of a fixed vocabulary on a previously unseen factory. Prompts also supply analyst choices about operational relevance and granularity.

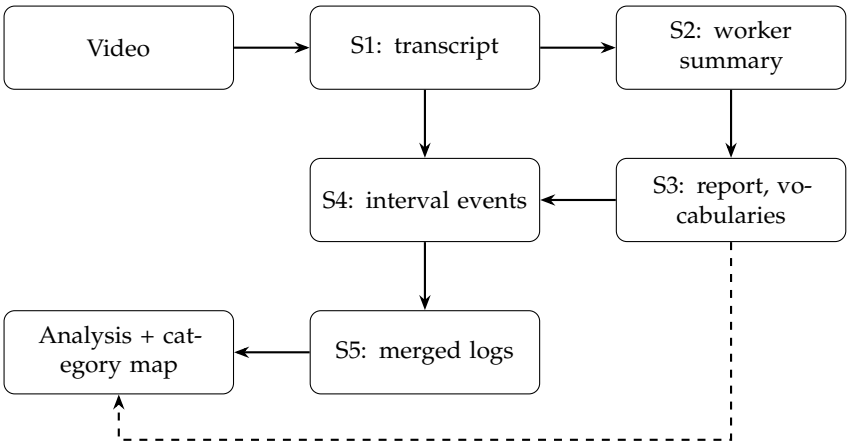


Figure 3. Evidence dependencies in the implemented pipeline. S1 to S3 use Gemini requests; S4 uses a text-only OpenAI request. The analysis map is an author-defined interpretation. An error in the transcript can affect both the narrative report and the extracted log.

4.1. Vocabulary construction as event abstraction

Event abstraction concerns the level at which observations represent process behavior [20]. Table 6 separates three decisions in our implementation. Constructing a reusable class and assigning an event to it are different tasks: a missing concept and a mistaken assignment require different checks. The process list supplies a second label dimension, with no enforced parent-child relation to the activity list.

Table 6. Conceptual tasks and their roles in the five-stage construction. The stages interact; this is not a claim that each task has an isolated error rate.

Task	Main stage	Decision made
Temporal segmentation	S1	Describe candidate episodes with estimated boundaries; merge stable repetition
Activity-class construction	S2 and S3	Aggregate worker descriptions and induce reusable factory activity and process lists
Event-instance assignment	S4	Select permitted labels for episodes; retain or split transcript intervals and estimate internal boundaries

4.2. Execution units and failure behavior

Table 7 states the input, output, and failure behavior for each execution unit. The algorithm below gives their dependency order.

Table 7. Stage specification from scripts 01 to 05. A nonempty text output is not a validation of its factual content.

Stage; unit	Inputs and context	Output	Failure and reuse behavior
S1; video	Uploaded video; transcription prompt	One chronological text file	Keeps existing files; retries transient failures; rejects an empty response; attempts deletion of uploads
S2; worker	All saved transcripts in one request; filenames omitted from the bundle	Worker report	Missing or empty input raises an error; empty response rejected; keeps existing output unless overwrite is set
S3; factory	All worker summaries in one request, with worker identifiers	Factory report with two label lists and compact worker entries	Same text and reuse checks as S2; malformed section structure may fail later in S4
S4; transcript	Transcript; two label lists; compact S3 worker entry, or a missing-context marker	Per-video CSV	Missing lists or invalid events raise errors; an empty event list is valid; existing CSV kept unless overwrite is set
S5; worker, then factory	CSVs in sorted filename order	Worker and factory CSVs	Checks timestamp columns and consistent headers; empty files add no time; keeps existing output if its schema matches

```
for each selected factory f:
    for each available video v:
        T[v] = reuse existing transcript or S1(video[v], prompt1)
    for each worker w:
        B = concatenate all T[v] for w, without filenames
        R[w] = reuse existing summary or S2(B, prompt2)
    F[f] = reuse existing report or S3(all R[w] for f, prompt3)
    A, P, worker_context = parse the required sections of F[f]
    for each transcript T[v]:
        context = T[v] + A + P + worker_context[w]
        E[v] = reuse CSV or normalize(S4(context, prompt4))
    for each worker w:
        offset = 0
        for each CSV v in sorted filename order:
            append E[v] shifted by offset; keep local offsets
            if E[v] is nonempty: offset += max end(E[v])
    concatenate worker logs into the factory log
```

Listing 1: Algorithm 1: implemented dependency order. API retries surround requests; this pseudocode does not add windowing or new validation.

S1 asks for a new timestamped entry when an action, object, location, or interaction changes. It asks for repeated stable work to be summarized once and for uncertainty to be stated briefly. These are instructions to the model. S1 does not check whether each visible change was narrated or whether the timestamps match the video.

S2 and S3 compress large text bundles into summaries. This makes factory-wide vocabulary induction possible, but uncommon actions can be lost. The implementation does not automatically split long requests into windows, reconcile separate summaries, or check coverage against all transcript spans. S4 partly bypasses this compression by reading each original transcript, although it must still use the induced vocabularies.

S4 requests a strict JSON schema with estimated start and end times, activity, and process. Its local parser can also accept a list, strip code fences, recognize fallback time keys, and parse two-component offsets or numeric seconds. It normalizes label case and surrounding quotes, checks membership, rejects end-before-start intervals, and sorts rows by start, end, activity, and process. It allows zero-duration events and overlaps. It does not check video bounds, full temporal coverage, the truth of an activity, or compatibility between the activity and process. The archive contains CSV outputs, not the original S4 JSON responses.

S1 to S3 default to `gemini-3.1-pro-preview`; S4 defaults to `gpt-5.4`, requests high reasoning effort, and permits up to 100 concurrent extraction tasks. These are recoverable code settings. The existing manuscript identifies the corresponding model families, but per-request execution records are unavailable. No temperature, token limit, seed, cost, or runtime is inferred from missing records. Appendix B of the Additional Material specifies the distinction between code defaults and historical execution evidence.

4.3. Requests, guarantees, observations, and expectations

Table 8. Four levels of evidence for pipeline properties.

Level	Example	What can be concluded
Prompt instruction	Mark uncertainty; include handling and waiting when visible; split meaningful changes	The behavior is requested. Compliance and completeness require separate assessment.
Software constraint	Parse event fields; canonicalize permitted labels; reject negative intervals; sort rows	Accepted outputs satisfy these checks. Semantic correctness and accurate time remain open.
Observed artifact property	All 10,698 rows have required values and permitted labels; 35 adjacent overlaps are detected	These statements hold for this release. They are not promises about future runs.
Untested design expectation	Summaries help vocabulary consistency; closed labels help interpretation	These are rationales. No ablation or comparative benefit estimate is available.

"Automated extraction" means that generation uses no task-specific fine-tuning or labeled event examples. It does not mean that the complete study is free of human judgment. Table 9 identifies the different inputs. "Constrained" refers to the separate permitted label lists. "Validated" is used only with a named check, never as a general claim of visual accuracy.

Table 9. Supervision and human input in this study. Unlike labeled threshold calibration in Kecht et al. [15] or parameter adaptation in SnapLog and Seeth et al. [12,19], generation here adapts through prompts and induced context.

Dimension	Role in the present procedure
Model pretraining	General-purpose pretrained models provide visual and language capabilities
Task-specific parameter updates	None in S1 to S4; no model is trained or fine-tuned on these factory recordings
Labeled examples	No labeled event examples for training, prompting, or calibration; S1 includes an illustrative narration-format example
Vocabulary origin	S3 induces two lists from the available worker summaries; S4 checks list membership
Domain and analyst input	Authored prompts define relevance and segmentation; analysts choose case projections and the operational-category map
Human assessment	One author's archived event and transcript-entry judgments assess outputs; they are not generation inputs

4.4. Design choices and tradeoffs

Table 10. Design rationale and conceptual alternatives. No alternative in the last column was experimentally compared here.

Choice	Intended benefit	Limitation	Possible alternative
Video-to-text intermediate	Readable evidence; reuse for different analyses	Visual errors become shared textual evidence	Direct video-to-events, with stronger visual provenance
Worker summaries	Compact factory-level context	Rare behavior and recording identity may be lost	Window summaries with explicit source references
Factory vocabularies	Concrete local labels across workers	Different factories use different abstractions	Global concepts with local extensions
Closed labels	Prevent out-of-list output	Closest allowed label may still be wrong	Open labels followed by review and reconciliation
Change-point narration	Compact description of stable behavior	Boundary detail and repeated cycles can disappear	Finer segments with explicit repetition counts
Interval events	Preserve approximate episode duration	Row counts do not equal production volume	Object-linked cycle records, when supported

Repeated cycles deserve particular care. If ten cycles become one narrated interval and one event, the event count decreases and the directly-follows relation loses nine possible repetitions. A longer event can represent more repetitions, slower work, or more aggressive compression. The logs alone do not distinguish these explanations. The text interface makes this decision inspectable, but does not recover details omitted during transcription.

5. Dataset and Released Artifacts

5.1. An inferred resource for process analysis

Assembly101 [29] records toy assembly and disassembly with simultaneous static and egocentric cameras. Its coarse and fine action annotations support benchmarks for recognition, anticipation, and temporal segmentation. Our source setting is recorded manual work in six factories, and the released labels and boundaries are inferred by the pipeline. The distinction is the purpose and provenance of the resource: linked narrations, summaries, vocabularies, events, logs, and analysis artifacts make the construction and interpretation of process measurements inspectable.

Researchers can use the preserved narrations to study alternative event representations, inspect which descriptions support a label, or compare how activity and process categories affect an aggregate. Such comparisons would examine representation choices unless independently checked against video. The present release includes structural checks and

an author audit against generated transcripts, but no independent video annotations. Its inferred labels are not an independently annotated ground-truth benchmark for action recognition or boundary detection.

5.2. Selection and provenance

The archived subset contains outputs for factories 001 to 006, with 59 worker identifiers and 322 paired transcript and event files. Factory and worker identifiers are inherited from the source organization. Domain descriptions in this paper summarize generated factory reports; they are not independently verified factory metadata. The archive does not record the selection rationale, the original source revision, or a complete inventory of the recordings available at extraction time. We therefore describe an available processed subset, not a random or representative sample of factories.

The current provider card reports a median clip length of 180 seconds [3], whereas many archived transcript endpoints lie near 20 minutes. These describe different quantities and possibly different snapshots or subsets. The card documents a per-video `duration_sec` field inside source archives, but those metadata files are not included here. The pipeline scans video files and does not preserve that field. We cannot verify the earlier claim that these selected source recordings were typically 20 minutes long or occasionally many hours long. The public source revision inspected during this revision is recorded in `paper/revision/source_metadata.json`; it must not be substituted for the unknown historical revision.

Table 11. Artifact inventory. Counts come from the frozen repository outputs. Worker and factory merged logs repeat the same source events.

Layer	Files	Content and provenance
Transcripts	322	One text per video; recording identity in path
Worker summaries	59	One text per worker; combines transcripts
Factory reports	6	Narrative, worker entries, activity and process lists
Per-video logs	322	10,698 interval-event rows; six stored columns
Merged worker logs	59	Same 10,698 events with source file, worker case, and local offsets
Merged factory logs	6	Same 10,698 events concatenated across workers
Audit record	1	42 event judgments and 42 transcript-entry judgments
Prompts; stage scripts	4; 5	Extraction instructions and implementation

The six per-video columns are `start_timestamp`, `end_timestamp`, `activity`, `process`, `factory`, and `worker`. S5 adds `source_file`, `case_id`, video-relative start and end offsets, and duration. Table 11 and the hashed artifact manifest distinguish file counts from unique event counts. The dataset card in `paper/revision/DATASET_CARD.txt` follows the documentation concerns of Datasheets for Datasets [30]: composition, collection, uses, and limitations.

There are 13,304 entries recognized by the original three-component timestamp parser. Recognizing the additional two-component and mixed-format entries gives 13,462 entries, without rescaling any timestamp. The original endpoint-span calculation totals 786,412 seconds (218.4 hours). This is a sum of parsed spans, not verified footage duration. Across all logs, interval unions cover 414,886 seconds and summed event durations total 421,283 seconds. Their difference, 6,397 seconds, reflects overlaps. The retained time-analysis set contains 10,647 events in 320 logs, with 349,659 seconds of summed event duration (97.1 hours). These quantities must not be interchanged.

5.3. Temporal data quality and inclusion rules

Table 12 identifies all seven transcripts whose literal parsed endpoint exceeds one hour. An endpoint of `20:06:00` paired with an event endpoint of `00:20:06` is consistent with a format error, but does not prove which timestamp is correct. Some files switch from `HH:MM:SS` to `MM:SS`. No timestamps are repaired in this revision.

Table 12. Transcript and event endpoints for the seven literal transcript spans over one hour. The final column applies the original time-analysis rule to event endpoints. IDs abbreviate factory/worker/video. Source durations are unavailable for all rows.

ID	Transcript endpoint	Event endpoint	Time-analysis decision
001/001/00004	20:00:00	20:00:00	Exclude
001/010/00001	01:20:00	01:20:00	Exclude
002/002/00008	20:00:00	00:20:00	Retain
002/010/00001	20:00:00	00:20:00	Retain
005/002/00000	13:52:00	00:13:52	Retain
006/001/00001	20:06:00	00:20:06	Retain
006/004/00000	19:59:00	00:19:59	Retain

The original value-analysis code excludes a log only when its maximum event endpoint exceeds 3,600 seconds. It excludes two logs, both in factory 001. The earlier prose described seven exclusions based on transcript spans; that description did not match the calculation. We preserve the implemented rule and the reproduced time tables, while stating that it leaves five of the timestamp-anomalous transcripts' logs in the analysis. Retention is a calculation rule, not certification of their timestamps.

Four other transcripts contain two-component endpoints. Their identifiers are 001/004/00001, 002/005/00001, 002/009/00003, and 003/003/00003. Three change format within the file; 002/005/00001 uses `MM:SS` throughout. The original parser misses 158 entries across these files. The inclusion manifest records every video's formats, format-transition positions, endpoints, row count, union duration, summed duration, and decision. A separate interval manifest preserves the original endpoint strings. The low coverage ratios in Section 7.2 therefore diagnose inconsistent representations; they do not establish long-video truncation.

5.4. Synthetic time and case selection

S4 writes offsets as dates relative to 2000-01-01. This date exists for software compatibility. The archive provides no verified calendar times or cross-worker synchronization. S5 processes clips in filename order, which is not proof of their real chronological order. For a worker's ordered clips $v_1, \ldots, v_m$, define $M_j = \max_{e \in E_{v_j}} t_e$, with $M_j = 0$ for an empty log. S5 uses

$$O_1 = 0, \qquad O_{j+1} = O_j + M_j, \qquad (t'_s, t'_e) = (O_j + t_s, O_j + t_e). \tag{2}$$

The next clip starts at the largest extracted endpoint, not at the full source duration. Unrepresented trailing footage and empty logs add no elapsed time. Within-clip gaps before that endpoint remain on the synthetic axis, but gaps between recording sessions are unknown. Each worker has a separate synthetic origin; equal synthetic dates do not establish simultaneous work.

6. Assessment Methodology

The assessment uses frozen texts, reports, CSVs, and archived author judgments. The descriptive workflow runs offline with Python's standard library. The original activity-discovery configuration is repeated separately with PM4Py [31], without changing the

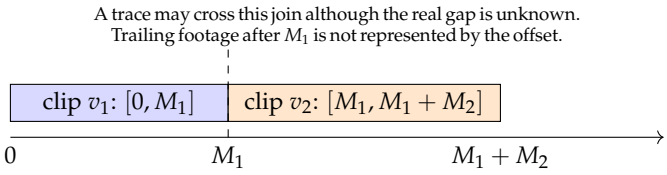


Figure 4. Schematic of the implemented merge, not measured source time. Separate video cases preserve the clip boundary. A worker case creates a directly-follows relation across it.

Table 13. Case constructions supported by the attributes. Process episodes require an additional grouping step and are not stored as case IDs.

Case rule	Supported description	Interpretation risk
Video as case, $\kappa(e) = v$	Local activity order within an observation window; used for discovery	Window may start or end midway through a production process
Worker as case, $\kappa(e) = (f, w)$	Sequence of retained clips; stored S5 case ID	Filename joins can create artificial transitions; calendar duration is unknown
Contiguous process episode	Consecutive events with the same process within a chosen clip, with a stated gap rule	Inferred context boundaries do not identify items or completed instances

miner or its noise threshold. This is recovery of an existing calculation, not a new discovery experiment. No source artifacts are overwritten.

6.1. Evaluation questions and reference data

Table 14 distinguishes the objects of evaluation. Assembly101 provides video action annotations [29]; Seeth et al. compare text-derived logs with source traces and process-level references [19]. Our transcript checks assess an intermediate transformation, while our downstream calculations demonstrate uses of its output. These reference structures support different conclusions, so their accuracy, fitness, and precision values should not be ranked as if they measured the same property.

Table 14. Evaluation questions, required references, and evidence in this study. Successful computation and correct operational interpretation are separate claims.

Question	Reference needed	Present evidence and scope
Are visual actions correct?	Independent annotations of the video	Not measured; generated transcripts cannot detect their own visual errors
Are labels consistent with text?	A reference interpretation of the text	Existing author judgments for 42 events; label membership checked for all rows
Are boundaries accurate?	Independently defined action boundaries	Agreement with generated transcript endpoints only; the five-second tolerance is a matching rule
Can the log support process-mining computations?	Defined case rules, measures, and completed calculations	Discovery and descriptive outputs demonstrate computation on the inferred representation
Are operational conclusions correct?	Valid measurements and evidence relevant to the conclusion	Traceable category descriptions and hypotheses; no independent production outcomes or intervention evidence

6.2. Metrics, denominators, and aggregation

For each video, let E_v be its events and B_v the set of transcript endpoints recognized by the original parser. Let $T_v^{\max}$ be the maximum such endpoint and M_v the maximum event endpoint. The original coverage diagnostic uses

$$C_v = \left| \bigcup_{e \in E_v} [t_s, t_e) \right|, \qquad S_v = \max(T_v^{\max}, M_v), \qquad \text{coverage}_f = \frac{\sum_{v \in f} C_v}{\sum_{v \in f} S_v}. \tag{3}$$

The denominator begins at zero. This is an endpoint-span ratio, weighted by span, not a mean of clip ratios and not footage coverage. When no transcript endpoint is recognized, the event endpoint supplies the denominator. The corrected parser's results are released as a separate diagnostic; the original table is retained and labeled.

A boundary matches if its distance from *any* recognized transcript endpoint is at most five seconds. Both ends of every event enter the denominator, including events in files with no recognized transcript entries. Multiple event boundaries can match the same transcript boundary. A match need not identify the correct action or justify an internal split.

Table 15. Metric definitions. E_f^* is the retained set under $M_v \leq 3600$. E_w^* is its worker subset, $H_w = \sum_{e \in E_w^*} d_e / 3600$, and R_w^{VA} is the worker's list of VA run durations.

Quantity	Definition	Unit, aggregation, exclusions
Label conformance	$\#\{e : a \in A_f,\ p \in P_f\} / \#E_f$	Fraction of all event rows
Vocabulary use	Distinct assigned labels divided by permitted labels	Separate activity and process lists, per factory
Coverage diagnostic	$\sum C_v / \sum S_v$	Fraction of parsed endpoint span; all logs
Boundary agreement	$\sum_{e, b \in \{t_s, t_e\}} \mathbf{1}[\min_{t \in B_v} \lvert b - t \rvert \leq 5] / (2\#E)$	Fraction of boundaries; all logs; original parser
Category share	$q_{fc} = \sum_{e \in E_f^*} d_e \mathbf{1}[g_f(p_e) = c] / \sum_{e \in E_f^*} d_e$	Fraction of summed event duration; overlap counted in each row
Worker VA share	Same ratio restricted to E_w^* and category VA	Eligible workers require $H_w \geq 0.5$; factory median weights workers equally
VA transition rate	I_w / H_w, where I_w counts VA-to-nonVA transitions in concatenated run lists	Transitions per summed event-hour; factory median
Mean VA run	$\overline{R}_w = \sum R_w^{VA} / \#R_w^{VA}$	Minutes; table reports median across eligible workers of these means
MH/TR count and rate	Number of retained MH or TR rows; count divided by summed event-hours	Rows, not merged episodes; duration-weighted factory denominator
Dominant process	$\arg\max_p \sum_{e \in E_w^*: p_e = p} d_e$	Groups workers; comparisons then use all their retained events
Self-loop share	Equal adjacent activity labels divided by all adjacent pairs	Within video cases only; all logs

For category analysis, the process lists have 113 factory-specific entries and 108 distinct strings across factories. Of the 113 entries, 112 are used in the logs. The unused factory 005 label *motor assembly finishing* has no category assignment in the original map. Every process string actually assigned to an event is mapped. Appendix D of the Additional Material lists the map by factory and marks the unused entry explicitly.

The categories are value-adding production work (VA), material handling and staging (MH), transport (TR), quality inspection (QI), cleaning and maintenance (CM), rework (RW), and documentation (DOC). VA includes packaging and other completion work under the authors' scheme; it is not a direct measurement of customer value. Defect patching is assigned RW because its label and descriptions concern filling or repairing surface defects. This does not establish that it is avoidable or that the upstream process failed a specified quality standard. Supporting work can be necessary even when assigned outside VA.

Runs collapse consecutive same-category rows *within each video*. Their duration is the sum of member durations, which can bridge unrepresented gaps and count overlaps. Run lists are then concatenated across a worker's clips before VA-to-nonVA transitions are counted. This can count transitions across a clip join; the release contains 15 such transitions among eligible workers. These rates are therefore representation-dependent transition measures, not verified interruptions of continuous work. The original script rounds each worker's VA share, transition rate, and mean run duration to one decimal before taking factory medians. We retain this rounding rule. No eligible worker has an empty VA-run list in this release; the original implementation would report zero for that case.

All per-video logs are nonempty. Negative and zero durations are checked separately; no such rows occur. Overlaps remain in time composition and are merged only for coverage. Ambiguous transcript timestamps remain literal. This preserves the original calculations while making their limits visible.

6.3. Existing semantic audit protocol

The archive records 42 sampled events and 42 sampled transcript entries, seven of each per factory. The earlier manuscript attributes the judgments to one author. The judgment file states `random.seed(42)` and describes factory stratification. However, the referenced sampling block is absent from the archived assessment script. The sampling order, full sampling frame, and handling of timestamp formats cannot be reconstructed. We report the existing sample as documented and do not claim that it can be redrawn exactly.

For the event sample, the reference is the generated text overlapping the event interval. Code C means fully supported: the label describes the transcribed action in that interval. P means partially supported: the label is plausible but the overlapping text alone is insufficient. X means contradicted. Strict support is $36/42 = 0.857$. The six P cases are retained in the denominator, not treated as fully correct.

For the transcript-entry sample, COV denotes overlap with at least one event, EXC an uncovered entry judged non-operational, and MISS an uncovered entry judged operational. The archive reports $34/(34+4) = 0.895$ after excluding four EXC entries. We call this the *reported entry-overlap rate*, not action recall. One COV entry describes camera tilt covered by a longer event. Thus, the denominator does not establish 38 independently verified operational entries, and overlap does not show that all actions or labels were extracted correctly.

The audit measures consistency with transcripts. It cannot identify visual errors, missed actions, or mistaken object interpretations already present in the transcripts. There is no independent evaluator, inter-rater agreement estimate, or source-video audit. The sample proportions do not bound error in downstream time shares, category assignments, observation selection, or causal interpretation. Appendix E of the Additional Material reproduces all judgments and their notes, with the unverified truncation explanation clearly marked.

7. Results and Factory Case Studies

7.1. RQ1: Construction and structural properties

Table 16 reports the released corpus. All 10,698 events have the required values, nonnegative ordered endpoints, and labels in the relevant factory lists. Start times are nondecreasing within each log. There are no empty logs or zero-duration events. However, 35 adjacent event pairs overlap, 20 in factory 001 and 15 in factory 002. Passing schema and vocabulary checks therefore does not imply a non-overlapping segmentation. Activity vocabulary use ranges from 89.3% to 96.7%.

Table 16. Corpus and original transcript diagnostics. Activity and process columns show permitted/used labels. Coverage uses unions divided by parsed endpoint spans, not verified video duration. Alignment is boundary agreement within five seconds under the original parser.

Factory	Workers	Videos	Events	Activities	Processes	Coverage	Alignment
001	11	97	2,288	131/125	13/13	94.8%	93.1%
002	10	54	1,541	75/67	24/24	28.2%	71.8%
003	11	72	2,449	55/52	12/12	93.0%	86.8%
004	10	51	1,893	71/65	22/22	92.1%	90.4%
005	11	22	1,103	102/97	18/17	25.0%	75.0%
006	6	26	1,424	61/59	24/24	14.1%	62.1%
All	59	322	10,698			52.8%	82.1%

7.2. RQ2: Consistency with generated transcripts

The original parser finds 82.1% of event boundaries within five seconds of a recognized transcript endpoint. It yields an overall coverage diagnostic of 52.8%. Neither statistic is video accuracy. The coverage denominator is heavily affected by the literal multi-hour endpoints listed in Table 12. Alignment can also be low when formats change or when S4 splits a narrated interval. We remove the previous interpretation of low coverage as demonstrated extraction truncation of long videos.

Table 17. Existing author judgments against generated transcripts. No additional audit was conducted.

Sample outcome	Count	Interpretation
Event fully supported (C)	36	Strict transcript support: 36/42, or 85.7%
Event partially supported (P)	6	Context is plausible; overlapping description is insufficient
Event contradicted (X)	0	No contradiction among the sampled events
Transcript entry overlaps (COV)	34	At least one event overlaps; action completeness not established
Uncovered, non-operational (EXC)	4	Excluded from the archive's reported overlap denominator
Uncovered, operational (MISS)	4	Reported entry-overlap rate: 34/38, or 89.5%

Partial-support examples show the difficulty of checking events against compressed text. Event sample 5 assigns a particular bagging activity where the transcript only states that repetitive assembly and packaging continue. Sample 40 assigns guiding an upper mold half where the text only says that the worker helps with a mold. Recall sample 10 uses a transcript interval from 11:51:00 to 12:59:00 in an anomalous file whose event log ends at 00:20:00. Its MISS judgment is preserved, but the original explanation as long-recording truncation is unverified. These cases show why a single accuracy label would obscure different sources of uncertainty.

7.3. An end-to-end foundry example

Consider factory 006, worker 003, recording `factory006_worker003_00003`. The S1 transcript interval from 00:04:05 to 00:04:36 describes placing an empty frame on a pattern plate, pouring and hand-packing powder, and using a wooden tool to level the surface. The S2 summary describes preparation, filling, packing, leveling, and compression of molds. It compresses many recordings into a worker-level account. The S3 report supplies process *Sand mold creation*, activity *level powder surface with wooden scraper*, and a compact summary of this worker's molding work.

S4 produces two events within that 31-second transcript interval: *pack casting sand into mold frame*, from 00:04:05 to 00:04:24, and *level powder surface with wooden scraper*, from 00:04:24 to 00:04:36. Both have process *Sand mold creation*. Figure 5 shows what is retained and added. The internal boundary at 00:04:24 is inferred; S1 does not timestamp that transition separately. The events compress placement, pouring, and joint hand-packing into the first activity and add controlled names and a process context.

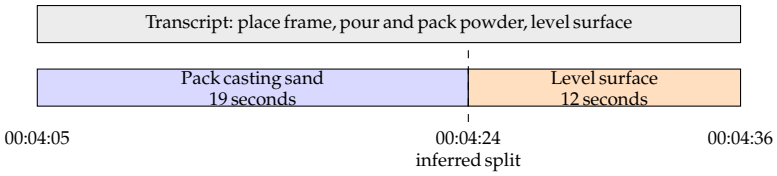


Figure 5. Exact transcript and event intervals for the foundry example. The original transcript is line 16 of its text file; the events are data rows 17 and 18 of the corresponding CSV. Bar lengths show recorded durations, not independently checked action boundaries.

```
{"events": [{
  "estimated_start_time": "00:04:24",
  "estimated_end_time": "00:04:36",
  "activity": "level powder surface with wooden scraper",
  "process": "Sand mold creation"
}]}
```

Listing 2: Illustrative JSON reconstructed from CSV data row 18. It is not an archived model response.

The source paths are `raw_transcriptions/factory_006/worker_003/factory006_worker003_00003.txt` and the corresponding path under `process_mining_event_logs/` with extension `.csv`. The summary is `worker_process_summaries/factory_006/worker_003.txt`; the vocabulary and compact context are in `factory_process_mining_reports/factory_006.txt`. S5 retains the source filename and local offsets alongside shifted timestamps. Audit event 41 judges the leveling event fully supported by its transcript. This supports the label's textual basis, not the exact internal split or a video-based duration measurement.

7.4. RQ3: Descriptive analytical capabilities

7.4.1. Time composition and category transitions

Table 18 reproduces the existing category shares using the actual two-log exclusion rule. The non-VA category share ranges from 3.7% to 25.8% of retained summed event duration. This is neither total worker time nor recoverable capacity. Factory 003 assigns 10.8% to defect patching. Its factory report already describes defect patching in the opening overview and vocabulary. The contribution is to quantify that recorded behavior under an explicit category rule, not to discover previously unmentioned rework.

The mean-run column is the median across workers of their *mean* VA-run durations. A value of 3.1 minutes in factory 006 is a central tendency; it says nothing about the longest VA episode. Factory 001 has 449 MH/TR rows, a mean row duration of 14.54 seconds, and 14.6 such rows per summed event-hour. Factory 006 has 192 MH/TR rows, a mean of 25.14 seconds, and 28.4 rows per summed event-hour. These are row-based descriptions. Segmentation, repeated-action compression, and clip joins influence their values.

7.4.2. Process flow and discovery

Video-as-case traces describe observation windows. Among the 97, 54, 72, 51, 22, and 26 videos in factories 001 to 006, there are respectively 97, 53, 70, 51, 22, and 26 distinct

Table 18. Reproduced time analysis on 320 logs. Left: percentage of summed event duration. Right: factory medians over eligible workers, after the original worker-level rounding. A run sums consecutive same-category rows within a clip; transition counting can cross clips.

	Process-based category shares (%)							Worker summaries		
Factory	VA	MH	TR	QI	CM	RW	DOC	VA (%)	Trans./h	Mean run (min)
001	93.1	4.1	1.8	0.0	0.2	0.0	0.9	94.5	9.2	4.6
002	96.3	0.1	2.3	0.2	0.0	0.0	1.1	97.3	3.9	8.8
003	82.1	0.4	0.0	0.0	6.3	10.8	0.4	86.4	3.6	9.0
004	89.9	3.0	3.5	2.0	0.9	0.0	0.7	91.3	10.6	3.6
005	80.6	5.4	9.7	4.3	0.0	0.0	0.0	85.9	5.6	6.2
006	74.2	12.1	7.8	0.0	5.7	0.0	0.3	87.0	14.4	3.1

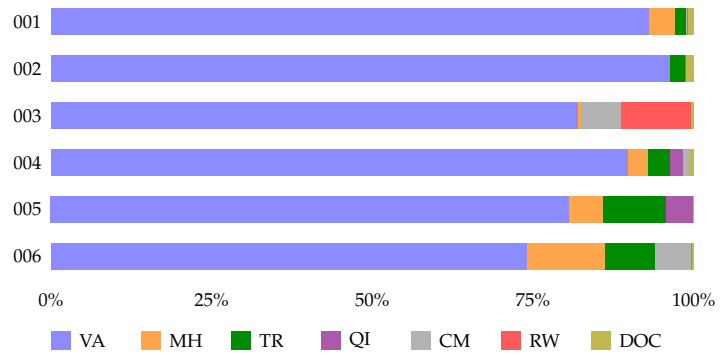


Figure 6. Category composition calculated from retained event rows and the released process map. Segments use unrounded duration totals; Table 18 reports rounded percentages. Factories have different task mixes and label schemes, so the plot does not rank efficiency.

activity traces. Self-loops account for 4.3% to 16.8% of within-video directly-follows pairs. These statistics are reproduced directly from the stored labels. A self-loop can reflect separately extracted repetitions or segmentation choices; it is not a count of manufactured items.

The released discovery script uses Inductive Miner [32] with noise threshold 0.2, video cases, and activity labels. Appendix C of the Additional Material records the repeated calculation and current dependency version. The recalculated fitness ranges from 0.9544 to 0.9910 and precision from 0.0603 to 0.2679. Fitness measures how the discovered model can replay the inferred traces; precision measures how much additional behavior it permits relative to that log. Both are properties of a model-log pair, not accuracy against actual factory behavior.

Many distinct traces and low precision can arise from flexible work, recording boundaries, abstraction choices, label variation, or extraction mistakes. The present evidence does not separate these causes. No process-level discovery result is reported because its computation and saved output are unavailable. Replacing activity labels with process labels would change the represented behavior and evaluation target. A higher precision after that change would not by itself be a controlled demonstration of better extraction or modeling. No new process-level models are generated for this revision.

7.4.3. Worker profiles and shared dominant processes

A shared vocabulary permits descriptive comparison within a factory. Table 19 groups workers by their largest process-duration total, then compares VA shares over *all* retained events for those workers. Eligibility requires at least 1,800 seconds of summed event duration. It does not require verified footage duration or equivalent tasks. There are 11, 10, 10, 10, 5, and 5 eligible workers in factories 001 to 006.

Table 19. Selected shared-dominant-process groups, using the original eligibility and rounding rules. Ranges summarize worker profiles; they are not estimates of individual efficiency.

Factory	Dominant process	Workers	VA share	Mean VA run
001	Manual mechanical assembly	6	89.7 to 97.8%	1.7 to 6.7 min
001	Metal stamping	3	90.6 to 98.5%	3.2 to 7.9 min
003	Surface finishing and polishing	5	67.3 to 96.9%	3.3 to 13.7 min
004	Garment ironing	2	52.8 to 77.1%	3.5 to 4.1 min
004	Overlock seaming	4	87.8 to 96.5%	1.5 to 10.3 min
005	Manual lathe machining	2	95.0 to 95.8%	6.9 to 9.4 min

The 29.6 percentage-point range in the surface-finishing group describes different observed profiles. Differences may reflect task mix, product requirements, recording selection, category assignment, or working conditions. Likewise, the small range for two lathe workers cannot rule out differences in behavior. Neither result supports individual performance rankings.

7.5. Six descriptive factory cases

Each case below states its recorded scope, quantitative result, relationship to the report, and unresolved interpretation. Factory descriptions are derived from the reports. Cross-factory rankings are limited by different vocabularies, products, and observation windows.

Factory 001: hardware stamping and assembly.

The archive has 97 clips from 11 workers; the time analysis retains 95 clips. Manual mechanical assembly accounts for 55.7% of retained summed duration, metal stamping for 18.2%, and component bagging for 11.3%. These differ from the earlier unfiltered dominant-process table because the two excluded logs are in this factory. The report already describes material replenishment, floor storage, and operator transport. The 449 MH/TR rows and their short mean duration quantify the assigned category pattern. They motivate examining material presentation, but do not establish that dedicated handlers, shorter travel, or a different layout would improve output. Product mix and compressed repetitions remain competing explanations.

Factory 002: garment finishing and packaging.

There are 54 clips from ten workers, all retained by the event-end rule. Fabric folding, garment bagging, and ironing contribute 18.8%, 17.1%, and 13.2% of summed duration. VA is 96.3%. The report already describes transport, floor staging, and varied folding methods. Quantification shows a small separately categorized handling and transport share, not proof that those behaviors are rare within other processes. Two anomalous transcript endpoints and mixed formats weaken temporal interpretation. Product-specific finishing requirements and category boundaries need examination before any claim of superior efficiency.

Factory 003: surface preparation and assembly.

The archive covers 72 clips from 11 workers; all clips are retained. Surface finishing and polishing contributes 42.1%, wax pattern assembly 19.2%, and defect patching 10.8%. The report already identifies patching and material transport. The log quantifies patching's share without establishing defect rates, avoidable rework, or financial loss. It also records 101 transport events totaling 1,230 seconds even though the process-based TR share is zero.

This case demonstrates how aggregation can hide an extracted behavior. Material types and quality criteria remain uncertain in the report itself.

Factory 004: garment sewing and finishing.

There are 51 clips from ten workers, all retained. Overlock seaming contributes 23.5%, garment folding 11.0%, and thread trimming 10.8%. The median worker VA-transition rate is 10.6 per summed event-hour. The report already describes tool switching, material handling, and inspection. The logs add a reproducible category pattern and a 24.3 percentage-point VA-share range in the two-worker ironing group. Product specifications, additional finishing duties, and recording windows could explain this difference. The data do not identify which changes to tools or stations would help.

Factory 005: machining and motor assembly.

The archive contains 22 clips from 11 workers, with only five workers meeting the time threshold. All clips are retained. Manual lathe machining contributes 32.1%, drill press machining 19.1%, and material transport and logistics 9.7%. The report describes staging, fixturing, inspection, and coupled workstations. The log adds duration shares, including 4.3% assigned to dimensional inspection. The two lathe profiles have similar VA shares, but their task equivalence is unknown. Inspection can be necessary, and one transcript has an unresolved endpoint anomaly. The recorded shares cannot measure excess quality work or recoverable machine capacity.

Factory 006: molding and foundry work.

There are 26 clips from six workers, all retained; five workers meet the time threshold. Sand mold creation, pattern cleaning and coating, and compression molding contribute 17.4%, 14.0%, and 12.2%. The report already describes floor staging, material movement, cleaning, and mold-track operations. The logs assign 19.8% of summed duration to MH/TR and yield a median worker mean VA run of 3.1 minutes. These quantities support a closer study of handling requirements, not a diagnosis of layout as their cause. Necessary mold preparation, differing materials, and segmentation choices are alternatives. Two transcript endpoints require resolution against source metadata.

7.6. From observations to operational hypotheses

Table 20. Evidence-linked hypotheses. These are candidates for investigation; intervention effects were not measured.

Observation	Plausible explanation	Competing explanation	Evidence needed
001: 449 short MH/TR rows; 5.9% of summed duration	Material presentation creates frequent replenishment	Segmentation splits one handling episode into several rows; task mix differs	Video checks, supply distances, batch quantities, station observations
006: 19.8% MH/TR; frequent category transitions	Layout or replenishment arrangements require repeated movement	Heavy or fragile materials require necessary support work	Routes, loads, safety requirements, matched task observations
003: 10.8% defect patching	Upstream defects require corrective work	Patching is a planned finishing requirement	Product specifications, defect criteria, item counts, upstream records
003 and 004: VA shares differ within dominant-process groups	Conditions or work allocation differ	Product mix, selection, or extraction differences	Comparable products and observation windows; independent video review
005: two similar lathe VA shares	Common station requirements shape profiles	Similar aggregate shares hide different tasks or behavior	Task-level comparisons and production context

Reports identify phenomena; logs can quantify them under a chosen representation. Explaining their causes requires additional evidence. Transport, inspection, cleaning, and documentation are not automatically waste, and the time assigned to them is not automatically available for production. No intervention effect or cost saving is demonstrated by these descriptive results.

8. Measurement and Analytical Implications

8.1. Observability and the interpretation of zeros

A zero in an analytical table has several possible causes (Table 21). These causes occur at different stages and require different checks. Requiring a label for transport or waiting improves representability, but does not establish reliable detection or a measured absence. A model may still omit the action, assign another label, or absorb it into a longer episode.

Table 21. Possible meanings of an apparent zero, ordered along the evidence path. Only the last mechanism is directly demonstrated by the factory 003 example; the others are possible mechanisms implied by the pipeline.

Mechanism	Where information is lost	Needed check
Behavior absent from the recorded window	Observation selection	Define the window and verify that it is suitable for the question
Behavior present but not narrated	Video interpretation or narration	Independent review of source footage
Behavior narrated but lost in summaries	S2 or S3 compression	Compare transcripts with worker and factory summaries
No suitable vocabulary label	Vocabulary induction	Inspect lists against the behavior of interest
Suitable label exists but is not assigned	Event extraction	Compare relevant transcript spans and extracted labels
Event exists but category aggregation hides it	Analytical mapping	Compare activity-level rows with process-derived categories

In factory 003, both *transport loaded tray to storage rack* and *transport bulk material via wheelbarrow* are permitted activity labels and occur in the logs. Together they account for 101 events and 1,230 seconds. No process label is mapped to TR in that factory. Their durations therefore inherit categories such as VA from their assigned processes. The TR category's zero describes the map's output, not the absence of transport or the inability of the activity vocabulary to express it.

To interpret an observed zero as evidence of absence within a window, an analyst would need a defined observation scope, a suitable representation, adequate detection, correct assignment, and an aggregation rule that preserves the behavior. None follows from label membership alone. Conversely, an observed event can establish what the representation contains while leaving the event's visual accuracy unmeasured.

8.2. Uncertainty propagation and limits of provenance

Errors can propagate along both branches of Figure 3. A mistaken object description can shape the worker summary, the factory vocabulary, and the final event label. Agreement among those outputs can therefore reflect a shared error. Quality-aware construction [9] and event-log imperfection patterns [23] establish the broader concern. Table 22 shows how it arises in this construction, separating observed examples from possible mechanisms.

These mechanisms occur within an observation scope that is itself incomplete: the selection protocol and source durations are unavailable. No stage-wise error rates are calibrated, and structural checks cannot quantify visual errors. Worker and factory differences may therefore reflect observation selection as well as representational choices.

Table 22. Transformation, possible imperfection, analytical consequence, and existing evidence. A prompt or a permitted operation establishes a possible mechanism, not its error frequency.

Transformation	Possible imperfection	Downstream consequence	Existing evidence
S1: narration	Omitted actions or compressed repetitions; inaccurate times	Row frequency differs from cycle frequency; duration can be distorted	Repetition rule in prompt; seven endpoint anomalies in Table 12; visual omissions unmeasured
S2 and S3: summaries and classes	Rare details lost; concepts merged or separated	Vocabulary may omit a needed distinction	Compression requested by prompts; lists available for inspection; information loss not quantified
S4: label assignment	Episode forced into the closest permitted label	Membership passes despite weak textual support	Six partially supported audit events, including the bagging example; mechanism not isolated by the audit
S4: interval assignment	Internal boundary added without a timed transition in the text	Duration attributed to each action depends on the split	Foundry split at 00:04:24; 35 adjacent overlaps in the full archive
S5: consolidation	Filename joins treated as continuous behavior	Added transitions and synthetic elapsed time	Merge code and preserved local offsets; real inter-clip gaps unknown
Analysis: category mapping	Recorded activity hidden by its process category	Apparent zero for a behavior present in the log	Factory 003 has 101 transport events but no process mapped to TR

Readable text is useful evidence, but it is weaker than structured event provenance. Existing records identify a source file and local interval. They do not store supporting transcript-span identifiers, alternative labels, calibrated confidence, or a flag that distinguishes an inferred internal boundary from a copied transcript endpoint. Finding the source of an event therefore requires reading and matching intervals. The foundry example can be traced manually, yet its CSV does not record why the split at 00:04:24 was chosen.

A future schema could add transcript-entry references, a boundary-origin field, and vocabulary and prompt versions. Data-quality annotations could retain known issues for downstream analysis [24]. Explicit alternative labels or bounded times would instead extend the event representation toward uncertain data [25,33]. Such alternatives need evidence: the five-second matching tolerance does not imply that an event boundary lies within five seconds of its true value. We do not retrofit invented confidence values to the existing events. Provenance can explain how a conclusion was reached; it does not certify that every preceding observation was correct.

8.3. Missing time does not imply a one-sided bound

The observed share outside VA is sometimes described as a lower bound because waiting and other supporting work can be omitted. That interpretation also assumes that omitted time is sufficiently non-VA. Missing VA time can instead raise the observed non-VA share.

Proposition.

Consider an idealized observation with $C > 0$ seconds of correctly classified, non-overlapping observed time, of which N seconds are non-VA. Let $U \geq 0$ seconds be unobserved. If observed and unobserved time partition a known target window, then its full-time non-VA share satisfies

$$\frac{N}{C+U} \leq p_{\text{nonVA}} \leq \frac{N+U}{C+U}. \tag{4}$$

Proof. Let x be the non-VA duration in the unobserved part. Since $0 \leq x \leq U$, the full share is $(N + x)/(C + U)$ and has the stated extrema. Both are attainable: all missing time may be VA or all may be non-VA.

For $U > 0$, the observed ratio N/C is a lower bound only if $x/U \geq N/C$. Thus, merely knowing that some waiting is missing is insufficient. The interval width in Equation 4 is $U/(C + U)$, which shows how unknown coverage limits a share even with perfect observed labels.

This is a conceptual result, not an empirical confidence interval for this dataset. Source durations and therefore U are unavailable; labels are inferred; and summed event durations include overlaps. Substituting the coverage diagnostic or the 97.1 retained summed event-hours into this proposition would violate its assumptions. The result identifies the additional evidence needed before making a bound claim.

8.4. Why aggregation changes the question

A duration-weighted factory share estimates the composition of the retained event rows. A median worker share gives equal weight to each eligible worker. They answer different questions. In factory 006, for example, the factory VA share is 74.2%, while the median worker VA share is 87.0%. Different observation amounts and work profiles can produce this difference without either statistic being erroneous.

Likewise, process-based and activity-based categories need not agree. Counting rows emphasizes the extraction granularity; counting runs suppresses adjacent labels; measuring interval unions removes overlap but does not resolve classification conflicts. None is a universal correction. A defensible analysis states its unit, denominator, case rule, handling of gaps, and interpretation before drawing operational conclusions. The released measurements serve as a reproducible example of those choices and their limits.

9. Discussion and Conclusions

9.1. How representation choices affect measurement

The specific contribution beyond existing video-to-log construction is the account of a shared factory representation and its analytical consequences. Vid2log already connects visual interpretation, domain context, and event data [4]. Event-abstraction and quality-aware construction research already establish that representation and input quality matter [9,20]. Our existing artifacts show how three decisions interact: what the vocabulary names, how episodes are assigned to those names, and how the labels are mapped into measurement categories.

Factory 003 separates these decisions directly. Its activity vocabulary names transport, S4 assigns 101 events to two transport activities, and the process-based map assigns their durations to categories other than TR. The zero TR share is therefore explained by aggregation, not a missing transport term. A vocabulary check alone would not detect this mismatch between the analytical question and the measurement rule.

The foundry example shows a different dependency. A 31-second description becomes packing and leveling events lasting 19 and 12 seconds. The factory lists supply reusable names, but the assignment step also supplies an internal split not timed separately in the narration. An analysis of the two actions' duration shares depends on this additional boundary decision. The transcript audit supports the leveling description without independently validating the split.

Finally, S5 retains video-relative offsets while placing clips in filename order on a synthetic worker timeline. A worker case can therefore add a transition across a clip join, whereas a video case preserves that boundary. This follows from the merge rule and shows

why case selection is part of the measurement definition. These examples demonstrate particular representational effects; they do not estimate how often each effect occurs in other datasets or establish a more accurate alternative pipeline.

9.2. Answers to the research questions

For RQ1, the five-stage pipeline produced a layered resource of transcripts, summaries, vocabularies, and 322 event logs. All 10,698 event rows satisfy the reported field, ordering, and label checks. Overlaps and unchecked semantic properties show why these checks must be named rather than treated as general validity.

For RQ2, the existing audit finds full transcript support for 36 of 42 sampled events and partial support for six. Boundary agreement and entry overlap add temporal evidence, but format inconsistencies limit their interpretation. Accuracy against source footage remains unmeasured. The audit does not bound total downstream uncertainty.

For RQ3, the retained logs support descriptions of category composition, local sequences, and worker profiles. They quantify an already described defect-patching process and expose differences worth investigating. The evidence supports operational hypotheses, not causal diagnoses, individual efficiency scores, or expected savings. Qualitative reports and quantitative logs complement one another but share generated transcripts.

For RQ4, the examples establish three general lessons. Recorded behavior can disappear under an aggregation rule. Synthetic case and time construction can introduce transitions that were not observed continuously. Missing time can move a category share in either direction. These lessons apply to inferred logs beyond video whenever an analysis depends on abstraction, selection, and reconstructed timestamps.

9.3. Limits tied to the conclusions

The vocabulary is induced from the same available factory corpus to which it is applied. Multiple factories show repeated use of the construction procedure with different local vocabularies. They do not establish transfer of a fixed vocabulary to unseen factories, prospective performance, or streaming vocabulary updates. Shared names support within-factory grouping; matching names or categories across factories would require further semantic checks. No comparison here establishes that fixed-model prompting is preferable to fine-tuning.

The release lacks the historical source revision, selection protocol, duration metadata, full model execution records, and complete sampling code. These gaps limit exact regeneration and claims about representative factory behavior. The frozen artifacts still permit the descriptive calculations to be reproduced, and the revision notes identify the missing historical information explicitly.

The process map is a coarse analytical convention. It can assign transport to VA and combines necessary support work with activities an analyst might consider avoidable. It cannot estimate waste or recoverable production capacity. Product identifiers, output counts, quality specifications, and material links across workers are absent, so the logs cannot establish throughput, first-pass yield, upstream defect rates, or complete product routes.

Temporal inconsistencies affect endpoint coverage; overlaps affect summed durations; gap-bridging runs affect fragmentation language; and clip joins affect transitions. The event-end exclusion rule leaves some inconsistent transcripts in the analysis. The retained numerical tables should therefore be interpreted as descriptions of frozen representations, with their sensitivity to unresolved time errors still unknown. We do not convert anomalous timestamps to more plausible values without source evidence.

The author audit is small, has one evaluator, and refers to generated text. It cannot detect transcription errors shared by the report and log. Unequal windows and dominant-process grouping do not establish matched worker tasks. Alternative explanations in Table 20 remain open, and no intervention was evaluated. These limitations directly restrict operational conclusions rather than merely limiting generalization to other factories.

9.4. Responsible interpretation and use

Worker-level process data can be turned into individual profiles even when names are removed [34]. The release uses source worker identifiers and does not redistribute video. These identifiers are pseudonymous, not a guarantee against re-identification. A distinctive task, timestamp pattern, or combination with local records may reveal a person or role.

The intended use is research on extraction and measurement, and investigation of process design at an appropriate aggregate level. The profiles should not be used for employee appraisal, pay, discipline, or automated worker ranking. The unequal observation windows and inferred category assignments do not support those decisions. For workplace use, access should be restricted to the stated analytical purpose, with aggregation across suitable task groups and review with the people whose work is represented. Results should retain their coverage and provenance limits when shared.

The provider describes real-factory collection and publishes a dataset card and access terms [3]. The inspected card does not document the original consent procedure. The present authors performed secondary processing, collected no new video, and report no new consent or ethics-approval record. Provider statements, author processing choices, and unavailable collection details are therefore kept separate. The pipeline prompts discourage worker-level judgments, but prompts alone do not control later use of the public outputs.

9.5. Reusable contribution and future work

Appendix B of the Additional Material documents reproduction of calculations from fixed outputs. Regenerating those outputs requires source access, model availability, and partly unrecorded historical settings, so exact regeneration is not claimed.

Future work could preserve source durations, check activity-process compatibility, link events to transcript spans, and audit against video with multiple evaluators. Alternative extraction and category rules need evaluation. Synchronized flow and product analysis require real calendar times and object references.

The design places factory vocabulary induction before event assignment. The resource preserves intermediate evidence, and the findings explain how boundaries, cases, and category maps affect measurements. These contributions support structured study of recorded work with explicit evidence limits.

Additional Material

The accompanying Additional Material contains the journal-extension record (Appendix A), reproduction instructions and configuration (Appendix B), activity-level discovery results (Appendix C), complete operational-category map (Appendix D), all archived audit judgments (Appendix E), and full extraction prompts (Appendix F).

Declarations

Author Contributions: Alessandro Berti carried out the experiments. Wil M. P. van der Aalst reviewed the manuscript and suggested improvements.

Funding: Funded by the European Union. This work received funding from the European High Performance Computing Joint Undertaking (JU), the German Federal Ministry of Research, Tech-

nology and Space (BMFTR), the Ministry of Culture and Science of North Rhine-Westphalia (MKW NRW), and the Hessian Ministry of Science and Research, Arts and Culture (HMWK), under grant agreement No. 101250682.

Institutional Review Board Statement: This study is a secondary analysis of the existing Egocentric-10K dataset. It involved no recruitment of participants, intervention, or new video collection. No ethics approval or exemption record for this secondary analysis is reported.

Informed Consent Statement: No participants were recruited or contacted for this secondary analysis. The source videos were obtained from the existing Egocentric-10K dataset. The authors did not collect new consent, and the source dataset card does not report the original consent procedure.

Data Availability Statement: The pipeline, prompts, transcripts, factory vocabularies, derived event logs, and assessment code are available at https://github.com/fit-alessandro-berti/annotated-egocentric-10k-dataset. The source videos are available from Build AI's Egocentric-10K dataset at https://huggingface.co/datasets/builddotai/Egocentric-10K, under its access terms and Apache License 2.0. The repository contains derived artifacts and does not redistribute the source videos.

Acknowledgments: The study used Gemini 3.1 Pro for video descriptions, worker summaries, and factory reports, and GPT-5.4 for event extraction, as described in the methods. OpenAI Codex (GPT-6) assisted with the journal revision, evidence checks, descriptive recalculation scripts, language editing, LaTeX formatting, and preparation of the cover letter. The authors are responsible for the content of this work.

Conflicts of Interest: Wil M. P. van der Aalst is affiliated with Celonis, a process mining software company. No other conflicts of interest are reported.

References

1. van der Aalst, W.M.P. *Process Mining: Data Science in Action*, 2 ed.; Springer, 2016. https://doi.org/10.1007/978-3-662-49851-4.
2. Kratsch, W.; König, F.; Röglinger, M. Shedding light on blind spots - Developing a reference architecture to leverage video data for process mining. *Decis. Support Syst.* **2022**, *158*, 113794. https://doi.org/10.1016/j.dss.2022.113794.
3. Build AI. Egocentric-10K: Dataset Card. https://huggingface.co/datasets/builddotai/Egocentric-10K, 2025. Accessed 19 October 2026; current revision 3e5f87c.
4. Gavric, A.; Bork, D.; Proper, H. Multimodal Process Mining. In Proceedings of the 2024 IEEE 26th Conference on Business Informatics (CBI). IEEE, 2024, pp. 99 to 108. https://doi.org/10.1109/CBI62504.2024.00021.
5. Petersen, N.; Pagani, A.; Stricker, D. Real-Time Modeling and Tracking Manual Workflows from First-Person Vision. In Proceedings of the 2013 IEEE International Symposium on Mixed and Augmented Reality (ISMAR). IEEE, 2013, pp. 117 to 124. https://doi.org/10.1109/ISMAR.2013.6671771.
6. Pham, T.; Xiao, Y. Unsupervised Workflow Extraction from First-person Video of Mechanical Assembly. In Proceedings of the 19th International Workshop on Mobile Computing Systems and Applications. ACM, 2018, pp. 31 to 36. https://doi.org/10.1145/3177102.3177112.
7. König, F.; Egger, A.; Kratsch, W.; Röglinger, M.; Wördehoff, N. Unstructured Data in Process Mining: A Systematic Literature Review. *ACM Trans. Manag. Inf. Syst.* **2025**, *16*, 25:1 to 25:34. https://doi.org/10.1145/3727148.
8. Diba, K.; Batoulis, K.; Weidlich, M.; Weske, M. Extraction, correlation, and abstraction of event data for process mining. *WIREs Data Mining Knowl. Discov.* **2020**, *10*, e1346. https://doi.org/10.1002/widm.1346.
9. Andrews, R.; van Dun, C.G.J.; Wynn, M.T.; Kratsch, W.; Röglinger, M.; ter Hofstede, A.H.M. Quality-Informed Semi-Automated Event Log Generation for Process Mining. *Decis. Support Syst.* **2020**, *132*, 113265. https://doi.org/10.1016/j.dss.2020.113265.
10. Knoch, S.; Ponpathirkoottam, S.; Schwartz, T. Video-to-Model: Unsupervised Trace Extraction from Videos for Process Discovery and Conformance Checking in Manual Assembly. In Proceedings of the BPM. Springer, 2020, Vol. 12168, *Lecture Notes in Computer Science*, pp. 291 to 308. https://doi.org/10.1007/978-3-030-58666-9_17.
11. Lepsien, A.; Koschmider, A.; Kratsch, W. Analytics Pipeline for Process Mining on Video Data. In Proceedings of the BPM (Forum). Springer, 2023, Vol. 490, *Lecture Notes in Business Information Processing*, pp. 196 to 213. https://doi.org/10.1007/978-3-031-41623-1_12.
12. Pegoraro, M.; Seng, J.; Heller, D.; van der Aalst, W.M.P.; Kersting, K. All Eyes on the Workflow: Automated and Efficient Event Discovery from Video Streams. *CoRR* **2026**, *abs/2604.22476*. https://doi.org/10.48550/arXiv.2604.22476.

13. Brzychczy, E.; Aleknonytė-Resch, M.; Janssen, D.; Koschmider, A. Process mining on sensor data: a review of related works. *Knowl. Inf. Syst.* **2025**, *67*, 4915 to 4948. https://doi.org/10.1007/s10115-024-02297-y.
14. Krishna, R.; Hata, K.; Ren, F.; Fei-Fei, L.; Niebles, J.C. Dense-Captioning Events in Videos. In Proceedings of the IEEE International Conference on Computer Vision (ICCV). IEEE, 2017, pp. 706 to 715. https://doi.org/10.1109/ICCV.2017.83.
15. Kecht, C.; Egger, A.; Kratsch, W.; Röglinger, M. Event Log Construction from Customer Service Conversations Using Natural Language Inference. In Proceedings of the 2021 3rd International Conference on Process Mining. IEEE, 2021, pp. 144 to 151. https://doi.org/10.1109/ICPM53251.2021.9576869.
16. Shirali, M.; Fani Sani, M.; Ahmadi, Z.; Serral, E. LLM-Based Event Abstraction and Integration for IoT-Sourced Logs. In Proceedings of the Business Process Management Workshops. Springer, 2025, Vol. 534, *Lecture Notes in Business Information Processing*, pp. 138 to 149. https://doi.org/10.1007/978-3-031-78666-2_11.
17. Berti, A.; Kourani, H.; van der Aalst, W.M.P. PM-LLM-Benchmark: Evaluating Large Language Models on Process Mining Tasks. In Proceedings of the ICPM Workshops. Springer, 2025, Vol. 533, *Lecture Notes in Business Information Processing*, pp. 610 to 623. https://doi.org/10.1007/978-3-031-82225-4_45.
18. Dani, V.S.; Dees, M.; Leopold, H.; Busch, K.; Beerepoot, I.; van der Werf, J.M.E.M.; Reijers, H.A. Event Log Extraction for Process Mining Using Large Language Models. In Proceedings of the CoopIS. Springer, 2025, Vol. 15506, *Lecture Notes in Computer Science*, pp. 56 to 72. https://doi.org/10.1007/978-3-031-81375-7_4.
19. Seeth, M.; Tavares, G.M.; Schuster, D. Automated Event Log Generation from Unstructured Text Using Finetuned LLMs, 2026, [2609.01320]. Preprint.
20. van Zelst, S.J.; Mannhardt, F.; de Leoni, M.; Koschmider, A. Event Abstraction in Process Mining: Literature Review and Taxonomy. *Granular Computing* **2021**, *6*, 719 to 736. https://doi.org/10.1007/s41066-020-00226-2.
21. Kapugama Geeganage, D.T.; Wynn, M.T.; ter Hofstede, A.H.M. Text2EL+: Expert Guided Event Log Enrichment Using Unstructured Text. *ACM J. Data Inf. Qual.* **2024**, *16*, 8:1 to 8:28. https://doi.org/10.1145/3640018.
22. Sturm, F.; Liessmann, A.; Matzner, M. Multimodal Event Log Construction for Process Mining: Instantiating a Reference Architecture. In Proceedings of the Design for Better Futures: Beyond the Science of the Artificial. Completed Research. Springer, 2026, Vol. 16605, *Lecture Notes in Computer Science*, pp. 146 to 164. https://doi.org/10.1007/978-3-032-28316-0_9.
23. Suriadi, S.; Andrews, R.; ter Hofstede, A.H.M.; Wynn, M.T. Event Log Imperfection Patterns for Process Mining: Towards a Systematic Approach to Cleaning Event Logs. *Information Systems* **2017**, *64*, 132 to 150. https://doi.org/10.1016/j.is.2016.07.011.
24. Goel, K.; Leemans, S.J.J.; Martin, N.; Wynn, M.T. Quality-Informed Process Mining: A Case for Standardised Data Quality Annotations. *ACM Trans. Knowl. Discov. Data* **2022**, *16*, 97:1 to 97:47. https://doi.org/10.1145/3511707.
25. Pegoraro, M.; Uysal, M.S.; van der Aalst, W.M.P. Conformance Checking over Uncertain Event Data. *Information Systems* **2021**, *102*, 101810. https://doi.org/10.1016/j.is.2021.101810.
26. Esser, S.; Fahland, D. Multi-Dimensional Event Data in Graph Databases. *J. Data Semant.* **2021**, *10*, 109 to 141. https://doi.org/10.1007/s13740-021-00122-1.
27. van der Aalst, W.M.P. Object-Centric Process Mining: Dealing with Divergence and Convergence in Event Data. In Proceedings of the SEFM. Springer, 2019, Vol. 11724, *Lecture Notes in Computer Science*, pp. 3 to 25. https://doi.org/10.1007/978-3-030-30446-1_1.
28. Corallo, A.; Lazoi, M.; Striani, F. Process Mining and Industrial Applications: A Systematic Literature Review. *Knowledge and Process Management* **2020**, *27*, 225 to 233. https://doi.org/10.1002/kpm.1630.
29. Sener, F.; Chatterjee, D.; Shelepov, D.; He, K.; Singhania, D.; Wang, R.; Yao, A. Assembly101: A Large-Scale Multi-View Video Dataset for Understanding Procedural Activities. In Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR), 2022, pp. 21096 to 21106.
30. Gebru, T.; Morgenstern, J.; Vecchione, B.; Vaughan, J.W.; Wallach, H.; Daumé III, H.; Crawford, K. Datasheets for Datasets. *Communications of the ACM* **2021**, *64*, 86 to 92. https://doi.org/10.1145/3458723.
31. Berti, A.; van Zelst, S.J.; Schuster, D. PM4Py: A process mining library for Python. *Softw. Impacts* **2023**, *17*, 100556. https://doi.org/10.1016/j.simpa.2023.100556.
32. Leemans, S.J.J.; Fahland, D.; van der Aalst, W.M.P. Discovering Block-Structured Process Models from Event Logs - A Constructive Approach. In Proceedings of the Petri Nets. Springer, 2013, Vol. 7927, *Lecture Notes in Computer Science*, pp. 311 to 329. https://doi.org/10.1007/978-3-642-38697-8_17.
33. Pegoraro, M.; van der Aalst, W.M.P. Mining Uncertain Event Data in Process Mining. In Proceedings of the 2019 International Conference on Process Mining. IEEE, 2019, pp. 89 to 96. https://doi.org/10.1109/ICPM.2019.00023.
34. Mannhardt, F.; Petersen, S.A.; Oliveira, M.F. Privacy Challenges for Process Mining in Human-Centered Industrial Environments. In Proceedings of the Intelligent Environments. IEEE, 2018, pp. 64 to 71. https://doi.org/10.1109/IE.2018.00017.