dbt Run Cache - Prod Setup Instructions

How to Enable in Fivetran Transformations (Prod)

1. Go to Fivetran Transformations and click "Manage projects"



2. Select the applicable project, and "Edit connection settings"
3. You will now need to update the target with the appropriate credentials.
   a. **[TO GENERATE NEW CREDENTIALS]** If you are need to create new credentials, generate them by running the following commands from your terminal:
      i. create the new client ID using:
         1. `drc auth client-create -n "client_name_example" -d "add description"`
      ii. then retrieve the ID for that newly created client by running:
         1. `drc auth client-list`
      iii. then, generate the secret for that client by running:
         1. `drc auth client-secret "client_ID_retrieved_from_last_step"`

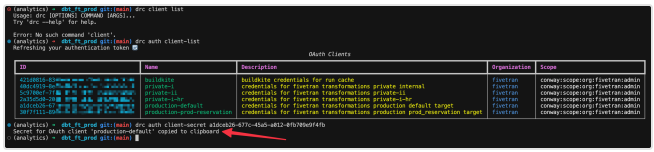

   b. With this information, now you can edit the target, and add the optional keys

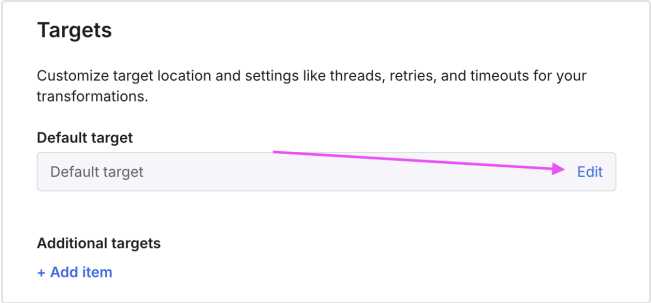

i. `run_cache_oauth_client_id`

ii. `run_cache_oauth_client_secret`

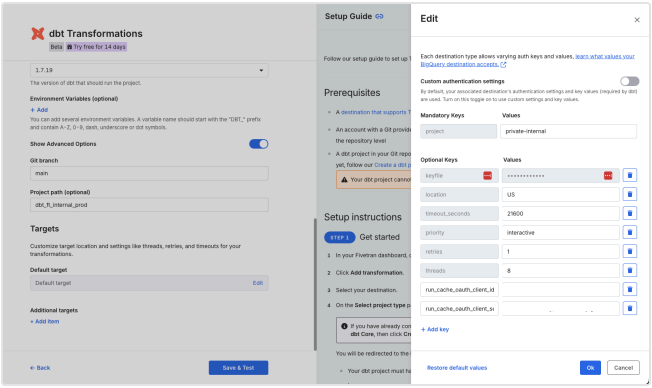

c. Add an environment variable, `DBT_RUN_CACHE_DISABLED=0` .

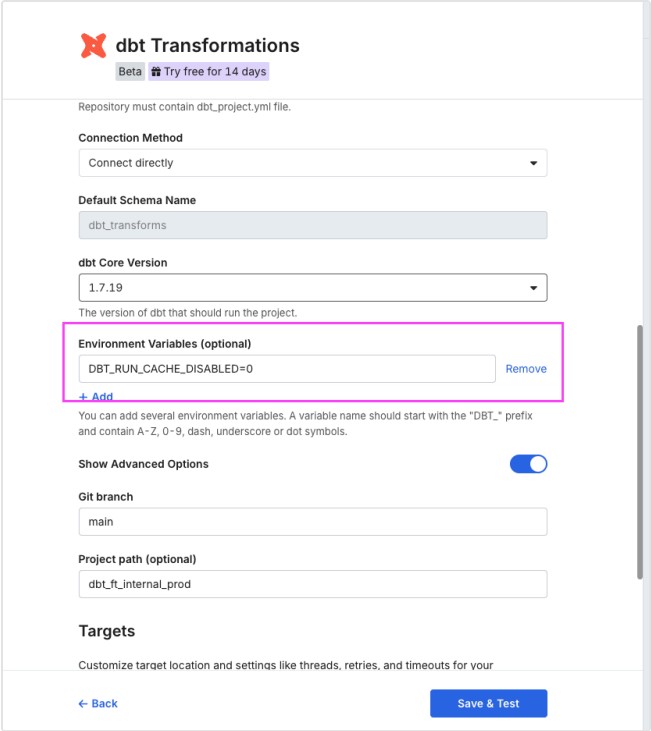

How to Disable in Fivetran Transformations (Prod)
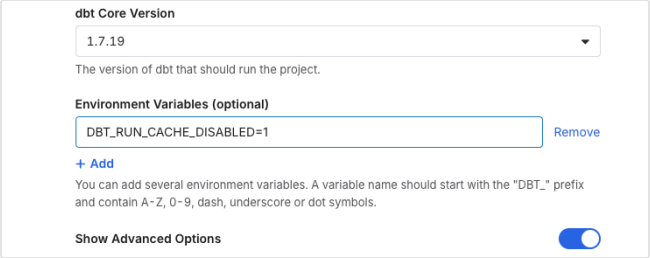
1. Go to Fivetran Transformations and click "Manage projects"
2. Select the applicable project, and "Edit connection settings"
3. Add an environment variable, `DBT_RUN_CACHE_DISABLED=1`