

ONE TASK, TWO MACHINES

English

“...download the blogs opening now in PDF format and save them in their title to /home/user/Documents/Blog.”


Arabic (MSA, human-translated)

«...يرجى تنزيل المدونات المفتوحة الآن بصيغة PDF وحفظها
بعناوينها في المسار:»


/home/user/Documents/Blog

+ Egyptian · Syrian · Qatari · Sudanese arms (human dialect translations)


English desktop

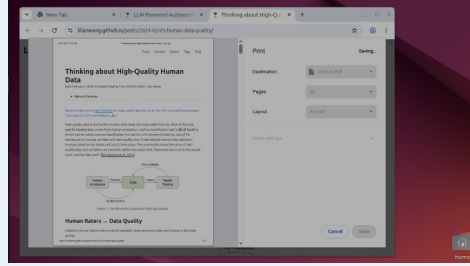

Print → Save as PDF

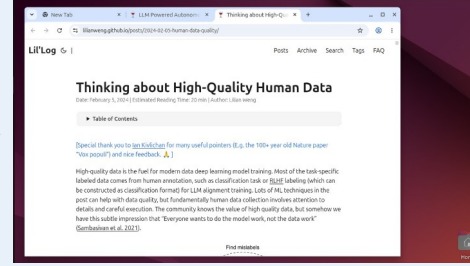


Creates Documents/Blog, saves by title

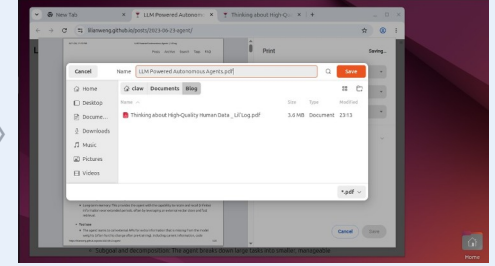


Second article saved · DONE at step 21

PASS ✓


Arabic desktop (RTL)

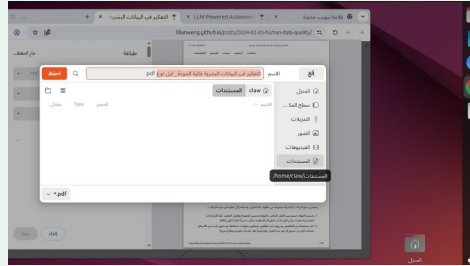

Types the literal path .../Documents/Blog

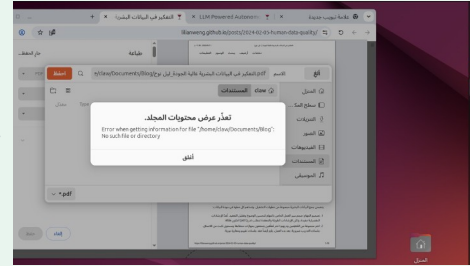

Folder is المستندات → “folder not found”

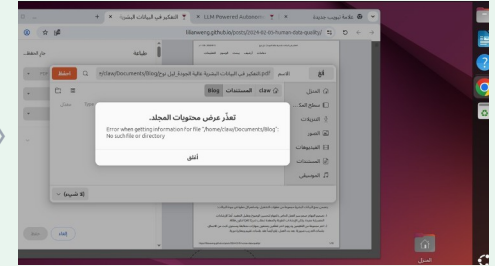

Step 50: same error, 0 PDFs

FAIL X

THE PIPELINE



Task sources

OSWorld · ClawBench ·
Terminal-Bench
+ 50 native Arab-world tasks




Human translation

MSA + 4 dialects
literal parity enforced



Matched machines

EN VM · AR VM
same image, locale differs



Agent

screenshot in
mouse + keyboard out



Evidence

recorder + blocking proxy
final request captured, never
sent



Checker

deterministic
reads evidence only



Paired verdict

PASS / FAIL per arm
EVAL_ERROR excluded

Same task, same model (GPT-5.4), same budget — only the language of the instruction and the desktop differ. English saved both PDFs in 21 steps; Arabic typed the literal “Documents” path on a desktop whose folder is المستندات and never recovered.