

Joseph Flammia


3/10/25

CYB126


Lab 12

Lab 12A:


To start off, on our IIS Windows server we will allow our site to use Windows Authentication. To do this, navigate to the “Add Roles and Features Wizard” by clicking the top right button that says “manage”. From here, click on “Server Roles” as highlighted in the picture below, and then scroll down to the IIS role. From here, we will click the drop-down menu and click “Web Server”, and then click “Security”. From here, we will check off the Windows Authentication option.

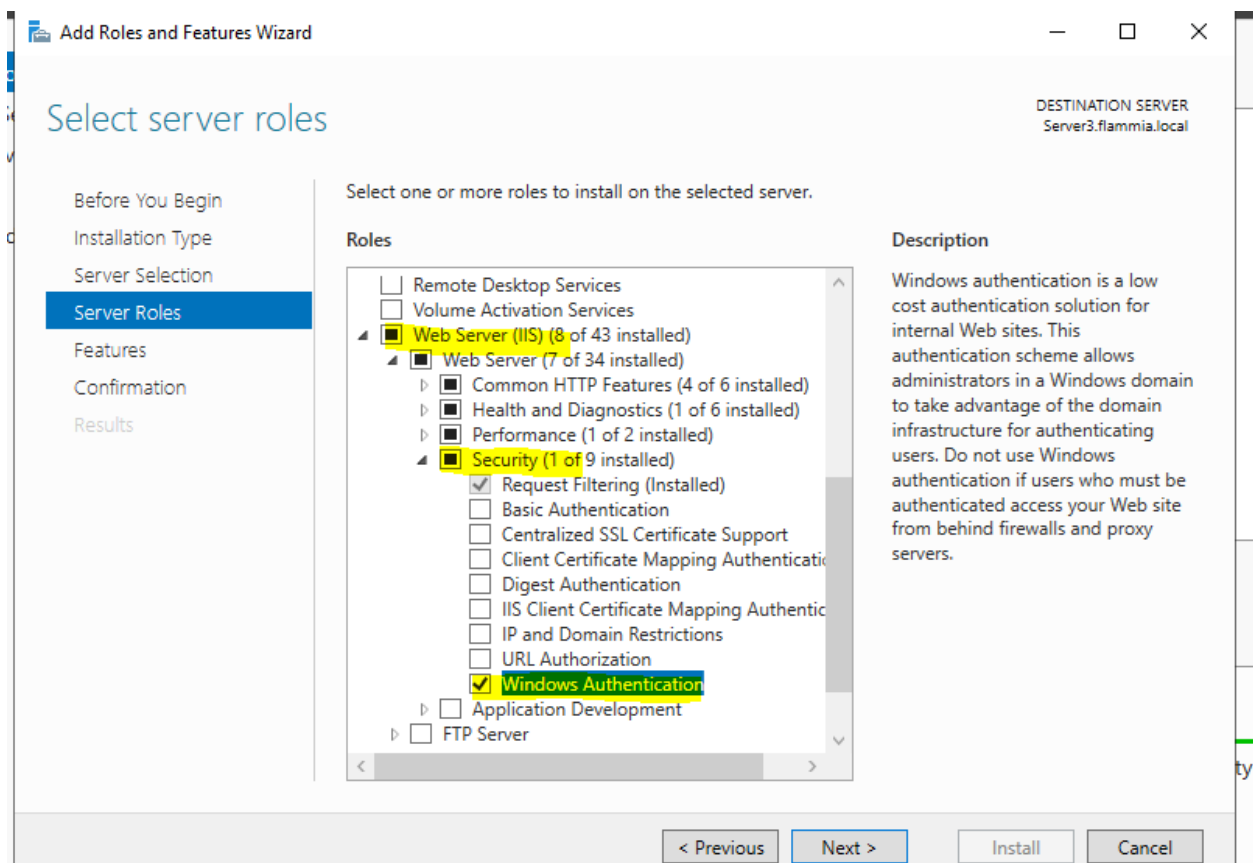


Once checked off, click next twice, and then review your configurations. They should look something like this:

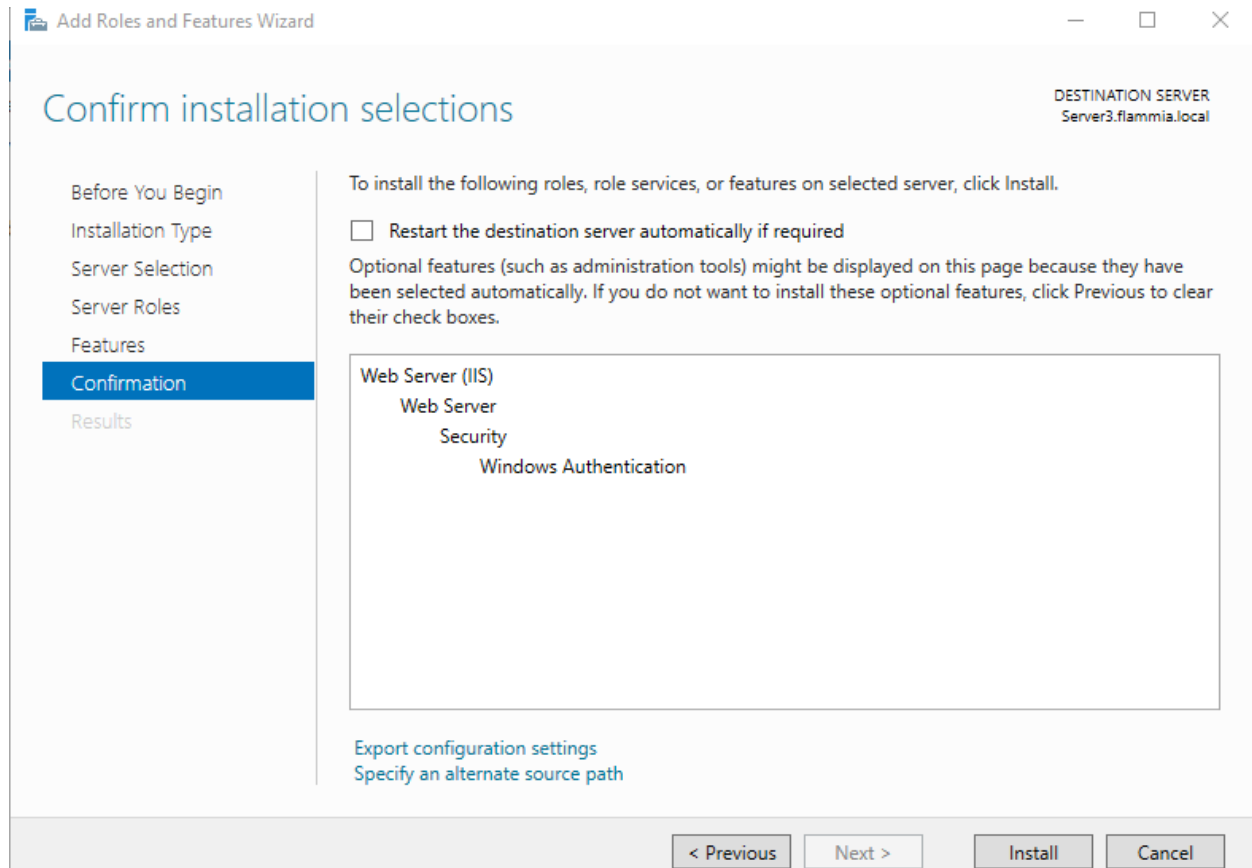


If everything looks correct, we can start the installation. Once finished, we can navigate over to the IIS manager to check our newly installed option called “Authentication”.

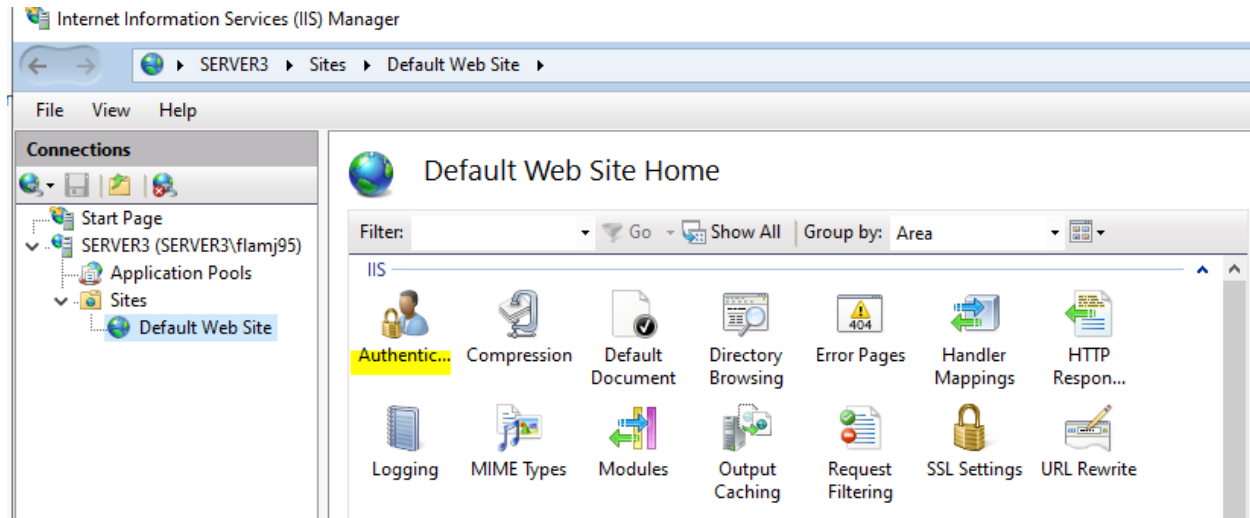

Double clicking on the Authentication option will give us some options to choose from. Here, we will want to disable “Anonymous Authentication” and enable “Windows Authentication”.

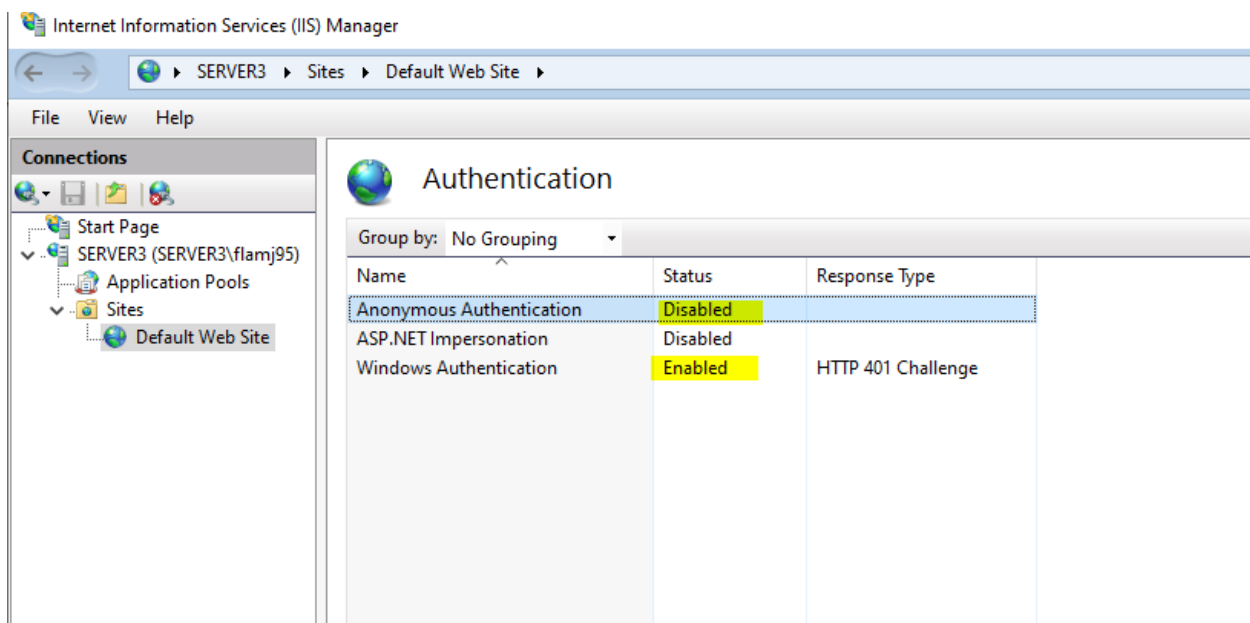

Doing this will require a user to login when trying to view the website. Below, from my Windows 11 VM I attempted to access the site and was greeted with a login prompt.

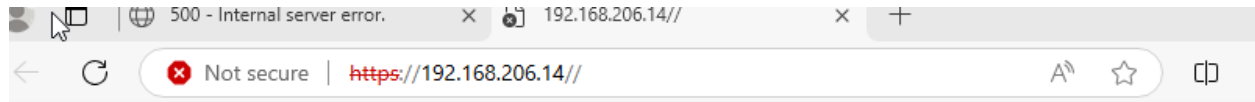

 Windows Security

Sign in to access this site


Authorization required by https://192.168.206.14

User name


Password

Domain: FLAMMIA


Now to configure the permissions of the site so that only specific people can access the webpage. To do this, right click on “Default Web Site” and click “edit permissions” Then navigate to the security tab. This process will be like editing a files permission.

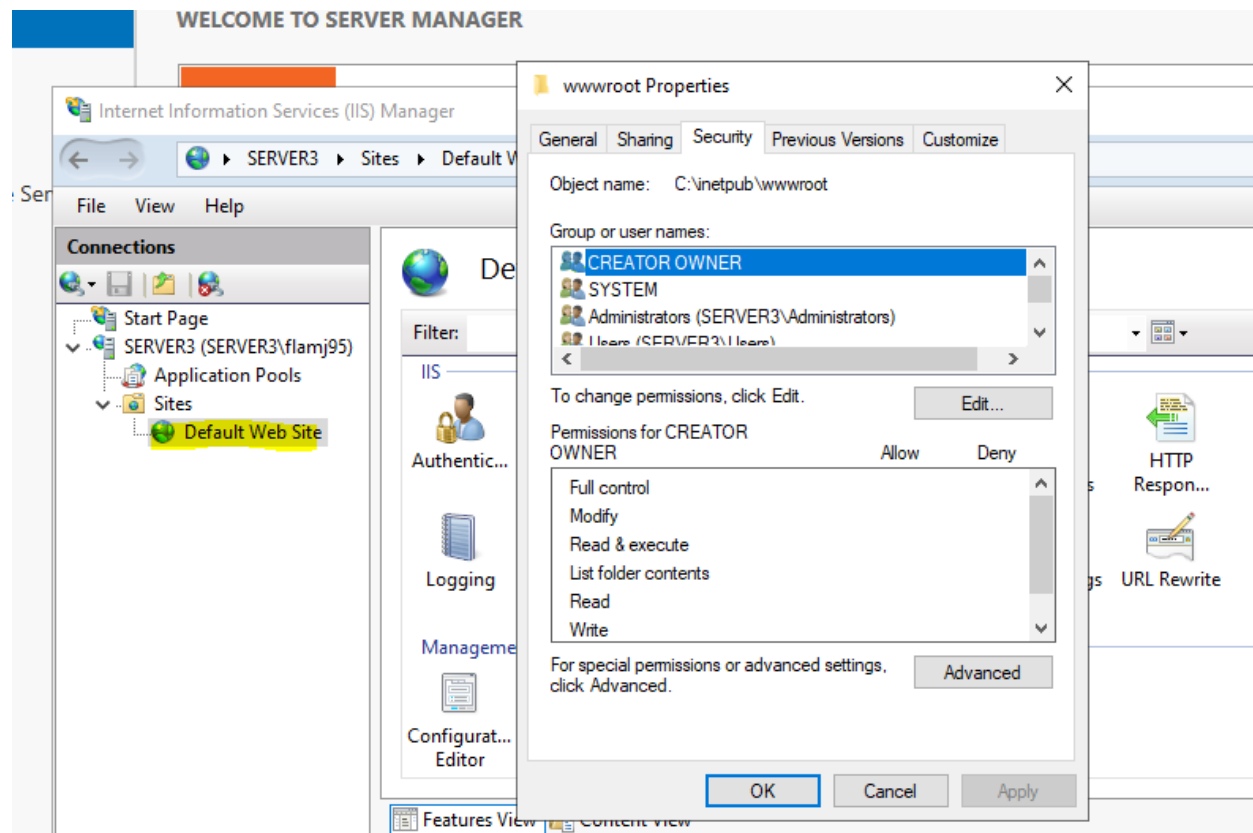


Once on the security tab, click “Advanced”, and then disable inheritance.

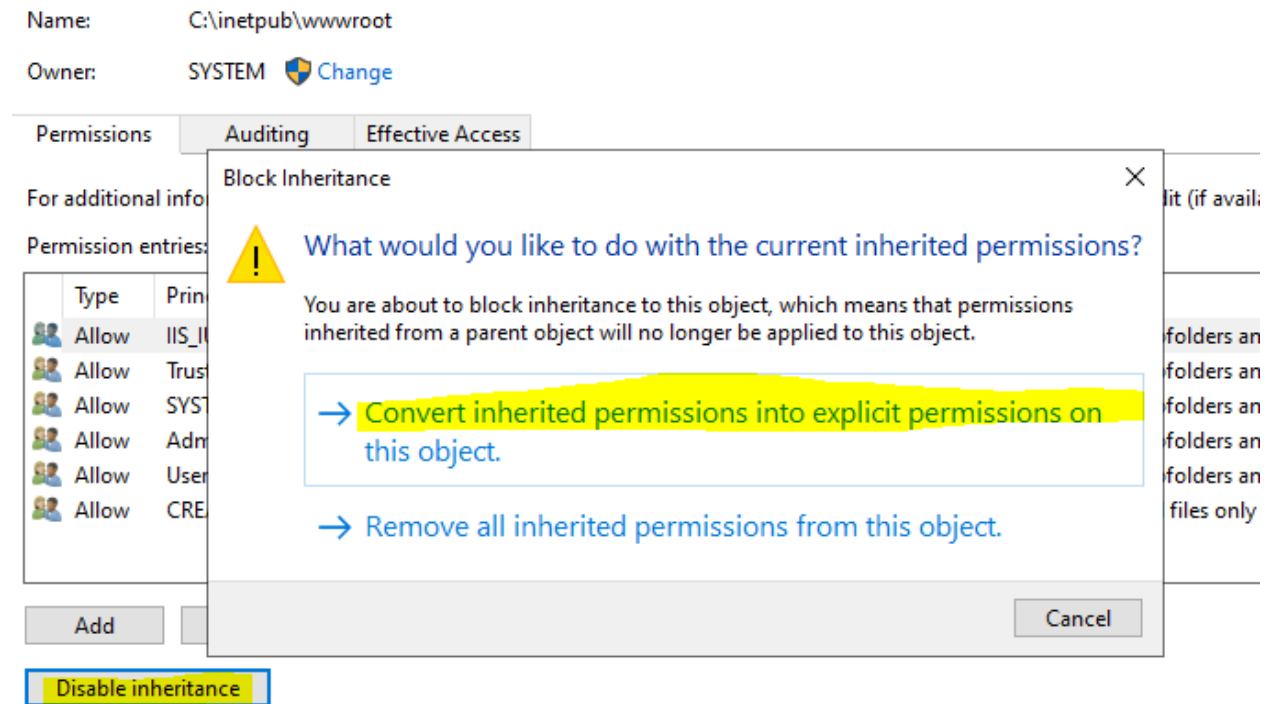


From here, I added user “BBuilder” and granted him access to view the webpage.

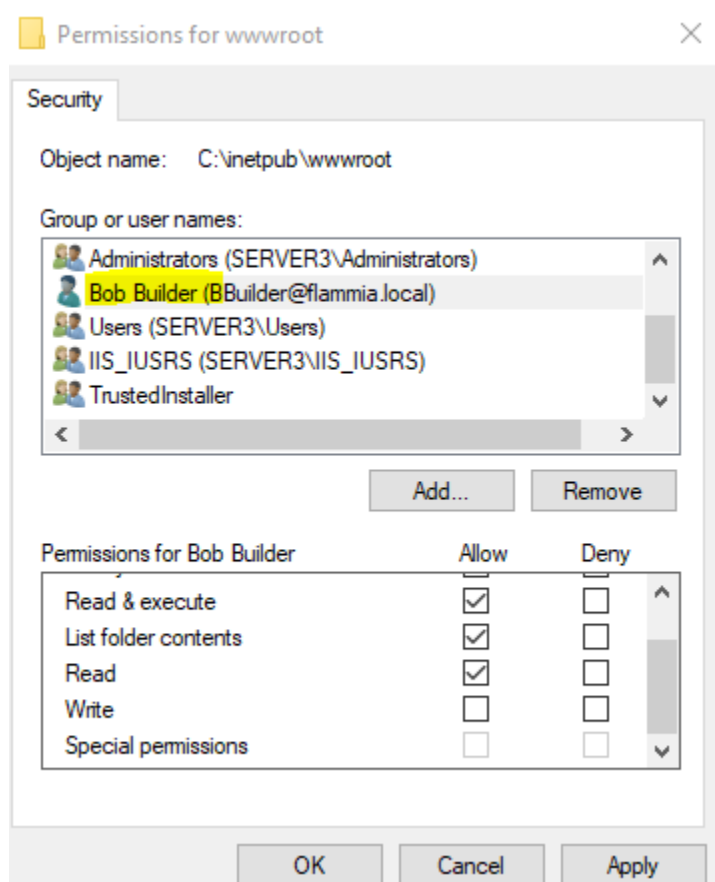

If our configurations are correct, we should be able to access the webpage from the Bbuilder account.

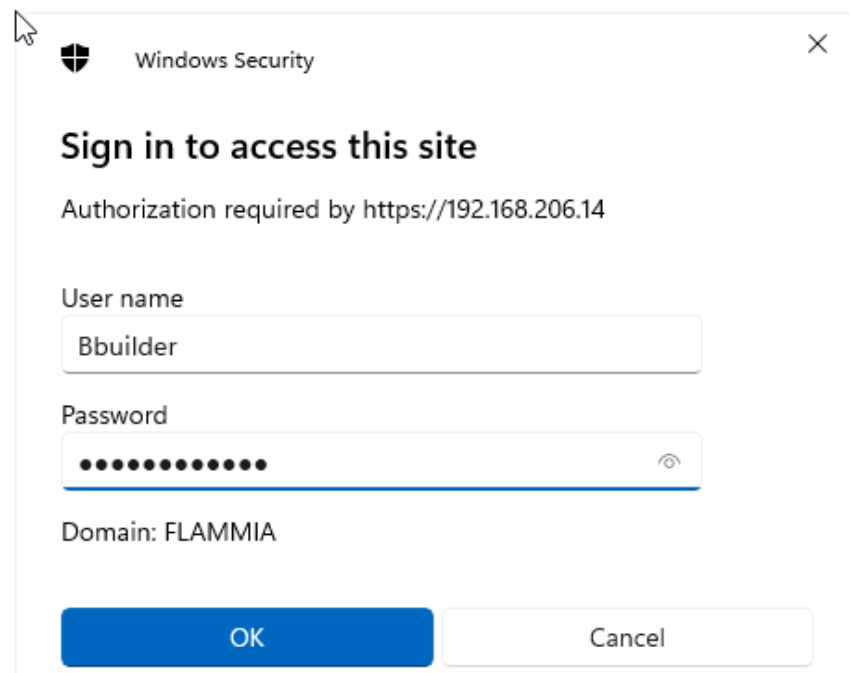

After logging in, I was able to view the IIS webpage successfully.

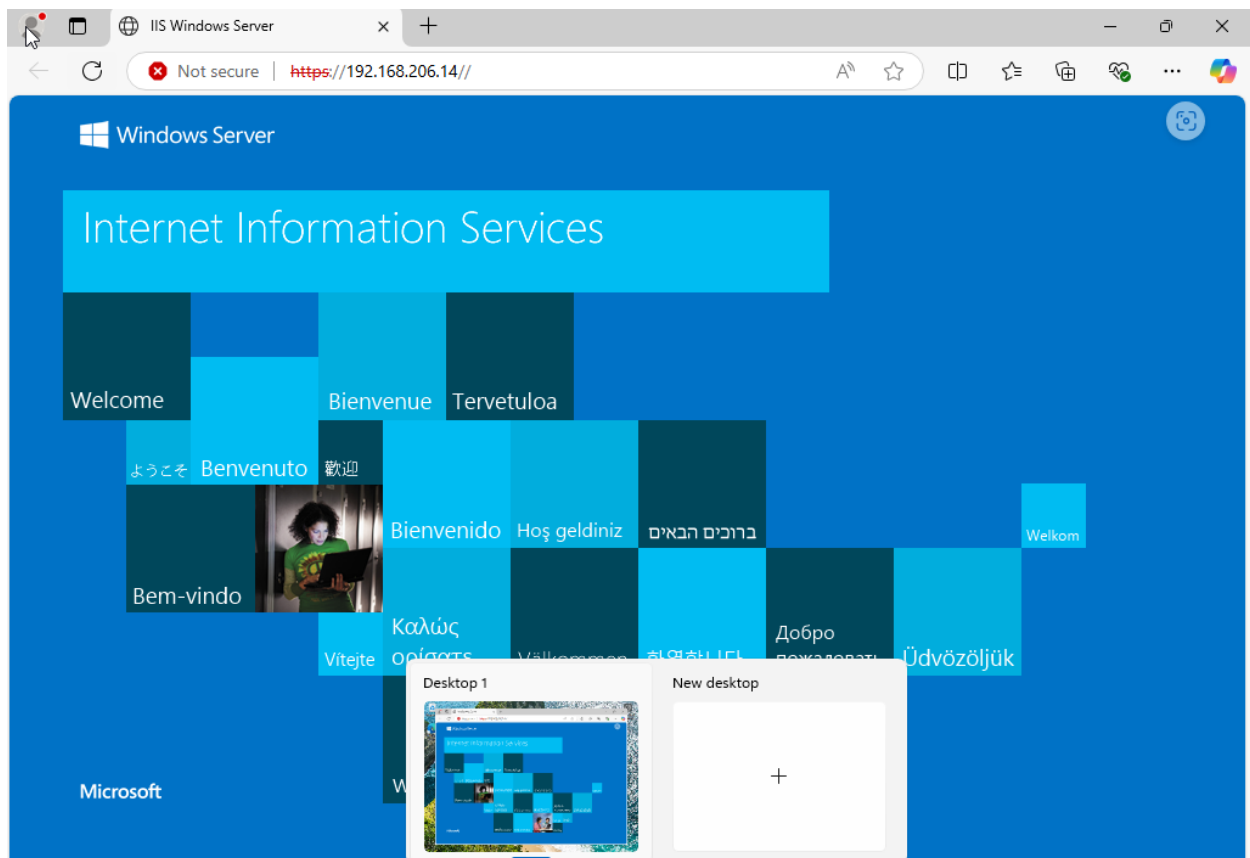

Lab 12B:

Next up, we will configure the permissions so that only a specific group can access the server. Here, I made a new group in my domain called “website_users”. Then, I removed permissions for all users and added the newly created group to the permissions list, granting it access to view the site. Additionally, I removed “BBuilder” from the permissions list.

Name: C:\inetpub\wwwroot

Owner: SYSTEM  [Change](#)

Permissions Auditing Effective Access

For additional information, double-click a permission entry. To modify a permission entry, select the entry and click Edit (if available).

Permission entries:

	Type	Principal	Access	Inherited from	Applies to
	Allow	CREATOR OWNER	Full control	None	Subfolders and files only
	Allow	SYSTEM	Full control	None	This folder, subfolders and files
	Allow	IISTEST (FLAMMIA\IISTEST)	Read & execute	None	This folder, subfolders and files
	Allow	website_users (flammia\websi...	Read & execute	None	This folder, subfolders and files
	Allow	Administrators (SERVER3\Ad...	Full control	None	This folder, subfolders and files
	Allow	IIS_IUSRS (SERVER3\IIS_IUSRS)	Read & execute	None	This folder, subfolders and files
	Allow	TrustedInstaller	Full control	None	This folder, subfolders and files


Add

Remove

View

Enable inheritance

After these configurations, attempting to login will result in failure no matter what. Only users in the “website_users” group can view the site.

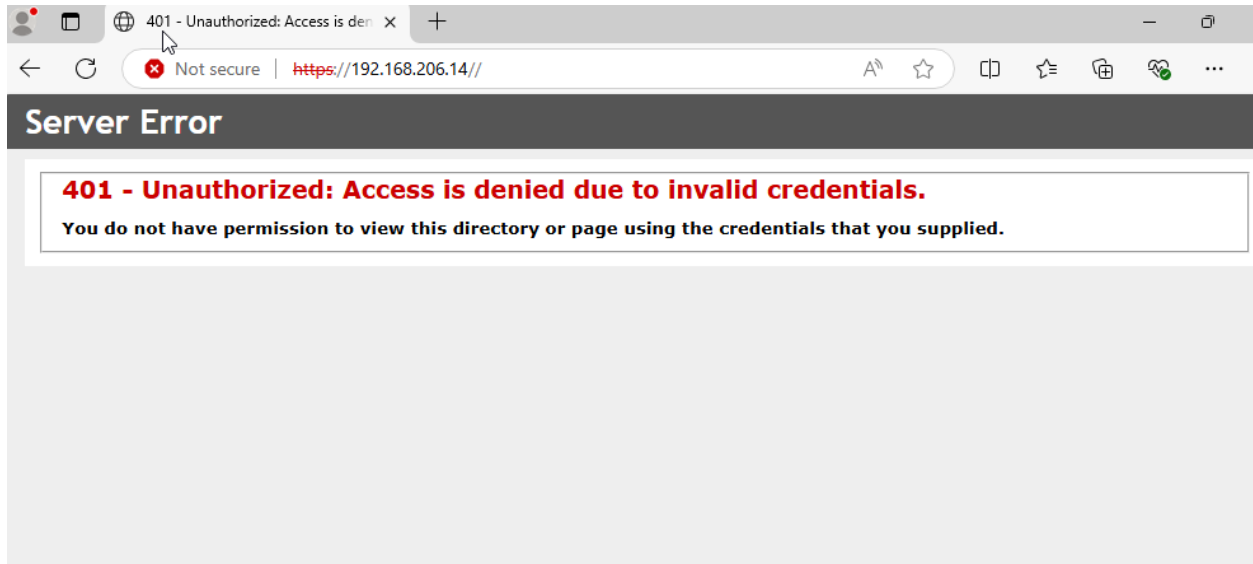

Here, I added “BBuilder” to the “website_users” group. Now trying to access the webpage with the BBuilder user will result in no issues.

Bob Builder Properties



General	Address	Account	Profile	Telephones	Organization
Remote control		Remote Desktop Services Profile			COM+
Member Of		Dial-in	Environment	Sessions	

Member of:

Name	Active Directory Domain Services Folder
Domain Users	flammia.local/Users
IIS_IUSRS	flammia.local/Builtin
IT	flammia.local/Users
website_users	flammia.local/Users

Add...

Remove

Primary group: Domain Users

Set Primary Group


There is no need to change Primary group unless you have Macintosh clients or POSIX-compliant applications.

OK

Cancel


Apply

Help

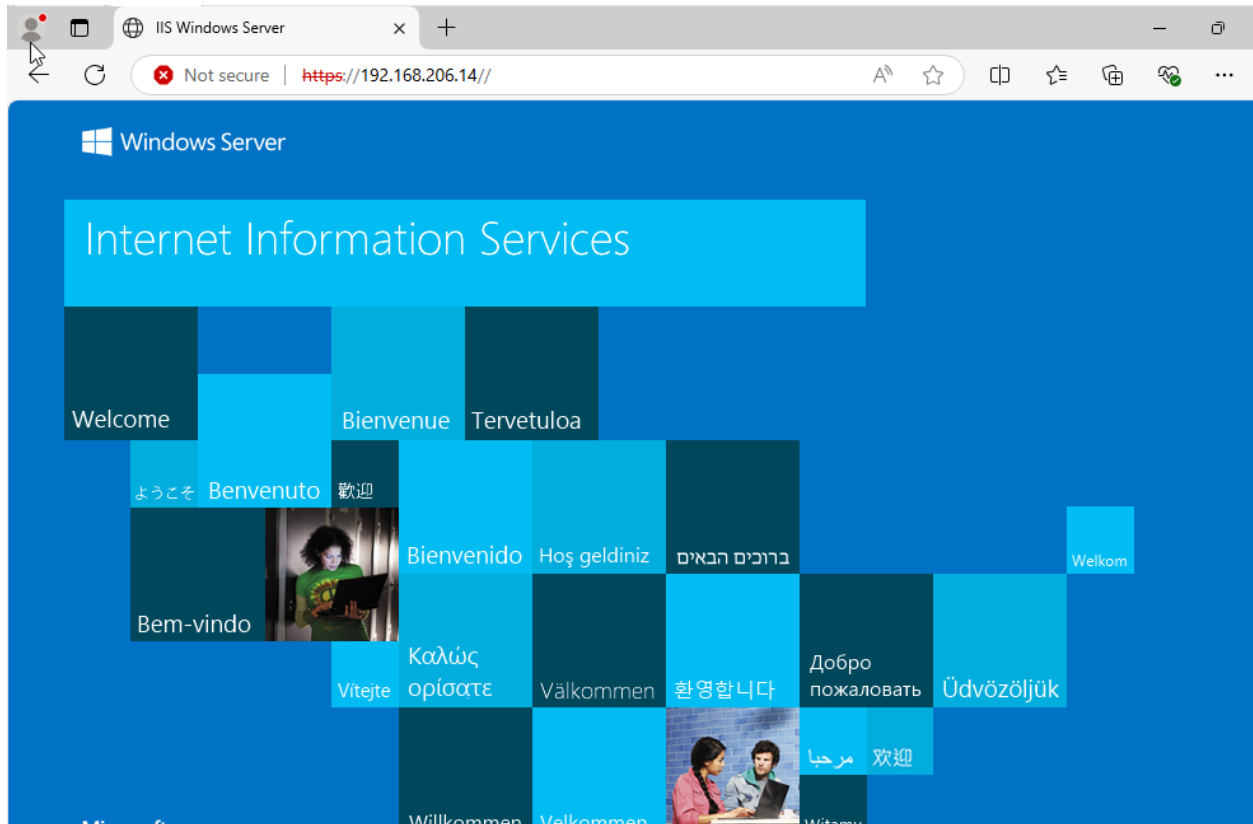


Lab 12C:


Now to try and customize our webpage. Here, I copied “Index.html” from Brightspace and dragged and dropped it to my Server 3 Desktop.

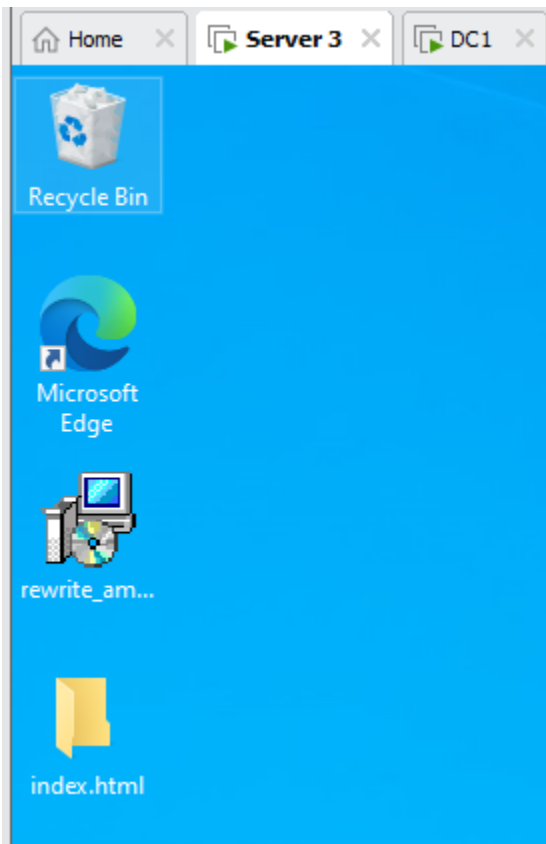

From here, I moved the file inside the folder “index.html” to the folder the ‘wwwroot’ directory. You can find this directory by right clicking on “Default Document” and then “Explore” in IIS manager.

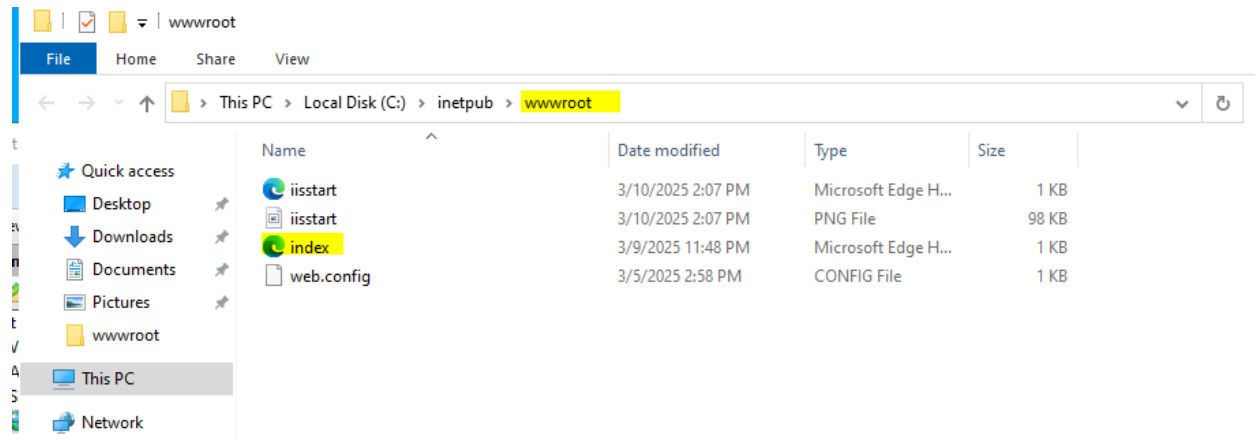


Trying to access the webpage now from a browser will greet you with this:



CYB126


Hello world!

Next up, I changed the name of the file from “index” to “test” to see what would happen. As you can see, after changing the file name the HTML was no longer present, and the IIS webpage was back.

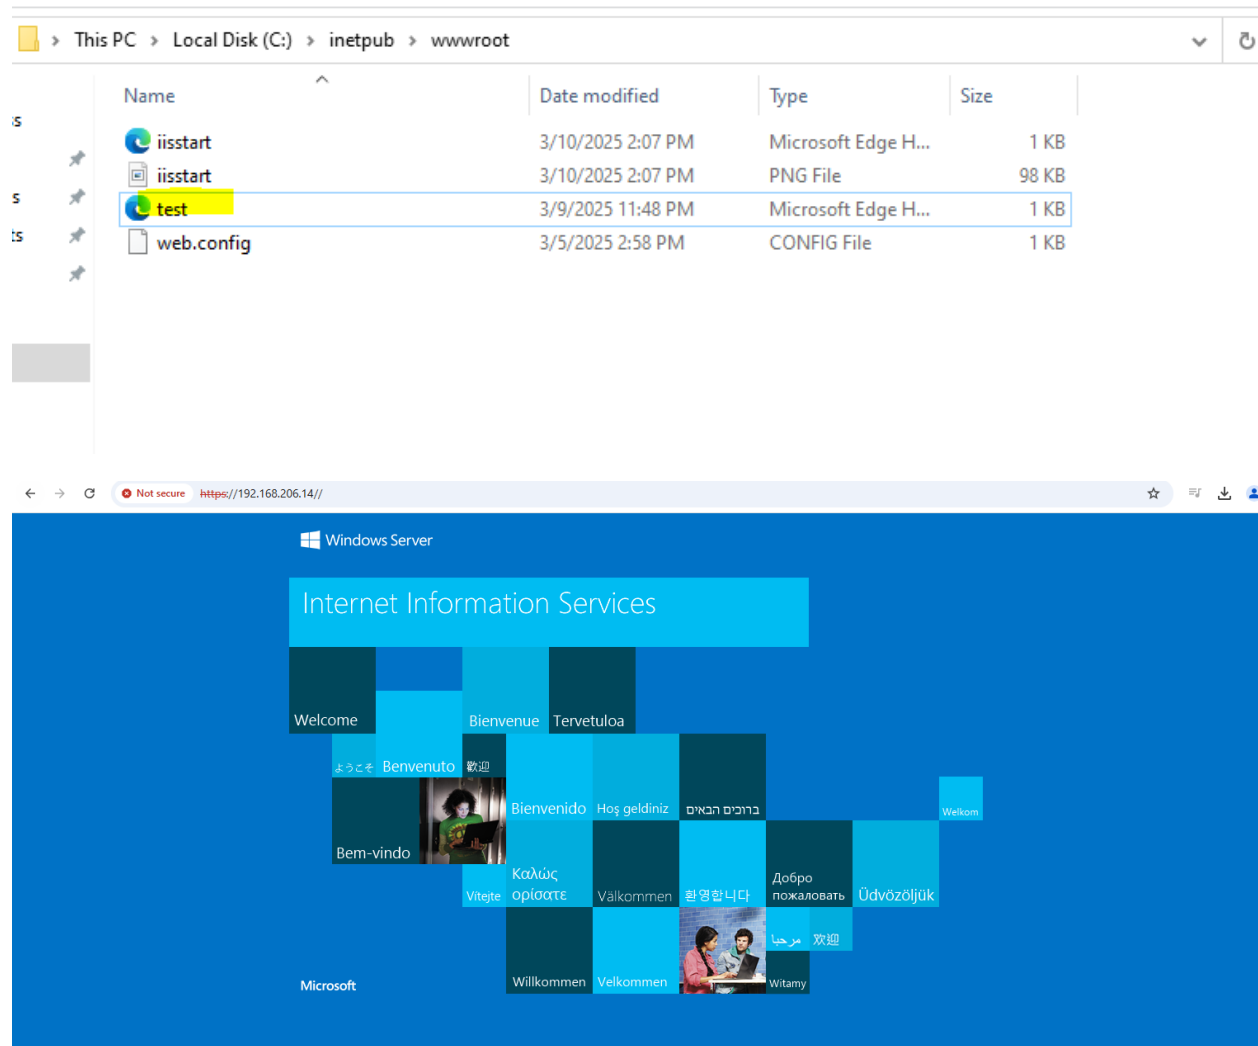

If we add a new name in the Default Document settings called “test” however, we can go back to the HTML webpage. To do this, simply right click in the default document settings,

click “add” and then enter the name.

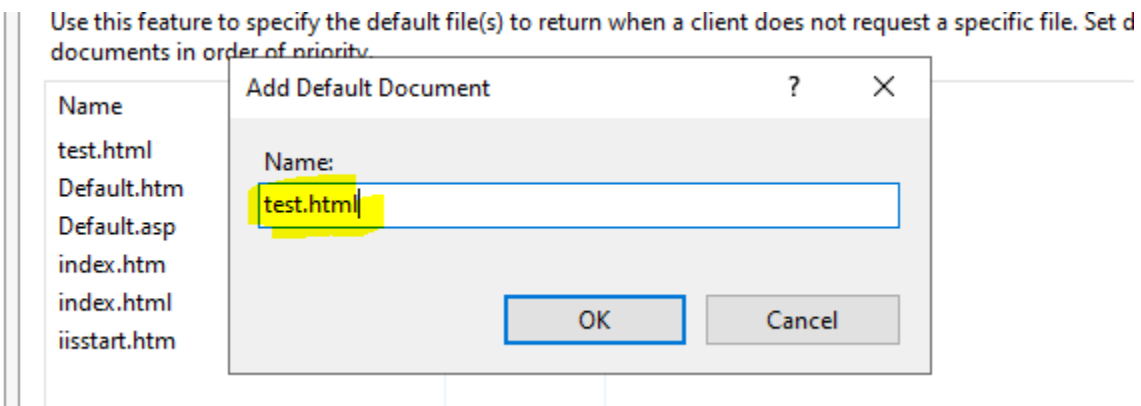


Now, we can attempt to access the site again. Here, I simply typed “192.168.206.14/test.html” and got the original webpage back.




Default Document

Use this feature to specify the default file(s) to return when a client does documents in order of priority.


Name	Entry Type
test.html	Local
Default.htm	Inherited
Default.asp	Inherited
index.htm	Inherited
index.html	Inherited
iisstart.htm	Inherited

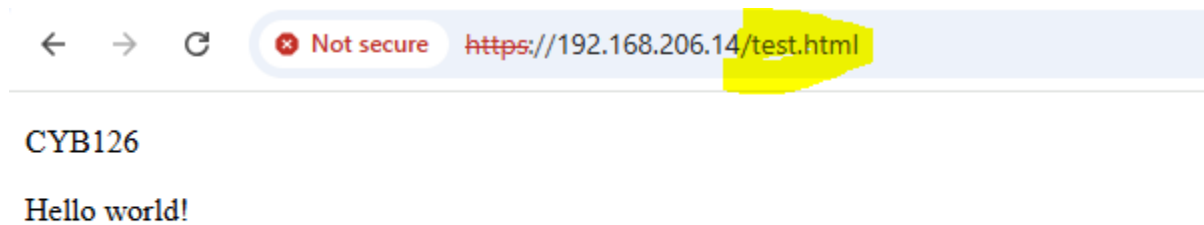

Now let's change the order around. First, we will add a new name in the default document settings. Here, I called it "flammia"

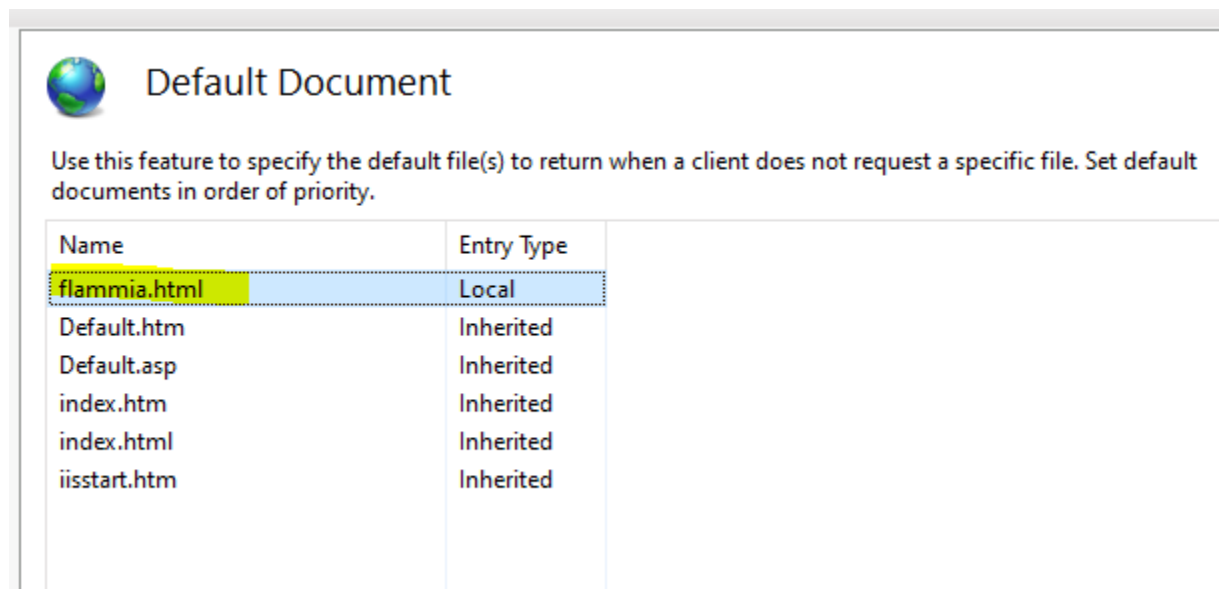

Then, in the "wwwroot" directory, I renamed the html file to "flammia".

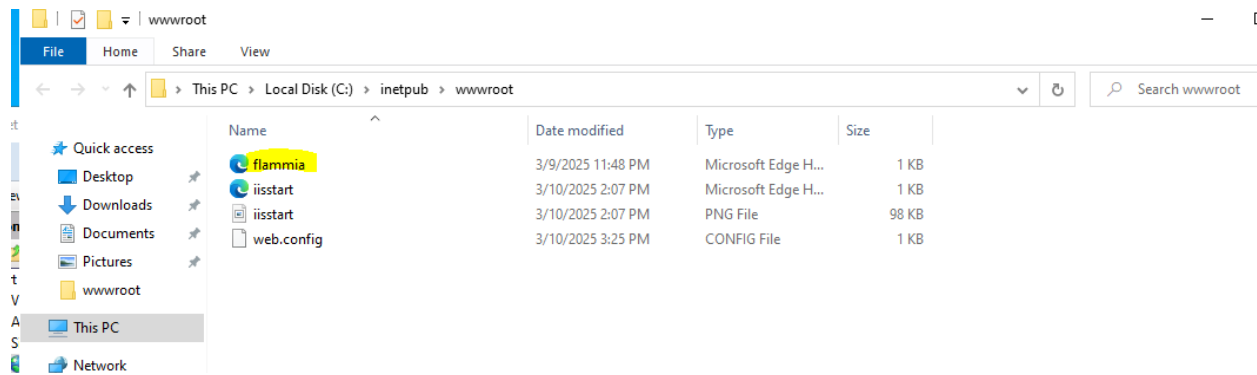

Trying to access the webpage now will once again show the HTML webpage with the new “flammia.html” tagged at the end of the URL.



CYB126

Hello world!