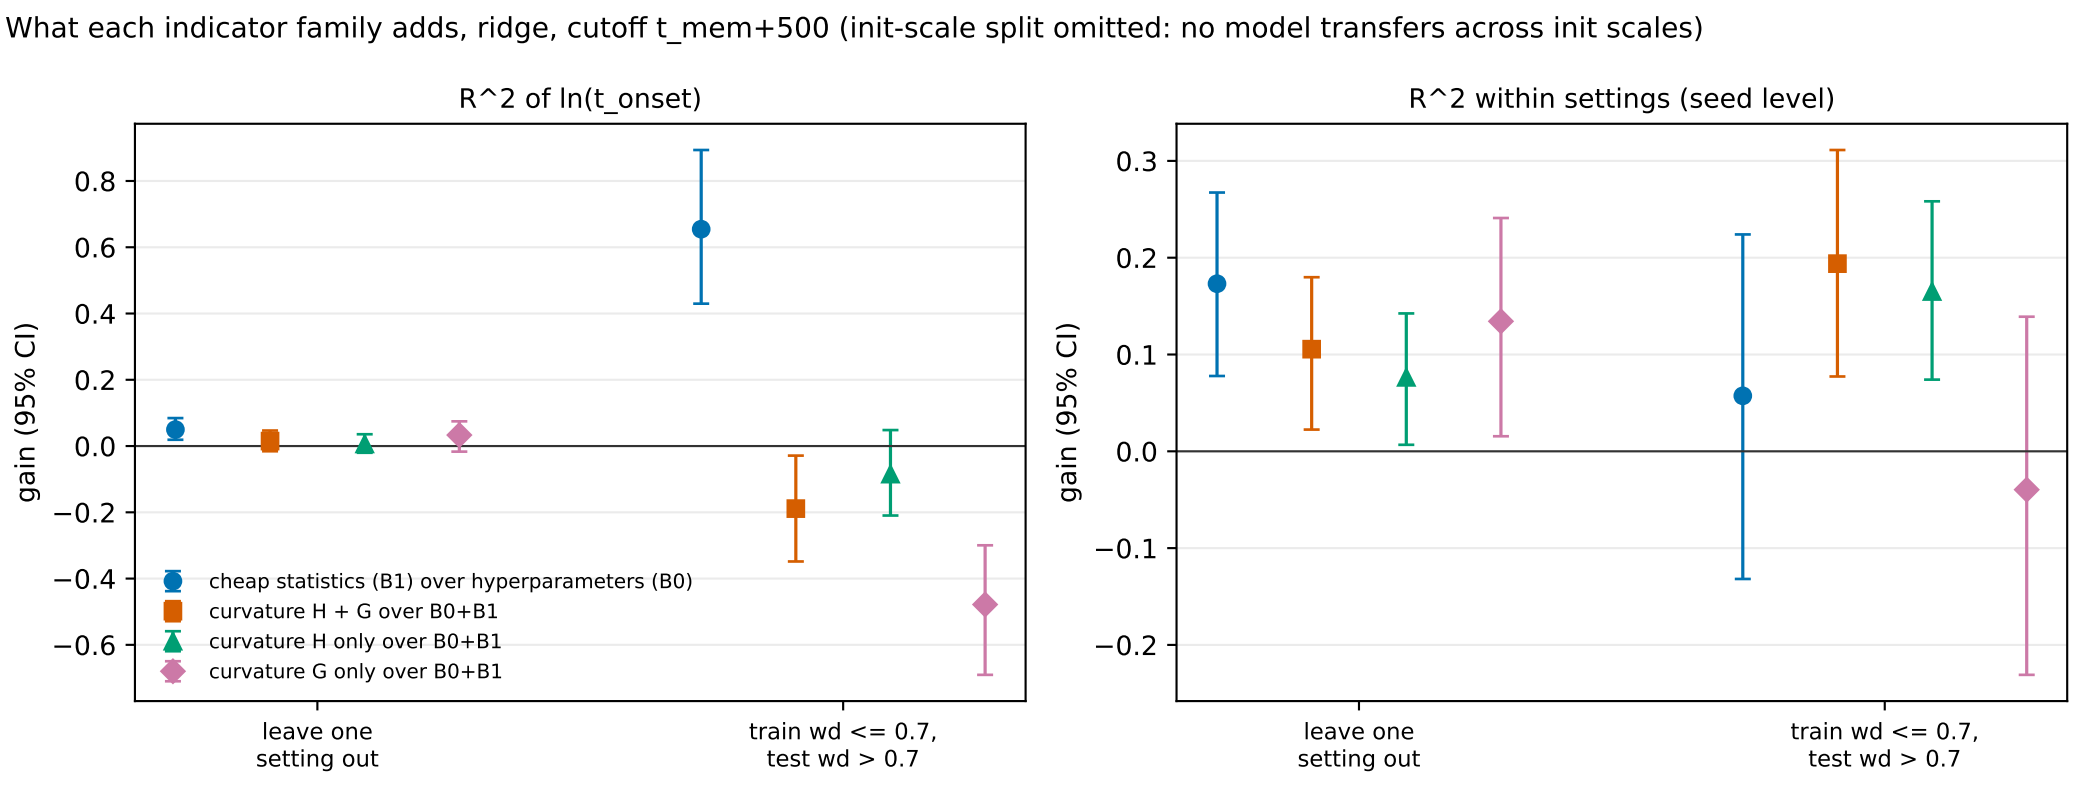
What each indicator family adds, ridge, cutoff t_mem+500 (init-scale split omitted: no model transfers across init scales)
R^2 of ln(t_onset)
gain (95% CI)
0.8
0.6
0.4
0.2
0.0
−0.2
−0.4
−0.6
cheap statistics (B1) over hyperparameters (B0)
curvature H + G over B0+B1
curvature H only over B0+B1
curvature G only over B0+B1
leave one setting out
train wd <= 0.7, test wd > 0.7
R^2 within settings (seed level)
gain (95% CI)
0.3
0.2
0.1
0.0
−0.1
−0.2
leave one setting out
train wd <= 0.7, test wd > 0.7