

Preventing Wrong-Target Agent Actions in Spatial Interfaces with Executable Interaction Contracts

ANONYMOUS AUTHOR(S)

Embodied agents in three-dimensional interfaces can return a fluent response even when the selected object, responsible agent, invoked operation, and reported evidence do not agree. Such failures are difficult to detect when scene bindings, agent roles, handoffs, and backend endpoints are wired in separate artifacts. We present an executable interaction contract for spatial multi-agent interfaces, realized as FunctionalMLDS across a Unity desktop client and a conversational-agent backend. The contract pins one model version and requires each admitted request to resolve one spatial target, one declared provider, one capability use, and one concrete runtime action. The backend re-resolves these relations rather than trusting client fields; stale, ambiguous, unreachable, or multiply bound requests fail before a response-model call and session mutation whenever the violation is request-decidable. Response-dependent violations are rejected transactionally.

We evaluate coverage, migration non-regression, runtime enforcement, added cross-layer expressiveness, and structural cost in three authored spatial environments. All 93 scene assets participate in complete declared interaction paths (186/186 asset-targeting step-capability-use pairs). A normalized direct-wiring adapter and the contract representation agree on all 93 owner decisions and 459 object-by-start-agent route classifications under a fixed shared policy. The executable backend admits all 298 local or directly reachable routes with matching target and provider evidence, and rejects all 161 transitive or unreachable routes before the deterministic response stub without retained session mutation. A stricter provider contract detects and localizes 9/9 additional cross-layer mutations with 0/3 false positives; the direct artifacts do not represent the corresponding typed relations. This additional structure costs 5.9–7.6 times the local adapter workload in the reported microbenchmark. The contribution is a fail-closed control and evidence boundary for an intelligent spatial interface, not a claim about answer quality or human experience.

CCS Concepts: • **Human-centered computing** → **Intelligent user interfaces**; *Interactive systems and tools*; • **Computing methodologies** → *Intelligent agents*.

Additional Key Words and Phrases: intelligent user interfaces, embodied agents, spatial grounding, interaction contracts, runtime assurance, model-driven engineering, Unity

ACM Reference Format:

Anonymous Author(s). 2026. Preventing Wrong-Target Agent Actions in Spatial Interfaces with Executable Interaction Contracts. 1, 1 (August 2026), 24 pages. <https://doi.org/10.1145/nnnnnnn.nnnnnnn>

1 Introduction

Immersive three-dimensional interfaces—including virtual-reality environments and desktop 3D applications—can contain several embodied AI agents with different knowledge, responsibilities, and capabilities. A virtual exhibition, for example, may include a reception agent, a product specialist, and a career advisor. When a visitor points at a product panel and asks, “What is this?”, the interface must do more than generate a plausible sentence. It must preserve the

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than the author(s) must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from permissions@acm.org.

© 2026 Copyright held by the owner/author(s). Publication rights licensed to ACM.

Manuscript submitted to ACM

Manuscript submitted to ACM

selected object, determine which agent is responsible for it, verify that this agent can perform the requested task, invoke the correct operation, and present a response that still refers to the same object.

These decisions usually span several parts of an implementation. A 3D client, implemented for example in a game engine such as Unity, stores scene objects, colliders, highlights, and interaction state. Configuration artifacts describe agent roles and knowledge. Orchestration code chooses among agents, backend endpoints invoke language models or tools, and logs may record only that a request succeeded. Each part can therefore appear locally correct while the composed interaction is wrong. A fluent answer may concern the wrong object, come from an agent without the required responsibility or capability, or result from an operation that was never intended for that target. Although our evaluated prototype uses Unity, this cross-layer mismatch is not specific to one 3D engine.

For an intelligent user interface, transport success is therefore not the same as interaction success. Before probabilistic generation begins, the system must answer four deterministic questions: *Which modeled object did the visitor select? Which of the available agents is responsible for it? Which capability is that agent allowed to use for this request? Which concrete backend action implements that capability?* After generation, the interface must additionally check that the returned result still agrees with the selected object and responsible agent.

We investigate an *executable interaction contract* that records and checks these decisions. In plain terms, the contract states which objects and agents exist in a spatial scenario, which objects each agent is responsible for, which capabilities each agent provides, which backend action realizes each capability, and which evidence should accompany a successful interaction. Its current realization, FunctionalMLDS (Functional Meta-Language-defined Structure), extends an MLDS-style machine-readable artifact with explicit functional interaction relations [15]. The formal model represents the links as scenario steps, capability uses, runtime bindings, runtime actions, and assertions; Section 3 defines these terms in detail.

A generation pipeline turns the shared contract into the artifacts required by a 3D client and a multi-agent backend. In the current prototype, the client is implemented in Unity. It reports a candidate selected by a camera ray, while the backend treats the pinned contract as authoritative. The backend checks that the candidate has one stable identity, determines the responsible agent from the modeled asset, group, and zone relations, verifies that this agent is reachable from the currently active agent, and selects the exact operation modeled for that target and provider. A client-supplied endpoint name cannot bypass these checks.

We call a request *contract-grounded* when all of these decisions come from the same pinned model version. For an admitted request, the system has found one complete path from the selected target through the responsible agent and capability to the concrete action, and the returned evidence agrees with that path. Problems that can already be recognized from the request—for example, a stale model version, an ambiguous owner, an unknown target, or an unreachable responsible agent—stop the interaction before a response model is called or conversation state is changed. Some problems become visible only after a model has proposed a response. If, for example, the model proposes a handoff to an agent that is not declared as a valid destination, the provisional change is discarded and the previous session state is restored. In either case, the system can identify the failed stage and relation instead of returning only a generic chat error.

The contract begins after the interface has selected a target candidate. It does not determine the visitor’s unobserved intention, prove that reported ray geometry is physically trustworthy, or establish that generated language is factually correct. A gaze-, gesture-, speech-, or multimodal reference resolver may propose an object; the contract decides whether an admissible interaction exists for that object. This separation is useful because uncertainty about *what the*

visitor meant and inconsistency in *what the system is allowed to do* are different failure classes and require different evidence.

The work is motivated by three interaction requirements drawn from the implemented visitor path and established human–AI interaction guidance [1, 35, 36]:

Stable spatial reference. The object highlighted by the 3D client remains the target while the visitor composes the request, and the response is presented only if the returned identifiers match that pending selection.

Visible unresolved states. No target and ambiguous target are explicit states. They block a deictic request rather than falling through to a fluent but ungrounded answer.

Capability-aware and inspectable routing. The interface selects among agents according to their modeled responsibilities and capabilities. The chosen provider, route reason, capability, binding, and action remain available as structured evidence for developer diagnosis.

We do not infer that these mechanisms improve trust, preference, or usability; that requires human evaluation. We instead ask whether the system implements the claimed control boundary, whether migration preserves the behavior already encoded in the direct artifacts, and what assurance and cost the additional relations introduce.

Accordingly, we study three research questions:

RQ1—Coverage and non-regression. Can authored 3D environments with multiple agents and distinct capabilities be migrated to complete target–provider–capability–action paths while preserving their existing ownership and routing decisions under a fixed policy?

RQ2—Fail-closed enforcement. Does the implemented 3D-client–backend path, evaluated in the Unity prototype, admit exactly the contract-valid local and one-hop requests, preserve target and provider evidence, and reject stale, ambiguous, unreachable, or contradictory requests without retained side effects?

RQ3—Added assurance and cost. Which cross-layer inconsistencies are expressible and localizable in the contract representation beyond the direct artifacts, and what representation and local execution costs accompany that structure?

The paper makes four contributions:

- (1) an interaction-oriented failure model and executable contract for multi-agent 3D interfaces that binds a spatial selection to one responsible provider, capability, action, and evidence path under a pinned model version;
- (2) an implemented fail-closed architecture across a Unity-based 3D client and a conversational multi-agent backend, including authoritative server-side re-resolution, staged admission checks, one-hop handoff constraints, and transactional response validation;
- (3) a reproducible, API-free evaluation over three spatial environments, comprising complete-chain audits, a normalized direct-wiring non-regression comparison, 459 executable routing probes, targeted invalid requests, and Unity batch smokes; and
- (4) a separated analysis of common faults, contract-only cross-layer faults, representation edits, and local structural runtime, exposing both the added invariant scope and its cost.

The complete prototype, model instances, benchmark scripts, raw results, and reproduction instructions are provided in the accompanying anonymous repository. The central claim is not that a metamodel by itself makes an interface intelligent. Rather, the explicit relations determine what the intelligent interface is allowed to interpret and present.

This shifts a class of wrong-target, wrong-provider, and undeclared-action failures out of probabilistic dialogue behavior and into a deterministic, inspectable boundary.

The remainder of the paper is organized as follows. Section 2 positions the work against embodied agents, spatial reference, conversational XR, model-based interface engineering, and runtime assurance. Section 3 introduces the executable interaction contract and its guarantees. Section 4 describes its realization in the Unity client, multi-agent backend, generation pipeline, and runtime evidence path. Section 5 presents the evaluation design, and Section 6 reports the structural, runtime, and fault-injection results. Section 7 discusses implications for intelligent interfaces and the cost of the additional structure. Section 8 states the limitations and threats to validity, and Section 9 concludes the paper; the appendix provides the detailed contract and evaluation tables.

2 Related Work and Positioning

2.1 Embodied agents and spatial reference

Embodied conversational agents combine language with a visible body, gesture, gaze, and shared space [10]. Museum-guide systems show why the location and social role of an agent matter to interaction [3, 21], while recent generative-agent and multi-agent work adds memory, role specialization, and language-mediated coordination [25, 32]. These systems motivate the multi-agent setting considered here, but a role or dialogue policy does not by itself bind an utterance to one Unity entity and one executable operation.

Situated-language research addresses the upstream reference problem. Approaches combine plan recognition with referring expressions [16], map directions into perceived environments [20], maintain symbolic anchors for discourse [23], and learn perceptually grounded word meanings [19]. MM-Conv extends this line with synchronized speech, motion, gaze, and scene context for ambiguous reference in dynamic 3D dialogue [13]. Our contract does not compete with these resolvers: it accepts a candidate selection and checks whether the modeled interface permits that target to reach a specific provider and action. A learned or multimodal resolver could therefore replace the current desktop ray without changing the downstream admission questions.

2.2 Conversational XR and model-based interface engineering

Language models increasingly author or operate immersive environments. LLMR uses prompting, scene understanding, planning, execution, and self-debugging to edit mixed-reality worlds [12]. Tell-XR supports conversational end-user development of event-condition-action automations [9]; CUIfy packages LLM-powered conversational agents for XR [4]; and AgentHands studies gestures for spatially grounded agent conversations [28]. These systems establish that conversational generation, agent embodiment, and XR interaction are valuable and feasible. The issue studied here is narrower: after a world and its agents exist, can the interface prevent a selected object, responsible agent, backend action, and returned evidence from silently diverging?

Model-based interface development has long separated domain, task, abstract interface, and concrete implementation concerns [7, 34]. UsiXML and MARIA support multiple development paths and abstraction levels [27, 33], while OpenUIDL addresses runtime omni-channel interfaces [31]. Model-driven work for immersive applications likewise generates AR applications from domain models [8] or structures VR requirements around roles, scenes, actions, states, and validation [18]. FunctionalMLDS is not a general UI description language. It specializes the runtime link among spatial entities, embodied-agent responsibility, permitted capabilities, concrete operations, and observable assertions.

The closest lineage is MLDS. Fischer et al. define a Meta-Language-defined Structure as a machine-readable artifact governed by a domain-specific language specification [15]. Prior work already uses this idea for natural-language-to-Unity materialization and optional placement refinement [6], and modular MLDS instructions add profiles, dependencies, versions, and gatekeeper validation for evolving toolchains [5]. Consequently, this paper does not claim novelty for MLDS-to-Unity generation, placement, or modular language specification. Its contribution begins at interaction time: the same typed relations used during materialization remain active as an admission and evidence contract.

2.3 Human–AI control, contracts, and provenance

Human–AI interaction guidelines emphasize communicating system capability and status, making uncertainty visible, enabling correction, and supporting recovery [1, 35, 36]. Explanations should answer questions people actually have [26], but explanation alone does not guarantee improved joint performance [2]. These findings motivate explicit selection states and structured route evidence. They do not justify a claim that the current diagnostic payload is usable or beneficial; the evaluation tests conformance to the declared behavior, not human outcomes.

Design by Contract separates preconditions, postconditions, and invariants [30]; runtime verification evaluates specified properties against execution observations [24]. We adopt this enforcement intuition without claiming formal program verification. The relevant obligations cross implementation layers: a request must use a pinned model, a unique target, a responsible and reachable provider, and an exact action binding; a response must preserve those identifiers. W3C PROV shows how entities, activities, and agents can support exchangeable provenance [22], and failure-attribution work demonstrates that output-only traces are insufficient for multi-agent diagnosis [11]. Our evidence is intentionally smaller than a full reasoning trace: it records contract identifiers and observable outcomes, not private chain-of-thought or an explanation of semantic answer quality.

Requirements traceability is relevant because a link is valuable only when it supports reasoning about change and failure [17, 29]. The evaluation therefore does not count links alone. It tests whether valid cases resolve end to end, whether controlled mutations are localized, whether runtime requests are admitted or rejected at the intended boundary, and what representational cost the links introduce.

2.4 Positioning

Table 1 distinguishes the unit constrained by representative work. Conversational-XR systems primarily generate or control worlds; reference-resolution systems infer a target; model-based UI approaches connect abstract and concrete interfaces; and multi-agent systems coordinate roles. The present contract starts from a selected candidate and constrains the specific path that may cross the Unity–backend boundary.

3 Interaction Contract

This section formalizes the contract through one running example. A visitor selects `brand_panel3` while the Lounge Host is active. The model assigns the panel to the Reception Agent, which provides a grounded-answer capability bound to the backend chat action. It anchors the failure model and checks below.

3.1 Failure model

A fluent response can still hide an unknown panel, ambiguous responsibility, a forbidden handoff, or evidence for another target. Table 2 groups such failures by the inconsistent relation. They define the tested boundary, not prevalence.

Table 1. Positioning by primary unit and assurance locus. The distinctions state the focus of this paper; they do not imply that a cited system lacks mechanisms outside its stated contribution.

Work	Primary represented unit	Main interface/runtime emphasis	Distinction of this work
LLMR [12] and Tell-XR [9]	World edits or event-condition-action automations	Conversational generation and end-user authoring	We constrain an already materialized request through target, provider, capability, and action.
Spatial grounding [16, 23]	Referring expression, perception, and candidate referent	Inferring what a person refers to	We begin after candidate selection and test whether the selected entity has a permitted executable path.
Model-based UI engineering [7, 33, 34]	Tasks, domain concepts, and abstract/concrete interfaces	Transformation across abstraction and deployment levels	We specialize the runtime boundary to spatial entities, agents, capabilities, actions, and evidence.
MLDS lineage [5, 15]	Machine-readable artifacts and modular language specifications	Generation, validation, profiles, and toolchain evolution	We keep one typed artifact active during request admission and response presentation.
This work	Pinned target-provider-capability-action-assertion contract	Fail-closed spatial request admission and relation-level evidence	The contribution is the composed boundary and its executable, corpus-bounded evaluation.

Table 2. Cross-layer failures addressed by the executable contract.

Failure	Example	Contract decision	Observable consequence
Target identity	A collider reports an unknown entity, an obsolete model hash, or a source identifier shared by several objects.	Reject before routing.	No response-model call; target relation and stage are reported.
Target ambiguity	The client reports several candidates or a non-resolved deictic state.	Reject rather than selecting a candidate.	The interface remains in an unresolved state.
Responsibility drift	The active agent is not the unique owner and has no declared direct handoff to the owner.	Resolve asset, then group, then zone ownership; require one owner at the highest matching tier and at most one direct handoff.	Local/direct routes proceed; transitive or unreachable routes stop.
Action shortcut	A scenario or client attempts to invoke an endpoint without a matching provider-specific capability and runtime binding.	Require an exact scenario-step-capability-use-capability-binding-action path.	Zero or multiple exact mappings fail closed.
Evidence mismatch	A response names a different target, provider, binding, or action from the pending request.	Reject presentation and retain the failed relation.	A transport-level success is not treated as contract success.
Undeclared handoff	The response model proposes an agent that is not an allowed handoff target.	Validate the proposed response before commit.	Provisional history is rolled back.

3.2 Contract objects and executable path

A contract-grounded interaction is represented by

$$\mathcal{I} = \langle m, s, t, p, u, c, b, a, q, o \rangle,$$

where m is the pinned model and hash, s a scenario step, t the target, p the provider, u the capability use, c the capability, b the runtime binding, a the concrete action, q the assertions, and o the observation evidence. In the example, t is `brand_panel13`, p is the Reception Agent, s, u, c describe the grounded answer, b, a map it to backend chat, and q, o check the returned path.

The required declaration path is

$$s \rightarrow u \rightarrow c \rightarrow b \rightarrow a.$$

The step cannot invoke a directly. Its capability use must name the provider and targets and resolve one capability, binding, and action; a validation case covers the same binding and assertions. Thus, a generic `POST /chat` call cannot replace the declaration that the Reception Agent may answer about this panel.

The provider p is resolved independently of display names. For target t , the resolver selects the most specific non-empty tier:

$$R(t) = \begin{cases} R_{\text{asset}}(t), & \text{if non-empty,} \\ R_{\text{group}}(t), & \text{otherwise if non-empty,} \\ R_{\text{zone}}(t), & \text{otherwise.} \end{cases}$$

Exactly one agent at that tier is required; several are ambiguous and none is unassigned. The panel's asset-level owner is the Reception Agent, so group or zone owners do not override it. If another agent is active, one declared handoff may reach the provider; longer routes are diagnostic only.

3.3 Admission and response conditions

A deictic request is admitted only if:

- (1) the session is pinned to m , and the supplied model hash equals the current project hash and stored contract fingerprint;
- (2) the supplied entity and source identifier resolve to the same unique scene asset in m , with a resolved, non-ambiguous selection state;
- (3) the responsibility rule yields one provider p , and p is either the active agent or one permitted direct handoff away;
- (4) one capability use u for the trusted target and provider resolves to one capability c , binding b , and action a ;
- (5) the request conforms to the declared action schema.

These checks confirm the pinned room and panel identity, resolve the Reception Agent, permit the Lounge Host's direct handoff, and select the grounded-answer action before the response model is called. The proposal is then compared with that path: handoffs must be declared and all returned identifiers must agree. A match is committed with evidence; another target or undeclared agent rolls back provisional state. Later observations evaluate the assertions as pass, fail, inconclusive, or error.

Figure 1 shows the order. Identity, responsibility, and operation precede generation; response agreement precedes presentation.

3.4 Guarantee boundary

The implementation provides a *model-consistency guarantee*, not semantic correctness. If the example is admitted, one trusted panel resolves to one provider reachable by at most one handoff and one capability-to-action binding; the

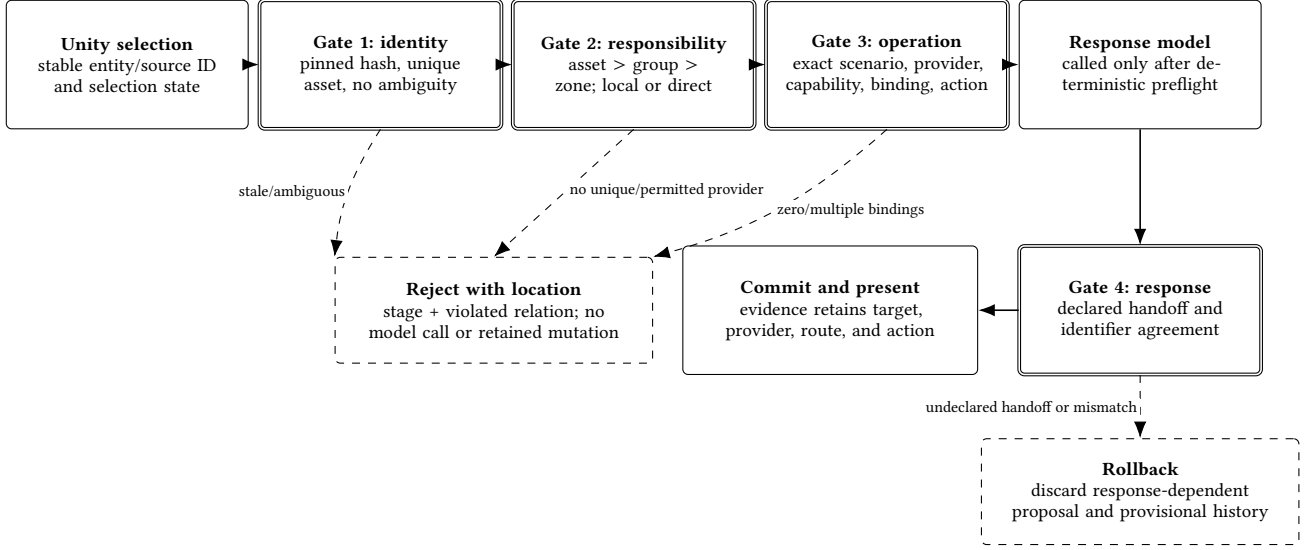


Fig. 1. Fail-closed admission path. Unity proposes a selected target, but the backend re-resolves identity, responsibility, and the exact operation from the pinned contract before generation. Request-decidable failures stop before the response model; response-dependent failures roll back the proposal.

response carries matching identifiers. The guarantee does not establish that the visitor intended the collider, that the Reception Agent’s knowledge is correct, or that the generated answer is good. Those properties require trusted sensing, semantic ground truth, and human or task-level evaluation.

4 System Realization

Section 3 defined the interaction contract independently of a particular implementation. This section explains how the contract is represented, generated, and executed in the prototype. We first introduce the underlying MLDS idea and the FunctionalMLDS extension, then follow the resulting model through the 3D client, backend admission, and runtime evidence. The running example remains the selected object `brand_panel3`, for which the Reception Agent is the modeled provider of a grounded answer.

4.1 From MLDS to FunctionalMLDS

A Meta-Language-defined Structure (MLDS) is a machine-readable artifact whose vocabulary and structural rules are defined by an explicit meta-language specification [15]. In practical terms, the meta-language states which kinds of elements may occur, how they may refer to one another, and which constraints a generated artifact must satisfy. A generator and a validator can therefore operate on the same declared structure instead of relying on implicit conventions spread across prompts, files, and source code. In this work, each room-specific FunctionalMLDS document is such an MLDS instance.

Figure 2 gives a compact map of the resulting metamodel. The following paragraphs explain how the inherited foundation is extended and connected to executable behavior and evidence.

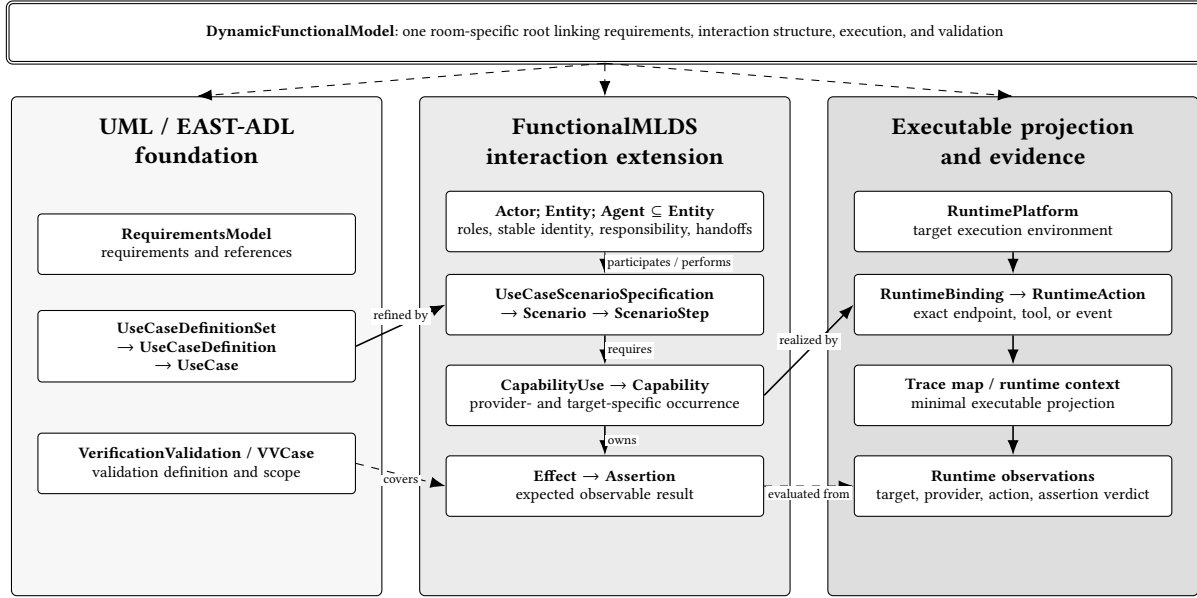


Fig. 2. Selected layers of the FunctionalMLDS metamodel. Familiar use-case, requirements, and verification concepts form the foundation. FunctionalMLDS adds explicit scenario flow, spatial entities and agents, scenario-specific capability uses, and expected effects. Runtime bindings then map those declarations to executable actions and observation evidence. Attributes and secondary associations are omitted for readability.

The conceptual starting point is the familiar UML use-case and scenario view: actors participate in use cases, and a concrete scenario refines a user-visible goal into ordered steps. The repository realizes the use-case foundation with selected EAST-ADL 2.1.12 elements and associations, including UseCaseDefinitionSet, UseCaseDefinition, and UseCase, together with requirements and verification/validation concepts [14]. FunctionalMLDS preserves the meaning of this selected foundation and extends it with the explicit interaction information needed by a spatial multi-agent interface. We do not claim complete UML or EAST-ADL conformance.

The middle layer in Figure 2 makes the use-case flow executable. A use case is linked to a Scenario, whose ordered ScenarioSteps state who acts and which interaction occurs. A reusable Capability describes what an agent can do. A CapabilityUse records one concrete occurrence of that ability in a scenario and binds it to a provider and one or more targets. This distinction is important: “answer grounded questions” is a capability, whereas “the Reception Agent answers about brand_panel13 in this step” is a capability use. An Agent specializes Entity and additionally records provided capabilities, responsible zones, grounded assets and groups, and permitted handoffs. Finally, a RuntimeBinding maps a capability to a platform and one or more executable RuntimeActions, while effects, assertions, and verification cases describe what should be observable. The DynamicFunctionalModel root connects these requirements, use cases, scenarios, entities, capabilities, runtime mappings, and validation elements in one room model.

4.2 Model validity and executable profile

The implementation separates four questions that are easy to conflate. First, the JSON schema asks whether the serialization contains the required fields, value types, enumerations, and reference shapes. Second, the canonical V2

metamodel asks whether it is a well-formed FunctionalMLDS model: references must close, cardinalities and element types must agree, source identifiers must be unique, assertions must have valid owners, and a scenario step may not bypass the capability path to call a runtime action directly. Third, the executable profile asks whether a well-formed model is complete enough to run. It requires, among other constraints, one provider and capability per evaluated capability use, agreement between provider, performer, and target responsibility, and a complete runtime binding. Runtime checks then bind one request and response to one already valid, pinned instance. This staging reports whether a failure belongs to serialization, model structure, executable completeness, or runtime evidence.

Room objects are identified by stable id and sourceId values, not by display labels or 3D-engine object names. Agents additionally have a unique source-agent identifier and typed references to their capabilities, responsibilities, grounded objects, and handoff targets. Runtime bindings own ordered actions with a locator and optional input/output schemas. The canonical instance remains authoritative; generated runtime projections contain only the subset needed by a particular client or backend.

4.3 Generation and publication

The pipeline starts from structured room data and frozen semantic artifacts. It normalizes objects, groups, and zones; derives agent roles and handoffs; materializes local knowledge; computes placement; and constructs use cases, scenarios, capability uses, runtime bindings, assertions, and validation cases. Deterministic stages assign stable identifiers and produce the trace map and backend runtime context. All validators must pass before the artifacts are published atomically. Content hashes connect the canonical model with its projections so that an outdated client or backend configuration can be detected.

Language models may propose scene semantics, role labels, handoffs, and knowledge during generation. They do not choose runtime identifiers, decide benchmark routes, or override a failed structural check. After the semantic artifacts are frozen, the evaluation regenerates and tests the complete model without a network or model API.

4.4 3D-client target binding and interaction state

The evaluated 3D client is implemented in Unity, but the binding is engine-independent: a selectable scene object must map to exactly one stable model entity. The Unity client imports the room, agent configuration, runtime projection, and trace map. A scene-object component binds each relevant collider to an exact entity and source identifier. During scene startup, a registry rejects duplicate entities, duplicate source matches, conflicting manual bindings, and missing target-specific contexts; UUID-like suffixes are not accepted as approximate matches.

In the desktop path, a camera ray selects a registered collider. The client retains that selection while the request is composed and distinguishes none, resolved, and ambiguous. A deictic request contains the pinned model hash, entity and source identifiers, candidate list, hit position and distance, input modality, active agent, and utterance. The payload bounds numbers, list sizes, and string lengths. Missing or ambiguous selection is blocked before serialization, although the backend repeats the authoritative check.

Figure 3 shows the running example. The selected source object `brand_panel3` is bound to `ENT-ASSET-BRAND_PANEL3`. The screenshot demonstrates the implemented desktop path, not a headset study or a finished diagnostic interface.

The client bridge also avoids a generic “chat” dispatch. It uses the selected entity and server-resolved provider to find the target-specific scenario context, then accepts only the scenario, capability, binding, and action identifiers confirmed by the backend. Zero or several exact contexts fail closed.



Fig. 3. Implemented Unity desktop view after loading the model-grounded scene and selecting brand_panel3. Runtime admission uses the stable entity binding rather than the visible label.

4.5 Authoritative backend admission

At session setup, the backend validates the native V2 instance and trace map, builds the runtime context, and pins the model hash and contract fingerprint. If project artifacts change, preflight detects the drift; the session must be set up again with the regenerated model rather than adopting it silently.

For each deictic request, the backend strictly validates the spatial payload. It rejects unknown fields, non-finite or out-of-range ray values, oversized candidate lists, conflicting entity and source identifiers, unknown or non-scene objects, stale hashes, and ambiguous states. It then derives the selected asset's group and zone from the pinned model instead of trusting client-provided responsibility information.

Responsibility resolution applies the asset-group-zone precedence described in Section 3. The active agent may answer locally or hand off once along a declared edge. A provider that is reachable only through several agents remains diagnostically reachable but is rejected for the current turn. The backend next resolves one exact runtime action from the trusted scenario, provider, and target; matching only a generic endpoint or action kind is insufficient.

Before generation, the backend snapshots mutable session state. A request-decidable failure therefore occurs before a response-model call. If the generated structured response proposes an undeclared handoff or violates an identifier postcondition, the snapshot is restored. Only a response that matches the preselected contract path and its success evidence is committed.

4.6 Evidence and diagnostics

The accepted response and runtime events retain the identifiers needed to reconstruct the path: model hash, scenario and step, target entity and source object, provider, route reason, capability use, capability, runtime binding, action, and assertion references. Before presenting an answer, the client compares the returned target, provider, route, and action with its pending selection. The validation recorder distinguishes operation invocation, grounding, provider agreement, action agreement, and the observed assertion result. Missing observations can therefore remain inconclusive instead of silently passing.

The detailed payload is currently developer-facing. Visitors see selection highlighting and unresolved status, while route and assertion information is available to logs and runtime components. Designing and evaluating a concise visitor-facing explanation or correction interface remains future work.

4.7 Running example

For `brand_panel13`, the model resolves the exact asset, its branding group, and entrance zone. Asset-level responsibility selects the Reception Agent, and one declared handoff reaches it from the Lounge Host. The scenario-specific capability use links that provider and target to the grounded answer capability and its backend-chat action; an accepted response must carry the same identifiers. From the Career Advisor, reaching the Reception Agent requires two edges, so the request is rejected before the response stub and the conversation state remains unchanged.

5 Evaluation Method

5.1 Scope and design

We conduct a software-system evaluation of the contract rather than a study of generated language or human experience. The design has four linked parts: (1) a migration and coverage audit over every modeled scene asset, (2) a controlled non-regression comparison with the direct artifacts from which the contract instances were generated, (3) executable backend and Unity contract tests, and (4) mutation and timing analyses that separate common faults from contract-only cross-layer faults. All reported proportions use exact numerators and denominators for the fixed corpus.

The corpus contains the three spatial development cases available in the repository: a career-fair room, a classroom with a dinosaur exhibit, and a food/trade-fair brand room. They contain 27, 36, and 30 routable scene assets and 5, 4, and 6 modeled agents, respectively. The cases were authored during system development, not sampled from a population or held out from implementation decisions. This scope supports exhaustive checks over the three models, not generalization to other rooms or authors.

5.2 RQ1: coverage and non-regression

For each case, the benchmark regenerates a fresh native V2 instance in memory from its frozen version-0.5 case model. Checked-in V2 files are hashed and audited but are not used as treatment input. An asset is complete only if it appears in at least one asset-targeting interaction chain and every such chain resolves exactly one capability and provider, agrees with the scenario performer, contains the evaluated asset among its targets, reaches an executable runtime binding and action, resolves all resulting assertions, and has a use-case-linked validation case covering the binding and assertions. The asset denominator contains every V2 entity with `entityRole=sceneObject`; the chain denominator contains every `ScenarioStep/CapabilityUse` pair explicitly targeting one of those assets. A complete chain is a declaration and traceability result, not evidence that a conversation was executed.

The non-regression comparison uses two independently parsed adapters over the same frozen cases:

Direct wiring. Reads the existing scene-semantics, generated agent-role, and handoff-matrix artifacts.

Contract representation. Reads the fresh V2 instance regenerated in the same benchmark run.

Both expose a normalized ownership graph and the same decision policy: asset assignment outranks object-group assignment, which outranks zone responsibility; more than one owner at the highest active tier is ambiguous. For every routeable object, the benchmark compares the owner and then classifies a route from every modeled starting agent as local, directly permitted, transitively graph-reachable, or unreachable.

The parsers extract candidate sets and handoff edges separately, but one shared routing function classifies both normalized views. Agreement is consequently a migration and serialization non-regression check under a fixed policy, not independent evidence that the policy itself is correct.

All natural objects currently have asset-level owners. To exercise the entire precedence rule without misrepresenting corpus frequencies, a separate derived suite copies one object per case and creates three probes: remove its asset owner to require a group fallback; remove both asset and group owners to require a zone fallback; and add a competing owner at the highest active tier to require ambiguity rejection. The direct artifacts have no native group relation, so the benchmark inserts the same normalized group candidate into both copies. These probes test decision behavior, not equivalent native authoring expressiveness.

5.3 RQ2: fail-closed runtime enforcement

The exhaustive runtime sweep converts all object-by-start-agent combinations into backend requests, for 459 probes in total. The expected owner and route class come from the frozen direct-wiring projection. A fresh V2 project is materialized and verified equal to the in-memory treatment before execution. Each probe runs through `SessionStore.chat` with a deterministic structured-response stub and an active network guard.

Local and direct routes are expected to be admitted. An admitted response must preserve the expected target and provider and contain non-empty, cross-field-consistent capability-use, capability, binding, and action identifiers. Transitive and unreachable routes are expected to be rejected because one request permits at most one direct handoff. A rejected request must stop before the stub and leave session state unchanged. The benchmark restores a session snapshot after every probe so that cases remain independent.

A targeted spatial-contract suite exercises one valid deictic request and 16 invalid variants, including missing context, unknown or contradictory identifiers, obsolete hashes, ambiguous candidates, invalid active agents, oversized fields, non-finite coordinates, and an undeclared handoff proposed by the stub. Request-decidable variants require zero stub calls and no retained mutation. The undeclared handoff is knowable only after generation; it requires one stub call and must then roll back provisional state.

Three Unity Editor batch entry points load the same generated artifacts and runtime components used by the client. They exercise scenario progression, dispatch, five assertion types, valid and broken evidence, desktop-ray selection, ambiguous binding registries, exact target-specific multi-scenario selection, and permission checks. Exit status and explicit success markers are recorded. These are executable Editor paths, not participant or headset trials.

5.4 RQ3: fault scope, representation edits, and local cost

The *common* mutation suite applies three changes that both representations can express, once per case: remove all ownership paths for one object, add a second asset-level owner, and replace a handoff target with a dangling identifier.

Each mutation starts from an expected-valid copy. A detection counts only a new issue relative to that copy; localization requires the new issue to name a mutation-specific object, agent, or field token. We record false positives, edited top-level artifacts, and added, removed, or replaced stored references. Edit counts describe deterministic patches, not developer effort.

A separate *contract-only* suite mutates typed relations absent from the direct representation: it removes a capability-use provider, duplicates an agent’s source-agent identifier, or assigns a domain capability to the runtime orchestrator. Each mutation is applied once per case. We report the canonical V2 validator and the stricter pipeline agent–provider contract separately. The baseline is marked “not representable” rather than failed; these results measure added invariant scope, not comparative superiority on an impossible task.

For descriptive cost, each adapter repeatedly constructs its normalized responsibility view and enumerates all routes. After four warm-ups, execution order alternates for 40 measured repetitions per case using a monotonic nanosecond clock. The measurement includes adapter construction from already parsed artifacts and route enumeration. It excludes JSON I/O, v0.5-to-V2 generation, Unity, networking, and model latency. We report medians, quartiles, ranges, and the V2/direct median ratio without inferential claims.

5.5 Reproducibility and analysis boundary

The benchmark is API-free and records raw per-probe results, environment metadata, source and input hashes, mutations, validation issues, timing samples, and generated tables. A verifier regenerates fresh V2 instances, reruns targeted tests, checks the three Unity smokes when the Editor is available, and scans the anonymous artifact for identifiers and secrets.

No confidence intervals or significance tests are attached to exhaustive, deterministic probes over three purposively authored cases; doing so would imply a sampling model the design does not have. The evaluation does not measure answer correctness, usefulness, trust, workload, preference, end-to-end latency, or maintenance time. It also does not use a language model as a semantic judge.

6 Results

Table 3 summarizes the principal outcomes. The values are exact for the fixed three-case corpus and deterministic test paths. They are not participant counts or dialogue-quality scores.

6.1 RQ1: complete migration with routing non-regression

All 93 scene assets occurred in at least one declared interaction chain, and all 93 satisfied the asset-completeness definition. The chain audit examined 186 asset-targeting ScenarioStep/CapabilityUse pairs: 54 in the career-fair case, 72 in the classroom, and 60 in the brand room. Every pair resolved one capability and provider, agreed with its scenario performer and target, reached an executable binding and action, resolved all resulting assertions, and was covered by an appropriate validation case. No asset-chain error was reported. The two pairs per asset encode answer and handoff paths; they are not two executed conversations.

Natural-corpus ownership was unique for 93/93 assets. Every decision occurred at the explicit asset tier; no natural object exercised group or zone fallback, and none was ambiguous or unassigned. In the separate derived priority suite, both adapters passed all nine decision cases: three group fallbacks, three zone fallbacks, and three ambiguity rejections. Across both adapters this is 18/18 expected outcomes, kept separate from natural-corpus frequencies.

The 459 object-by-start-agent routes comprised 93 local-owner cases, 205 direct handoffs, 143 transitive-only graph paths, and 18 unreachable pairs. Local-or-direct one-hop coverage was therefore 298/459 (64.9%), while offline graph

Table 3. Main measured results and their interpretation boundary.

Check	Observed result	Supported interpretation
Complete declarations	93/93 scene assets and 186/186 asset-targeting step-capability-use pairs complete	The three regenerated models contain provider-coherent paths through binding, action, assertion, and validation coverage.
Migration non-regression	93/93 owner decisions and 459/459 route classifications agree	V2 preserves the direct artifacts under the fixed shared resolver; this is not an independent routing oracle.
Runtime admission	298/298 local/direct routes admitted; 161/161 transitive/unreachable routes rejected before the stub	The implemented one-hop policy is enforced and preserves target and provider evidence without retained mutation on rejection.
Common injected faults	Both adapters detected and localized 9/9; 0/3 false positives	Parity for the three shared fault types.
Contract-only faults	Strict provider contract detected and localized 9/9; 0/3 false positives; canonical model validator detected 3/9	The executable profile adds typed cross-layer invariants absent from the direct artifacts.
Unity execution	3/3 batch entry points passed; one multi-scenario smoke loaded 31 contexts and 73 actions and bound 30/30 scene objects exactly	The evaluated desktop runtime components execute the generated contract; no headset or user outcome is established.

reachability was 441/459 (96.1%). The latter does not imply that the online runtime traverses several handoffs within one turn.

The direct-wiring and fresh-V2 adapters selected the same owner for all 93 objects and the same route class for all 459 pairs. They also remained aligned after all nine common mutations. Because both normalized views are classified by one shared policy function, this result establishes migration non-regression and serialization parity, not that V2 discovered a more correct routing policy.

6.2 RQ2: fail-closed enforcement

The executable runtime sweep passed all 459 probes. It admitted 298/298 local or direct routes and made exactly 298 deterministic-stub calls. Every admitted response preserved the expected source object, target entity, and routed provider and returned non-empty capability-use, capability, binding, and action identifiers that agreed across the checked response, grounding, routing, and runtime-action fields.

The runtime rejected 161/161 transitive or unreachable routes before the stub and without retained session mutation. This set contains the 143 transitive-only and 18 unreachable pairs. The result demonstrates the current one-hop admission boundary, not task failure in principle: a system with a different declared policy could permit multi-hop execution, but this implementation does not.

The targeted spatial suite accepted its valid deictic request and rejected all 16 invalid variants without retained mutation. Fifteen variants were request-decidable and stopped before the stub. The remaining variant used a structured response that proposed an undeclared handoff; one stub call was necessary to reveal the destination, after which provisional history was rolled back. Rejections included stale model hashes, unknown or contradictory identifiers, ambiguous selections, invalid agents, excessive payloads, and non-finite or out-of-range spatial values.

All three Unity Editor batch entry points returned success. Together they exercised scenario progression, dispatch, five assertion types, valid and deliberately broken evidence, selection-state blocking, and ambiguous registries. The multi-scenario Steinpilz smoke loaded 31 contexts and 73 actions and established unique exact bindings for 30/30 scene

Table 4. Contract-only mutations. “Not represented” means that the direct artifacts contain no equivalent typed relation; it is not counted as a baseline miss.

Mutation (once per scene)	Violated invariant	Direct artifacts	Executable provider contract
Remove CapabilityUse.provider	An executable capability occurrence has exactly one provider agreeing with the performing agent and target responsibility.	Not represented	3/3 detected and localized
Duplicate Agent.sourceAgentId	Runtime-facing source-agent identity is unique.	No typed equivalent	3/3 detected and localized
Assign a domain capability to the runtime orchestrator	Domain behavior is provided by the modeled domain agent, while the orchestrator realizes infrastructure actions.	Not represented	3/3 detected and localized

objects without UUID-suffix fallback. These observations confirm that the client-side bridge and evidence components execute the materialized contract; they do not measure frame rate, end-to-end latency, or human understanding.

6.3 RQ3: added invariant scope and cost

On the common mutation denominator, both adapters accepted all three unmodified case copies, for 0/3 false positives per adapter. Both detected and localized 9/9 changes: one missing owner, one duplicate owner, and one dangling handoff per scene. The result is deliberately neutral. Direct wiring can enforce these three relationships when supplied with a validator and the same policy.

The representation patches expose a mixed trade-off. Across the nine common mutations, the contract representation changed 9 top-level artifacts compared with 15 for direct wiring, but changed 18 stored references compared with 15. These counts describe the scripted patches and do not establish that a developer would work faster or make fewer mistakes.

The contract-only suite provides the positive evidence for additional expressiveness. Table 4 reports the three typed mutation classes. The canonical model validator detected the duplicated source-agent identifier in each case (3/9 overall) but intentionally permits some optional relations for compatibility. The executable pipeline agent-provider contract detected and localized all 9/9 mutations with 0/3 false positives on valid copies. The direct artifacts have no typed capability-use provider or domain-capability-to-runtime-orchestrator relation, so there is no equivalent baseline outcome to score.

Table 5 reports the current benchmark snapshot. The fresh-V2 adapter required 5.89–7.61 times the direct-wiring median for the measured in-memory workload. Absolute medians ranged from 6.15 to 10.06 ms for V2 and 1.04 to 1.32 ms for direct wiring. Outputs remained deterministic across all repetitions. These values exclude file parsing, generation, Unity, networking, and model inference and must not be read as end-user response latency.

Taken together, RQ3 does not show that an explicit contract is universally better than direct artifacts. It shows a more specific trade: shared ownership and handoff faults can be validated in either representation, while the contract makes additional provider, identity, capability, binding, and evidence relations explicit and enforceable at measurable structural cost.

Table 5. Local structural workload over 40 measured repetitions per adapter and case. Values are median [Q1, Q3] in milliseconds.

Case	Direct	Fresh V2	Ratio
Career fair	1.322 [1.167, 1.516]	10.057 [7.784, 11.573]	7.61
Classroom	1.246 [0.772, 1.609]	9.439 [5.681, 13.336]	7.58
Brand room	1.044 [0.992, 1.694]	6.151 [4.951, 7.309]	5.89

7 Discussion

7.1 Why the contract is an intelligent-interface contribution

The contract does not generate the linguistic content that makes an agent appear intelligent. It determines whether the interface may use and present that content for a particular spatial interaction. This distinction matters because a wrong-target answer can be both fluent and locally plausible. By binding the pending selection to one provider and action before generation, the system turns a silent semantic-looking failure into a deterministic admission decision.

The user-facing consequence is limited but concrete. A deictic request cannot proceed from a missing or ambiguous selection; a returned answer cannot be presented as grounded when its target or provider disagrees with the pending interaction. The current implementation exposes the detailed route and binding primarily to developers, not visitors. A future interface could use the same evidence to explain, for example, “This object is handled by the Reception Agent” or to offer a clarification choice. Whether such explanations improve understanding, reliance, or recovery remains an empirical question.

7.2 What the direct-wiring comparison establishes

The comparison is intentionally less dramatic than an architecture competition. For explicit asset ownership, handoff edges, and a fixed priority rule, direct artifacts can produce the same routing decisions and detect the same three common fault types. This is an important result: introducing FunctionalMLDS did not change the behavior already encoded in the source artifacts, but neither did the migration automatically improve it.

The added value appears where the interaction crosses artifact boundaries. Direct wiring has no typed occurrence connecting a scenario target to one provider, capability, binding, action, and assertion. Consequently, relations such as “this capability use has no provider” or “this domain capability is provided by the runtime orchestrator” are not representable as baseline invariants. The strict provider contract detected all such injected faults. This supports a scoped adoption argument: the model is useful when a system needs lifecycle-wide target-provider-action evidence, not merely an owner lookup table.

7.3 When the added structure is justified

A static room with one chatbot and a small, stable set of objects may not justify more than direct configuration and tests. The contract becomes more plausible when several agents divide responsibility, the same action kind has many target-specific bindings, scenes are regenerated, or developers need to trace a failure across Unity and backend artifacts. Even then, its cost is not free. The current representation stores more references for the common patches and its normalized adapter is substantially slower than direct wiring, although the measured workload remains small relative to a typical model call.

The benchmark does not measure authoring effort. Fewer changed top-level files could reduce search and coordination, while more explicit references could increase editing burden. A developer study must test this trade rather than inferring it from patch counts.

7.4 Interaction design opportunities

The present boundary supports several interaction patterns that are not yet implemented as evaluated visitor experiences:

Clarification. When several candidates or owners exist, the interface can present the alternatives instead of only blocking the request.

Transparent handoff. Before delegating, the active agent can name the responsible provider and reason, then let the visitor confirm.

Correction. A visitor or author can replace the selected target or report that the proposed responsibility is wrong; the model relation can then be revised through a typed transaction.

Abstention with location. A rejection can distinguish “I cannot identify the object,” “no agent is responsible,” and “the responsible agent is not reachable” rather than presenting one generic failure.

These patterns use evidence the system already produces, but their wording, timing, and cognitive cost require design and evaluation. They are stronger future directions than adding more internal trace fields without an interface that uses them.

7.5 Priority evidence needed beyond this study

Two additions would most improve external validity. First, a fourth independently authored, frozen scene should contain natural group- and zone-level responsibility, at least one unassigned object, and one genuine ambiguity. Resolver and validator code should be frozen before the case is revealed. This would test transfer without deriving every interesting condition synthetically.

Second, expected routes should be supplied by an independent oracle or a separately implemented resolver rather than the same shared classification function. A declarative table reviewed before execution would be sufficient for a modest held-out case. These technical additions address the strongest circularity concern without making unsupported human claims.

A developer task study is the most relevant human follow-up if ethics review, participants, and sufficient time are available. Participants could diagnose and repair target, provider, and handoff faults using direct artifacts or the contract representation. Completion rate, time, inspected artifacts, incorrect repairs, and explanation accuracy would test the proposed diagnostic benefit. A small convenience study using only subjective ratings would add less evidence than a well-controlled held-out technical evaluation.

7.6 Authorization and policy composition

“Permitted” in this paper means declared by the interaction model. The contract neither authenticates a visitor nor grants access to protected data or actuators. A deployment can first resolve the exact target–provider–action tuple and then submit it to an external authorization policy. Capability lifecycle governance can separately decide which implementation version is active. The current prototype implements neither identity management nor resource authorization and should not be presented as a security boundary by itself.

7.7 Privacy, bias, and accountability

A spatial-agent request can reveal utterances, selected objects, locations, and interaction histories. The backend receives the utterance, stable target identifiers, ray metadata, modality, and bounded history. Persistent runtime events omit the utterance text in the evaluated path, but the prototype lacks visitor-facing consent, retention, export, and deletion controls. A deployment should minimize stored spatial data and separate technical entity identifiers from personal identities.

Explicit agent responsibility can make organizational assumptions easier to inspect, but it can also formalize biased or inappropriate authority. A validator can establish that one provider is declared consistently; it cannot establish that the provider assignment is fair, representative, or safe. Model review, knowledge provenance, refusal behavior, and domain safeguards remain necessary.

8 Limitations and Threats to Validity

The evaluation establishes behavior for three purposively authored development cases. It does not estimate frequencies in a population of rooms, domains, or authors. Every natural asset has an explicit asset-level owner, so group and zone fallback and ambiguity are exercised only in derived copies. No independently authored or held-out scene tests generalization.

The non-regression comparison is controlled rather than independent. Both representations originate from shared semantic artifacts and are classified by one routing function after separate parsing. The direct-wiring projection also supplies expected owner and route classes for the runtime sweep. Agreement therefore detects migration and serialization divergence but cannot validate the shared policy against an external oracle. Binding identifiers are checked for cross-field agreement within one pinned model, not against independently authored binding labels.

Fault injection is systematic but small. The common denominator contains three mutation types, and the contract-only denominator contains three additional types. Detection and localization of these faults do not imply complete fault coverage or automatic repair. Scripted artifact and reference deltas are not developer effort. The V2 assembler, canonical validator, executable provider validator, and materializer share a codebase, so their agreement is not independent standard conformance.

Runtime tests replace the online response model with a deterministic structured stub. This isolates admission, call counts, evidence, and rollback, but it does not measure factual correctness, relevance, naturalness, refusal quality, or the interaction between generated content and the contract. No language model is used as a semantic judge.

The Unity evidence is limited to a desktop ray and Editor batch execution. There is no headset, WebXR controller, gaze, touch, or physical multi-user evaluation. The server validates bounded client-reported ray metadata but cannot prove that the geometry came from a trusted sensor. A deployed system needs authenticated transport and a trusted client boundary.

Sessions pin a static project version. Drift is detected, but the system has no live migration for objects created, deleted, merged, or rebound during a conversation. Online routing permits at most one direct handoff per request; transitive reachability is reported only as an offline diagnostic. Concurrent writes to one session and coordination among simultaneous visitors were not evaluated.

The current visitor interface exposes selection and unresolved status, while the detailed contract evidence is mainly developer-facing. No participant study tests whether people notice or understand the failure states, whether developers

diagnose faults faster, or whether added explanations calibrate reliance. We therefore make no claims about usability, trust, workload, preference, immersion, or maintenance advantage.

The local timing benchmark uses one environment and measures only in-memory adapter construction and route enumeration. It excludes parsing, generation, Unity, network, and model latency. Ratios characterize this implementation and snapshot, not end-to-end response time. Finally, the selected EAST-ADL subset serves as a traceability foundation; full EAST-ADL conformance has not been independently assessed.

9 Conclusion

We presented an executable interaction contract that keeps a selected spatial entity, responsible embodied agent, declared capability, concrete backend action, and returned evidence within one pinned model version. The Unity client makes unresolved selection explicit, while the backend re-resolves identity, responsibility, route, and action before generation and rolls back response-dependent violations.

Across three authored environments, all 93 assets and 186 target-specific declaration pairs were complete. Migration preserved all 93 owner decisions and 459 route classifications under a shared policy. The runtime admitted all 298 local or direct routes with matching evidence and rejected all 161 transitive or unreachable routes before the response stub without retained mutation. A strict provider contract additionally detected and localized all nine injected cross-layer faults that rely on relations absent from the direct artifacts, at a measured increase in local structural workload.

These results support a narrow conclusion: an explicit contract can provide a fail-closed control and evidence boundary for the evaluated spatial-agent interface. They do not establish better dialogue or a better user experience. The next decisive evidence is an independently authored held-out scene and, when feasible, a controlled developer study of diagnosis and repair.

GenAI Usage Disclosure

The frozen case-study inputs include eight successful structured-output calls to gpt-4.1-mini-2025-04-14 at temperature 0.2: two scene-semantics artifacts, three agent-role and handoff artifacts, and three sets of local knowledge entries. A remaining scene-semantics artifact was recovered deterministically without a model call. Prompts, returned JSON, model identifiers, token metadata, and validation records are retained with the case artifacts. The authors reviewed and froze these outputs as study inputs; no generative model supplied evaluation labels or served as a semantic judge. Model assembly, routing probes, fault injection, measurements, and reported tables are deterministic and API-free.

A coding assistant supported prototype hardening, test and analysis code, literature-search support, and drafting and editing. The authors inspected and revised the resulting code and prose, verified citations and generated evidence, and remain responsible for all claims.

A Detailed Contract and Evaluation Tables

A.1 Running-example identifiers

Table 6 spells out the exact objects used for the brand_panel3 walkthrough. Display labels are shortened in the prose, while execution uses these stable identifiers.

Table 6. Exact contract objects for the Steinpilz brand_panel3 interaction.

Element	Exact instance	Runtime meaning
Target	brand_panel3 → ENT-ASSET-BRAND_PANEL3; group ENT-GROUP-BRANDING; zone ENT-ZONE-ENTRANCE_ZONE	Collider observation and trusted model referent
Use case and scenario	UC-STEINPILZ_BRAND_ROOM-INTERACT- BRAND_PANEL3; SC-STEINPILZ_BRAND_ROOM- INTERACT-BRAND_PANEL3-MAIN	User-facing interaction and executable flow
Answer step	STEP-STEINPILZ_BRAND_ROOM-INTERACT- BRAND_PANEL3-ANSWER	Scenario occurrence requiring one capability use
Capability use	CU-STEINPILZ_BRAND_ROOM-INTERACT-BRAND_ PANEL3-ANSWER-ROOM-GROUNDED-QUESTION; provider ENT-AGENT-RECEPTION_AGENT	Explicit target tuple and provider
Capability	CAP-STEINPILZ_BRAND_ROOM-ANSWER-ROOM- GROUNDED-QUESTION	Operation declared for the Reception Agent
Binding and action	RB-STEINPILZ_BRAND_ROOM-ANSWER-ROOM- GROUNDED-QUESTION; RA-STEINPILZ_BRAND_ROOM-BACKEND-CHAT	Exact realization at POST /chat
Assertion and case	SA-STEINPILZ_BRAND_ROOM-ANSWER-GROUNDED; VC-STEINPILZ_BRAND_ROOM-INTERACT- BRAND_PANEL3	Declared identifier agreement and validation scope

A.2 Per-case structural results

Table 7. Complete interaction paths. “Pairs” are asset-targeting ScenarioStep/CapabilityUse pairs.

Case	Assets	Complete	Pairs	Complete
Career fair	27	27	54	54
Classroom	36	36	72	72
Brand room	30	30	60	60
Total	93	93	186	186

A.3 Enforcement layers

B Artifact Map

The reproducible benchmark is rooted at `research/iui2027/evaluation`. Its `results.json` contains raw records; `tables.md` contains regenerated paper summaries; and `environment.json` records hashes and the local timing environment. The verifier and frozen regeneration entry points are under `research/iui2027/artifact`. Backend runtime code

Table 8. Offline structural routes from every modeled starting agent. “Transitive” and “reachable” are graph properties, not one-turn online execution.

Case	Probes	Local	Direct	Transitive	Unreachable	Reachable
Career fair	135	27	53	55	0	135
Classroom	144	36	81	9	18	126
Brand room	180	30	71	79	0	180
Total	459	93	205	143	18	441

Table 9. Representative invariants and failure boundaries in the implemented interaction path.

Layer	Representative invariant	Failure boundary
JSON schema	Required fields, types, enumerations, reference shapes	Before constructing a model instance
Canonical V2 model	Referential closure, typed cardinalities, source-ID uniqueness, assertion/validation ownership, no direct step-to-action shortcut	Instance rejected before materialization
Executable profile	One provider and capability per occurrence, provider/performer/target agreement, complete binding and action	Invalid chains are not published
Backend runtime	Pinned hash, unique trusted entity, derived group/zone, unique provider, local/direct route, exact target-specific action, request/response schema	Before generation and mutation when request-decidable; rollback after a response-dependent failure
Unity client	Exact collider binding, explicit unresolved states, returned target/provider/route/action agreement	Before request serialization or answer presentation; backend remains authoritative

is under `InteractivAgents/openai_unity_expert_npc_pycharm/InteractiveAgents/backend`, and Unity runtime components are under the corresponding `unity_scripts/FunctionalMldsV2` directory. The original manuscript remains in `research/iui2027/paper`; this reframed manuscript is deliberately separate.

References

- [1] Saleema Amershi, Dan Weld, Mihaela Vorvoreanu, Adam Fourney, Besmira Nushi, Penny Collisson, Jina Suh, Shamsi Iqbal, Paul N. Bennett, Kori Inkpen, Jaime Teevan, Ruth Kikin-Gil, and Eric Horvitz. 2019. Guidelines for Human-AI Interaction. In *Proceedings of the 2019 CHI Conference on Human Factors in Computing Systems*. ACM, 1–13. doi:10.1145/3290605.3300233
- [2] Gagan Bansal, Tongshuang Wu, Joyce Zhou, Raymond Fok, Besmira Nushi, Ece Kamar, Marco Tulio Ribeiro, and Daniel Weld. 2021. Does the Whole Exceed its Parts? The Effect of AI Explanations on Complementary Team Performance. In *Proceedings of the 2021 CHI Conference on Human Factors in Computing Systems*. ACM, 1–16. doi:10.1145/3411764.3445717
- [3] Timothy Bickmore, Laura Pfeifer, and Daniel Schulman. 2011. Relational Agents Improve Engagement and Learning in Science Museum Visitors. In *Intelligent Virtual Agents*. Springer, 55–67. doi:10.1007/978-3-642-23974-8_7
- [4] Kadir Burak Buldu, Süleyman Özdel, Ka Hei Carrie Lau, Mengdi Wang, Daniel Saad, Sofie Schönborn, Auxane Boch, Enkelejda Kasneci, and Efe Bozkir. 2025. Cully the XR: An Open-Source Package to Embed LLM-Powered Conversational Agents in XR. In *2025 IEEE International Conference on Artificial Intelligence and eXtended and Virtual Reality*. IEEE, 192–197. doi:10.1109/AIXVR63409.2025.00037
- [5] Louis Burk, Alexander Fischer, Uwe Wienkop, Ramin Tavakoli Kolagari, Christoph Scharnagl, and Alexandra Arzberger. 2026. Handling Toolchain Evolution with Modular Meta-Languages: An Approach for Structured LLM-Based Artifact Generation. In *Proceedings of the 21st International Conference on Evaluation of Novel Approaches to Software Engineering*, Vol. 1. SciTePress, 807–814. doi:10.5220/0014715200004015
- [6] Louis Burk and Uwe Wienkop. 2025. Dynamische Optimierung von VR-Lernumgebungen durch generative KI. In *Zukunft MINT Lehre: Was bleibt? Was kommt? Was wirkt? Tagungsband zum 6. Symposium zur Hochschullehre in den MINT-Fächern (Didaktiknachrichten)*, Hanna Dölling and Claudia Schäffe (Eds.). BayZiel – Bayerisches Zentrum für Innovative Lehre, München, 300–308. DiNa-Sonderausgabe, ISSN 1612-4537. https://bayziel.de/wp-content/uploads/Tagungsband_MINTSymposium_2025.pdf
- [7] Gaëlle Calvary, Joëlle Coutaz, David Thevenin, Quentin Limbourg, Laurent Bouillon, and Jean Vanderdonckt. 2003. A Unifying Reference Framework for Multi-target User Interfaces. *Interacting with Computers* 15, 3 (2003), 289–308. doi:10.1016/S0953-5438(03)00010-9
- [8] Rubén Campos-López, Esther Guerra, Juan de Lara, Alessandro Colantoni, and Antonio Garmendia. 2023. Model-Driven Engineering for Augmented Reality. *Journal of Object Technology* 22, 2 (2023), 2:1–2:15. doi:10.5381/jot.2023.22.2.a7
- [9] Alessandro Carcangiu, Marco Manca, Jacopo Mereu, Carmen Santoro, Ludovica Simeoli, and Lucio Davide Spano. 2025. Tell-XR: Conversational End-User Development of XR Automations. In *Human-Computer Interaction – INTERACT 2025*. Springer, 617–641. doi:10.1007/978-3-032-04999-5_35
- [10] Justine Cassell, Timothy W. Bickmore, Mark Billinghurst, Lee Campbell, Kenny Chang, Hannes Högni Vilhjálmsón, and Hao Yan. 1999. Embodiment in Conversational Interfaces: Rea. In *Proceedings of the SIGCHI Conference on Human Factors in Computing Systems*. ACM, 520–527. doi:10.1145/302979.303150
- [11] Mengzhuo Chen, Junjie Wang, Fangwen Mu, Yawen Wang, Zhe Liu, Huanxiang Feng, and Qing Wang. 2026. Seeing the Whole Elephant: A Benchmark for Failure Attribution in LLM-based Multi-Agent Systems. In *Proceedings of the 64th Annual Meeting of the Association for Computational Linguistics*. Association for Computational Linguistics, 19888–19905. doi:10.18653/v1/2026.acl-long.912
- [12] Fernanda De La Torre, Cathy Mengying Fang, Han Huang, Andrzej Banburski-Fahey, Judith Amores Fernandez, and Jaron Lanier. 2024. LLMR: Real-time Prompting of Interactive Worlds using Large Language Models. In *Proceedings of the CHI Conference on Human Factors in Computing Systems*. ACM, 1–22. doi:10.1145/3613904.3642579
- [13] Anna Deichler, Jim O'Regan, Fethiye Irmak Dogan, Lubos Marcinek, Anna Klezovich, Iolanda Leite, and Jonas Beskow. 2026. MM-Conv: A Multimodal Dataset and Benchmark for Context-Aware Grounding in 3D Dialogue. arXiv:2605.21796 [cs.CV] doi:10.48550/arXiv.2605.21796
- [14] EAST-ADL Association. 2013. *EAST-ADL Domain Model Specification*. Language Specification Version 2.1.12. EAST-ADL Association. https://east-adl.info/Specification/V2.1.12/EAST-ADL-Specification_V2.1.12.pdf
- [15] Alexander Fischer, Louis Burk, Ramin Tavakoli Kolagari, and Uwe Wienkop. 2025. Machine-Readable by Design: Language Specifications as the Key to Integrating LLMs into Industrial Tools. In *Proceedings of the 20th Conference on Computer Science and Intelligence Systems*, Vol. 43. Polish Information Processing Society, 531–542. doi:10.15439/2025F5613
- [16] Peter Gorniak and Deb Roy. 2005. Probabilistic Grounding of Situated Speech Using Plan Recognition and Reference Resolution. In *Proceedings of the 7th International Conference on Multimodal Interfaces*. ACM, 138–143. doi:10.1145/1088463.1088489
- [17] Orlena C. Z. Gotel and Anthony C. W. Finkelstein. 1994. An Analysis of the Requirements Traceability Problem. In *Proceedings of the First IEEE International Conference on Requirements Engineering*. IEEE, 94–101. doi:10.1109/ICRE.1994.292398
- [18] Sai Anirudh Karre and Y. Raghu Reddy. 2024. Model-based Approach for Specifying Requirements of Virtual Reality Software Products. *Frontiers in Virtual Reality* 5 (2024), 1471579. doi:10.3389/frvir.2024.1471579
- [19] Casey Kennington and David Schlangen. 2015. Simple Learning and Compositional Application of Perceptually Grounded Word Meanings for Incremental Reference Resolution. In *Proceedings of the 53rd Annual Meeting of the Association for Computational Linguistics*. Association for Computational Linguistics, 292–301. doi:10.3115/v1/P15-1029
- [20] Thomas Kollar, Stefanie Tellex, Deb Roy, and Nicholas Roy. 2010. Toward Understanding Natural Language Directions. In *2010 5th ACM/IEEE International Conference on Human-Robot Interaction*. IEEE, 259–266. doi:10.1109/HRI.2010.5453186
- [21] Stefan Kopp, Lars Gesellensetter, Nicole C. Krämer, and Ipke Wachsmuth. 2005. A Conversational Agent as Museum Guide: Design and Evaluation of a Real-World Application. In *Intelligent Virtual Agents*. Springer, 329–343. doi:10.1007/11550617_28

- [22] Timothy Lebo, Satya Sahoo, and Deborah McGuinness. 2013. *PROV-O: The PROV Ontology*. W3C Recommendation. World Wide Web Consortium. <https://www.w3.org/TR/2013/REC-prov-o-20130430/>
- [23] Séverin Lemaignan, Raquel Ros, E. Akin Sisbot, Rachid Alami, and Michael Beetz. 2012. Grounding the Interaction: Anchoring Situated Discourse in Everyday Human-Robot Interaction. *International Journal of Social Robotics* 4, 2 (2012), 181–199. doi:10.1007/s12369-011-0123-x
- [24] Martin Leucker and Christian Schallhart. 2009. A Brief Account of Runtime Verification. *The Journal of Logic and Algebraic Programming* 78, 5 (2009), 293–303. doi:10.1016/j.jlap.2008.08.004
- [25] Guohao Li, Hasan Abed Al Kader Hammoud, Hani Itani, Dmitrii Khizbullin, and Bernard Ghanem. 2023. CAMEL: Communicative Agents for “Mind” Exploration of Large Language Model Society. In *Advances in Neural Information Processing Systems*, Vol. 36. 51991–52008. doi:10.52202/075280-2264
- [26] Q. Vera Liao, Daniel Gruen, and Sarah Miller. 2020. Questioning the AI: Informing Design Practices for Explainable AI User Experiences. In *Proceedings of the 2020 CHI Conference on Human Factors in Computing Systems*. ACM, 1–15. doi:10.1145/3313831.3376590
- [27] Quentin Limbourg, Jean Vanderdonckt, Benjamin Michotte, Laurent Bouillon, and Victor López-Jaquero. 2005. USIXML: A Language Supporting Multi-path Development of User Interfaces. In *Engineering Human Computer Interaction and Interactive Systems*. Springer, 200–220. doi:10.1007/11431879_12
- [28] Ziyi Liu, David Li, Zhongyi Zhou, David Kim, Ruofei Du, and Xun Qian. 2026. AgentHands: Generating Interactive Hand Gestures for Spatially Grounded Agent Conversations in XR. In *Proceedings of the 2026 CHI Conference on Human Factors in Computing Systems*. ACM, 1–24. doi:10.1145/3772318.3790938
- [29] Patrick Mäder and Alexander Egyed. 2015. Do Developers Benefit from Requirements Traceability When Evolving and Maintaining a Software System? *Empirical Software Engineering* 20, 2 (2015), 413–441. doi:10.1007/s10664-014-9314-z
- [30] Bertrand Meyer. 1992. Applying Design by Contract. *Computer* 25, 10 (1992), 40–51. doi:10.1109/2.161279
- [31] Alex Moldovan, Vlad Nicula, Ionut Pasca, Mihai Popa, Jaya Krishna Namburu, Anamaria Oros, and Paul Brie. 2020. OpenUIDL, A User Interface Description Language for Runtime Omni-Channel User Interfaces. *Proceedings of the ACM on Human-Computer Interaction* 4, EICS (2020), 1–52. doi:10.1145/3397874
- [32] Joon Sung Park, Joseph O’Brien, Carrie Jun Cai, Meredith Ringel Morris, Percy Liang, and Michael S. Bernstein. 2023. Generative Agents: Interactive Simulacra of Human Behavior. In *Proceedings of the 36th Annual ACM Symposium on User Interface Software and Technology*. ACM, 1–22. doi:10.1145/3586183.3606763
- [33] Fabio Paternò, Carmen Santoro, and Lucio Davide Spano. 2009. MARIA: A Universal, Declarative, Multiple Abstraction-Level Language for Service-Oriented Applications in Ubiquitous Environments. *ACM Transactions on Computer-Human Interaction* 16, 4 (2009), 1–30. doi:10.1145/1614390.1614394
- [34] Angel R. Puerta and Jacob Eisenstein. 1999. Towards a General Computational Framework for Model-Based Interface Development Systems. In *Proceedings of the 4th International Conference on Intelligent User Interfaces*. ACM, 171–178. doi:10.1145/291080.291108
- [35] Justin D. Weisz, Jessica He, Michael Muller, Gabriela Hofer, Rachel Miles, and Werner Geyer. 2024. Design Principles for Generative AI Applications. In *Proceedings of the CHI Conference on Human Factors in Computing Systems*. ACM, 1–22. doi:10.1145/3613904.3642466
- [36] Qian Yang, Aaron Steinfeld, Carolyn Rosé, and John Zimmerman. 2020. Re-examining Whether, Why, and How Human-AI Interaction Is Uniquely Difficult to Design. In *Proceedings of the 2020 CHI Conference on Human Factors in Computing Systems*. ACM, 1–13. doi:10.1145/3313831.3376301