

# The ProtégéLOV Plugin: Ontology Access and Reuse for Everyone

Nuria García-Santa<sup>1</sup>, Ghislain Auguste Ateazing<sup>2</sup>,  
and Boris Villazón-Terrazas<sup>1</sup>

<sup>1</sup> Expert System Iberia, Campo de las Naciones, Madrid, Spain.

<sup>2</sup> MONDECA, 35 boulevard de Strasbourg, Paris, France .

ngarcia@expertsystem.com,ghislain.ateazing@mondeca.com,bvillazon@expertsystem.com

**Abstract.** Developing ontologies, by reusing already available and well-known ontologies, is commonly acknowledged to play a crucial role to facilitate inclusion and expansion of the Web of Data. Some recommendations exist to guide ontologists in ontology engineering, but they do not provide guidelines on how to reuse vocabularies at low fine grained, i.e., reusing specific classes and properties. Moreover, there is still hard to find a tool that provides users with an environment to reuse terms. This paper presents ProtégéLOV, a plugin for the ontology editor Protégé, that combines the access to the Linked Open Vocabularies (LOV) during ontology modeling. It allows users to search a term in LOV and provides three actions if the term exists : (i) replace the selected term in the current ontology; (ii) add the `rdfs:subClassOf` or `rdfs:subPropertyOf` axiom between the selected term and the local term; and (iii) add the `owl:equivalentClass` or `owl:equivalentProperty` between the selected term and local term. Results from a preliminary user study indicate that ProtégéLOV does provide an intuitive access and reuse of terms in external vocabularies.

**Keywords:** ontology engineering, ontology reuse, LOV, Protégé, Plugin

## 1 Introduction

So far, Linked Data principles and practices are being adopted by an increasing number of data providers, getting as result a global data space on the Web containing hundreds of LOD datasets [4]. There are already several guidelines for generating, publishing, interlinking, and consuming Linked Data [4]. An important task, within the generation process, is to build the vocabulary to be used for modelling the domain of the data sources, and the common recommendation is to reuse as much as possible available vocabularies [4, 5]. This reuse approach speeds up the vocabulary development, and therefore, publishers will save time, efforts, and resources.

There are research efforts, like the NeOn Methodology [7], the Best Practices for Publishing Linked Data - W3C Working Group Note [5], and the work proposed by Lonsdale et al. [6]. However, at the time of writing we have not found

specific and detailed guidelines that describe how to reuse available vocabularies at low fine grained level, i.e., reusing specific classes and properties. Our claim is that this difficulty in how to reuse vocabularies at low fine grained level is one of major barriers to the vocabulary development and in consequence to deployment of Linked Data.

Moreover, the recent success of Linked Open Vocabularies (LOV<sup>3</sup>) as a central point for curated catalog of ontologies is helping to convey on best practices to publish vocabularies on the Web, as well as to help in the Data publication activity on the Web. LOV comes with many features, such as an API, a search function and a SPARQL endpoint.

In this paper we propose an initial set of guidelines for this task, and provide technological support by means of a plugin for Protégé, which is one of the popular framework for developing ontologies in a variety of formats including OWL, RDF(S), and XML Schema. It is backed by a strong community of developers and users in many domains. One success on Protégé also lies on the availability to extend the core framework adding new functionalities by means of plug-ins. In addition, we propose to explore, design and implement a plug-in of LOV in Protégé for easing the development of ontologies by reusing existing vocabularies at low fine grained level. The tool has to improve the modeling and reuse of ontologies used in the LOD cloud.

## 2 Reusing vocabulary elements when building ontologies

In this section we describe the procedure of reusing available vocabulary terms when building ontologies. In a nutshell, the task of building vocabularies by reusing available vocabulary terms consists of

- Search for suitable vocabulary terms to reuse from the LOV repository. The search should be conducted by using the terms of the application domain.
- Assess the set of candidate terms from LOV repository. In this particular case the results coming from LOV repository include a score for each term retrieved.
- Select the most appropriate term taking into the account its score.
- Include the selected term in the ontology that has being developed. The selected term will be the external term. There are three alternatives in this case:
  - Include the external term and use it directly in the local ontology by defining local axioms to/from that term in the local ontology.
  - Include the external term, create a local term, and define the `rdfs:subClassOf` or `rdfs:subPropertyOf` axiom to relate both terms.
  - Include the external term, create a local term, and define the `owl:equivalentClass` or `owl:equivalentProperty` axiom to relate both terms.

---

<sup>3</sup> <http://lov.okfn.org/dataset/lov/>

### 3 Related Work

The BioPortal Reference Plugin<sup>4</sup> allows the user to insert into the ontology references to external ontologies and terminologies stored in BioPortal<sup>5</sup>. The plugin allows to generate external reference of a selected term. Additionally, the BioPortal Import Plugin<sup>6</sup> allows users to import classes from external ontologies stored in the BioPortal ontology repository. The user can import entire trees of classes with a desired depth and choose which properties to import for each class. However, those plugins work only with Protégé 3.x releases and are not ported yet to recent versions.

Most closely related to the Protégé LOV plugin are approaches that use semantic search engine to support the process of editing an ontology and make large scale knowledge reuse automatically integrated in the tool. An example is the Watson Plugin [2] for the NeOn Toolkit [3], a plugin supporting the NeOn life-cycle management using the Watson [1] APIs<sup>7</sup>. However the similar plugin for Protege<sup>8</sup> is just a proof of concept rather than a real plugin.

### 4 Linked Open Vocabulaires (LOV)

The intended purpose of the LOV [8] is to help users to find and reuse terms of vocabularies in Linked Open Data. For achieving that purpose, the LOV gives access to vocabularies metadata and terms using programmatic access with APIs. LOV<sup>9</sup> catalogue is a hub of curated vocabularies used in the Linked Open Data Cloud, as well as other vocabularies suggested by users for their reuse. Some of the three main features of the LOV are for: (1) searching ontologies according to their scope, (2) assessing ontologies by providing a score for each term retrieved by a keyword search and (3) interconnecting ontologies using VOA<sup>10</sup>.

Futhermore, the LOV APIs give a remote access to the many functions of LOV through a set of RESTful services<sup>11</sup>. The APIs give access through three different type of services related to: (1) vocabulary terms (classes, properties, datatypes and instances), (2) vocabulary browsing and (3) ontology's creators.

### 5 ProtégéLOV

ProtégéLOV is an open source tool that provides support to the methodological guidelines described in section 2. It is written in Java programming language as a plugin for the Protégé ontology editor. It can be easily installed by just copying the jar file provided at the ProtégéLOV website<sup>12</sup> into the plugins directory of

<sup>4</sup> [http://protegewiki.stanford.edu/wiki/BioPortal\\_Reference\\_Plugin](http://protegewiki.stanford.edu/wiki/BioPortal_Reference_Plugin)

<sup>5</sup> <http://bioportal.bioontology.org/>

<sup>6</sup> [http://protegewiki.stanford.edu/wiki/BioPortal\\_Import\\_Plugin](http://protegewiki.stanford.edu/wiki/BioPortal_Import_Plugin)

<sup>7</sup> [http://watson.kmi.open.ac.uk/WS\\_and\\_API.html](http://watson.kmi.open.ac.uk/WS_and_API.html)

<sup>8</sup> [http://protegewiki.stanford.edu/wiki/Watson\\_Search\\_Preview](http://protegewiki.stanford.edu/wiki/Watson_Search_Preview)

<sup>9</sup> <http://lov.okfn.org/dataset/lov/>

<sup>10</sup> <http://lov.okfn.org/vocab/voaf>

<sup>11</sup> <http://lov.okfn.org/dataset/lov/apidoc/>


<sup>12</sup> <http://labs.mondeca.com/protolov/>

an existing Protégé installation. Then upon a new start, the user should select *Linked Open Vocabularies* item, within the *Ontology views* menu item.

Currently, ProtégéLOV<sup>13</sup> provides the following five functionalities:

1. **Search for a particular term (class or property) in LOV repository.** The user selects a particular term from the *Class*, *Object property* or *Data property* navigator. Next, the user switches to the *Linked Open Vocabularies View* and performs a search on the LOV repository. The system takes as input the selected term, and calls the LOV REST API to get the LOV terms that match the criteria. The plugin provides the following information (if it is available) for each term (1) URI, (2) score, (3) label, (4) local name, and (5) usage note.
2. **Reuse directly a particular term from LOV repository** The user selects the *reuse directly* option. Next, the system replaces the selected term from the *Class*, *Object property* or *Data property* navigator, and replaces by the selected term from LOV.
3. **Add the particular term and define the owl:equivalentClass or owl:equivalentProperty axiom.** The user selects the *add entity and equivalent axiom* option. Next, the system includes the new term on the local ontology, and defines owl:equivalentClass or owl:equivalentProperty axiom to relate both terms.
4. **Add the particular term and define the rdf:subClassOf or rdfs:subPropertyOf axiom.** The user selects the *add entity and sub-entity axiom* option. Next, the system includes the new term on the local ontology, and defines rdf:subClassOf or rdfs:subPropertyOf axiom to related both terms.

Figure 1 depicts the three main actions the user can perform.

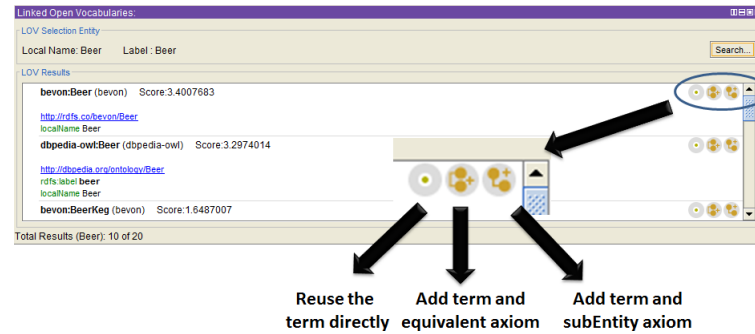

**Fig. 1.** Three actions currently available in the plugin after looking up a term in LOV catalogue: (a) reuse it directly, (b) add equivalent axiom and (c) add subEntity axiom

<sup>13</sup> A video is also available at <https://www.youtube.com/watch?v=UgA17N5FNzA>

## 6 Evaluation

We have conducted an initial user driven evaluation of the tool. For this preliminary evaluation we keep the number of evaluators low; seven ontology engineers used our plugin and gave us an insight on their experience by filling in a questionnaire <sup>14</sup>. The results indicate that while the tool needs some minor improvements, the majority of the evaluators still consider the tool to be useful.

## 7 Conclusions and Future Work

In this paper we have presented (1) initial guidelines that describe how to reuse available vocabularies at low fine grained level, i.e., reusing specific classes and properties, and (2) a tool that provides technological support by means of a plugin for Protégé that access LOV API. As future work we plan to fully evaluate the tool and guidelines.

During the demonstration we will show how to (1) install the plugin, (2) develop ontologies by reusing terms from LOV repository in Protégé.

**Acknowledgments.** Thanks to Pierre-Yves and the LOV team for providing and maintaining a curated vocabularies and API access.

## References

1. M. D'Aquin, C. Baldassarre, L. Gridinoc, M. Sabou, S. Angeletou, and E. Motta. Watson: Supporting next generation semantic web applications. 2007.
2. M. D'Aquin and M. C. Suárez-Figueroa. A Quick Guide to Knowledge Reuse with the Watson Plugin for the NeOn Toolkit, 2008. [http://watson.kmi.open.ac.uk/DownloadsAndPublications\\_files/WNTP-guide.pdf](http://watson.kmi.open.ac.uk/DownloadsAndPublications_files/WNTP-guide.pdf).
3. P. Haase, H. Lewen, R. Studer, D. Tran, M. Erdmann, M. d'Aquin, and E. Motta. The neon ontology engineering toolkit. In *WWW*, 2008.
4. T. Heath and C. Bizer. *Linked Data: Evolving the Web into a Global Data Space: Theory and Technology*, volume 1. Morgan & Claypool Publishers, 2011. <http://www.morganclaypool.com/doi/abs/10.2200/S00334ED1V01Y201102WBE001>.
5. B. Hyland, G. Ateazing, and B. Villazon-Terrazas. Best Practices for Publishing Linked Data. W3C Working Group Note, 2014. <http://www.w3.org/TR/ld-bp/>.
6. D. Lonsdale, D. W. Embley, Y. Ding, L. Xu, and M. Hepp. Reusing ontologies and language components for ontology generation. *Data & Knowledge Engineering*, 69(4):318 – 330, 2010. Including Special Section: 12th International Conference on Applications of Natural Language to Information Systems (NLDB07) - Three selected and extended papers.
7. M.-C. Suárez-Figueroa, A. Gómez-Pérez, E. Motta, and A. Gangemi. *Ontology Engineering in a Networked World*. Springer, Berlin, 2012.
8. P.-Y. Vandenbussche, G. A. Ateazing, M. Poveda-Villalón, and B. Vatan. LOV: a gateway to reusable semantic vocabularies on the Web. *Semantic Web Journal (under review)*, 2015. <http://www.semantic-web-journal.net/system/files/swj974.pdf>.

<sup>14</sup> <http://goo.gl/H4YgBJ>