Preparing your manuscript

Florian Börgel¹, Sven Karsten¹

¹Leibniz-Institute for Baltic Sea Research Warnemünde,

 $Corresponding \ author: \ Florian \ B\"{o}rgel, \ {\tt florian.boergel@io-warnemuende.de}$

Abstract

- The abstract (1) states the nature of the investigation and (2) summarizes the im-
- 6 portant conclusions. The abstract should be suitable for indexing. Your abstract
- 5 should:

Plain Language Summary

A Plain Language Summary (PLS) can be an incredibly effective science communication tool. By summarizing your paper in non-technical terms, you can explain your 10 research and its relevance to a much broader audience. A PLS is required for submis-11 sions to AGU Advances, G-Cubed, GeoHealth, GRL, JAMES, JGR: Biogeosciences, 12 JGR: Oceans, JGR: Planets, JGR: Solid Earth, JGR: Atmospheres, Space Weather, 13 and Reviews of Geophysics, but optional for other journals. A PLS should be no longer than 200 words and should be free of jargon, acronyms, equations, and any 15 technical information that would be unknown to people from outside your scientific 16 discipline. Read our tips for creating an effective PLS. 17

1 Introduction

18

River runoff is an important component of the global water cycle as it comprises 19 about one third of the precipitation over land areas (Hagemann et al., 2020). For 20 the Baltic Sea river runoff is even more important, as the Baltic Sea is nearly decou-21 pled from the open ocean (see Figure). As a consequence, the salinity of the Baltic 22 Sea is driven to a large part by freshwater supply from rivers. More generally, the 23 freshwater input into the Baltic Sea comes either as river runoff or a positive net 24 precipitation (precipitation minus evaporation) over the sea surface. The net precip-25 itation accounts for 11 % and the river input for 89 % of the total freshwater input 26 (Meier and Doescher, 2002). Modeling the Baltic Sea is therefore to a large part the 27 result of the quality of the river input, that is used for the simulation. 28

In the context of climate change studies, river runoff is usually generated in two 29 ways. First, river runoff as input for ocean models can be created using hyrdological 30 models such as the Hydrological Discharge (HD) model (Hagemann et al., 2020). 31 HD calculates the water balance using hydrological processes (e.g. snow, glaciers, soil 32 moisture, groundwater contribution). It represents a complex forecast tool that uses 33 underlying physical processes. A different approach would use data-based models 34 that intergrate statistical correction, using the land surface schemes of global or 35 regional climate models. 36

The releatively recent rise of machine learning (ML) models has been mostly ex-37 plored for river runoff forcasting, as accurate runoff forecasting, especially over 38 extended periods, is pivotal for effective water resources management (Fang et al., 39 2019; Tan et al., 2018; Yang et al., 2018). Common approach us employ artificial neural networks, support vector machines, adaptive neuro-fuzzy inference systems, 41 and notably, Long Short-Term Memory (LSTM) neural networks and have gained 42 traction for long-term hydrological forecasting due to their commendable perfor-43 mance (Humphrey et al 2016, Huang et al 2014, Ashrafi et al 2017, Yuan et al 2018, 44 Xu et al 2021). 45

LSTM networks, an evolution of the classical Recurrent Neural Networks (RNNs), have shown stability and efficacy in sequence-to-sequence predictions, such as using climatic indices for rainfall estimation or long-term hydrological forecasting. However, a limitation of LSTMs is their inability to effectively capture two-dimensional structures, an area where Convolutional Neural Networks (CNNs) excel.

Recognizing this, we use the ConvLSTM, which integrates the strengths of both LSTM and CNN, to extract spatiotemporal features from atmospheric fields for predicting river runoff in the Baltic Sea catchment, summarized by 97 inidivual rivers.

- $_{54}$ Following the previous description of the complex hyrdological model E-Hype when
- present E-Hype should be used. However, in absence of a fully functioning hydro-
- 56 golocial model, that also uses a rather complex parametrization, RNNs represent
- $_{57}$ a robust way to predict river runoff for any give period of time using atmospheric
- forcing.
- Modeling the Baltic Sea is to a large part the result of the quality of the freshwater
- input, that is used for the simulation. Meier and Kauker (2003) showed that decadal
- salinity variations of about 1 $g kg^{-1}$ are caused, inter alia, by annual runoff varia-
- tions. Further, Meier and Kauker (2003) showed that about 50 % of the decadal
- salinity variability can be explained by variations in freshwater input into the Baltic
- Sea.

70

- This paper delves into the application of deep learning, particularly ConvLSTM, to
- the challenging task of precipitation nowcasting, a domain yet to fully harness the
- ₆₇ potential of advanced machine learning techniques. We present ConvLSTM as a
- 68 novel solution to this spatiotemporal sequence forecasting challenge, highlighting its
- 69 advantages and potential future applications.

2 Methods

2.1 LSTM network

The Long Short-Term Memory (LSTM), a specialized form of Recurrent Neural Net-

- works (RNNs), is specifically tailored for modeling temporal sequences. Its unique
- design allows it to adeptly handle long-range dependencies, setting it apart from
- traditional RNNs in terms of accuracy (see Figure 1).

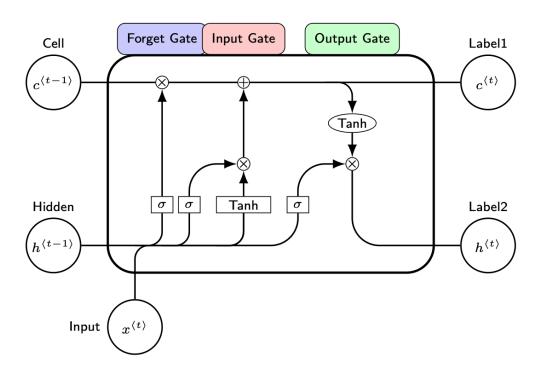


Figure 1: Inner structure of a Long Short-Term Memory Cell

This performance in modeling long-range dependencies has been validated in various studies. The key component of LSTM's innovation is its memory cell, c_t t, which

stores state information, also refered to as long-term memory. This cell is accessed, modified, and reset through several self-parameterized gates. For the input of the sequence x_t input, the forget gate f_t defines the percentage of the previous long-term memory status c_{t-1} that should be retained stored. Next the input gate i_t decides how much of the input is added to the the long-term memory, forming the updated cell state c_t . The decision to propagate the latest cell output, c_t , to the final state, h_t , is governed by the output gate, o_t , representing the updated short-term memory of the hidden state h_t . A significant advantage of this architecture is the memory cell's ability to retain gradients. This mechanism addresses the vanishing gradient problem, where, as input sequences elongate, the influence of initial stages becomes harder to capture, causing gradients of early input points to approach zero. The LSTM's activation function, inherently recurrent, mirrors the identity function with a consistent derivative of 1.0, ensuring the gradient remains stable throughout backpropagation.

One LSTM cell hence maybe expressed as:

$$\begin{split} i_t &= \sigma(W_{xi}x_t + W_{hi}h_{t-1} + W_{ci} \circ c_{t-1} + b_i) \\ f_t &= \sigma(W_{xf}x_t + W_{hf}h_{t-1} + W_{cf} \circ c_{t-1} + b_f) \\ c_t &= f_t \circ c_{t-1} + i_t \circ \tanh(W_{xc}x_t + W_{hc}h_{t-1} + b_c) \\ o_t &= \sigma(W_{xo}x_t + W_{ho}h_{t-1} + W_{co} \circ c_t + b_o) \\ h_t &= o_t \circ \tanh(c_t) \end{split}$$

with

- x_t : Input vector at time step t.
- h_{t-1} : Hidden state from the previous time step.
- C_{t-1} : Cell state from the previous time step.
- W and b: Weight matrices and bias vectors, respectively, associated with the gates of the LSTM. The subscripts denote the specific gate or operation they are associated with (e.g., W_f and b_f are the weight matrix and bias for the forget gate).
- σ : Sigmoid activation function $(0, \dots 1)$
- tanh: Hyperbolic tangent activation function (\$ -1 ...1\$)

2.2 ConvLSTM network

The FC-LSTM fails to handle information when handling spatiotemporal data due to its reliance on full connections in both input-to-state and state-to-state transitions. To address this limitation we use a convLSTM architecture. convLSTM replaces the fully connected operations in the LSTM with convolutional operations. Hence, all inputs X_1, \ldots, X_t , cell outputs C_1, \ldots, C_t , hidden states H_1, \ldots, H_t , and gates i_t, f_t, o_t of the ConvLSTM are 3D tensors. The last two dimensions of these tensors represent spatial dimensions, specifically rows and columns. Conceptually, these inputs and states can be visualized as vectors positioned on a spatial grid.

In the ConvLSTM, the future state of a specific cell on this grid is determined by the inputs and past states of its neighboring cells. This spatial consideration is integrated by employing a convolution operator in both state-to-state and input-to-state transitions, as illustrated in Fig. 2. The foundational equations for ConvLSTM are:

$$\begin{split} i_t &= \sigma(W_{xi} * X_t + W_{hi} * H_{t-1} + W_{ci} \circ C_{t-1} + b_i) \\ f_t &= \sigma(W_{xf} * X_t + W_{hf} * H_{t-1} + W_{cf} \circ C_{t-1} + b_f) \\ C_t &= f_t \circ C_{t-1} + i_t \circ \tanh(W_{xc} * X_t + W_{hc} * H_{t-1} + b_c) \\ o_t &= \sigma(W_{xo} * X_t + W_{ho} * H_{t-1} + W_{co} \circ C_t + b_o) \\ H_t &= o_t \circ \tanh(C_t) \end{split}$$

In summary, the ConvLSTM excels at processing tasks that demand a combined understanding of spatial patterns and temporal sequences in data. It merges the image-processing capabilities of Convolutional Neural Networks (CNNs) with the time-series modeling of Long Short-Term Memory (LSTM) networks.

2.3 Implemented model architecture

116

117

118

120

121

122

123

124

126

127

128

129

130

131

132

133

134

136

137

138

The ConvLSTM architectures uses and encoder/decoder structure as discussed in TODO. To predict all 97 rivers entering the Baltic Sea, we flatten the output and use fully connected layers to map onto the individual rivers outputs.

An overview of the model structure is given below




Figure 2: BaltConvLSTM

For the computation we use the following set of hyper parameters:

Table 1: Hyperparameters

Parameter size
4
10
30
(9,9)
1
64
1e-3 with CosineAnnealing

As input the model receives 30 days of atmospheric surface fields temperature T, precipitation P, specific humidity Q and wind speed W, with a daily resolution to predict the river runoff R at the time step $\Delta t + 1$, which can be summarized as

$$R_{\Delta t+1} = f\left(T_{t-30:t}, P_{t-30:t}, Q_{t-30:t}, W_{t-30:t}\right)$$

with f being a function maps the 30 days of daily atmospheric surface fields data to the predicted river runoff.


The choice of atmospheric fields was based on the implemented river runoff calculation in the atmospheric model COSMO-CLM which uses these four fields to calculate an river runoff estimate.

3 Results

For the evaluation of the model performance we consider the period 1979 to 2011. For this period no bias correction was applied to the original E-HYPE dataset. We chose a split of 80% training data, 10% validation data to evaluate the performance

of the model during training, and 10% training data that is finally used to evaluate the performance of the model after training.

Figure 3 shows the perfomance of the model using the test dataset. The predicted total river runoff for the Baltic Sea is closely matching the original data. Zooming in on the largest individual rivers (lower panels) it can be seen that that also the prediction of the inidivual rivers is close to the original data.

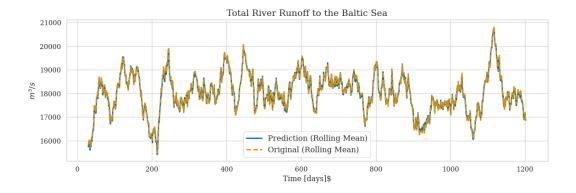

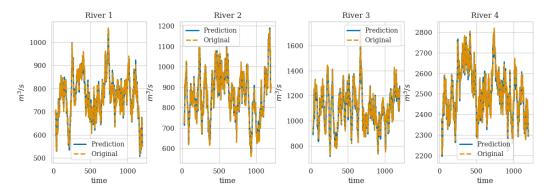


Figure 3: Figure ..

The accuracy of the model is further displayed in Figure 4 . The correlation is close to 1 and the residuals show the error of the model is below 1% of the original data.

Lastly, we evaluated the performance of the runoff model by incorporating the predicted river runoff as forcing into the ocean model MOM5. This provides a robust validation of the runoff model against more complex real world conditions. This allows us to ensure that the predictions accurately reflect the impact of the river discharge on the ocean dynamics, validating the temporal and spatial variability of the the river discharge. **?@fig-by15** shows the salinity comparison between the original E-HYPE river runoff and the predicted river runoff at BY15 - a central stations in the Baltic Sea.


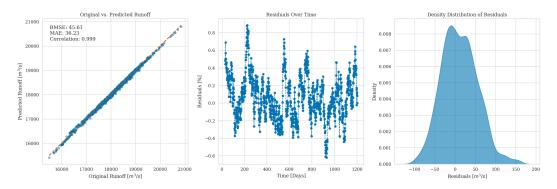


Figure 4: Figure ...

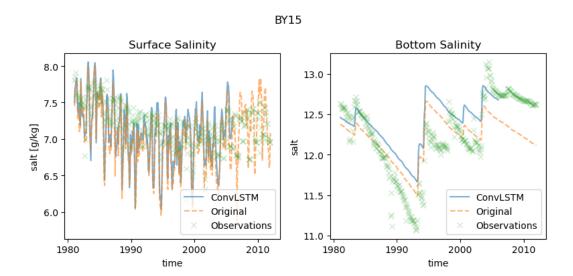

4 Acknowledgments

Phasellus interdum tincidunt ex, a euismod massa pulvinar at. Ut fringilla ut nisi nec volutpat. Morbi imperdiet congue tincidunt. Vivamus eget rutrum purus. Etiam et pretium justo. Donec et egestas sem. Donec molestie ex sit amet viverra egestas. Nullam justo nulla, fringilla at iaculis in, posuere non mauris. Ut eget imperdiet elit.

5 Open research

Phasellus interdum tincidunt ex, a euismod massa pulvinar at. Ut fringilla ut nisi nec volutpat. Morbi imperdiet congue tincidunt. Vivamus eget rutrum purus. Etiam et pretium justo. Donec et egestas sem. Donec molestie ex sit amet viverra egestas. Nullam justo nulla, fringilla at iaculis in, posuere non mauris. Ut eget imperdiet elit.

References
Fang, W., Huang, S., Ren, K., Huang, Q., Huang, G., Cheng, G., & Li, K. (2019).

Examining the applicability of different sampling techniques in the development of decomposition-based streamflow forecasting models. *Journal of Hydrology*, 568, 534–550. https://doi.org/10.1016/j.jhydrol.2018.11.020

Hagemann, S., Stacke, T., & Ho-Hagemann, H. T. M. (2020). High Resolution Discharge Simulations Over Europe and the Baltic Sea Catchment. Frontiers in Earth Science, 8. https://doi.org/10.3389/feart.2020.00012

```
Tan, Q.-F., Lei, X.-H., Wang, X., Wang, H., Wen, X., Ji, Y., & Kang, A.-Q. (2018).

An adaptive middle and long-term runoff forecast model using EEMD-ANN hybrid approach. Journal of Hydrology, 567, 767–780. https://doi.org/10.1016/j.jhydrol.2018.01.015

Yang, Z., Liu, P., Cheng, L., Wang, H., Ming, B., & Gong, W. (2018). Deriving operating rules for a large-scale hydro-photovoltaic power system using implicit stochastic optimization. Journal of Cleaner Production, 195, 562–572. https://doi.org/10.1016/j.jclepro.2018.05.154
```