Journal of the Free/Libre and Open Source Software

in Educational Research || FLOSSinER

Vol. 1, Issue 1 , 2018 flossiner.com || @flossiner.com

Test Article

Andrei J. Vukolov [1] *, Olga V. Egorova* [2]

Abstract
Abstract comes here. 10pt. Max. 250 words

Keywords:
keyword1, keyword2, keyword3 (max. 5 values)

Received:
XX.XX.XXXX

Accepted:
XX.XX.XXXX

Introduction

Introduction comes here. 12pt, regular, justified. Dont use inline. Line-height=1.15, add space after paragraph.

The document should link the LaTeX class file `flossiner.cls` provided from the official website through following directive: `\documentclass{flossiner}`.

Method

Sample or Study Group (second order title, 12pt, bold, italic)

Please give detailed information here about your sample or study group.

Tools & LaTeX prerequisites

Class file `flossiner.cls` uses the following LaTeX packages you should have on the machine to successfully compile the article:

```
mathpazo  anyfontsize   ifthen
fancyhdr    geometry    graphicx
listings      color     hyperref
titlesec    tabularx    colortbl
 environ     caption     apacite
```

[1] BMSTU
[2] BMS

All these packages are bundled into any modern LaTeX distrubution. If you do not have one of them, you always can download it on CTAN: https://www.ctan.org/. Simply place the contents of uncompressed archive into the directory where LaTeX would see it.

Tables

You may use centered `tabular` or unjustified `tabularx` environments wrapped into standard `table` floating object. Please keep the structure of your tables as simple and readable as possible.

Table 1
Sample table

Group	par1	par2	par3
Group1	10	20	30
Group2	400	500	800

You can also add source code listings into your articles. To do so, you should use `lstlisting` environment. Source code which represents Table 1 is printed in Listing 1.

Listing 1. Code for floating table (from above)
```
\begin{table}[h]%Table environment
    \caption{Sample table}
    \label{tbl:tbl1}
    \begin{tabularx}{\textwidth}{p{10cm}cXr}
        \hline %Place data under the line
        Group   &   par1    &   par2    &   par3    \\
        \hline %Separator
        Group1  &   10      &   20      &   30      \\
        Group2  &   400     &   500     &   800     \\
        \hline
    \end{tabularx}
\end{table}
```

The header string for the listing above looks like `\begin{lstlisting}[language=TeX, label=lst:lst1,caption={Code for floating table (from above)}]`.

For another language like C++ just change the header of the environment: `\begin{lstlisting}[language=C++,label=lst:lstcpp,caption={Code}]`:

Listing 2. C++ code example
```
#include <iostream>
using namespace std;
int main(int argc, char** args)
```

```
{
    cout << "Hello World!" << endl;
    return 0;
}
```

Figures

To include images into your article please use standard `figure` environment wrapping `includegraphics` command as the following (fig. 1):

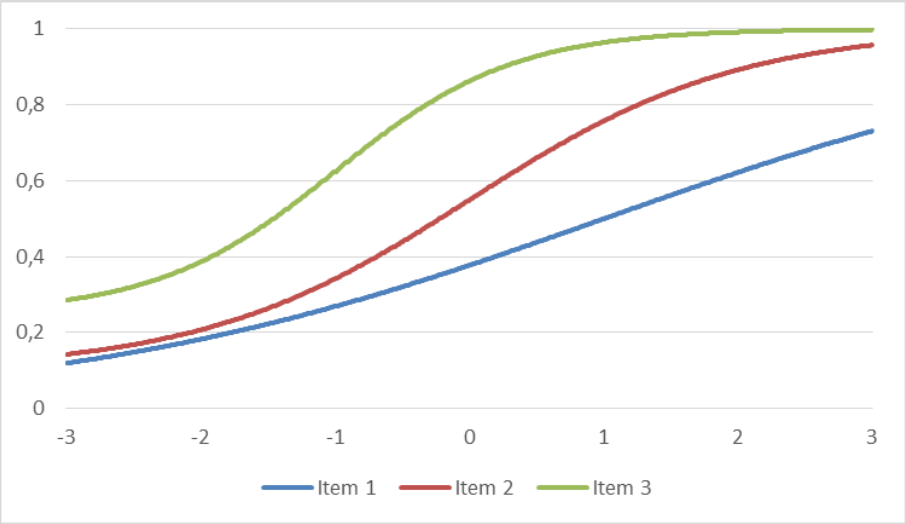

Figure 1. Test figure

Listing 3. Code for floating figure

```
\begin{figure}[h]
    \begin{center}
        \includegraphics[width=\textwidth]{testfigure}
        \caption{Test figure}
        \label{fig:fig1}
    \end{center}
\end{figure}
```

Conclusion

You can edit this title as Summary, etc.

Acknowledgments

Please provide any notes about your article (inc. grants, financial support etc.) under this section.

Bibliography

Use `apacite` bibliography style to generate citations using BibTeX. It is strongly unrecommended to write `\bibitem` commands manually because of very specific form of APA entry. Instead of it, use bibliographic entries collected within `.bib` file according to BibTeX documentation (http://www.bibtex.org/) and write the following commands:

Listing 4. Adding a bibliography

```
1    \bibliographystyle{apacite}
2    \bibliography{books}
```

where `book` is the name of your `.bib` file. These commands will also add 'References' section automatically.