



Mailingboss 4.0 / 5.0

Integration API


June 2022

1. Getting the Token – Integration Key for Authentication


The Token for authentication of the requests for the API is found in the Integration Key section of the Mailingboss, as shown below.

Menu > Integration

Click Copy or select and copy (CTRL+C) the integration key to paste into the other tool or into your request code.

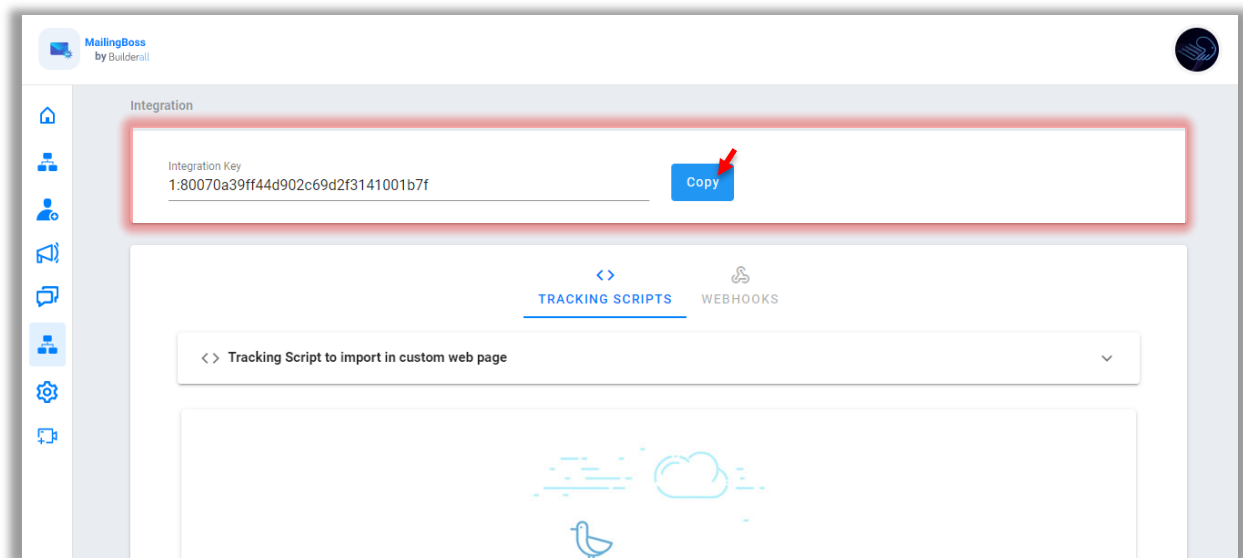

Img 1- Mailingboss 5.0 Integration

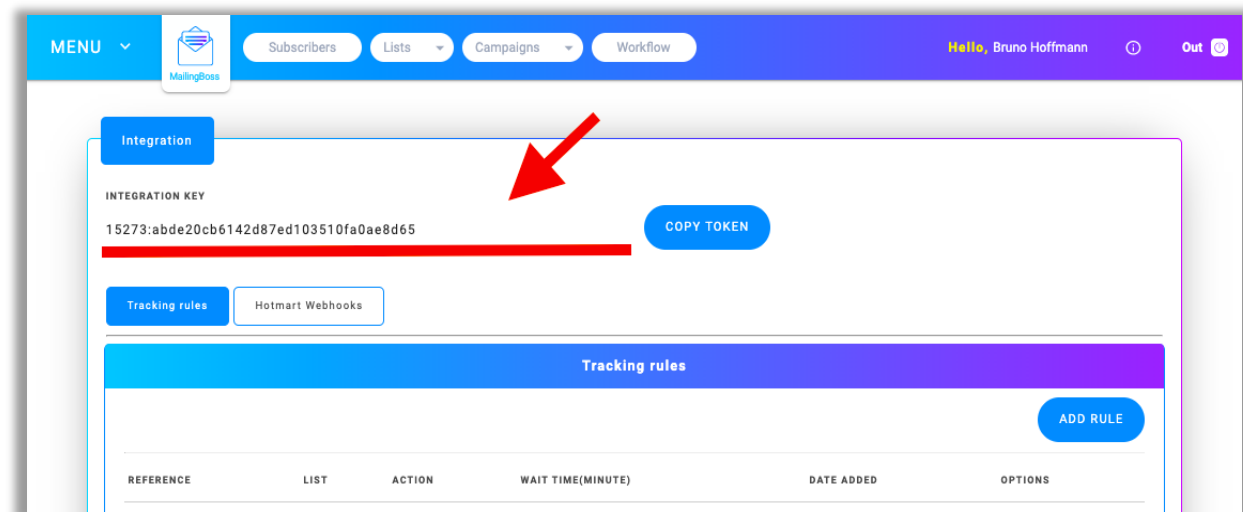

Img 2 - Mailingboss 4.0 Integration



The integration key will be the same between versions of Mailingboss. The API will know which version of Mailingboss to target according to the subscriber list sent as a request parameter.

2.Method to Search the Lists

To getting all the lists of user, it is necessary to make a GET request to the URL

<https://member.mailingboss.com/integration/index.php/lists/<TOKEN>>:

Request example GET:

```
GET /integration/index.php/lists/<TOKEN>
```

```
HOST: https://member.mailingboss.com
```

Response example JSON:

```
{
  status: "success", data: [
    {
      list_uid: "m07ug174cie26",
      name: "E-mail Marketing",
      display_name: "E-mail Marketing",
      description: "E-mail Marketing"
    },
    {
      list_uid: "mj546z2pwp2de",
      name: "Form name / List Test",
      display_name: "List Test",
      description: "List Test"
    }
  ]
}
```

3. Method to get the Custom Fields

To getting all the custom fields, it is necessary to make a POST request to the URL

<https://member.mailingboss.com/integration/index.php/lists/fields/<TOKEN>>:

Request example POST:

POST /integration/index.php/lists/fields/<TOKEN>

HOST: <https://member.mailingboss.com>

PARAMS - FORM DATA:

list_uid: STRING Ex: vh485p76so057

Response example JSON:

```
{
  status: "success",
  data: [
    {
      label: "Email",
      tag: "EMAIL",
      type: "text",
      required: "yes",
      options: []
    },
    {
      label: "Gender",
      tag: "GENDER",
      type: "dropdown",
      required: "no",
      options: [
        {
          name: "Male",
          value: "male"
        },
        {
          name: "Female",
          value: "female"
        }
      ]
    }
  ]
}
```

4. Add subscriber to list

To associate a subscriber with a list, it is necessary make a POST request to the URL

<https://member.mailingboss.com/integration/index.php/lists/subscribers/create/<TOKEN>>
by passing the fields email, list_uid and taginternals:

Request example POST:

```
POST /integration/index.php/lists/subscribers/create/<TOKEN>
HOST: https://member.mailingboss.com
PARAMS – FORM DATA:
  email: STRING Ex: teste@teste.com
  list_uid: STRING Ex: vh485p76so057
  taginternals: STRING Ex: testetag, tag2
```

Response example JSON:

```
{
  status: "success",
  data: {
    subscriber_uid: "ow305e5oat103",
    email: "teste@teste.com", taginternals:
    "testetag, tag2", status: "confirmed"
  }
}
```

Request example POST using Custom Fields:

```
POST /integration/index.php/lists/subscribers/create/<TOKEN>
HOST: https://member.mailingboss.com
PARAMS – FORM DATA:
  email: STRING Ex: teste@teste.com list_uid:
  STRING Ex: vh485p76so057 taginternals:
  STRING Ex: testetag, tag2
  gender: STRING VALUE
  fname: STRING VALUE
  lname: STRING VALUE
```

Response example JSON:

```
{
  status: "success",
  data: {
    subscriber_uid: "ow305e5oat103",
    email: "teste@teste.com", taginternals:
    "testetag, tag2", status: "confirmed"
  }
}
```

5. Search subscriber by email

To search for a subscriber by email, you need to make a POST request to URL

<https://member.mailingboss.com/integration/index.php/lists/subscribers/search-by-email/<TOKEN>> by passing the fields email and list_uid:

Request example POST:

POST /integration/index.php/lists/subscribers/search-by-email/<TOKEN>

HOST: <https://member.mailingboss.com>

PARAMS – FORM DATA:

email: STRING Ex: teste@teste.com list_uid:

STRING Ex: vh485p76so057

Response example JSON:

```
{
  status: "success",
  data: {
    email: "teste@teste.com", status:
    "confirmed", subscriber_uid:
    "ow305e5oat103", taginternals:
    "testetag, tag2"
  }
}
```

6. Update subscriber data

You can change the email, tags, and field values of a subscriber by POST request to URL

<https://member.mailingboss.com/integration/index.php/lists/subscribers/update/<TOKEN>>
by passing the fields subscriber_uid(opcional), list_uid, email, taginternals:

Request example POST:

POST /integration/index.php/lists/subscribers/update/<TOKEN>

HOST: <https://member.mailingboss.com>

PARAMS:

subscriber_uid: STRING Ex: ho984vsr8af13

list_uid: STRING Ex: vh485p76so057

email: STRING Ex: teste@teste.com

taginternals: STRING Ex: testetag, tag2

taginternals_remove: STRING Ex: tag1

Response example JSON:

```
{
    status: "success"
}
```

Request example POST using Custom Fields:

POST /integration/index.php/lists/subscribers/update/<TOKEN>

HOST: <https://member.mailingboss.com>

PARAMS:

subscriber_uid: STRING Ex: ho984vsr8af13

list_uid: STRING Ex: vh485p76so057

email: STRING Ex: teste@teste.com

taginternals: STRING Ex: testetag, tag2

taginternals_remove: STRING Ex: tag1

gender: STRING VALUE

fname: STRING VALUE

lname: STRING VALUE

Response example JSON:

```
{
    status: "success"
}
```

7. Unsubscribe from subscriber in a list

To unsubscribe from a subscriber in a particular list, make a POST request to URL

<https://member.mailingboss.com/integration/index.php/lists/subscribers/unsubscribe/<TOKEN>> by passing the fields `subscriber_uid` and `list_uid`:

Request example POST:

POST /integration/index.php/lists/subscribers/unsubscribe/<TOKEN>

HOST: <https://member.mailingboss.com>

PARAMS:

`subscriber_uid`: STRING Ex: ho984vsr8af13

`list_uid`: STRING Ex: vh485p76so057

Response example JSON:

```
{
  status: "success"
}
```


8. Delete subscriber from a list

It is possible to remove a Subscriber from a list making a POST request to the URL

<https://member.mailingboss.com/integration/index.php/lists/subscribers/delete/<TOKEN>>
by passing the fields subscriber_uid and list_uid:

Request example POST:

POST /integration/index.php/lists/subscribers/delete/<TOKEN>

HOST: <https://member.mailingboss.com>

PARAMS:

subscriber_uid: STRING Ex: ho984vsr8af13

list_uid: STRING Ex: vh485p76so057

Response example JSON:

```
{  
    status: "success"  
}
```