



Create a scatter overlapped on a map of the US in which every point color and size is sensitive of the state population. For every year create a different image. Use the basemap tutorial in the Python datascience handbook. Find a database with the US states names and coordinates (latitude and longitude) and find a different data base with each state's population for several years. Extract the data from every database and create a dataframe from which the data for basemap will be extracted.

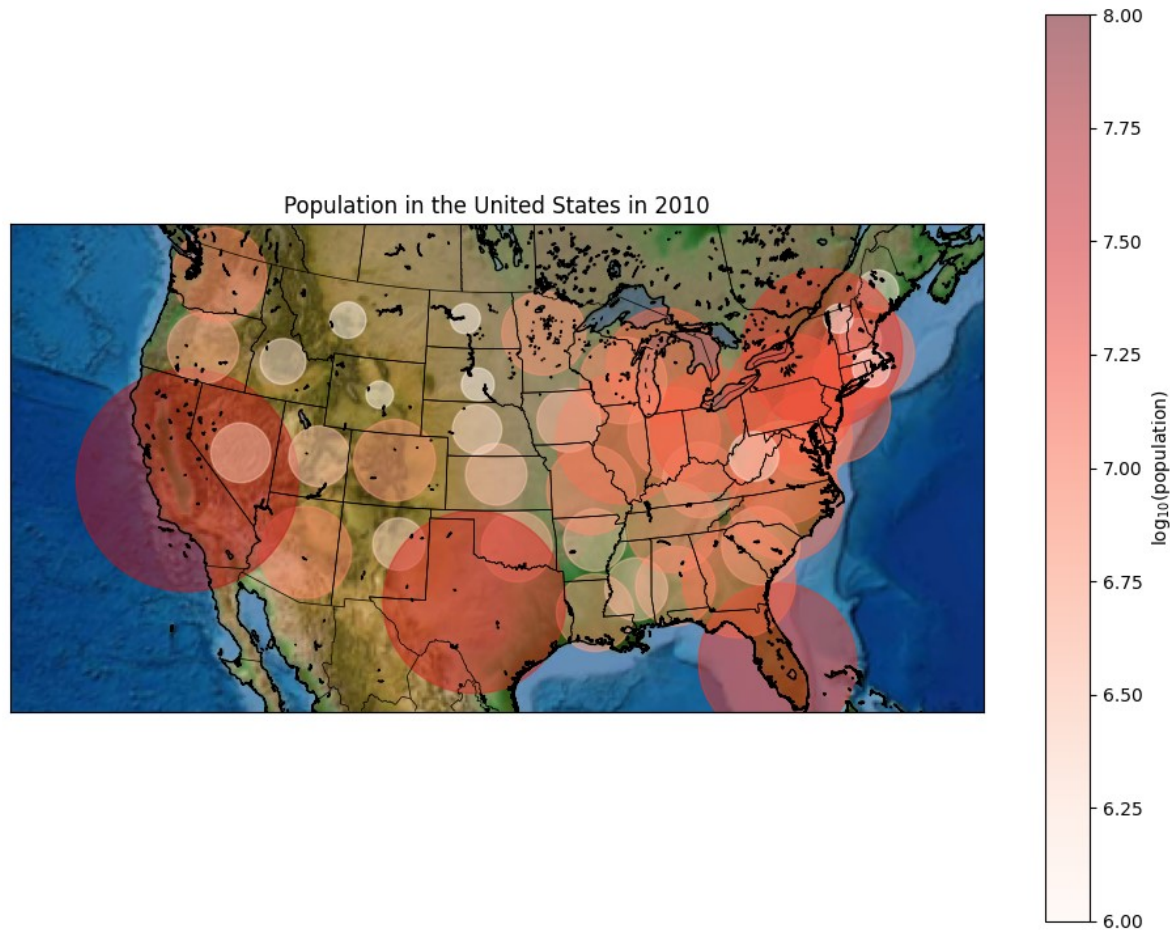


Francisco Medina
fmedinav@yahoo.com
Use of Python Basemap

Create a scatter overlapped on a map of the US in which every point color and size is sensitive of the state population. For every year create a different image. Use the basemap tutorial in the Python datascience handbook. Find a database with the US states names and coordinates (latitude and longitude) and find a different data base with each state's population for several years. Extract the data from every database and create a dataframe from which the data for basemap will be extracted.

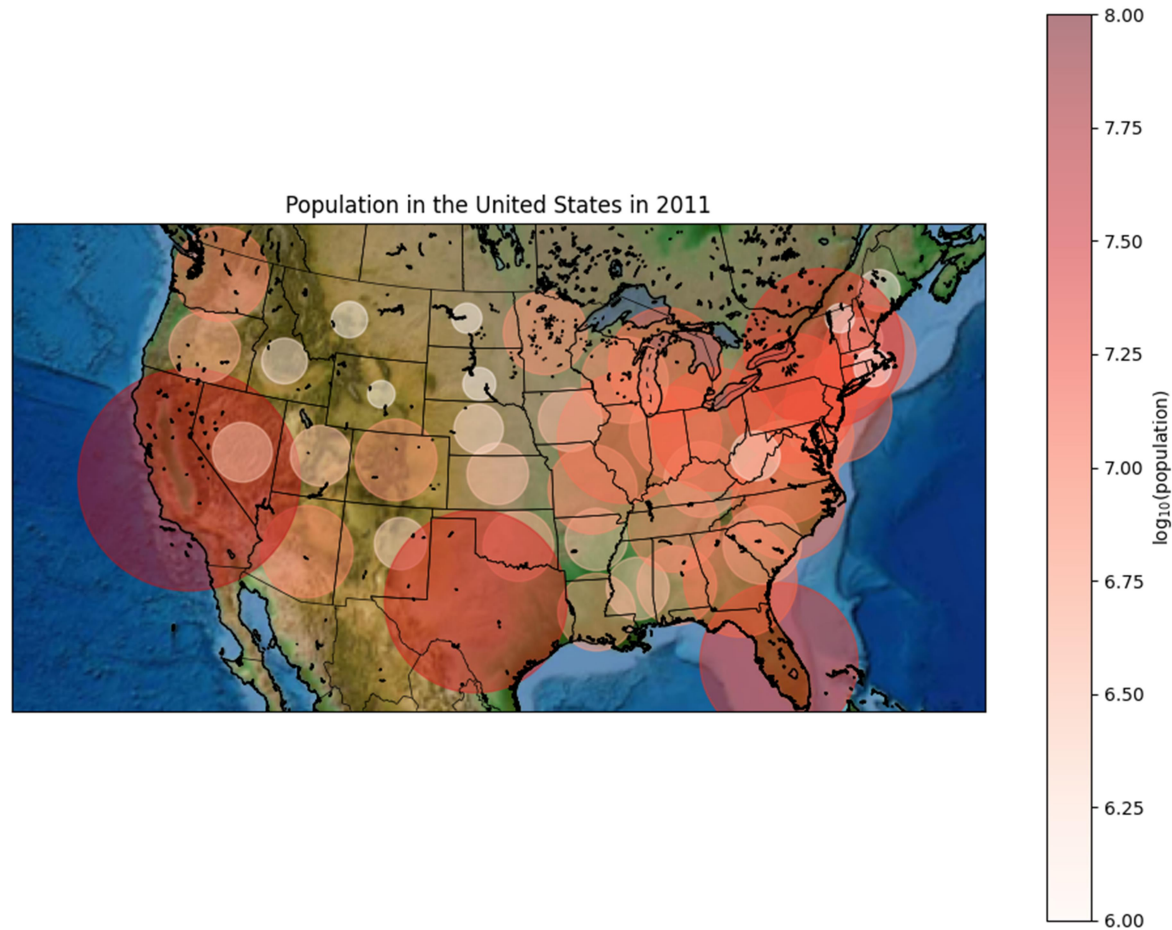


Francisco Medina
fmedinav@yahoo.com
Use of Python Basemap

Create a scatter overlapped on a map of the US in which every point color and size is sensitive of the state population. For every year create a different image. Use the basemap tutorial in the Python datascience handbook. Find a database with the US states names and coordinates (latitude and longitude) and find a different data base with each state's population for several years. Extract the data from every database and create a dataframe from which the data for basemap will be extracted.

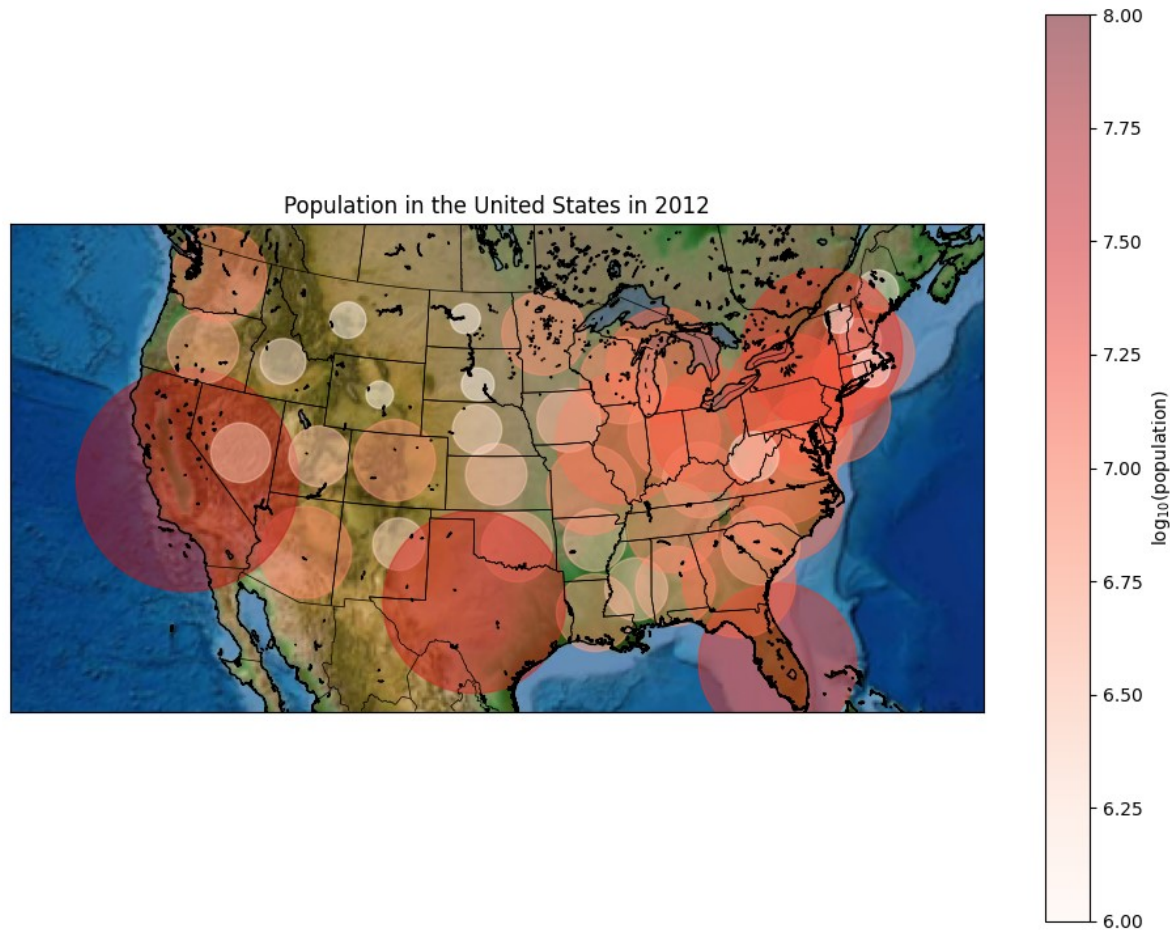


Francisco Medina
fmedinav@yahoo.com
Use of Python Basemap

Create a scatter overlapped on a map of the US in which every point color and size is sensitive of the state population. For every year create a different image. Use the basemap tutorial in the Python datascience handbook. Find a database with the US states names and coordinates (latitude and longitude) and find a different data base with each state's population for several years. Extract the data from every database and create a dataframe from which the data for basemap will be extracted.

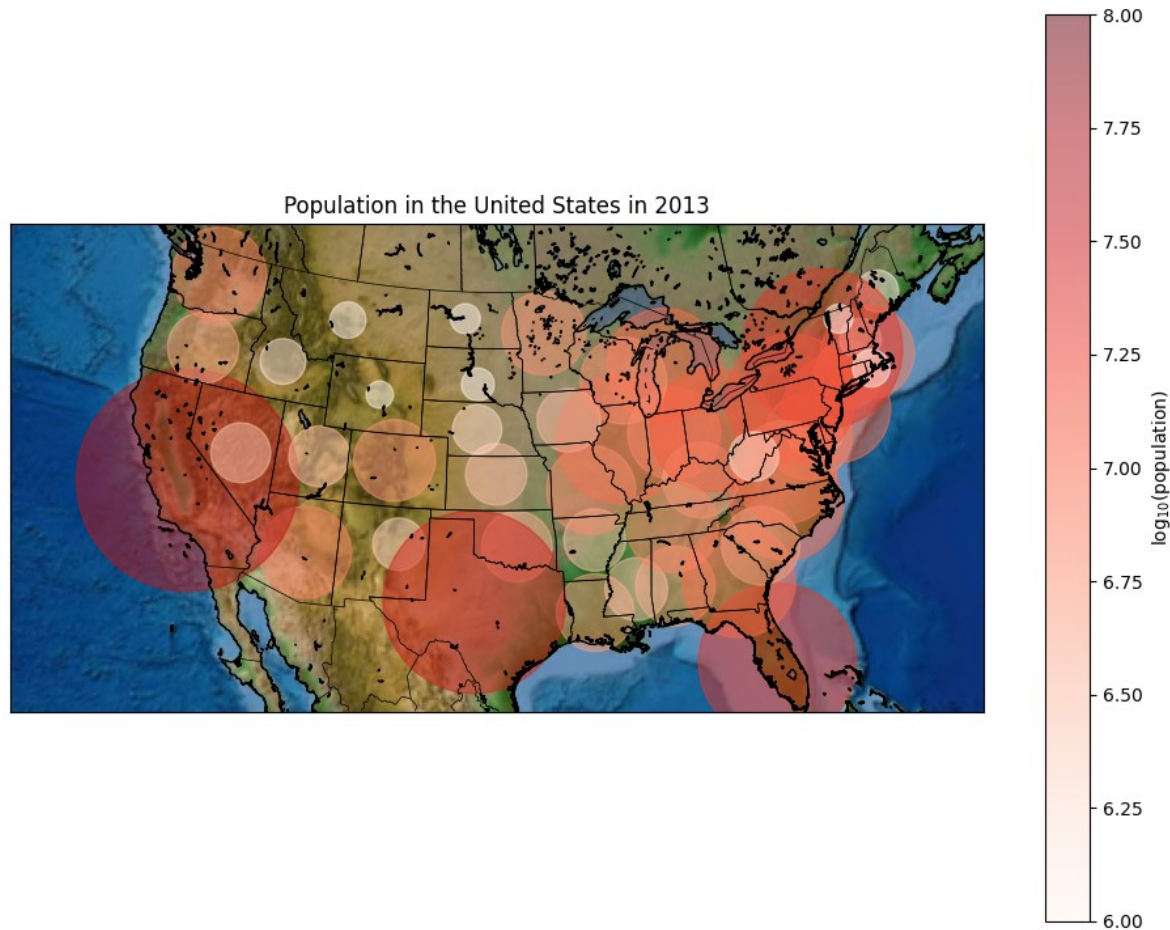


Francisco Medina
fmedinav@yahoo.com
Use of Python Basemap

Create a scatter overlapped on a map of the US in which every point color and size is sensitive of the state population. For every year create a different image. Use the basemap tutorial in the Python datascience handbook. Find a database with the US states names and coordinates (latitude and longitude) and find a different data base with each state's population for several years. Extract the data from every database and create a dataframe from which the data for basemap will be extracted.

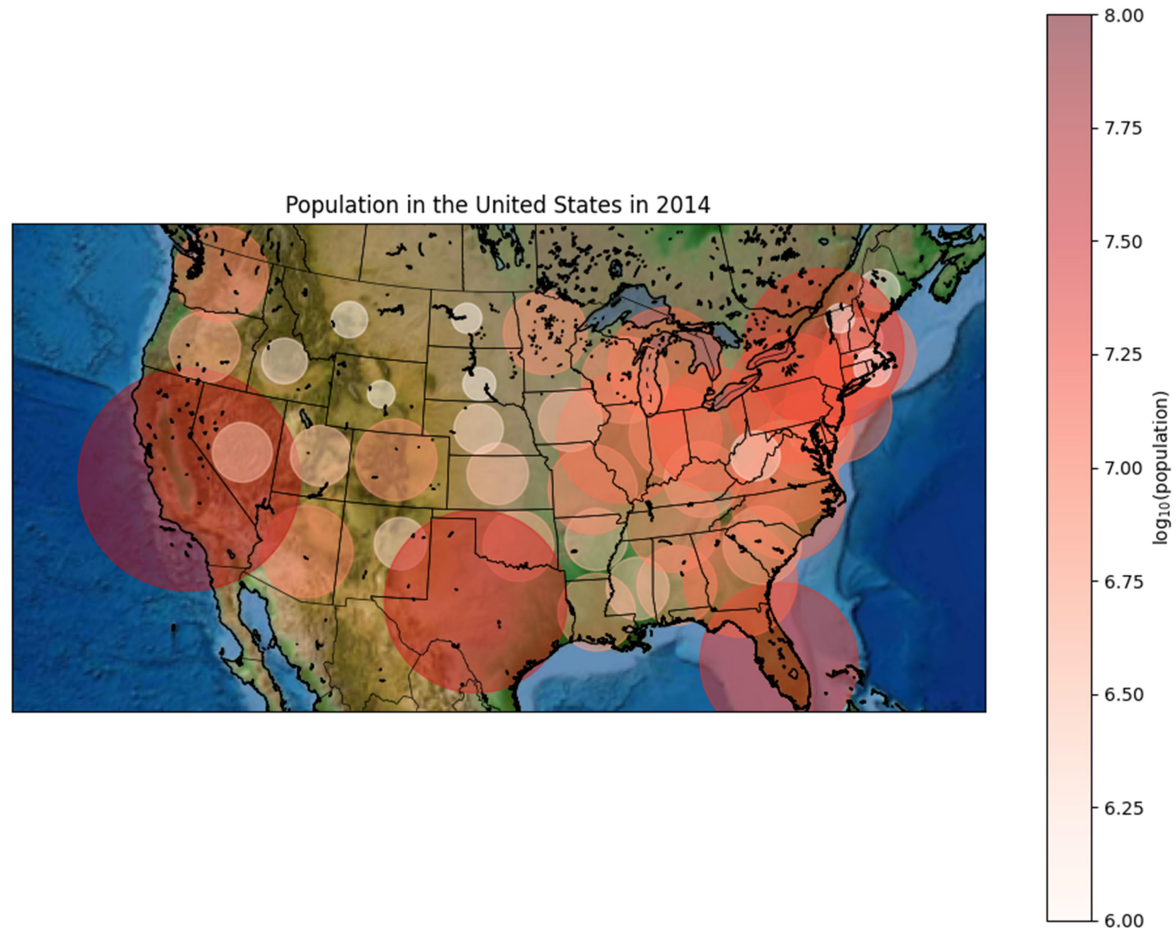


Francisco Medina
fmedinav@yahoo.com
Use of Python Basemap

Create a scatter overlapped on a map of the US in which every point color and size is sensitive of the state population. For every year create a different image. Use the basemap tutorial in the Python datascience handbook. Find a database with the US states names and coordinates (latitude and longitude) and find a different data base with each state's population for several years. Extract the data from every database and create a dataframe from which the data for basemap will be extracted.

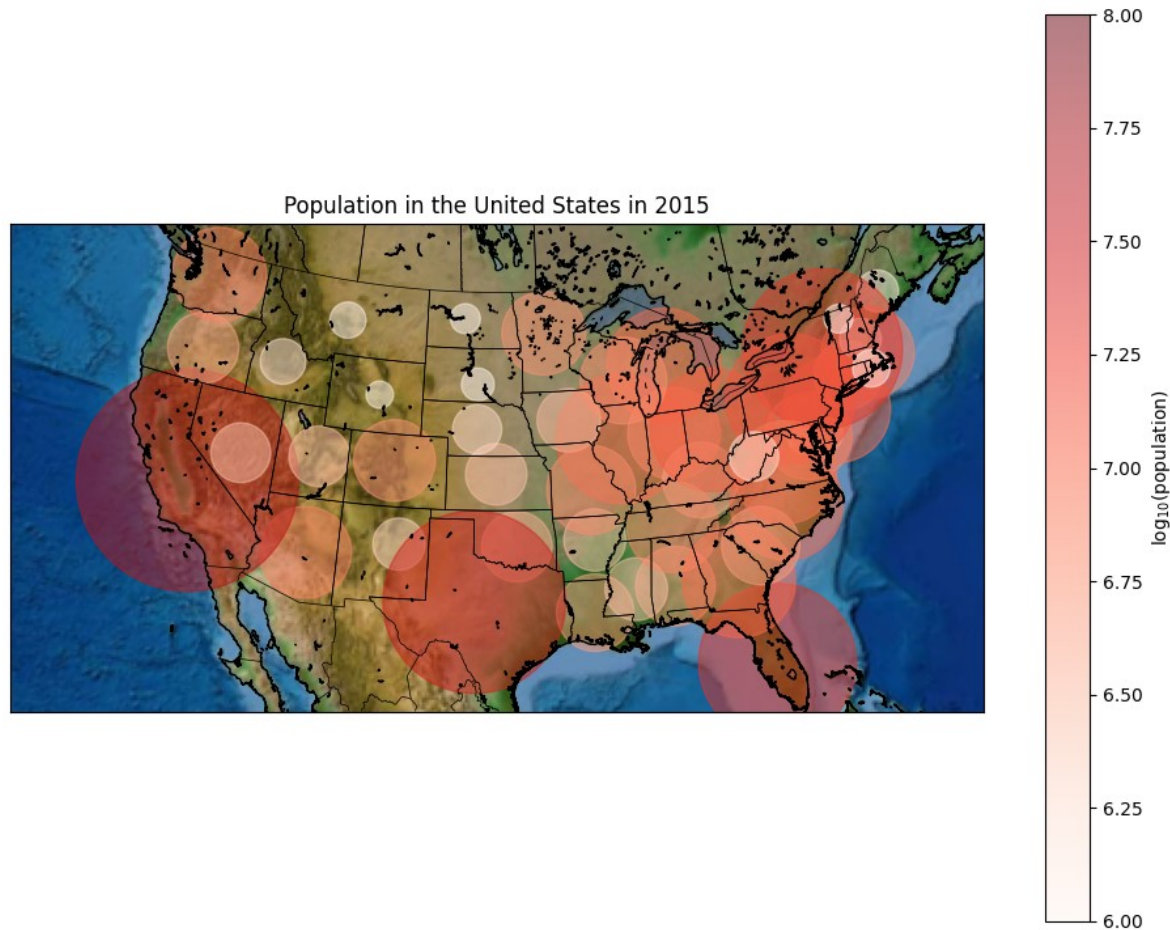


Francisco Medina
fmedinav@yahoo.com
Use of Python Basemap

Create a scatter overlapped on a map of the US in which every point color and size is sensitive of the state population. For every year create a different image. Use the basemap tutorial in the Python datascience handbook. Find a database with the US states names and coordinates (latitude and longitude) and find a different data base with each state's population for several years. Extract the data from every database and create a dataframe from which the data for basemap will be extracted.

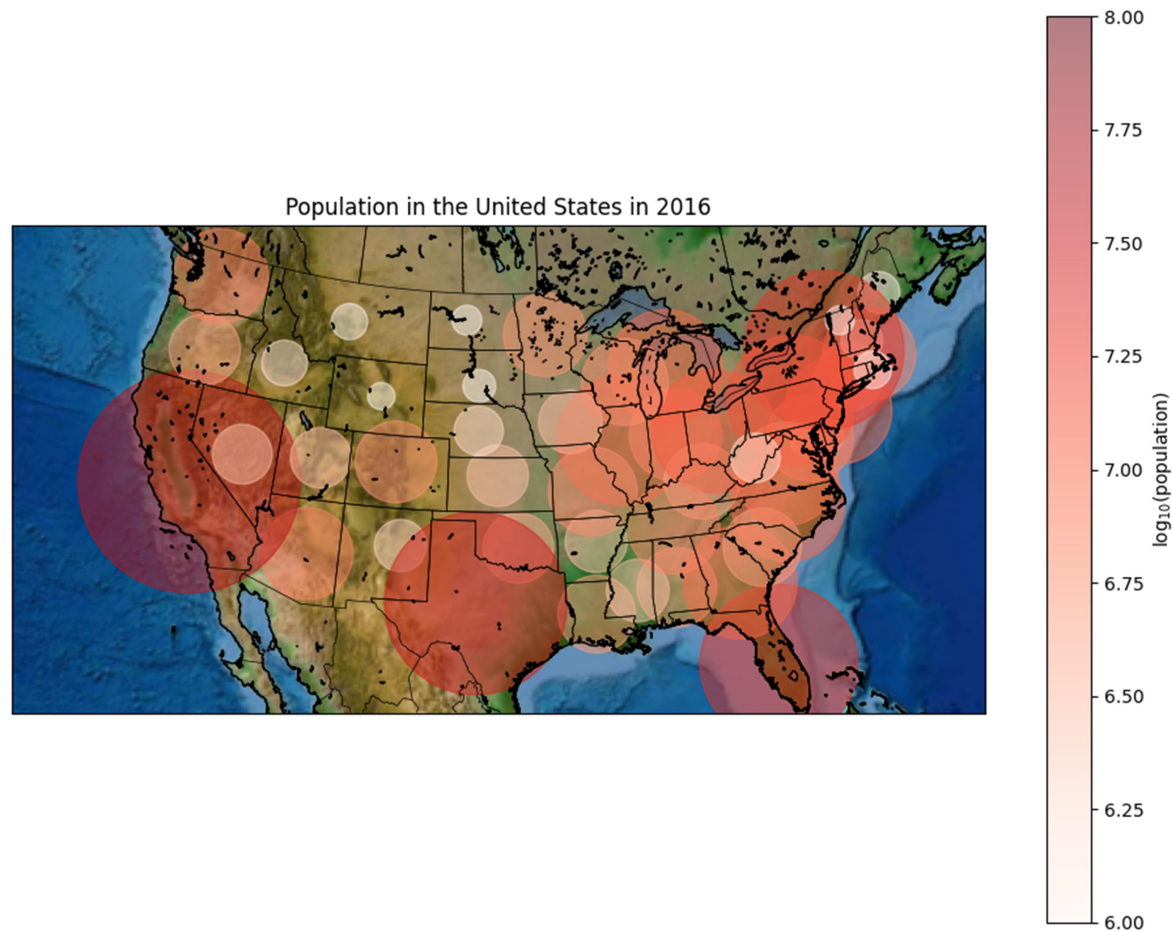


Francisco Medina
fmedinav@yahoo.com
Use of Python Basemap

Create a scatter overlapped on a map of the US in which every point color and size is sensitive of the state population. For every year create a different image. Use the basemap tutorial in the Python datascience handbook. Find a database with the US states names and coordinates (latitude and longitude) and find a different data base with each state's population for several years. Extract the data from every database and create a dataframe from which the data for basemap will be extracted.

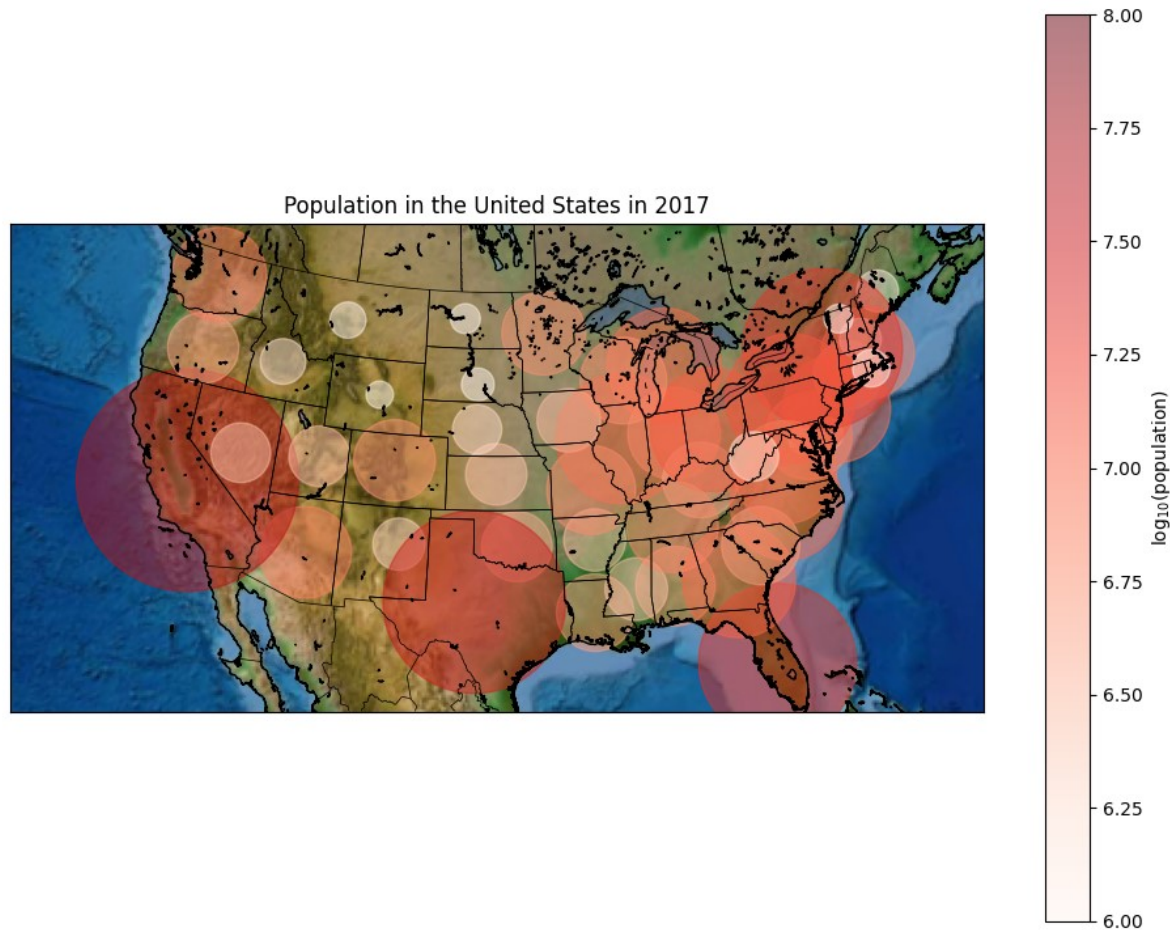


Francisco Medina
fmedinav@yahoo.com
Use of Python Basemap

Create a scatter overlapped on a map of the US in which every point color and size is sensitive of the state population. For every year create a different image. Use the basemap tutorial in the Python datascience handbook. Find a database with the US states names and coordinates (latitude and longitude) and find a different data base with each state's population for several years. Extract the data from every database and create a dataframe from which the data for basemap will be extracted.

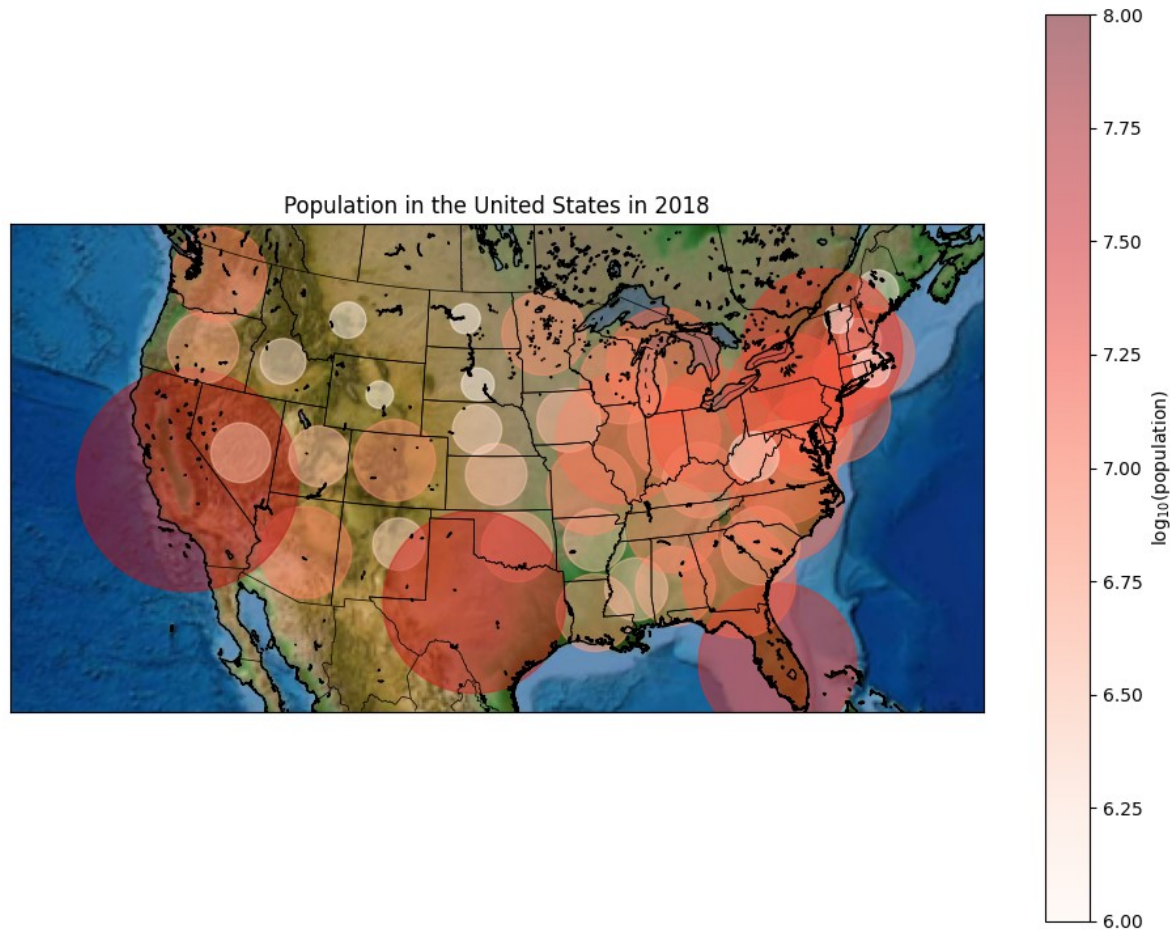

Francisco Medina
fmedinav@yahoo.com
Use of Python Basemap

Create a scatter overlapped on a map of the US in which every point color and size is sensitive of the state population. For every year create a different image. Use the basemap tutorial in the Python datascience handbook. Find a database with the US states names and coordinates (latitude and longitude) and find a different data base with each state's population for several years. Extract the data from every database and create a dataframe from which the data for basemap will be extracted.

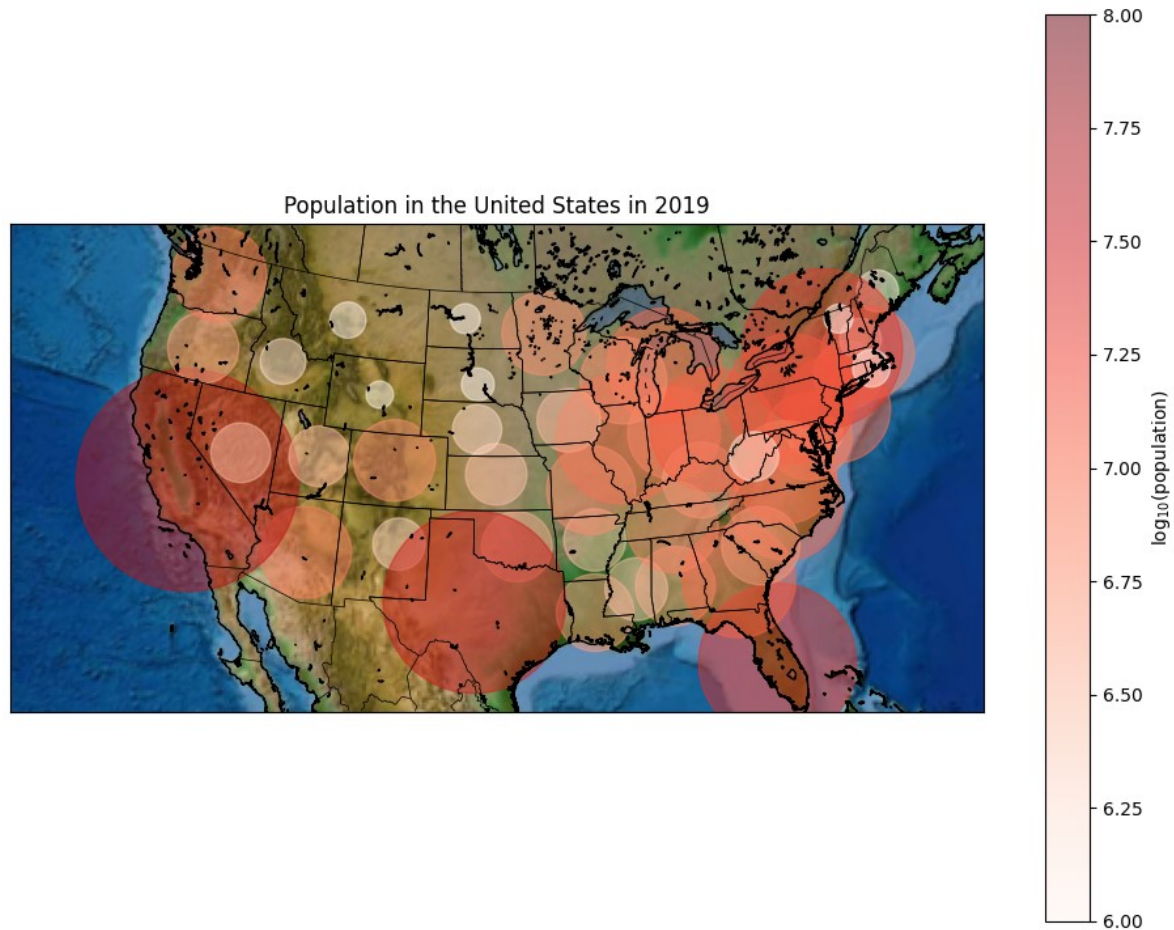

Francisco Medina
fmedinav@yahoo.com
Use of Python Basemap