

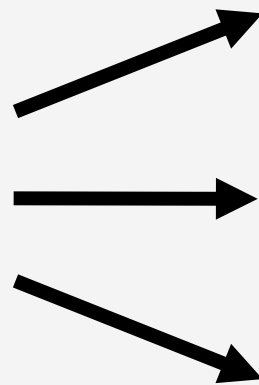


Data distribution

$p_{\text{data}}(x_c)$



$p_{\text{data}}(x|x_c)$

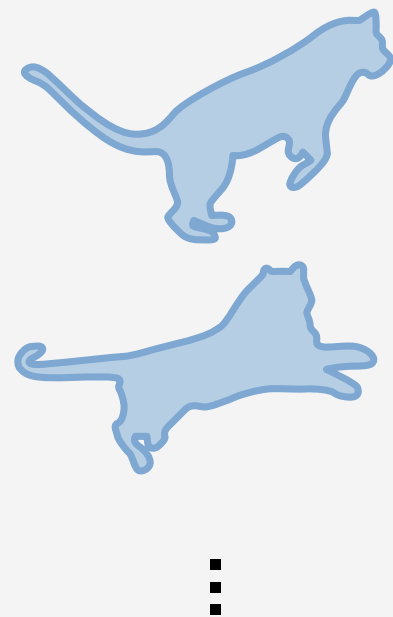


Encoder
 $z = f(x)$



Induced latent distribution $q_f(z, z_c)$

$p_{\theta}(z|z_c)$

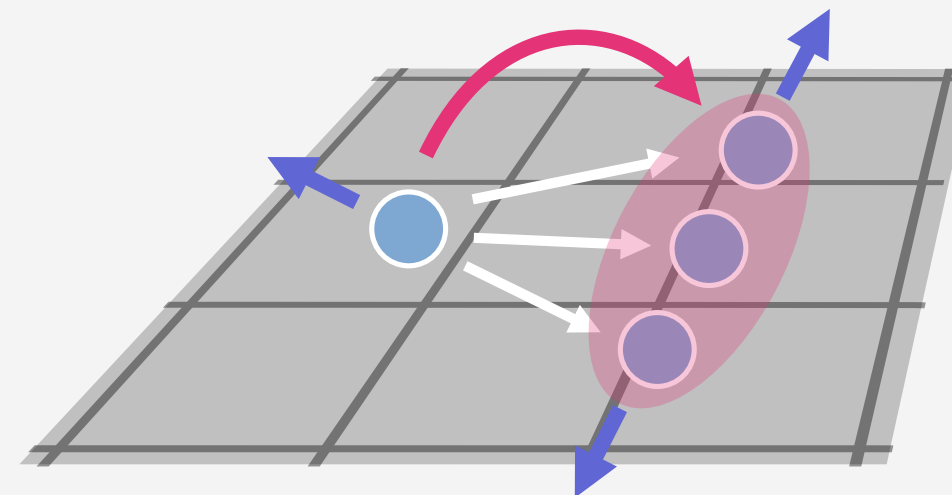

Align with
simple model

Push apart via
Entropy

$$\mathcal{F} = -D_{KL}[q_f(z, z_c) \parallel p_{\theta}(z, z_c)] + I_{q_f}[z; z_c]$$

$$\propto \underbrace{\langle \log p_{\theta}(z|z_c) \rangle_{q_f(z, z_c)}}_{\text{Likelihood}} + \underbrace{H_{q_f}[z]}_{\text{Entropy}}$$