

# Schema documentation for openSDX\_00-00-00-01.xsd

june 12, 2012

## Table of Contents

Resource hierarchy: .....	6
Namespace: "" .....	6
Schema(s) .....	6
Main schema openSDX_00-00-00-01.xsd .....	6
Element(s) .....	6
Element feed .....	6
Element feed / feedinfo .....	7
Element feedinfo / onlytest .....	7
Element feedinfo / feedid .....	8
Element feedinfo / creationdatetime .....	8
Element feedinfo / effectivedatetime .....	8
Element feedinfo / creator .....	8
Element creator / email .....	9
Element creator / userid .....	9
Element creator / keyid .....	10
Element feedinfo / receiver .....	10
Element receiver / type .....	11
Element receiver / servername .....	11
Element receiver / serveripv4 .....	11
Element receiver / serveripv6 .....	11
Element receiver / authtype .....	12
Element receiver / username .....	12
Element receiver / crypto .....	12
Element crypto / relatedemail .....	13
Element crypto / usedkeyid .....	13
Element crypto / usedpubkey .....	13
Element receiver / keyid .....	13
Element feedinfo / sender .....	13
Element sender / contractpartnerid .....	14
Element sender / ourcontractpartnerid .....	14
Element sender / email .....	14
Element sender / keyid .....	15
Element feedinfo / licensor .....	15
Element licensor / contractpartnerid .....	15
Element licensor / ourcontractpartnerid .....	16
Element licensor / email .....	16
Element licensor / keyid .....	16
Element feedinfo / licensee .....	16
Element licensee / contractpartnerid .....	17
Element licensee / ourcontractpartnerid .....	17
Element licensee / email .....	17
Element licensee / keyid .....	17
Element feedinfo / actions .....	18
Element actions / oninitialreceive .....	18
Element event / mailto .....	19
Element mailto / receiver .....	19
Element mailto / subject .....	20
Element mailto / text .....	20
Element event / http .....	20
Element http / url .....	21
Element http / type .....	21
Element http / addheader .....	21
Element http / addparams .....	21
Element event / fax .....	22
Element event / letter .....	22
Element letter / registered .....	23
Element letter / to .....	23
Element to / name .....	23
Element to / department .....	24
Element to / nameperson .....	24

Element to / street .....	24
Element to / postcode .....	24
Element to / country .....	25
Element to / additionaladdressinfo .....	30
Element letter / text .....	30
Element letter / costscoveredby .....	30
Element costscoveredby / contractpartnerid .....	31
Element costscoveredby / ourcontractpartnerid .....	31
Element costscoveredby / maxcostscovered .....	31
Element event / nothing .....	32
Element actions / onprocessstart .....	32
Element actions / onprocessend .....	32
Element actions / onfullsuccess .....	33
Element actions / onerror .....	34
Element feed / bundle .....	34
Element bundle / displayname .....	36
Element bundle / name .....	36
Element bundle / version .....	36
Element bundle / display_artistname .....	36
Element bundle / ids .....	36
Element ids / grid .....	37
Element ids / upc .....	38
Element ids / isrc .....	38
Element ids / iswc .....	38
Element ids / contentauth .....	38
Element ids / labelordernum .....	39
Element ids / amzn .....	39
Element ids / isbn .....	39
Element ids / finetunes .....	39
Element ids / licenser .....	40
Element ids / licensee .....	40
Element ids / gvl .....	40
Element ids / amg .....	41
Element bundle / items .....	41
Element items / item .....	41
Element item / displayname .....	43
Element item / name .....	43
Element item / version .....	43
Element item / type .....	43
Element item / display_artistname .....	43
Element item / ids .....	44
Element item / contributors .....	45
Element contributors / contributor .....	45
Element contributor / name .....	46
Element contributor / type .....	46
Element contributor / year .....	47
Element contributor / ids .....	47
Element contributor / www .....	48
Element www / facebook .....	48
Element www / myspace .....	49
Element www / homepage .....	49
Element www / twitter .....	50
Element www / blog .....	50
Element www / phone .....	50
Element item / information .....	51
Element information / texts .....	52
Element texts / promotext .....	52
Element texts / teasertext .....	53
Element information / physical_release_datetime .....	53
Element information / digital_release_datetime .....	53
Element information / playlength .....	53
Element information / num .....	54
Element information / setnum .....	54
Element information / suggested_prelistening_offset .....	54
Element information / origin_country .....	54
Element information / main_language .....	60
Element information / related .....	63
Element related / physical_distributor .....	63
Element related / utube .....	64
Element utube / url .....	64
Element utube / channel .....	64
Element related / bundle .....	65

Element bundle / contributors .....	66
Element bundle / information .....	66
Element bundle / license_basis .....	67
Element license_basis / territorial .....	67
Element territorial / territory .....	68
Element license_basis / timeframe .....	68
Element timeframe / from .....	69
Element timeframe / to .....	69
Element license_basis / pricing .....	69
Element pricing / pricecode .....	69
Element pricing / wholesale .....	70
Element license_basis / streaming_allowed .....	70
Element license_basis / channels .....	70
Element channels / channel .....	70
Element bundle / license_specifics .....	71
Element license_specifics / rules .....	71
Element rules / rule .....	72
Element rule / if .....	72
Element if / what .....	73
Element if / operator .....	73
Element if / value .....	73
Element rule / then .....	73
Element then / proclaim .....	74
Element proclaim / what .....	74
Element proclaim / for .....	74
Element then / echo .....	74
Element then / break .....	75
Element rule / else .....	75
Element else / proclaim .....	75
Element else / break .....	76
Element bundle / reporting .....	76
Element reporting / realtime .....	76
Element realtime / http .....	77
Element reporting / postponed .....	77
Element postponed / id .....	77
Element bundle / tags .....	78
Element tags / genres .....	78
Element genres / genre .....	79
Element tags / bundle_only .....	96
Element tags / explicit_lyrics .....	96
Element tags / live .....	96
Element tags / accoustic .....	96
Element tags / instrumental .....	97
Element bundle / files .....	97
Element files / file .....	97
Element file / location .....	99
Element fileLocation / origin_file .....	99
Element fileLocation / http .....	100
Element fileHttp / url .....	100
Element fileHttp / user .....	100
Element fileHttp / pass .....	101
Element fileHttp / expiresdatetime .....	101
Element fileLocation / ftp .....	101
Element fileFtp / server .....	102
Element fileFtp / port .....	102
Element fileFtp / path .....	103
Element fileFtp / user .....	103
Element fileFtp / pass .....	103
Element fileFtp / expiresdatetime .....	103
Element fileLocation / path .....	103
Element file / type .....	104
Element file / filetype .....	104
Element file / samplerate .....	105
Element file / prelistening_offset .....	105
Element file / prelistening_length .....	105
Element file / samplesize .....	106
Element file / bitrate .....	106
Element file / bitratetype .....	106
Element file / codec .....	107
Element file / codecsettings .....	107
Element file / bytes .....	107
Element file / checksums .....	108

Element checksums / md5 .....	108
Element checksums / sha1 .....	108
Element checksums / sha256 .....	109
Element file / channels .....	109
Element file / dimension .....	109
Element dimension / width .....	110
Element dimension / height .....	110
Element file / decryptinfo .....	110
Element decryptinfo / cipher .....	111
Element decryptinfo / initvector .....	111
Element decryptinfo / key .....	111
Element decryptinfo / bytes .....	112
Element decryptinfo / checksums .....	112
Element file / no_file_given .....	112
Element file / comment .....	113
Element bundle / purchase .....	113
Element purchase / pos .....	113
Element purchase / url .....	113
Element item / license_basis .....	114
Element license_basis_item / territorial .....	114
Element license_basis_item / timeframe .....	114
Element license_basis_item / pricing .....	115
Element license_basis_item / streaming_allowed .....	115
Element license_basis_item / channels .....	116
Element license_basis_item / as_on_bundle .....	116
Element item / license_specifics .....	116
Element license_specifics_item / rules .....	117
Element license_specifics_item / as_on_bundle .....	117
Element item / tags .....	117
Element item / fingerprint .....	118
Element fingerprint / echoprint .....	118
Element item / reporting .....	118
Element item / files .....	119
Element feed / item .....	119
Complex Type(s) .....	121
Complex Type feedinfo .....	121
Complex Type creator .....	122
Complex Type receiver .....	122
Complex Type crypto .....	123
Complex Type sender .....	124
Complex Type licenssor .....	124
Complex Type licensee .....	124
Complex Type actions .....	125
Complex Type event .....	125
Complex Type mailto .....	126
Complex Type action .....	127
Complex Type http .....	127
Complex Type http_addheader .....	127
Complex Type action_instruction .....	128
Complex Type http_addparams .....	128
Complex Type fax .....	128
Complex Type letter .....	129
Complex Type to .....	129
Complex Type costscoveredby .....	130
Complex Type bundle .....	130
Complex Type ids .....	132
Complex Type items .....	132
Complex Type item .....	133
Complex Type contributors .....	134
Complex Type contributor .....	134
Complex Type www .....	135
Complex Type publishable_url .....	136
Complex Type information .....	136
Complex Type texts .....	137
Complex Type promotext .....	138
Complex Type teasertext .....	138
Complex Type related .....	138
Complex Type physical_distributor .....	139
Complex Type utube .....	139
Complex Type license_basis .....	140
Complex Type territorial .....	140
Complex Type territory .....	141


Complex Type timeframe .....	141
Complex Type pricing .....	142
Complex Type channels .....	142
Complex Type channel .....	142
Complex Type license_specifics .....	143
Complex Type rules .....	143
Complex Type rule .....	144
Complex Type if .....	144
Complex Type then .....	145
Complex Type proclaim .....	145
Complex Type else .....	146
Complex Type reporting .....	146
Complex Type realtime .....	146
Complex Type postponed .....	147
Complex Type tags .....	147
Complex Type genres .....	148
Complex Type files .....	148
Complex Type file .....	148
Complex Type fileLocation .....	151
Complex Type fileHttp .....	151
Complex Type fileFtp .....	152
Complex Type checksums .....	152
Complex Type dimension .....	153
Complex Type decryptinfo .....	153
Complex Type purchase .....	154
Complex Type license_basis_item .....	154
Complex Type license_specifics_item .....	155
Complex Type fingerprint .....	155
Complex Type oninitialreceive .....	156
Complex Type onprocessstart .....	156
Complex Type onprocessend .....	157
Complex Type onfullsuccess .....	158
Complex Type onerror .....	158
Simple Type(s) .....	159
Simple Type notemptystring .....	159
Simple Type datetimeGMT .....	159
Simple Type email .....	160
Simple Type userid .....	160
Simple Type receivertypes .....	160
Simple Type iporhostname .....	160
Simple Type ipv4 .....	161
Simple Type ipv6 .....	161
Simple Type authtype .....	161
Simple Type keyid .....	162
Simple Type emailist .....	162
Simple Type url .....	162
Simple Type httpmethods .....	162
Simple Type nothing .....	163
Simple Type grid .....	163
Simple Type upc .....	163
Simple Type isrc .....	164
Simple Type iswc .....	164
Simple Type contentauth .....	164
Simple Type amzn .....	165
Simple Type isbn .....	165
Simple Type finetunes .....	165
Simple Type gvl .....	166
Simple Type amg .....	166
Simple Type contributorType .....	166
Simple Type year .....	167
Simple Type allowance .....	168
Simple Type operator .....	168
Simple Type explicitLyrics .....	168
Simple Type fileType .....	169
Simple Type md5 .....	169
Simple Type sha1 .....	169
Simple Type sha256 .....	170
Simple Type fileChannels .....	170
Attribute(s) .....	170
Attribute publishable_url / @publishable .....	170
Attribute contributor / @num .....	171
Attribute promotext / @lang .....	171

Attribute teasertext / @lang .....	171
Attribute physical_distributor / @publishable .....	171
Attribute territory / @type .....	171
Attribute channel / @type .....	171
Attribute rule / @num .....	172
Namespace: "http://fnpl.org/opensdx/countrycodes" .....	172
Schema(s) .....	172
Imported schema openSDX_countryCodes.xsd .....	172
Simple Type(s) .....	172
Simple Type countryCode .....	172
Namespace: "http://fnpl.org/opensdx/genres" .....	192
Schema(s) .....	192
Imported schema openSDX_genres.xsd .....	192
Simple Type(s) .....	193
Simple Type genre .....	193
Namespace: "http://fnpl.org/opensdx/languages" .....	219
Schema(s) .....	219
Imported schema openSDX_languages.xsd .....	219
Simple Type(s) .....	219
Simple Type language .....	219


## Resource hierarchy:

**Legend:**  Import,  Include,  Redefine,  Cycle detected

openSDX\_00-00-00-01.xsd

 openSDX\_countryCodes.xsd

 openSDX\_genres.xsd

 openSDX\_languages.xsd

## Namespace: ""

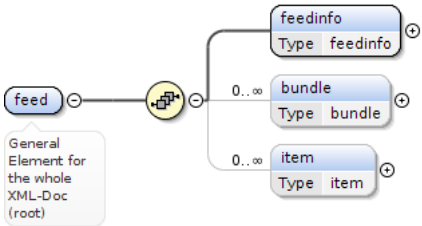
### Schema(s)

#### Main schema openSDX\_00-00-00-01.xsd

Namespace	No namespace
Properties	attribute form default: unqualified
	element form default: unqualified

### Element(s)

#### Element feed

Namespace	No namespace
Annotations	General Element for the whole XML-Doc (root)
Diagram	
Properties	content: complex
Model	feedinfo , bundle* , item*
Children	bundle, feedinfo, item
Instance	<pre>&lt;feed&gt;   &lt;feedinfo&gt;{1,1}&lt;/feedinfo&gt;   &lt;bundle&gt;{0,unbounded}&lt;/bundle&gt;   &lt;item&gt;{0,unbounded}&lt;/item&gt;</pre>


	</feed>
Source	<pre> &lt;xsd:element name="feed"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;General Element for the whole XML-Doc (root)&lt;/ xsd:documentation&gt;   &lt;/xsd:annotation&gt;   &lt;xsd:complexType&gt;     &lt;xsd:sequence&gt;       &lt;xsd:element name="feedinfo" type="feedinfo"/&gt;       &lt;xsd:element name="bundle" type="bundle" maxOccurs="unbounded" minOccurs="0"/&gt;       &lt;xsd:element name="item" type="item" maxOccurs="unbounded" minOccurs="0"/&gt;     &lt;/xsd:sequence&gt;   &lt;/xsd:complexType&gt; &lt;/xsd:element&gt; </pre>

## Element feed / feedinfo


Namespace	No namespace
Diagram	
Type	feedinfo
Properties	content: complex
Model	ALL(onlytest feedid creationdatetime effectivedatetime creator{0,1} receiver sender licensor licensee actions{0,1})
Children	actions, creationdatetime, creator, effectivedatetime, feedid, licensee, licensor, onlytest, receiver, sender
Instance	<pre> &lt;feedinfo&gt;   &lt;onlytest&gt;{1,1}&lt;/onlytest&gt;   &lt;feedid&gt;{1,1}&lt;/feedid&gt;   &lt;creationdatetime&gt;{1,1}&lt;/creationdatetime&gt;   &lt;effectivedatetime&gt;{1,1}&lt;/effectivedatetime&gt;   &lt;creator&gt;{0,1}&lt;/creator&gt;   &lt;receiver&gt;{1,1}&lt;/receiver&gt;   &lt;sender&gt;{1,1}&lt;/sender&gt;   &lt;licensor&gt;{1,1}&lt;/licensor&gt;   &lt;licensee&gt;{1,1}&lt;/licensee&gt;   &lt;actions&gt;{0,1}&lt;/actions&gt; &lt;/feedinfo&gt; </pre>
Source	<pre> &lt;xsd:element name="feedinfo" type="feedinfo" /&gt; </pre>

## Element feedinfo / onlytest


Namespace	No namespace
-----------	--------------

Diagram	
Type	xsd:boolean
Properties	content: simple
Source	<code>&lt;xsd:element name="onlytest" type="xsd:boolean"/&gt;</code>


## Element feedinfo / feedid

Namespace	No namespace
Diagram	
Type	notemptystring
Properties	content: simple
Facets	minLength 1
Source	<code>&lt;xsd:element name="feedid" type="notemptystring"/&gt;</code>

## Element feedinfo / creationdatetime

Namespace	No namespace
Diagram	
Type	datetimeGMT
Properties	content: simple
Facets	pattern \d{4}-\d{2}-\d{2} \d{2}: \d{2}:\d{2} GMT\+\d{2}: \d{2}
Source	<code>&lt;xsd:element name="creationdatetime" type="datetimeGMT"/&gt;</code>

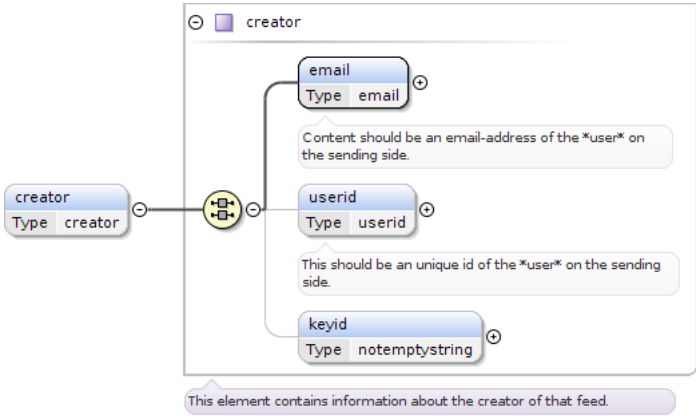
## Element feedinfo / effectivedatetime

Namespace	No namespace
Diagram	
Type	datetimeGMT
Properties	content: simple
Facets	pattern \d{4}-\d{2}-\d{2} \d{2}: \d{2}:\d{2} GMT\+\d{2}: \d{2}
Source	<code>&lt;xsd:element name="effectivedatetime" type="datetimeGMT"/&gt;</code>


## Element feedinfo / creator

Namespace	No namespace
-----------	--------------




Diagram							
Type	creator						
Properties	<table border="1"> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>1</td></tr> </table>	content:	complex	minOccurs:	0	maxOccurs:	1
content:	complex						
minOccurs:	0						
maxOccurs:	1						
Model	ALL(email userid{0,1} keyid{0,1})						
Children	email, keyid, userid						
Instance	<pre>&lt;creator&gt;   &lt;email&gt;{1,1}&lt;/email&gt;   &lt;userid&gt;{0,1}&lt;/userid&gt;   &lt;keyid&gt;{0,1}&lt;/keyid&gt; &lt;/creator&gt;</pre>						
Source	<code>&lt;xsd:element name="creator" type="creator" maxOccurs="1" minOccurs="0"/&gt;</code>						

## Element creator / email


Namespace	No namespace
Annotations	Content should be an email-address of the *user* on the sending side.
Diagram	
Type	email
Properties	content: simple
Facets	pattern <code>(([a-zA-Z0-9_-\.\.])+[a-zA-Z0-9-]+\.[a-zA-Z0-9-]+)*(\.[a-z]{2,3})?</code>
Source	<pre>&lt;xsd:element name="email" type="email"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;Content should be an email-address of the *user* on the sending side.&lt;/xsd:documentation&gt;   &lt;/xsd:annotation&gt; &lt;/xsd:element&gt;</pre>

## Element creator / userid

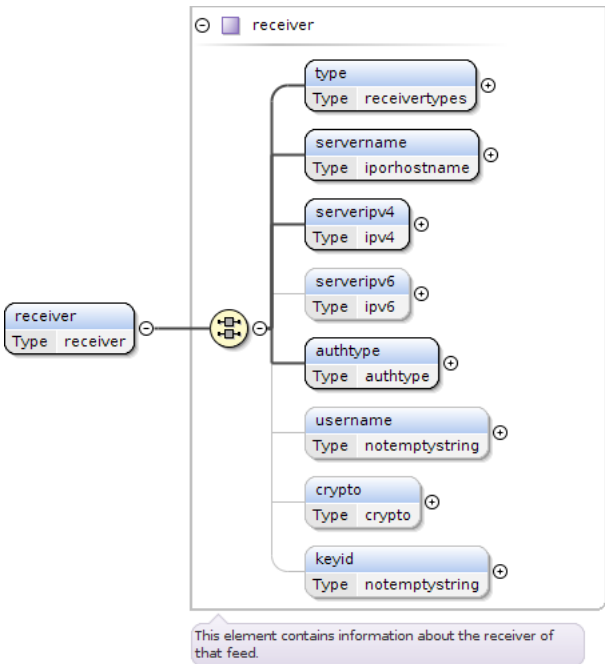
Namespace	No namespace
Annotations	This should be an unique id of the *user* on the sending side.
Diagram	
Type	userid

Properties	content:	simple
	minOccurs:	0
	maxOccurs:	1
Source	<pre>&lt;xsd:element name="userid" type="userid" maxOccurs="1" minOccurs="0"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;This should be an unique id of the *user* on the sending     side.&lt;/xsd:documentation&gt;   &lt;/xsd:annotation&gt; &lt;/xsd:element&gt;</pre>	

## Element creator / keyid


Namespace	No namespace	
Diagram		
Type	notemptystring	
Properties	content:	simple
	minOccurs:	0
	maxOccurs:	1
Facets	minLength	1
Source	<pre>&lt;xsd:element name="keyid" type="notemptystring" maxOccurs="1" minOccurs="0"/&gt;</pre>	

## Element feedinfo / receiver


Namespace	No namespace	
Diagram		
Type	receiver	
Properties	content:	complex
Model	ALL(type servername serveripv4 serveripv6{0,1} authtype username{0,1} crypto{0,1} keyid{0,1})	
Children	authtype, crypto, keyid, serveripv4, serveripv6, servername, type, username	
Instance	<pre>&lt;receiver&gt;   &lt;type&gt;{1,1}&lt;/type&gt;   &lt;servername&gt;{1,1}&lt;/servername&gt;   &lt;serveripv4&gt;{1,1}&lt;/serveripv4&gt;   &lt;serveripv6&gt;{0,1}&lt;/serveripv6&gt;   &lt;authtype&gt;{1,1}&lt;/authtype&gt;   &lt;username&gt;{0,1}&lt;/username&gt;</pre>	

	<pre>&lt;crypto&gt;{0,1}&lt;/crypto&gt; &lt;keyid&gt;{0,1}&lt;/keyid&gt; &lt;/receiver&gt;</pre>
Source	<code>&lt;xsd:element name="receiver" type="receiver"/&gt;</code>


## Element receiver / type

Namespace	No namespace										
Diagram											
Type	receivertypes										
Properties	content: simple										
Facets	<table> <tr><td>enumeration</td><td>ftp</td></tr> <tr><td>enumeration</td><td>ftps</td></tr> <tr><td>enumeration</td><td>sftp</td></tr> <tr><td>enumeration</td><td>webdav</td></tr> <tr><td>enumeration</td><td>openSDX fileserver</td></tr> </table>	enumeration	ftp	enumeration	ftps	enumeration	sftp	enumeration	webdav	enumeration	openSDX fileserver
enumeration	ftp										
enumeration	ftps										
enumeration	sftp										
enumeration	webdav										
enumeration	openSDX fileserver										
Source	<code>&lt;xsd:element name="type" type="receivertypes"/&gt;</code>										


## Element receiver / servername

Namespace	No namespace
Diagram	
Type	iporhostname
Properties	content: simple
Source	<code>&lt;xsd:element name="servername" type="iporhostname"/&gt;</code>

## Element receiver / serveripv4

Namespace	No namespace		
Diagram			
Type	ipv4		
Properties	content: simple		
Facets	<table> <tr><td>pattern</td><td>(25[0-5] 2[0-4][0-9] 1[0-9][0-9] [0-9]{1,2})\.(25[0-5] 2[0-4][0-9] 1[0-9][0-9] [0-9]{1,2}){3}</td></tr> </table>	pattern	(25[0-5] 2[0-4][0-9] 1[0-9][0-9] [0-9]{1,2})\.(25[0-5] 2[0-4][0-9] 1[0-9][0-9] [0-9]{1,2}){3}
pattern	(25[0-5] 2[0-4][0-9] 1[0-9][0-9] [0-9]{1,2})\.(25[0-5] 2[0-4][0-9] 1[0-9][0-9] [0-9]{1,2}){3}		
Source	<code>&lt;xsd:element name="serveripv4" type="ipv4"/&gt;</code>		

## Element receiver / serveripv6

Namespace	No namespace						
Diagram							
Type	ipv6						
Properties	<table> <tr><td>content:</td><td>simple</td></tr> <tr><td>minOccurs:</td><td>0</td></tr> <tr><td>maxOccurs:</td><td>1</td></tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						

Source	<code>&lt;xsd:element name="serveripv6" type="ipv6" maxOccurs="1" minOccurs="0"/&gt;</code>
--------	---

## Element receiver / authtype

Namespace	No namespace	
Diagram		
Type	authtype	
Properties	content:	simple
Facets	enumeration	login
	enumeration	keyfile
	enumeration	kerberos
	enumeration	keyfile+login
	enumeration	keyfile+username
Source	<code>&lt;xsd:element name="authtype" type="authtype"/&gt;</code>	


## Element receiver / username

Namespace	No namespace	
Diagram		
Type	notemptystring	
Properties	content:	simple
	minOccurs:	0
	maxOccurs:	1
Facets	minLength	1
Source	<code>&lt;xsd:element name="username" type="notemptystring" maxOccurs="1" minOccurs="0"/&gt;</code>	


## Element receiver / crypto

Namespace	No namespace	
Diagram		
Type	crypto	
Properties	content:	complex
	minOccurs:	0
	maxOccurs:	1
Model	ALL(relatedemail{0,1} usedkeyid{0,1} usedpubkey{0,1})	
Children	relatedemail, usedkeyid, usedpubkey	
Instance	<pre> &lt;crypto&gt;   &lt;relatedemail&gt;{0,1}&lt;/relatedemail&gt;   &lt;usedkeyid&gt;{0,1}&lt;/usedkeyid&gt;   &lt;usedpubkey&gt;{0,1}&lt;/usedpubkey&gt; &lt;/crypto&gt; </pre>	
Source	<code>&lt;xsd:element name="crypto" type="crypto" maxOccurs="1" minOccurs="0"/&gt;</code>	

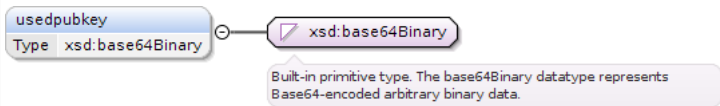
## Element crypto / relatedemail

Namespace	No namespace						
Diagram							
Type	email						
Properties	<table> <tr><td>content:</td><td>simple</td></tr> <tr><td>minOccurs:</td><td>0</td></tr> <tr><td>maxOccurs:</td><td>1</td></tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	<table> <tr> <td>pattern</td><td>(([a-zA-Z0-9_\-\.]+)@[a-z0-9-]+\.[a-z0-9-]+\.[a-z]{2,3}))?</td></tr> </table>	pattern	(([a-zA-Z0-9_\-\.]+)@[a-z0-9-]+\.[a-z0-9-]+\.[a-z]{2,3}))?				
pattern	(([a-zA-Z0-9_\-\.]+)@[a-z0-9-]+\.[a-z0-9-]+\.[a-z]{2,3}))?						
Source	<code>&lt;xsd:element name="relatedemail" type="email" maxOccurs="1" minOccurs="0"/&gt;</code>						


## Element crypto / usedkeyid

Namespace	No namespace						
Diagram							
Type	keyid						
Properties	<table> <tr><td>content:</td><td>simple</td></tr> <tr><td>minOccurs:</td><td>0</td></tr> <tr><td>maxOccurs:</td><td>1</td></tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Source	<code>&lt;xsd:element name="usedkeyid" type="keyid" maxOccurs="1" minOccurs="0"/&gt;</code>						

## Element crypto / usedpubkey

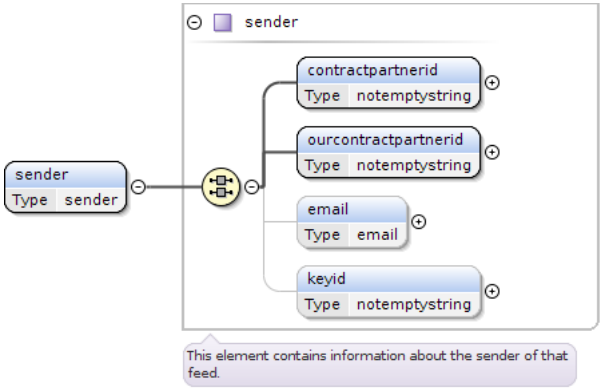
Namespace	No namespace						
Diagram							
Type	xsd:base64Binary						
Properties	<table> <tr><td>content:</td><td>simple</td></tr> <tr><td>minOccurs:</td><td>0</td></tr> <tr><td>maxOccurs:</td><td>1</td></tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Source	<code>&lt;xsd:element name="usedpubkey" type="xsd:base64Binary" maxOccurs="1" minOccurs="0"/&gt;</code>						

## Element receiver / keyid


Namespace	No namespace						
Diagram							
Type	notemptystring						
Properties	<table> <tr><td>content:</td><td>simple</td></tr> <tr><td>minOccurs:</td><td>0</td></tr> <tr><td>maxOccurs:</td><td>1</td></tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	<table> <tr><td>minLength</td><td>1</td></tr> </table>	minLength	1				
minLength	1						
Source	<code>&lt;xsd:element name="keyid" type="notemptystring" maxOccurs="1" minOccurs="0"/&gt;</code>						

## Element feedinfo / sender


Namespace	No namespace
-----------	--------------

Diagram	
Type	sender
Properties	content: complex
Model	ALL(contractpartnerid ourcontractpartnerid email{0,1} keyid{0,1})
Children	contractpartnerid, email, keyid, ourcontractpartnerid
Instance	<pre> &lt;sender&gt;   &lt;contractpartnerid&gt;{1,1}&lt;/contractpartnerid&gt;   &lt;ourcontractpartnerid&gt;{1,1}&lt;/ourcontractpartnerid&gt;   &lt;email&gt;{0,1}&lt;/email&gt;   &lt;keyid&gt;{0,1}&lt;/keyid&gt; &lt;/sender&gt; </pre>
Source	<code>&lt;xsd:element name="sender" type="sender" /&gt;</code>


#### Element sender / contractpartnerid

Namespace	No namespace
Diagram	
Type	notemptystring
Properties	content: simple
Facets	minLength 1
Source	<code>&lt;xsd:element name="contractpartnerid" type="notemptystring" /&gt;</code>

#### Element sender / ourcontractpartnerid


Namespace	No namespace
Diagram	
Type	notemptystring
Properties	content: simple
Facets	minLength 1
Source	<code>&lt;xsd:element name="ourcontractpartnerid" type="notemptystring" /&gt;</code>

#### Element sender / email

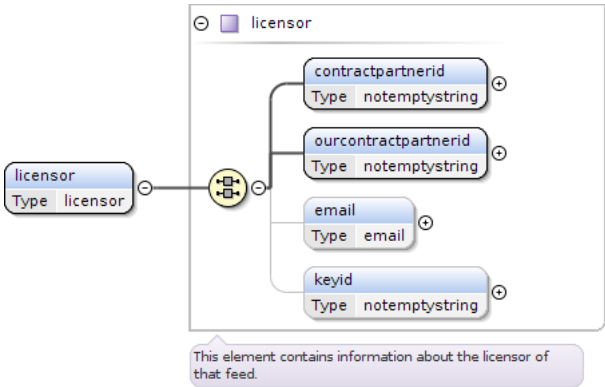
Namespace	No namespace						
Diagram							
Type	email						
Properties	<table> <tr> <td>content:</td><td>simple</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>1</td></tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						

Facets	pattern $(([a-zA-Z0-9\_-\.\ ]+)[a-zA-Z0-9-]+\.[a-zA-Z0-9-]+)*([a-zA-Z]{2,3})?$
Source	<code>&lt;xsd:element name="email" type="email" maxOccurs="1" minOccurs="0"/&gt;</code>


## Element sender / keyid

Namespace	No namespace
Diagram	
Type	notemptystring
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	minLength 1
Source	<code>&lt;xsd:element name="keyid" type="notemptystring" maxOccurs="1" minOccurs="0"/&gt;</code>


## Element feedinfo / licensor

Namespace	No namespace
Diagram	
Type	licensor
Properties	content: complex
Model	ALL(contractpartnerid ourcontractpartnerid email{0,1} keyid{0,1})
Children	contractpartnerid, email, keyid, ourcontractpartnerid
Instance	<pre>&lt;licensor&gt;   &lt;contractpartnerid&gt;{1,1}&lt;/contractpartnerid&gt;   &lt;ourcontractpartnerid&gt;{1,1}&lt;/ourcontractpartnerid&gt;   &lt;email&gt;{0,1}&lt;/email&gt;   &lt;keyid&gt;{0,1}&lt;/keyid&gt; &lt;/licensor&gt;</pre>
Source	<code>&lt;xsd:element name="licensor" type="licensor"/&gt;</code>


## Element licensor / contractpartnerid

Namespace	No namespace
Diagram	
Type	notemptystring
Properties	content: simple
Facets	minLength 1
Source	<code>&lt;xsd:element name="contractpartnerid" type="notemptystring"/&gt;</code>


## Element licensord / ourcontractpartnerid

Namespace	No namespace
Diagram	
Type	notemptystring
Properties	content: simple
Facets	minLength 1
Source	<code>&lt;xsd:element name="ourcontractpartnerid" type="notemptystring"/&gt;</code>

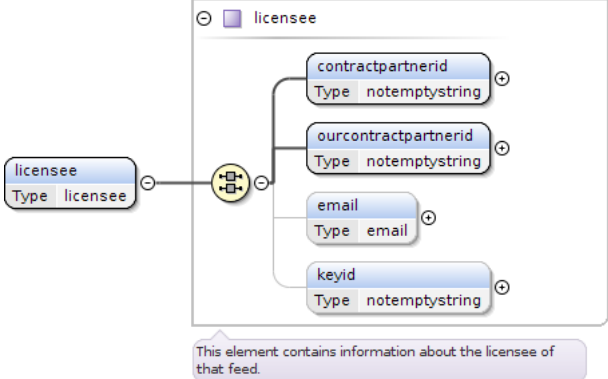
## Element licensord / email

Namespace	No namespace
Diagram	
Type	email
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	pattern (([a-zA-Z0-9_\-\.]+)@[a-z0-9-]+\.[a-z0-9-]+\.[a-z]{2,3}))?
Source	<code>&lt;xsd:element name="email" type="email" maxOccurs="1" minOccurs="0"/&gt;</code>

## Element licensord / keyid

Namespace	No namespace
Diagram	
Type	notemptystring
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	minLength 1
Source	<code>&lt;xsd:element name="keyid" type="notemptystring" maxOccurs="1" minOccurs="0"/&gt;</code>

## Element feedinfo / licensee

Namespace	No namespace
Diagram	



Type	licensee
Properties	content: complex
Model	ALL(contractpartnerid ourcontractpartnerid email{0,1} keyid{0,1})
Children	contractpartnerid, email, keyid, ourcontractpartnerid
Instance	<pre>&lt;licensee&gt;   &lt;contractpartnerid&gt;{1,1}&lt;/contractpartnerid&gt;   &lt;ourcontractpartnerid&gt;{1,1}&lt;/ourcontractpartnerid&gt;   &lt;email&gt;{0,1}&lt;/email&gt;   &lt;keyid&gt;{0,1}&lt;/keyid&gt; &lt;/licensee&gt;</pre>
Source	<code>&lt;xsd:element name="licensee" type="licensee" /&gt;</code>

### Element licensee / contractpartnerid

Namespace	No namespace
Diagram	<pre>graph LR     A[contractpartnerid Type notemptystring] --- B(notemptystring)</pre>
Type	notemptystring
Properties	content: simple
Facets	minLength 1
Source	<code>&lt;xsd:element name="contractpartnerid" type="notemptystring" /&gt;</code>

### Element licensee / ourcontractpartnerid

Namespace	No namespace
Diagram	<pre>graph LR     A[ourcontractpartnerid Type notemptystring] --- B(notemptystring)</pre>
Type	notemptystring
Properties	content: simple
Facets	minLength 1
Source	<code>&lt;xsd:element name="ourcontractpartnerid" type="notemptystring" /&gt;</code>

### Element licensee / email

Namespace	No namespace
Diagram	<pre>graph LR     A[email Type email] --- B(email)</pre>
Type	email
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	pattern (([a-zA-Z0-9_\-\.]+)@[a-z0-9-]+\.[a-z0-9-]+\.[a-z]{2,3}))?
Source	<code>&lt;xsd:element name="email" type="email" maxOccurs="1" minOccurs="0" /&gt;</code>

### Element licensee / keyid

Namespace	No namespace
Diagram	<pre>graph LR     A[keyid Type notemptystring] --- B(notemptystring)</pre>
Type	notemptystring

Properties	content:	simple
	minOccurs:	0
	maxOccurs:	1
Facets	minLength	1
Source	<xsd:element name="keyid" type="notemptystring" maxOccurs="1" minOccurs="0"/>	

## Element feedinfo / actions

Namespace	No namespace						
Diagram							
Type	actions						
Properties	<table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr><tr><td>maxOccurs:</td><td>1</td></tr></table>	content:	complex	minOccurs:	0	maxOccurs:	1
content:	complex						
minOccurs:	0						
maxOccurs:	1						
Model	ALL(oninitialreceive{0,1} onprocessstart{0,1} onprocessend{0,1} onfullsuccess{0,1} onerror{0,1})						
Children	onerror, onfullsuccess, oninitialreceive, onprocessend, onprocessstart						
Instance	<pre>&lt;actions&gt;   &lt;oninitialreceive&gt;{0,1}&lt;/oninitialreceive&gt;   &lt;onprocessstart&gt;{0,1}&lt;/onprocessstart&gt;   &lt;onprocessend&gt;{0,1}&lt;/onprocessend&gt;   &lt;onfullsuccess&gt;{0,1}&lt;/onfullsuccess&gt;   &lt;onerror&gt;{0,1}&lt;/onerror&gt; &lt;/actions&gt;</pre>						
Source	<pre>&lt;xsd:element name="actions" type="actions" maxOccurs="1" minOccurs="0"/&gt;</pre>						

## Element actions / oninitialreceive

Namespace	No namespace
Diagram	

Type	event
Properties	content: complex
	minOccurs: 0
	maxOccurs: 1
Model	mailto*, http*, fax*, letter*, nothing{0,1}
Children	fax, http, letter, mailto, nothing
Instance	<pre>&lt;oninitialreceive&gt;   &lt;mailto&gt;{0,unbounded}&lt;/mailto&gt;   &lt;http&gt;{0,unbounded}&lt;/http&gt;   &lt;fax&gt;{0,unbounded}&lt;/fax&gt;   &lt;letter&gt;{0,unbounded}&lt;/letter&gt;   &lt;nothing&gt;{0,1}&lt;/nothing&gt; &lt;/oninitialreceive&gt;</pre>
Source	<code>&lt;xsd:element name="oninitialreceive" type="event" maxOccurs="1" minOccurs="0"/&gt;</code>


## Element event / mailto

Namespace	No namespace
Diagram	
Type	mailto
Type hierarchy	<ul style="list-style-type: none"> <li>action</li> <li>mailto</li> </ul>
Properties	content: complex
	minOccurs: 0
	maxOccurs: unbounded
Model	receiver+, subject, text
Children	receiver, subject, text
Instance	<pre>&lt;mailto&gt;   &lt;receiver&gt;{1,unbounded}&lt;/receiver&gt;   &lt;subject&gt;{1,1}&lt;/subject&gt;   &lt;text&gt;{1,1}&lt;/text&gt; &lt;/mailto&gt;</pre>
Source	<code>&lt;xsd:element name="mailto" type="mailto" minOccurs="0" maxOccurs="unbounded"/&gt;</code>


## Element mailto / receiver

Namespace	No namespace
Diagram	
Type	emailist
Properties	content: simple
	minOccurs: 1
	maxOccurs: unbounded
Source	<code>&lt;xsd:element name="receiver" type="emailist" minOccurs="1" maxOccurs="unbounded"/&gt;</code>

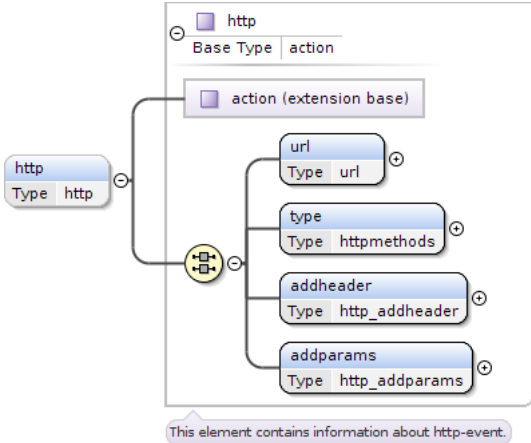
## Element mailto / subject

Namespace	No namespace
Diagram	
Type	notemptystring
Properties	content: simple
Facets	minLength 1
Source	<code>&lt;xsd:element name="subject" type="notemptystring"/&gt;</code>

## Element mailto / text

Namespace	No namespace
Diagram	
Type	notemptystring
Properties	content: simple
Facets	minLength 1
Source	<code>&lt;xsd:element name="text" type="notemptystring"/&gt;</code>

## Element event / http

Namespace	No namespace
Diagram	
Type	http
Type hierarchy	<ul style="list-style-type: none"> <li>• action</li> <li>• http</li> </ul>
Properties	content: complex minOccurs: 0 maxOccurs: unbounded
Model	ALL(url type addheader addparams)
Children	addheader, addparams, type, url
Instance	<pre> &lt;http&gt;   &lt;url&gt;{1,1}&lt;/url&gt;   &lt;type&gt;{1,1}&lt;/type&gt;   &lt;addheader&gt;{1,1}&lt;/addheader&gt;   &lt;addparams&gt;{1,1}&lt;/addparams&gt; &lt;/http&gt; </pre>
Source	<code>&lt;xsd:element name="http" type="http" minOccurs="0" maxOccurs="unbounded"/&gt;</code>

## Element http / url

Namespace	No namespace
Diagram	
Type	url
Properties	content: simple
Facets	minLength 1 pattern (http://.*\..*)   (https://.*\..*)
Source	<code>&lt;xsd:element name="url" type="url"/&gt;</code>

## Element http / type

Namespace	No namespace
Diagram	
Type	httpmethods
Properties	content: simple
Facets	enumeration GET enumeration POST enumeration HEAD
Source	<code>&lt;xsd:element name="type" type="httpmethods"/&gt;</code>

## Element http / addheader

Namespace	No namespace
Diagram	
Type	http_addheader
Type hierarchy	<ul style="list-style-type: none"> <li>action_instruction</li> <li>http_addheader</li> </ul>
Properties	content: complex
Model	ANY element from ANY namespace
Source	<code>&lt;xsd:element name="addheader" type="http_addheader"/&gt;</code>

## Element http / addparams

Namespace	No namespace
Diagram	
Type	http_addparams
Type hierarchy	<ul style="list-style-type: none"> <li>action_instruction</li> </ul>

	<ul style="list-style-type: none"> <li>http_addparams</li> </ul>
Properties	content: complex
Model	ANY element from ANY namespace
Source	<code>&lt;xsd:element name="addparams" type="http_addparams" /&gt;</code>

## Element event / fax

Namespace	No namespace
Diagram	
Type	fax
Type hierarchy	<ul style="list-style-type: none"> <li>action</li> <li>fax</li> </ul>
Properties	content: complex minOccurs: 0 maxOccurs: unbounded
Model	ANY element from ANY namespace
Source	<code>&lt;xsd:element name="fax" type="fax" minOccurs="0" maxOccurs="unbounded" /&gt;</code>

## Element event / letter

Namespace	No namespace
Diagram	
Type	letter
Properties	content: complex minOccurs: 0 maxOccurs: unbounded
Model	ALL(registered to text costscoveredby)
Children	costscoveredby, registered, text, to
Instance	<pre> &lt;letter&gt;   &lt;registered&gt;{1,1}&lt;/registered&gt;   &lt;to&gt;{1,1}&lt;/to&gt;   &lt;text&gt;{1,1}&lt;/text&gt;   &lt;costscoveredby&gt;{1,1}&lt;/costscoveredby&gt; &lt;/letter&gt; </pre>
Source	<code>&lt;xsd:element name="letter" type="letter" minOccurs="0" maxOccurs="unbounded" /&gt;</code>

## Element letter / registered

Namespace	No namespace
Annotations	This tells if letter must be registered or not.
Diagram	
Type	xsd:boolean
Properties	content: simple
Source	<pre>&lt;xsd:element name="registered" type="xsd:boolean"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;This tells if letter must be registered or not.&lt;/ xsd:documentation&gt;   &lt;/xsd:annotation&gt; &lt;/xsd:element&gt;</pre>

## Element letter / to


Namespace	No namespace
Diagram	
Type	to
Properties	content: complex
Model	ALL(name{0,1} department{0,1} nameperson{0,1} street postcode country additionaladdressinfo{0,1})
Children	additionaladdressinfo, country, department, name, nameperson, postcode, street
Instance	<pre>&lt;to&gt;   &lt;name&gt;{0,1}&lt;/name&gt;   &lt;department&gt;{0,1}&lt;/department&gt;   &lt;nameperson&gt;{0,1}&lt;/nameperson&gt;   &lt;street&gt;{1,1}&lt;/street&gt;   &lt;postcode&gt;{1,1}&lt;/postcode&gt;   &lt;country&gt;{1,1}&lt;/country&gt;   &lt;additionaladdressinfo&gt;{0,1}&lt;/additionaladdressinfo&gt; &lt;/to&gt;</pre>
Source	<pre>&lt;xsd:element name="to" type="to"/&gt;</pre>

## Element to / name


Namespace	No namespace
Diagram	

Type	notemptystring	
Properties	content:	simple
	minOccurs:	0
	maxOccurs:	1
Facets	minLength	1
Source	<code>&lt;xsd:element name="name" type="notemptystring" minOccurs="0" maxOccurs="1"/&gt;</code>	


### Element to / department

Namespace	No namespace	
Diagram		
Type	notemptystring	
Properties	content:	simple
	minOccurs:	0
	maxOccurs:	1
Facets	minLength	1
Source	<code>&lt;xsd:element name="department" type="notemptystring" minOccurs="0" maxOccurs="1"/&gt;</code>	

### Element to / nameperson

Namespace	No namespace	
Diagram		
Type	notemptystring	
Properties	content:	simple
	minOccurs:	0
	maxOccurs:	1
Facets	minLength	1
Source	<code>&lt;xsd:element name="nameperson" type="notemptystring" minOccurs="0" maxOccurs="1"/&gt;</code>	

### Element to / street

Namespace	No namespace	
Diagram		
Type	notemptystring	
Properties	content:	simple
Facets	minLength	1
Source	<code>&lt;xsd:element name="street" type="notemptystring"/&gt;</code>	

### Element to / postcode

Namespace	No namespace	
Diagram		
Type	notemptystring	
Properties	content:	simple
Facets	minLength	1



Source `<xsd:element name="postcode" type="notemptystring" />`

## Element to / country

Namespace	No namespace		
Diagram			
Type	countryCode		
Properties	content:	simple	
Facets	enumeration	AF	Afghanistan
	enumeration	AX	Åland Islands
	enumeration	AL	Albania
	enumeration	DZ	Algeria
	enumeration	AS	American Samoa
	enumeration	AD	Andorra
	enumeration	AO	Angola
	enumeration	AI	Anguilla
	enumeration	AQ	Antarctica
	enumeration	AG	Antigua and Barbuda
	enumeration	AR	Argentina
	enumeration	AM	Armenia
	enumeration	AW	Aruba
	enumeration	AU	Australia
	enumeration	AT	Austria
	enumeration	AZ	Azerbaijan
	enumeration	BS	Bahamas
	enumeration	BH	Bahrain
	enumeration	BD	Bangladesh
	enumeration	BB	Barbados
	enumeration	BY	Belarus
	enumeration	BE	Belgium
	enumeration	BZ	Belize
	enumeration	BJ	Benin
	enumeration	BM	Bermuda
	enumeration	BT	Bhutan
	enumeration	BO	Bolivia, Plurinational State of
	enumeration	BQ	Bonaire, Sint Eustatius and Saba
	enumeration	BA	Bosnia and Herzegovina
	enumeration	BW	Botswana
	enumeration	BV	Bouvet Island
	enumeration	BR	Brazil
	enumeration	IO	British Indian Ocean Territory
	enumeration	BN	Brunei Darussalam
	enumeration	BG	Bulgaria
	enumeration	BF	Burkina Faso
	enumeration	BI	Burundi
	enumeration	KH	Cambodia
	enumeration	CM	Cameroon
	enumeration	CA	Canada

enumeration	CV	Cape Verde
enumeration	KY	Cayman Islands
enumeration	CF	Central African Republic
enumeration	TD	Chad
enumeration	CL	Chile
enumeration	CN	China
enumeration	CX	Christmas Island
enumeration	CC	Cocos (Keeling) Islands
enumeration	CO	Colombia
enumeration	KM	Comoros
enumeration	CG	Congo
enumeration	CD	Congo, the Democratic Republic of the
enumeration	CK	Cook Islands
enumeration	CR	Costa Rica
enumeration	CI	Côte d'Ivoire
enumeration	HR	Croatia
enumeration	CU	Cuba
enumeration	CW	Curaçao
enumeration	CY	Cyprus
enumeration	CZ	Czech Republic
enumeration	DK	Denmark
enumeration	DJ	Djibouti
enumeration	DM	Dominica
enumeration	DO	Dominican Republic
enumeration	EC	Ecuador
enumeration	EG	Egypt
enumeration	SV	El Salvador
enumeration	GQ	Equatorial Guinea
enumeration	ER	Eritrea
enumeration	EE	Estonia
enumeration	ET	Ethiopia
enumeration	FK	Falkland Islands (Malvinas)
enumeration	FO	Faroe Islands
enumeration	FJ	Fiji
enumeration	FI	Finland
enumeration	FR	France
enumeration	GF	French Guiana
enumeration	PF	French Polynesia
enumeration	TF	French Southern Territories
enumeration	GA	Gabon
enumeration	GM	Gambia
enumeration	GE	Georgia
enumeration	DE	Germany
enumeration	GH	Ghana
enumeration	GI	Gibraltar
enumeration	GR	Greece
enumeration	GL	Greenland
enumeration	GD	Grenada
enumeration	GP	Guadeloupe


enumeration	GU	Guam
enumeration	GT	Guatemala
enumeration	GG	Guernsey
enumeration	GN	Guinea
enumeration	GW	Guinea-Bissau
enumeration	GY	Guyana
enumeration	HT	Haiti
enumeration	HM	Heard Island and McDonald Islands
enumeration	VA	Holy See (Vatican City State)
enumeration	HN	Honduras
enumeration	HK	Hong Kong
enumeration	HU	Hungary
enumeration	IS	Iceland
enumeration	IN	India
enumeration	ID	Indonesia
enumeration	IR	Iran, Islamic Republic of
enumeration	IQ	Iraq
enumeration	IE	Ireland
enumeration	IM	Isle of Man
enumeration	IL	Israel
enumeration	IT	Italy
enumeration	JM	Jamaica
enumeration	JP	Japan
enumeration	JE	Jersey
enumeration	JO	Jordan
enumeration	KZ	Kazakhstan
enumeration	KE	Kenya
enumeration	KI	Kiribati
enumeration	KP	Korea, Democratic People's Republic of
enumeration	KR	Korea, Republic of
enumeration	KW	Kuwait
enumeration	KG	Kyrgyzstan
enumeration	LA	Lao People's Democratic Republic
enumeration	LV	Latvia
enumeration	LB	Lebanon
enumeration	LS	Lesotho
enumeration	LR	Liberia
enumeration	LY	Libyan Arab Jamahiriya
enumeration	LI	Liechtenstein
enumeration	LT	Lithuania
enumeration	LU	Luxembourg
enumeration	MO	Macao
enumeration	MK	Macedonia, the former Yugoslav Republic of
enumeration	MG	Madagascar
enumeration	MW	Malawi
enumeration	MY	Malaysia
enumeration	MV	Maldives
enumeration	ML	Mali
enumeration	MT	Malta

enumeration	MH	Marshall Islands
enumeration	MQ	Martinique
enumeration	MR	Mauritania
enumeration	MU	Mauritius
enumeration	YT	Mayotte
enumeration	MX	Mexico
enumeration	FM	Micronesia, Federated States of
enumeration	MD	Moldova, Republic of
enumeration	MC	Monaco
enumeration	MN	Mongolia
enumeration	ME	Montenegro
enumeration	MS	Montserrat
enumeration	MA	Morocco
enumeration	MZ	Mozambique
enumeration	MM	Myanmar
enumeration	NA	Namibia
enumeration	NR	Nauru
enumeration	NP	Nepal
enumeration	NL	Netherlands
enumeration	NC	New Caledonia
enumeration	NZ	New Zealand
enumeration	NI	Nicaragua
enumeration	NE	Niger
enumeration	NG	Nigeria
enumeration	NU	Niue
enumeration	NF	Norfolk Island
enumeration	MP	Northern Mariana Islands
enumeration	NO	Norway
enumeration	OM	Oman
enumeration	PK	Pakistan
enumeration	PW	Palau
enumeration	PS	Palestinian Territory, Occupied
enumeration	PA	Panama
enumeration	PG	Papua New Guinea
enumeration	PY	Paraguay
enumeration	PE	Peru
enumeration	PH	Philippines
enumeration	PN	Pitcairn
enumeration	PL	Poland
enumeration	PT	Portugal
enumeration	PR	Puerto Rico
enumeration	QA	Qatar
enumeration	RE	Réunion
enumeration	RO	Romania
enumeration	RU	Russian Federation
enumeration	RW	Rwanda
enumeration	BL	Saint Barthélemy
enumeration	SH	Saint Helena, Ascension and Tristan da Cunha
enumeration	KN	Saint Kitts and Nevis


enumeration	LC	Saint Lucia
enumeration	MF	Saint Martin (French part)
enumeration	PM	Saint Pierre and Miquelon
enumeration	VC	Saint Vincent and the Grenadines
enumeration	WS	Samoa
enumeration	SM	San Marino
enumeration	ST	Sao Tome and Principe
enumeration	SA	Saudi Arabia
enumeration	SN	Senegal
enumeration	RS	Serbia
enumeration	SC	Seychelles
enumeration	SL	Sierra Leone
enumeration	SG	Singapore
enumeration	SX	Sint Maarten (Dutch part)
enumeration	SK	Slovakia
enumeration	SI	Slovenia
enumeration	SB	Solomon Islands
enumeration	SO	Somalia
enumeration	ZA	South Africa
enumeration	GS	South Georgia and the South Sandwich Islands
enumeration	SS	South Sudan
enumeration	ES	Spain
enumeration	LK	Sri Lanka
enumeration	SD	Sudan
enumeration	SR	Suriname
enumeration	SJ	Svalbard and Jan Mayen
enumeration	SZ	Swaziland
enumeration	SE	Sweden
enumeration	CH	Switzerland
enumeration	SY	Syrian Arab Republic
enumeration	TW	Taiwan, Province of China
enumeration	TJ	Tajikistan
enumeration	TZ	Tanzania, United Republic of
enumeration	TH	Thailand
enumeration	TL	Timor-Leste
enumeration	TG	Togo
enumeration	TK	Tokelau
enumeration	TO	Tonga
enumeration	TT	Trinidad and Tobago
enumeration	TN	Tunisia
enumeration	TR	Turkey
enumeration	TM	Turkmenistan
enumeration	TC	Turks and Caicos Islands
enumeration	TV	Tuvalu
enumeration	UG	Uganda
enumeration	UA	Ukraine
enumeration	AE	United Arab Emirates
enumeration	GB	United Kingdom
enumeration	US	United States

	enumeration	UM	United States Minor Outlying Islands
	enumeration	UY	Uruguay
	enumeration	UZ	Uzbekistan
	enumeration	VU	Vanuatu
	enumeration	VE	Venezuela, Bolivarian Republic of
	enumeration	VN	Viet Nam
	enumeration	VG	Virgin Islands, British
	enumeration	VI	Virgin Islands, U.S.
	enumeration	WF	Wallis and Futuna
	enumeration	WW	WorldWide
	enumeration	EH	Western Sahara
	enumeration	YE	Yemen
	enumeration	ZM	Zambia
	enumeration	ZW	Zimbabwe
Source	<xsd:element name="country" type="cc:countryCode" />		

## Element to / additionaladdressinfo

Namespace	No namespace						
Diagram							
Type	notemptystring						
Properties	<table> <tr> <td>content:</td><td>simple</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>1</td></tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	<table> <tr> <td>minLength</td><td>1</td></tr> </table>	minLength	1				
minLength	1						
Source	<xsd:element name="additionaladdressinfo" type="notemptystring" minOccurs="0" maxOccurs="1" />						

## Element letter / text

Namespace	No namespace		
Annotations	This contains the content/text of letter.		
Diagram			
Type	notemptystring		
Properties	<table> <tr> <td>content:</td><td>simple</td></tr> </table>	content:	simple
content:	simple		
Facets	<table> <tr> <td>minLength</td><td>1</td></tr> </table>	minLength	1
minLength	1		
Source	<pre>&lt;xsd:element name="text" type="notemptystring"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;This contains the content/text of letter.&lt;/xsd:documentation&gt;   &lt;/xsd:annotation&gt; &lt;/xsd:element&gt;</pre>		

## Element letter / costscoveredby

Namespace	No namespace
-----------	--------------

Diagram	
Type	costscoveredby
Properties	content: complex
Model	ALL(contractpartnerid ourcontractpartnerid maxcostscovered{0,1})
Children	contractpartnerid, maxcostscovered, ourcontractpartnerid
Instance	<pre>&lt;costscoveredby&gt;   &lt;contractpartnerid&gt;{1,1}&lt;/contractpartnerid&gt;   &lt;ourcontractpartnerid&gt;{1,1}&lt;/ourcontractpartnerid&gt;   &lt;maxcostscovered&gt;{0,1}&lt;/maxcostscovered&gt; &lt;/costscoveredby&gt;</pre>
Source	<code>&lt;xsd:element name="costscoveredby" type="costscoveredby"/&gt;</code>

#### Element costscoveredby / contractpartnerid

Namespace	No namespace
Diagram	
Type	notemptystring
Properties	content: simple
Facets	minLength 1
Source	<code>&lt;xsd:element name="contractpartnerid" type="notemptystring"/&gt;</code>

#### Element costscoveredby / ourcontractpartnerid


Namespace	No namespace
Diagram	
Type	notemptystring
Properties	content: simple
Facets	minLength 1
Source	<code>&lt;xsd:element name="ourcontractpartnerid" type="notemptystring"/&gt;</code>

#### Element costscoveredby / maxcostscovered

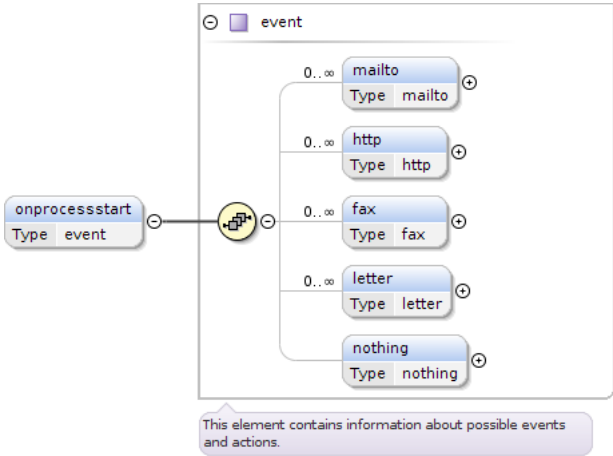
Namespace	No namespace
Annotations	This contains the max amount that will be covered.
Diagram	
Type	notemptystring
Properties	content: simple minOccurs: 0

	maxOccurs: 1
Facets	minLength 1
Source	<pre>&lt;xsd:element name="maxcostscovered" type="notemptystring" minOccurs="0" maxOccurs="1"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;This contains the max amount that will be covered.&lt;/ xsd:documentation&gt;   &lt;/xsd:annotation&gt; &lt;/xsd:element&gt;</pre>

## Element event / nothing

Namespace	No namespace						
Diagram							
Type	nothing						
Properties	<table> <tr><td>content:</td><td>simple</td></tr> <tr><td>minOccurs:</td><td>0</td></tr> <tr><td>maxOccurs:</td><td>1</td></tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	length 0						
Source	<pre>&lt;xsd:element name="nothing" type="nothing" minOccurs="0" maxOccurs="1"/&gt;</pre>						

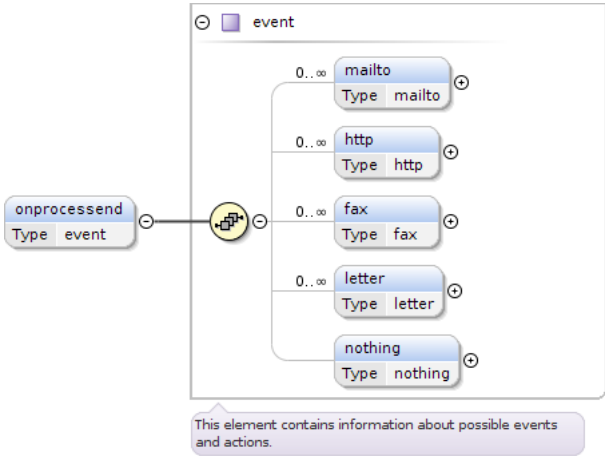
## Element actions / onprocessstart

Namespace	No namespace						
Diagram							
Type	event						
Properties	<table> <tr><td>content:</td><td>complex</td></tr> <tr><td>minOccurs:</td><td>0</td></tr> <tr><td>maxOccurs:</td><td>1</td></tr> </table>	content:	complex	minOccurs:	0	maxOccurs:	1
content:	complex						
minOccurs:	0						
maxOccurs:	1						
Model	mailto*, http*, fax*, letter*, nothing{0,1}						
Children	fax, http, letter, mailto, nothing						
Instance	<pre>&lt;onprocessstart&gt;   &lt;mailto&gt;{0,unbounded}&lt;/mailto&gt;   &lt;http&gt;{0,unbounded}&lt;/http&gt;   &lt;fax&gt;{0,unbounded}&lt;/fax&gt;   &lt;letter&gt;{0,unbounded}&lt;/letter&gt;   &lt;nothing&gt;{0,1}&lt;/nothing&gt; &lt;/onprocessstart&gt;</pre>						
Source	<pre>&lt;xsd:element name="onprocessstart" type="event" maxOccurs="1" minOccurs="0"/&gt;</pre>						

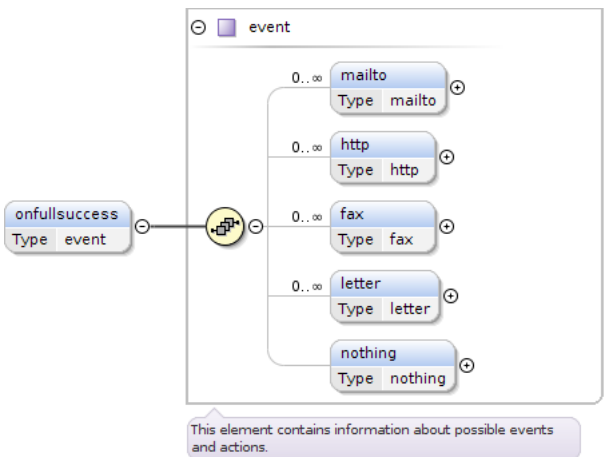
## Element actions / onprocessend

Namespace	No namespace
-----------	--------------



Diagram							
Type	event						
Properties	<table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>1</td></tr> </table>	content:	complex	minOccurs:	0	maxOccurs:	1
content:	complex						
minOccurs:	0						
maxOccurs:	1						
Model	mailto*, http*, fax*, letter*, nothing{0,1}						
Children	fax, http, letter, mailto, nothing						
Instance	<pre> &lt;onprocessend&gt;   &lt;mailto&gt;{0,unbounded}&lt;/mailto&gt;   &lt;http&gt;{0,unbounded}&lt;/http&gt;   &lt;fax&gt;{0,unbounded}&lt;/fax&gt;   &lt;letter&gt;{0,unbounded}&lt;/letter&gt;   &lt;nothing&gt;{0,1}&lt;/nothing&gt; &lt;/onprocessend&gt; </pre>						
Source	<code>&lt;xsd:element name="onprocessend" type="event" maxOccurs="1" minOccurs="0"/&gt;</code>						

## Element actions / onfullsuccess

Namespace	No namespace						
Diagram							
Type	event						
Properties	<table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>1</td></tr> </table>	content:	complex	minOccurs:	0	maxOccurs:	1
content:	complex						
minOccurs:	0						
maxOccurs:	1						
Model	mailto*, http*, fax*, letter*, nothing{0,1}						
Children	fax, http, letter, mailto, nothing						
Instance	<pre> &lt;onfullsuccess&gt;   &lt;mailto&gt;{0,unbounded}&lt;/mailto&gt;   &lt;http&gt;{0,unbounded}&lt;/http&gt;   &lt;fax&gt;{0,unbounded}&lt;/fax&gt; </pre>						

	<pre> &lt;letter&gt;{0,unbounded}&lt;/letter&gt; &lt;nothing&gt;{0,1}&lt;/nothing&gt; &lt;/onfullsuccess&gt; </pre>
Source	<pre> &lt;xsd:element name="onfullsuccess" type="event" maxOccurs="1" minOccurs="0"/&gt; </pre>

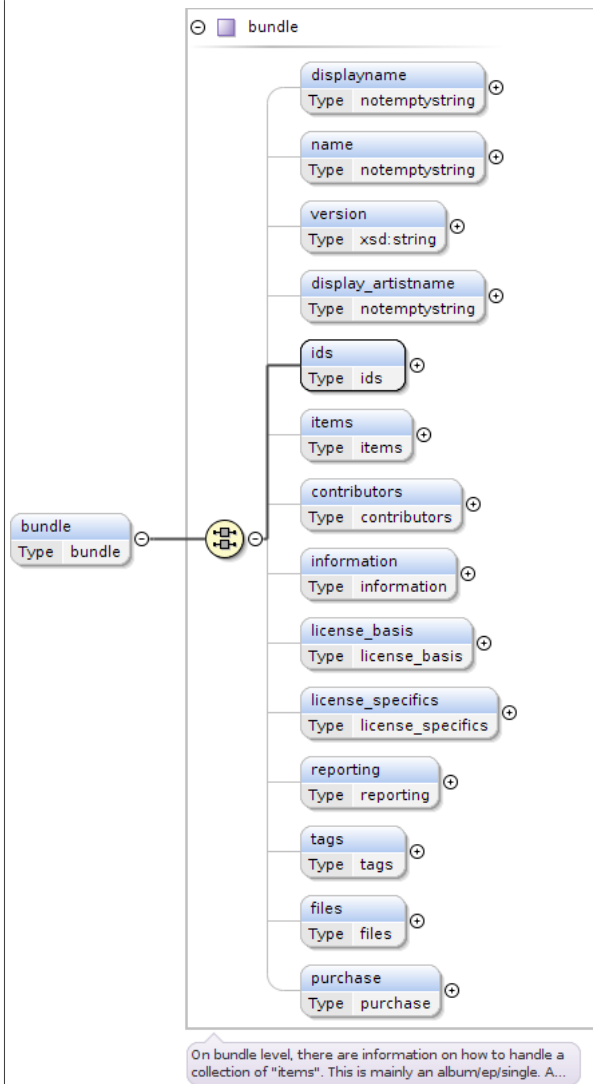
## Element actions / onerror

Namespace	No namespace						
Diagram							
Type	event						
Properties	<table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>1</td></tr> </table>	content:	complex	minOccurs:	0	maxOccurs:	1
content:	complex						
minOccurs:	0						
maxOccurs:	1						
Model	mailto* , http* , fax* , letter* , nothing{0,1}						
Children	fax, http, letter, mailto, nothing						
Instance	<pre> &lt;onerror&gt;   &lt;mailto&gt;{0,unbounded}&lt;/mailto&gt;   &lt;http&gt;{0,unbounded}&lt;/http&gt;   &lt;fax&gt;{0,unbounded}&lt;/fax&gt;   &lt;letter&gt;{0,unbounded}&lt;/letter&gt;   &lt;nothing&gt;{0,1}&lt;/nothing&gt; &lt;/onerror&gt; </pre>						
Source	<pre> &lt;xsd:element name="onerror" type="event" maxOccurs="1" minOccurs="0"/&gt; </pre>						

## Element feed / bundle


Namespace	No namespace
-----------	--------------

Diagram




Type	bundle
Properties	content: complex
	minOccurs: 0
	maxOccurs: unbounded
Model	ALL(displayname{0,1} name{0,1} version{0,1} display_artistname{0,1} ids items{0,1} contributors{0,1} information{0,1} license_basis{0,1} license_specifics{0,1} reporting{0,1} tags{0,1} files{0,1} purchase{0,1})
Children	contributors, display_artistname, displayname, files, ids, information, items, license_basis, license_specifics, name, purchase, reporting, tags, version
Instance	<pre> &lt;bundle&gt;   &lt;displayname&gt;{0,1}&lt;/displayname&gt;   &lt;name&gt;{0,1}&lt;/name&gt;   &lt;version&gt;{0,1}&lt;/version&gt;   &lt;display_artistname&gt;{0,1}&lt;/display_artistname&gt;   &lt;ids&gt;{1,1}&lt;/ids&gt;   &lt;items&gt;{0,1}&lt;/items&gt;   &lt;contributors&gt;{0,1}&lt;/contributors&gt;   &lt;information&gt;{0,1}&lt;/information&gt;   &lt;license_basis&gt;{0,1}&lt;/license_basis&gt;   &lt;license_specifics&gt;{0,1}&lt;/license_specifics&gt;   &lt;reporting&gt;{0,1}&lt;/reporting&gt;   &lt;tags&gt;{0,1}&lt;/tags&gt;   &lt;files&gt;{0,1}&lt;/files&gt;   &lt;purchase&gt;{0,1}&lt;/purchase&gt; &lt;/bundle&gt; </pre>
Source	<xsd:element name="bundle" type="bundle" maxOccurs="unbounded" minOccurs="0"/>

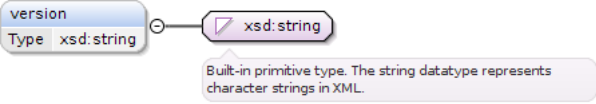
## Element bundle / displayname

Namespace	No namespace						
Diagram							
Type	notemptystring						
Properties	<table> <tr><td>content:</td><td>simple</td></tr> <tr><td>minOccurs:</td><td>0</td></tr> <tr><td>maxOccurs:</td><td>1</td></tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	<table> <tr><td>minLength</td><td>1</td></tr> </table>	minLength	1				
minLength	1						
Source	<code>&lt;xsd:element name="displayname" type="notemptystring" maxOccurs="1" minOccurs="0"/&gt;</code>						


## Element bundle / name

Namespace	No namespace						
Diagram							
Type	notemptystring						
Properties	<table> <tr><td>content:</td><td>simple</td></tr> <tr><td>minOccurs:</td><td>0</td></tr> <tr><td>maxOccurs:</td><td>1</td></tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	<table> <tr><td>minLength</td><td>1</td></tr> </table>	minLength	1				
minLength	1						
Source	<code>&lt;xsd:element name="name" type="notemptystring" maxOccurs="1" minOccurs="0"/&gt;</code>						

## Element bundle / version

Namespace	No namespace						
Diagram							
Type	xsd:string						
Properties	<table> <tr><td>content:</td><td>simple</td></tr> <tr><td>minOccurs:</td><td>0</td></tr> <tr><td>maxOccurs:</td><td>1</td></tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Source	<code>&lt;xsd:element name="version" type="xsd:string" maxOccurs="1" minOccurs="0"/&gt;</code>						

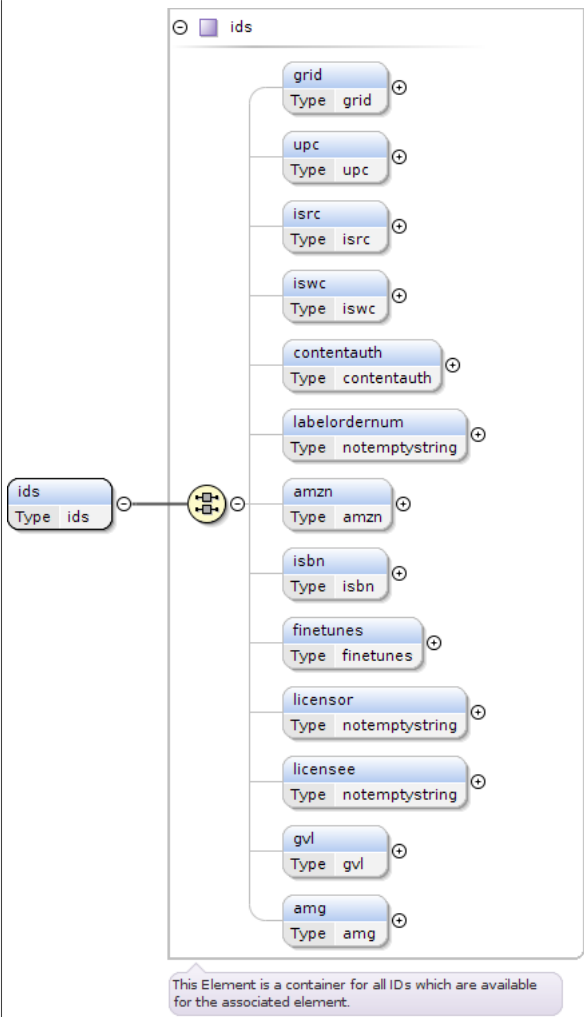
## Element bundle / display\_artistname

Namespace	No namespace						
Diagram							
Type	notemptystring						
Properties	<table> <tr><td>content:</td><td>simple</td></tr> <tr><td>minOccurs:</td><td>0</td></tr> <tr><td>maxOccurs:</td><td>1</td></tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	<table> <tr><td>minLength</td><td>1</td></tr> </table>	minLength	1				
minLength	1						
Source	<code>&lt;xsd:element name="display_artistname" type="notemptystring" maxOccurs="1" minOccurs="0"/&gt;</code>						

## Element bundle / ids

Namespace	No namespace
-----------	--------------

Diagram




Type	ids
Properties	content: complex
Model	ALL(grid{0,1} upc{0,1} isrc{0,1} iswc{0,1} contentauth{0,1} labelordernum{0,1} amzn{0,1} isbn{0,1} finetunes{0,1} licensensor{0,1} licensee{0,1} gvl{0,1} amg{0,1})
Children	amg, amzn, contentauth, finetunes, grid, gvl, isbn, isrc, iswc, labelordernum, licensee, licensensor, upc
Instance	<pre>&lt;ids&gt;   &lt;grid&gt;{0,1}&lt;/grid&gt;   &lt;upc&gt;{0,1}&lt;/upc&gt;   &lt;isrc&gt;{0,1}&lt;/isrc&gt;   &lt;iswc&gt;{0,1}&lt;/iswc&gt;   &lt;contentauth&gt;{0,1}&lt;/contentauth&gt;   &lt;labelordernum&gt;{0,1}&lt;/labelordernum&gt;   &lt;amzn&gt;{0,1}&lt;/amzn&gt;   &lt;isbn&gt;{0,1}&lt;/isbn&gt;   &lt;finetunes&gt;{0,1}&lt;/finetunes&gt;   &lt;licensor&gt;{0,1}&lt;/licensor&gt;   &lt;licensee&gt;{0,1}&lt;/licensee&gt;   &lt;gvl&gt;{0,1}&lt;/gvl&gt;   &lt;amg&gt;{0,1}&lt;/amg&gt; &lt;/ids&gt;</pre>
Source	<code>&lt;xsd:element name="ids" type="ids" /&gt;</code>

Element ids / grid


Namespace	No namespace
Diagram	
Type	grid

Properties	content:	simple
	minOccurs:	0
	maxOccurs:	1
Facets	minLength	18
Source	<xsd:element name="grid" type="grid" maxOccurs="1" minOccurs="0"/>	


## Element ids / upc

Namespace	No namespace	
Diagram		
Type	upc	
Properties	content:	simple
	minOccurs:	0
	maxOccurs:	1
Facets	pattern	(\d{10,13})
Source	<xsd:element name="upc" type="upc" maxOccurs="1" minOccurs="0"/>	


## Element ids / isrc

Namespace	No namespace	
Diagram		
Type	isrc	
Properties	content:	simple
	minOccurs:	0
	maxOccurs:	1
Facets	minLength	1
	pattern	([a-zA-Z]{2}(\-)?[0-9a-zA-Z]{3}(\-)?\d{2}(\-)?\d{5})
Source	<xsd:element name="isrc" type="isrc" maxOccurs="1" minOccurs="0"/>	

## Element ids / iswc


Namespace	No namespace	
Diagram		
Type	iswc	
Properties	content:	simple
	minOccurs:	0
	maxOccurs:	1
Facets	minLength	1
Source	<xsd:element name="iswc" type="iswc" maxOccurs="1" minOccurs="0"/>	

## Element ids / contentauth


Namespace	No namespace	
Diagram		

Type	contentauth	
Properties	content:	simple
	minOccurs:	0
	maxOccurs:	1
Facets	minLength	1
Source	<xsd:element name="contentauth" type="contentauth" maxOccurs="1" minOccurs="0"/>	


## Element ids / labelordernum

Namespace	No namespace	
Diagram		
Type	notemptystring	
Properties	content:	simple
	minOccurs:	0
	maxOccurs:	1
Facets	minLength	1
Source	<xsd:element name="labelordernum" type="notemptystring" maxOccurs="1" minOccurs="0"/>	

## Element ids / amzn


Namespace	No namespace	
Diagram		
Type	amzn	
Properties	content:	simple
	minOccurs:	0
	maxOccurs:	1
Facets	minExclusive	0
Source	<xsd:element name="amzn" type="amzn" maxOccurs="1" minOccurs="0"/>	

## Element ids / isbn


Namespace	No namespace	
Diagram		
Type	isbn	
Properties	content:	simple
	minOccurs:	0
	maxOccurs:	1
Facets	pattern	(\d{1}-\d{5}-\d{3}-\d{1}   \d{1}-\d{3}-\d{5}-\d{1}   \d{1}-\d{2}-\d{6}-\d{1}   \d{3}-\d{1}-\d{6}-\d{2}-\d{1})
Source	<xsd:element name="isbn" type="isbn" maxOccurs="1" minOccurs="0"/>	

## Element ids / finetunes


Namespace	No namespace	
-----------	--------------	--

Diagram									
Type	finetunes								
Properties	<table> <tr><td>content:</td><td>simple</td></tr> <tr><td>minOccurs:</td><td>0</td></tr> <tr><td>maxOccurs:</td><td>1</td></tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1		
content:	simple								
minOccurs:	0								
maxOccurs:	1								
Facets	<table> <tr><td>totalDigits</td><td>13</td></tr> <tr><td>maxExclusive</td><td>2000000000000</td></tr> <tr><td>minExclusive</td><td>1000000000000</td></tr> <tr><td>pattern</td><td>([\-+]?[0-9]+) &amp; ([0-9]{13})</td></tr> </table>	totalDigits	13	maxExclusive	2000000000000	minExclusive	1000000000000	pattern	([\-+]?[0-9]+) & ([0-9]{13})
totalDigits	13								
maxExclusive	2000000000000								
minExclusive	1000000000000								
pattern	([\-+]?[0-9]+) & ([0-9]{13})								
Source	<code>&lt;xsd:element name="finetunes" type="finetunes" maxOccurs="1" minOccurs="0"/&gt;</code>								


## Element ids / licenssor

Namespace	No namespace						
Diagram							
Type	notemptystring						
Properties	<table> <tr><td>content:</td><td>simple</td></tr> <tr><td>minOccurs:</td><td>0</td></tr> <tr><td>maxOccurs:</td><td>1</td></tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	<table> <tr><td>minLength</td><td>1</td></tr> </table>	minLength	1				
minLength	1						
Source	<code>&lt;xsd:element name="licenssor" type="notemptystring" maxOccurs="1" minOccurs="0"/&gt;</code>						

## Element ids / licensee

Namespace	No namespace						
Diagram							
Type	notemptystring						
Properties	<table> <tr><td>content:</td><td>simple</td></tr> <tr><td>minOccurs:</td><td>0</td></tr> <tr><td>maxOccurs:</td><td>1</td></tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	<table> <tr><td>minLength</td><td>1</td></tr> </table>	minLength	1				
minLength	1						
Source	<code>&lt;xsd:element name="licensee" type="notemptystring" maxOccurs="1" minOccurs="0"/&gt;</code>						


## Element ids / gvl

Namespace	No namespace						
Diagram							
Type	gvl						
Properties	<table> <tr><td>content:</td><td>simple</td></tr> <tr><td>minOccurs:</td><td>0</td></tr> <tr><td>maxOccurs:</td><td>1</td></tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	<table> <tr><td>minLength</td><td>8</td></tr> <tr><td>pattern</td><td>LC \d{5}</td></tr> </table>	minLength	8	pattern	LC \d{5}		
minLength	8						
pattern	LC \d{5}						

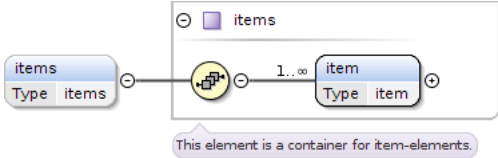


Source	<code>&lt;xsd:element name="gv1" type="gv1" maxOccurs="1" minOccurs="0"/&gt;</code>
--------	---

## Element ids / amg

Namespace	No namespace						
Diagram							
Type	amg						
Properties	<table> <tr><td>content:</td><td>simple</td></tr> <tr><td>minOccurs:</td><td>0</td></tr> <tr><td>maxOccurs:</td><td>1</td></tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	<table> <tr><td>minLength</td><td>1</td></tr> </table>	minLength	1				
minLength	1						
Source	<code>&lt;xsd:element name="amg" type="amg" maxOccurs="1" minOccurs="0"/&gt;</code>						

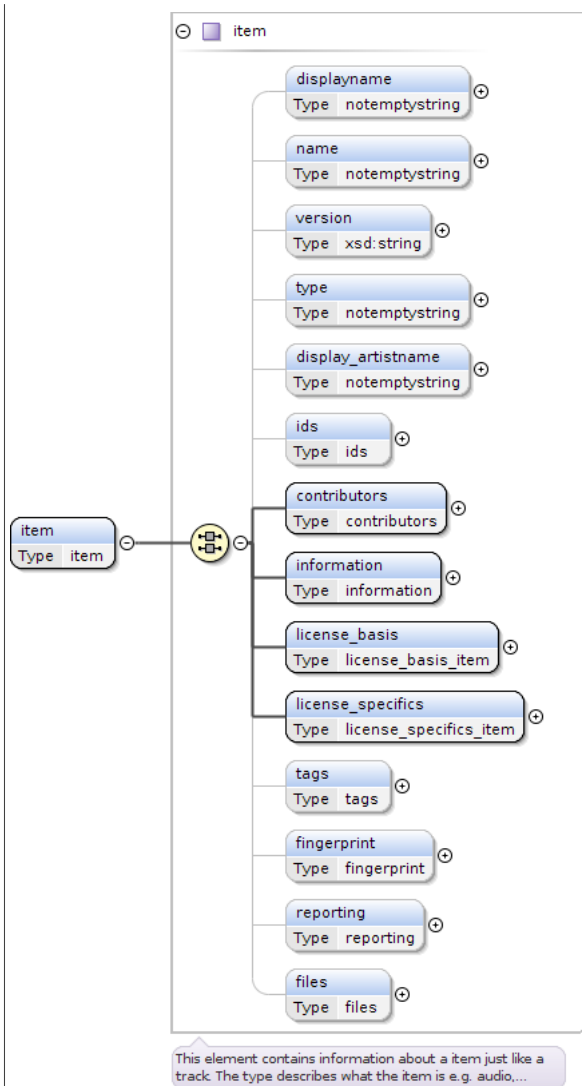
## Element bundle / items

Namespace	No namespace						
Diagram							
Type	items						
Properties	<table> <tr><td>content:</td><td>complex</td></tr> <tr><td>minOccurs:</td><td>0</td></tr> <tr><td>maxOccurs:</td><td>1</td></tr> </table>	content:	complex	minOccurs:	0	maxOccurs:	1
content:	complex						
minOccurs:	0						
maxOccurs:	1						
Model	item+						
Children	item						
Instance	<pre>&lt;items&gt;   &lt;item&gt;{1,unbounded}&lt;/item&gt; &lt;/items&gt;</pre>						
Source	<code>&lt;xsd:element name="items" type="items" maxOccurs="1" minOccurs="0"/&gt;</code>						

## Element items / item


Namespace	No namespace
-----------	--------------

Diagram




Type	item
Properties	content: complex
	minOccurs: 1
	maxOccurs: unbounded
Model	ALL(displayname{0,1} name{0,1} version{0,1} type{0,1} display_artistname{0,1} ids{0,1} contributors information license_basis license_specifics tags{0,1} fingerprint{0,1} reporting{0,1} files{0,1})
Children	contributors, display_artistname, displayname, files, fingerprint, ids, information, license_basis, license_specifics, name, reporting, tags, type, version
Instance	<pre> &lt;item&gt;   &lt;displayname&gt;{0,1}&lt;/displayname&gt;   &lt;name&gt;{0,1}&lt;/name&gt;   &lt;version&gt;{0,1}&lt;/version&gt;   &lt;type&gt;{0,1}&lt;/type&gt;   &lt;display_artistname&gt;{0,1}&lt;/display_artistname&gt;   &lt;ids&gt;{0,1}&lt;/ids&gt;   &lt;contributors&gt;{1,1}&lt;/contributors&gt;   &lt;information&gt;{1,1}&lt;/information&gt;   &lt;license_basis&gt;{1,1}&lt;/license_basis&gt;   &lt;license_specifics&gt;{1,1}&lt;/license_specifics&gt;   &lt;tags&gt;{0,1}&lt;/tags&gt;   &lt;fingerprint&gt;{0,1}&lt;/fingerprint&gt;   &lt;reporting&gt;{0,1}&lt;/reporting&gt;   &lt;files&gt;{0,1}&lt;/files&gt; &lt;/item&gt; </pre>
Source	<xsd:element name="item" type="item" maxOccurs="unbounded" minOccurs="1"/>

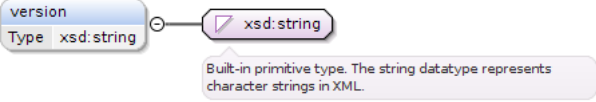
## Element item / displayname

Namespace	No namespace						
Diagram							
Type	notemptystring						
Properties	<table> <tr><td>content:</td><td>simple</td></tr> <tr><td>minOccurs:</td><td>0</td></tr> <tr><td>maxOccurs:</td><td>1</td></tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	<table> <tr><td>minLength</td><td>1</td></tr> </table>	minLength	1				
minLength	1						
Source	<code>&lt;xsd:element name="displayname" type="notemptystring" maxOccurs="1" minOccurs="0"/&gt;</code>						


## Element item / name

Namespace	No namespace						
Diagram							
Type	notemptystring						
Properties	<table> <tr><td>content:</td><td>simple</td></tr> <tr><td>minOccurs:</td><td>0</td></tr> <tr><td>maxOccurs:</td><td>1</td></tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	<table> <tr><td>minLength</td><td>1</td></tr> </table>	minLength	1				
minLength	1						
Source	<code>&lt;xsd:element name="name" type="notemptystring" maxOccurs="1" minOccurs="0"/&gt;</code>						

## Element item / version


Namespace	No namespace						
Diagram							
Type	xsd:string						
Properties	<table> <tr><td>content:</td><td>simple</td></tr> <tr><td>minOccurs:</td><td>0</td></tr> <tr><td>maxOccurs:</td><td>1</td></tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Source	<code>&lt;xsd:element name="version" type="xsd:string" maxOccurs="1" minOccurs="0"/&gt;</code>						

## Element item / type

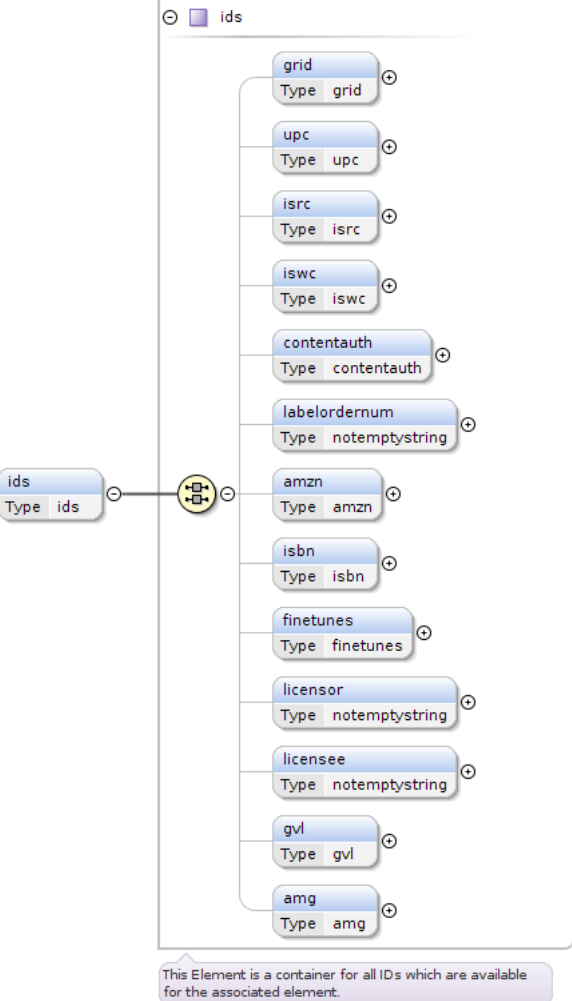
Namespace	No namespace						
Diagram							
Type	notemptystring						
Properties	<table> <tr><td>content:</td><td>simple</td></tr> <tr><td>minOccurs:</td><td>0</td></tr> <tr><td>maxOccurs:</td><td>1</td></tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	<table> <tr><td>minLength</td><td>1</td></tr> </table>	minLength	1				
minLength	1						
Source	<code>&lt;xsd:element name="type" type="notemptystring" maxOccurs="1" minOccurs="0"/&gt;</code>						

## Element item / display\_artistname

Namespace	No namespace
-----------	--------------

Diagram	 A diagram showing the 'display_artistname' element. It is a blue box labeled 'display_artistname' with 'Type notemptystring' below it. It is connected to a purple box labeled 'notemptystring' with a checkmark icon.						
Type	notemptystring						
Properties	<table border="1"> <tr> <td>content:</td> <td>simple</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	<table border="1"> <tr> <td>minLength</td> <td>1</td> </tr> </table>	minLength	1				
minLength	1						
Source	<code>&lt;xsd:element name="display_artistname" type="notemptystring" maxOccurs="1" minOccurs="0"/&gt;</code>						

## Element item / ids

Namespace	No namespace						
Diagram	 A diagram showing the 'ids' element. It is a blue box labeled 'ids' with 'Type ids' below it. It is connected to a yellow box labeled 'ids' with a plus icon. This yellow box is connected to a large container box labeled 'ids' with a plus icon. Inside this container box, there are several smaller blue boxes representing child elements: 'grid' (Type grid), 'upc' (Type upc), 'isrc' (Type isrc), 'iswc' (Type iswc), 'contentauth' (Type contentauth), 'labelordernum' (Type notemptystring), 'amzn' (Type amzn), 'isbn' (Type isbn), 'finetunes' (Type finetunes), 'licensor' (Type notemptystring), 'licensee' (Type notemptystring), 'gvl' (Type gvl), and 'amg' (Type amg). A tooltip at the bottom of the container box states: 'This Element is a container for all IDs which are available for the associated element.'						
Type	ids						
Properties	<table border="1"> <tr> <td>content:</td> <td>complex</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	complex	minOccurs:	0	maxOccurs:	1
content:	complex						
minOccurs:	0						
maxOccurs:	1						
Model	ALL(grid{0,1} upc{0,1} isrc{0,1} iswc{0,1} contentauth{0,1} labelordernum{0,1} amzn{0,1} isbn{0,1} finetunes{0,1} licensor{0,1} licensee{0,1} gvl{0,1} amg{0,1})						
Children	amg, amzn, contentauth, finetunes, grid, gvl, isbn, isrc, iswc, labelordernum, licensee, licensor, upc						
Instance	<pre>&lt;ids&gt;   &lt;grid&gt;{0,1}&lt;/grid&gt;   &lt;upc&gt;{0,1}&lt;/upc&gt;   &lt;isrc&gt;{0,1}&lt;/isrc&gt;   &lt;iswc&gt;{0,1}&lt;/iswc&gt;</pre>						

	<pre> &lt;contentauth&gt;{0,1}&lt;/contentauth&gt; &lt;labelordernum&gt;{0,1}&lt;/labelordernum&gt; &lt;amzn&gt;{0,1}&lt;/amzn&gt; &lt;isbn&gt;{0,1}&lt;/isbn&gt; &lt;finetunes&gt;{0,1}&lt;/finetunes&gt; &lt;licensor&gt;{0,1}&lt;/licensor&gt; &lt;licensee&gt;{0,1}&lt;/licensee&gt; &lt;gv1&gt;{0,1}&lt;/gv1&gt; &lt;amg&gt;{0,1}&lt;/amg&gt; &lt;/ids&gt; </pre>
Source	<code>&lt;xsd:element name="ids" type="ids" maxOccurs="1" minOccurs="0"/&gt;</code>

## Element item / contributors


Namespace	No namespace
Diagram	
Type	contributors
Properties	content: complex
Model	contributor*
Children	contributor
Instance	<pre> &lt;contributors&gt;   &lt;contributor num=""&gt;{0,unbounded}&lt;/contributor&gt; &lt;/contributors&gt; </pre>
Source	<code>&lt;xsd:element name="contributors" type="contributors"/&gt;</code>

## Element contributors / contributor

Namespace	No namespace
Diagram	
Type	contributor
Properties	content: complex minOccurs: 0 maxOccurs: unbounded
Model	ALL(name type year{0,1} ids www{0,1})
Children	ids, name, type, www, year
Instance	<pre> &lt;contributor num=""&gt;   &lt;name&gt;{1,1}&lt;/name&gt;   &lt;type&gt;{1,1}&lt;/type&gt; </pre>

	<pre>&lt;year&gt;{0,1}&lt;/year&gt; &lt;ids&gt;{1,1}&lt;/ids&gt; &lt;www&gt;{0,1}&lt;/www&gt; &lt;/contributor&gt;</pre>				
Attributes	<b>QName</b>	<b>Type</b>	<b>Fixed</b>	<b>Default</b>	<b>Use</b>
	<b>num</b>	xsd:integer			optional
Source	<xsd:element name="contributor" type="contributor" maxOccurs="unbounded" minOccurs="0" />				


## Element contributor / name

Namespace	No namespace		
Diagram			
Type	notemptystring		
Properties	content:	simple	
Facets	minLength	1	
Source	<xsd:element name="name" type="notemptystring" />		

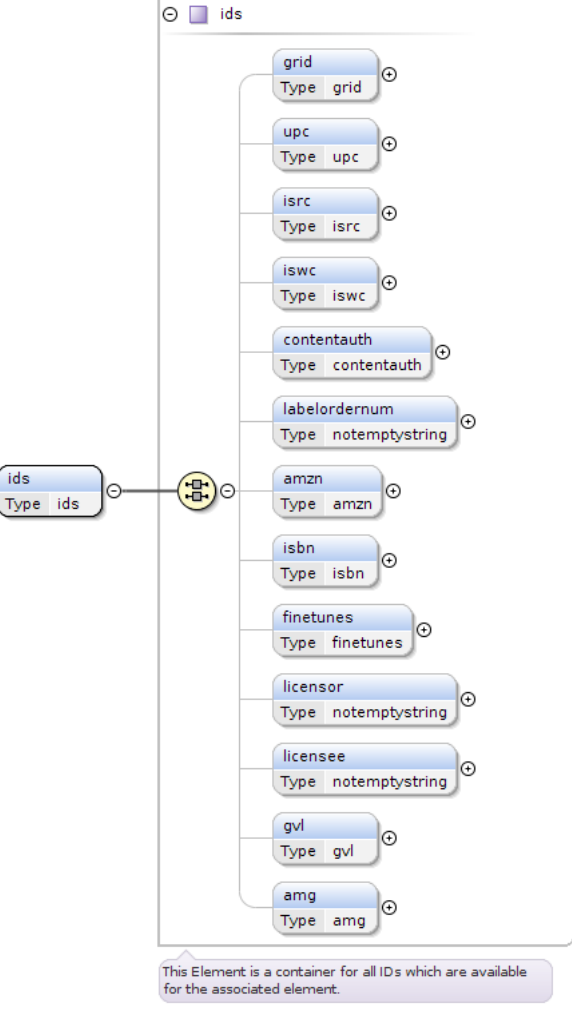
## Element contributor / type

Namespace	No namespace	
Diagram		
Type	contributorType	
Properties	content:	simple
Facets	enumeration	label
	enumeration	performer
	enumeration	texter
	enumeration	editor
	enumeration	conductor
	enumeration	orchestra
	enumeration	display_artist
	enumeration	singer
	enumeration	composer
	enumeration	mixer
	enumeration	remixer
	enumeration	producer
	enumeration	author
	enumeration	arranger
	enumeration	featuring
	enumeration	with
	enumeration	DJ
	enumeration	versus
	enumeration	meets
	enumeration	presents
	enumeration	compiler
	enumeration	copyright
	enumeration	production
	enumeration	publisher
	enumeration	clearinghouse
Source	<xsd:element name="type" type="contributorType" />	

## Element contributor / year

Namespace	No namespace						
Diagram							
Type	year						
Properties	<table> <tr> <td>content:</td><td>simple</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>1</td></tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	totalDigits 4						
Source	<code>&lt;xsd:element name="year" type="year" maxOccurs="1" minOccurs="0"/&gt;</code>						

## Element contributor / ids

Namespace	No namespace
Diagram	
Type	ids
Properties	content: complex
Model	ALL(grid{0,1} upc{0,1} isrc{0,1} iswc{0,1} contentauth{0,1} labelordernum{0,1} amzn{0,1} isbn{0,1} finetunes{0,1} licensord{0,1} licensee{0,1} gvl{0,1} amg{0,1})
Children	amg, amzn, contentauth, finetunes, grid, gvl, isbn, isrc, iswc, labelordernum, licensee, licensord, upc
Instance	<pre> &lt;ids&gt;   &lt;grid&gt;{0,1}&lt;/grid&gt;   &lt;upc&gt;{0,1}&lt;/upc&gt;   &lt;isrc&gt;{0,1}&lt;/isrc&gt; </pre>

	<pre> &lt;iswc&gt;{0,1}&lt;/iswc&gt; &lt;contentauth&gt;{0,1}&lt;/contentauth&gt; &lt;labelordernum&gt;{0,1}&lt;/labelordernum&gt; &lt;amzn&gt;{0,1}&lt;/amzn&gt; &lt;isbn&gt;{0,1}&lt;/isbn&gt; &lt;finetunes&gt;{0,1}&lt;/finetunes&gt; &lt;licensor&gt;{0,1}&lt;/licensor&gt; &lt;licensee&gt;{0,1}&lt;/licensee&gt; &lt;gvl&gt;{0,1}&lt;/gvl&gt; &lt;amg&gt;{0,1}&lt;/amg&gt; &lt;/ids&gt; </pre>
Source	<code>&lt;xsd:element name="ids" type="ids"/&gt;</code>

## Element contributor / www

Namespace	No namespace						
Diagram							
Type	www						
Properties	<table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>1</td></tr> </table>	content:	complex	minOccurs:	0	maxOccurs:	1
content:	complex						
minOccurs:	0						
maxOccurs:	1						
Model	facebook{0,1} , myspace{0,1} , homepage{0,5} , twitter{0,1} , blog{0,5} , phone{0,1}						
Children	blog, facebook, homepage, myspace, phone, twitter						
Instance	<pre> &lt;www&gt;   &lt;facebook publishable=""&gt;{0,1}&lt;/facebook&gt;   &lt;myspace publishable=""&gt;{0,1}&lt;/myspace&gt;   &lt;homepage publishable=""&gt;{0,5}&lt;/homepage&gt;   &lt;twitter publishable=""&gt;{0,1}&lt;/twitter&gt;   &lt;blog publishable=""&gt;{0,5}&lt;/blog&gt;   &lt;phone publishable=""&gt;{0,1}&lt;/phone&gt; &lt;/www&gt; </pre>						
Source	<code>&lt;xsd:element name="www" type="www" maxOccurs="1" minOccurs="0"/&gt;</code>						

## Element www / facebook

Namespace	No namespace
Diagram	
Type	publishable_url



Type hierarchy	<ul style="list-style-type: none"> <li>• xsd:anyURI</li> <li>• url</li> <li>• publishable_url</li> </ul>				
Properties	content:	complex			
	minOccurs:	0			
	maxOccurs:	1			
Attributes	<b>QName</b>	<b>Type</b>	<b>Fixed</b>	<b>Default</b>	<b>Use</b>
	<b>publishable</b>	xsd:boolean			optional
Source	<code>&lt;xsd:element name="facebook" type="publishable_url" maxOccurs="1" minOccurs="0"/&gt;</code>				

## Element www / myspace

Namespace	No namespace				
Diagram					
Type	publishable_url				
Type hierarchy	<ul style="list-style-type: none"> <li>• xsd:anyURI</li> <li>• url</li> <li>• publishable_url</li> </ul>				
Properties	content:	complex			
	minOccurs:	0			
	maxOccurs:	1			
Attributes	<b>QName</b>	<b>Type</b>	<b>Fixed</b>	<b>Default</b>	<b>Use</b>
	<b>publishable</b>	xsd:boolean			optional
Source	<code>&lt;xsd:element name="myspace" type="publishable_url" maxOccurs="1" minOccurs="0"/&gt;</code>				

## Element www / homepage

Namespace	No namespace				
Diagram					
Type	publishable_url				
Type hierarchy	<ul style="list-style-type: none"> <li>• xsd:anyURI</li> <li>• url</li> <li>• publishable_url</li> </ul>				
Properties	content:	complex			
	minOccurs:	0			
	maxOccurs:	5			

Attributes	QName	Type	Fixed	Default	Use
	<b>publishable</b>	xsd:boolean			optional
Source	<xsd:element name="homepage" type="publishable_url" maxOccurs="5" minOccurs="0"/>				

## Element www / twitter

Namespace	No namespace				
Diagram					
Type	publishable_url				
Type hierarchy	<ul style="list-style-type: none"> <li>xsd:anyURI <ul style="list-style-type: none"> <li>url <ul style="list-style-type: none"> <li>publishable_url</li> </ul> </li> </ul> </li> </ul>				
Properties	content:	complex			
	minOccurs:	0			
	maxOccurs:	1			
Attributes	QName	Type	Fixed	Default	Use
	<b>publishable</b>	xsd:boolean			optional
Source	<xsd:element name="twitter" type="publishable_url" maxOccurs="1" minOccurs="0"/>				

## Element www / blog

Namespace	No namespace				
Diagram					
Type	publishable_url				
Type hierarchy	<ul style="list-style-type: none"> <li>xsd:anyURI <ul style="list-style-type: none"> <li>url <ul style="list-style-type: none"> <li>publishable_url</li> </ul> </li> </ul> </li> </ul>				
Properties	content:	complex			
	minOccurs:	0			
	maxOccurs:	5			
Attributes	QName	Type	Fixed	Default	Use
	<b>publishable</b>	xsd:boolean			optional
Source	<xsd:element name="blog" type="publishable_url" maxOccurs="5" minOccurs="0"/>				

## Element www / phone

Namespace	No namespace				
-----------	--------------	--	--	--	--

Diagram	<p>The diagram illustrates the structure of the <code>publishable_url</code> element. It is a complex type that inherits from the <code>url</code> base type. The <code>publishable_url</code> type has an attribute named <code>publishable</code> of type <code>xsd:boolean</code>. A sample element <code>phone</code> is shown with its type set to <code>publishable_url</code>.</p>										
Type	publishable_url										
Type hierarchy	<ul style="list-style-type: none"><li>• xsd:anyURI<ul style="list-style-type: none"><li>• url<ul style="list-style-type: none"><li>• publishable_url</li></ul></li></ul></li></ul>										
Properties	<table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr><tr><td>maxOccurs:</td><td>1</td></tr></table>					content:	complex	minOccurs:	0	maxOccurs:	1
content:	complex										
minOccurs:	0										
maxOccurs:	1										
Attributes	<b>QName</b>	<b>Type</b>	<b>Fixed</b>	<b>Default</b>	<b>Use</b>						
	<b>publishable</b>	xsd:boolean			optional						
Source	<code>&lt;xsd:element name="phone" type="publishable_url" maxOccurs="1" minOccurs="0"/&gt;</code>										

## Element item / information

Namespace	No namespace
Diagram	
Type	information
Properties	content: complex
Model	ALL(texts{0,1} physical_release_datetime digital_release_datetime playlength{0,1} num{0,1} setnum{0,1} suggested_prelistening_offset{0,1} origin_country{0,1} main_language{0,1} related{0,1})
Children	digital_release_datetime, main_language, num, origin_country, physical_release_datetime, playlength, related, setnum, suggested_prelistening_offset, texts

Instance	<pre> &lt;information&gt;   &lt;texts&gt;{0,1}&lt;/texts&gt;   &lt;physical_release_datetime&gt;{1,1}&lt;/physical_release_datetime&gt;   &lt;digital_release_datetime&gt;{1,1}&lt;/digital_release_datetime&gt;   &lt;playlength&gt;{0,1}&lt;/playlength&gt;   &lt;num&gt;{0,1}&lt;/num&gt;   &lt;setnum&gt;{0,1}&lt;/setnum&gt;   &lt;suggested_prelistening_offset&gt;{0,1}&lt;/suggested_prelistening_offset&gt;   &lt;origin_country&gt;{0,1}&lt;/origin_country&gt;   &lt;main_language&gt;{0,1}&lt;/main_language&gt;   &lt;related&gt;{0,1}&lt;/related&gt; &lt;/information&gt; </pre>
Source	<code>&lt;xsd:element name="information" type="information"/&gt;</code>

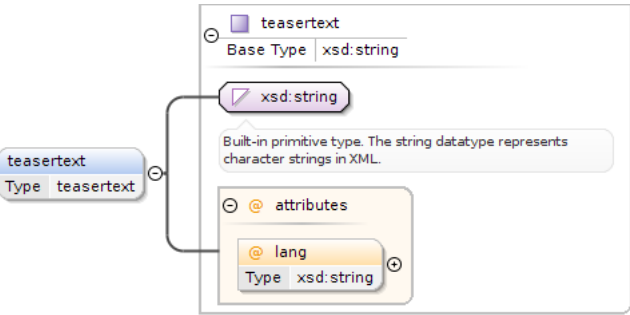
## Element information / texts

Namespace	No namespace						
Diagram							
Type	texts						
Properties	<table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>1</td></tr> </table>	content:	complex	minOccurs:	0	maxOccurs:	1
content:	complex						
minOccurs:	0						
maxOccurs:	1						
Model	promotext* , teasertext*						
Children	promotext, teasertext						
Instance	<pre> &lt;texts&gt;   &lt;promotext lang=""&gt;{0,unbounded}&lt;/promotext&gt;   &lt;teasertext lang=""&gt;{0,unbounded}&lt;/teasertext&gt; &lt;/texts&gt; </pre>						
Source	<code>&lt;xsd:element name="texts" type="texts" maxOccurs="1" minOccurs="0"/&gt;</code>						


## Element texts / promotext

Namespace	No namespace				
Diagram					
Type	promotext				
Properties	content:	complex			
	minOccurs:	0			
	maxOccurs:	unbounded			
Attributes	QName	Type	Fixed	Default	Use
	lang	xsd:string			optional
Source	<code>&lt;xsd:element name="promotext" type="promotext" maxOccurs="unbounded" minOccurs="0" /&gt;</code>				


## Element texts / teasertext

Namespace	No namespace				
Diagram					
Type	teasertext				
Properties	content:	complex			
	minOccurs:	0			
	maxOccurs:	unbounded			
Attributes	<b>QName</b>	<b>Type</b>	<b>Fixed</b>	<b>Default</b>	<b>Use</b>
	lang	xsd:string			optional
Source	<code>&lt;xsd:element name="teasertext" type="teasertext" maxOccurs="unbounded" minOccurs="0"/&gt;</code>				


## Element information / physical\_release\_datetime

Namespace	No namespace		
Diagram			
Type	datetimeGMT		
Properties	content:	simple	
Facets	pattern	\d{4}-\d{2}-\d{2} \d{2}:\d{2}:\d{2} GMT\+\d{2}:\d{2}	
Source	<xsd:element name="physical_release_datetime" type="datetimeGMT"/>		

## Element information / digital\_release\_datetime

Namespace	No namespace		
Diagram			
Type	datetimeGMT		
Properties	content:	simple	
Facets	pattern	\d{4}-\d{2}-\d{2} \d{2}:\d{2}:\d{2} GMT\+\d{2}:\d{2}	
Source	<xsd:element name="digital_release_datetime" type="datetimeGMT"/>		

## Element information / playlength

Namespace	No namespace				
Diagram					
Type	xsd:integer				
Properties	content:	simple			
	minOccurs:	0			

	maxOccurs: 1
Source	<code>&lt;xsd:element name="playlength" type="xsd:integer" maxOccurs="1" minOccurs="0"/&gt;</code>

### Element information / num

Namespace	No namespace						
Diagram	<p>The diagram shows a box for the element 'num' with 'Type xsd:integer' below it. A line connects this box to a box labeled 'xsd:integer'. A callout bubble points to the 'xsd:integer' box with the text: "Built-in derived type. The integer datatype is derived from decimal by fixing the value of fractionDigits to be 0. This..."</p>						
Type	xsd:integer						
Properties	<table> <tr><td>content:</td><td>simple</td></tr> <tr><td>minOccurs:</td><td>0</td></tr> <tr><td>maxOccurs:</td><td>1</td></tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Source	<code>&lt;xsd:element name="num" type="xsd:integer" maxOccurs="1" minOccurs="0"/&gt;</code>						

### Element information / setnum

Namespace	No namespace						
Diagram	<p>The diagram shows a box for the element 'setnum' with 'Type xsd:integer' below it. A line connects this box to a box labeled 'xsd:integer'. A callout bubble points to the 'xsd:integer' box with the text: "Built-in derived type. The integer datatype is derived from decimal by fixing the value of fractionDigits to be 0. This..."</p>						
Type	xsd:integer						
Properties	<table> <tr><td>content:</td><td>simple</td></tr> <tr><td>minOccurs:</td><td>0</td></tr> <tr><td>maxOccurs:</td><td>1</td></tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Source	<code>&lt;xsd:element name="setnum" type="xsd:integer" maxOccurs="1" minOccurs="0"/&gt;</code>						

### Element information / suggested\_prelistening\_offset

Namespace	No namespace						
Diagram	<p>The diagram shows a box for the element 'suggested_prelistening_offset' with 'Type xsd:integer' below it. A line connects this box to a box labeled 'xsd:integer'. A callout bubble points to the 'xsd:integer' box with the text: "Built-in derived type. The integer datatype is derived from decimal by fixing the value of fractionDigits to be 0. This..."</p>						
Type	xsd:integer						
Properties	<table> <tr><td>content:</td><td>simple</td></tr> <tr><td>minOccurs:</td><td>0</td></tr> <tr><td>maxOccurs:</td><td>1</td></tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Source	<code>&lt;xsd:element name="suggested_prelistening_offset" type="xsd:integer" maxOccurs="1" minOccurs="0"/&gt;</code>						

### Element information / origin\_country

Namespace	No namespace		
Diagram	<p>The diagram shows an element box labeled 'origin_country' with 'Type cc:countryCode' below it. A line connects this box to another box labeled 'cc:countryCode'. A callout bubble points to the 'cc:countryCode' box with the text: "This element includes a list of ISO 3166-1 country codes."</p>		
Type	countryCode		
Properties	content:	simple	
	minOccurs:	0	
	maxOccurs:	1	
Facets	enumeration	AF	Afghanistan
	enumeration	AX	Åland Islands
	enumeration	AL	Albania

enumeration	DZ	Algeria
enumeration	AS	American Samoa
enumeration	AD	Andorra
enumeration	AO	Angola
enumeration	AI	Anguilla
enumeration	AQ	Antarctica
enumeration	AG	Antigua and Barbuda
enumeration	AR	Argentina
enumeration	AM	Armenia
enumeration	AW	Aruba
enumeration	AU	Australia
enumeration	AT	Austria
enumeration	AZ	Azerbaijan
enumeration	BS	Bahamas
enumeration	BH	Bahrain
enumeration	BD	Bangladesh
enumeration	BB	Barbados
enumeration	BY	Belarus
enumeration	BE	Belgium
enumeration	BZ	Belize
enumeration	BJ	Benin
enumeration	BM	Bermuda
enumeration	BT	Bhutan
enumeration	BO	Bolivia, Plurinational State of
enumeration	BQ	Bonaire, Sint Eustatius and Saba
enumeration	BA	Bosnia and Herzegovina
enumeration	BW	Botswana
enumeration	BV	Bouvet Island
enumeration	BR	Brazil
enumeration	IO	British Indian Ocean Territory
enumeration	BN	Brunei Darussalam
enumeration	BG	Bulgaria
enumeration	BF	Burkina Faso
enumeration	BI	Burundi
enumeration	KH	Cambodia
enumeration	CM	Cameroon
enumeration	CA	Canada
enumeration	CV	Cape Verde
enumeration	KY	Cayman Islands
enumeration	CF	Central African Republic
enumeration	TD	Chad
enumeration	CL	Chile
enumeration	CN	China
enumeration	CX	Christmas Island
enumeration	CC	Cocos (Keeling) Islands
enumeration	CO	Colombia
enumeration	KM	Comoros
enumeration	CG	Congo
enumeration	CD	Congo, the Democratic Republic of the

enumeration	CK	Cook Islands
enumeration	CR	Costa Rica
enumeration	CI	Côte d'Ivoire
enumeration	HR	Croatia
enumeration	CU	Cuba
enumeration	CW	Curaçao
enumeration	CY	Cyprus
enumeration	CZ	Czech Republic
enumeration	DK	Denmark
enumeration	DJ	Djibouti
enumeration	DM	Dominica
enumeration	DO	Dominican Republic
enumeration	EC	Ecuador
enumeration	EG	Egypt
enumeration	SV	El Salvador
enumeration	GQ	Equatorial Guinea
enumeration	ER	Eritrea
enumeration	EE	Estonia
enumeration	ET	Ethiopia
enumeration	FK	Falkland Islands (Malvinas)
enumeration	FO	Faroe Islands
enumeration	FJ	Fiji
enumeration	FI	Finland
enumeration	FR	France
enumeration	GF	French Guiana
enumeration	PF	French Polynesia
enumeration	TF	French Southern Territories
enumeration	GA	Gabon
enumeration	GM	Gambia
enumeration	GE	Georgia
enumeration	DE	Germany
enumeration	GH	Ghana
enumeration	GI	Gibraltar
enumeration	GR	Greece
enumeration	GL	Greenland
enumeration	GD	Grenada
enumeration	GP	Guadeloupe
enumeration	GU	Guam
enumeration	GT	Guatemala
enumeration	GG	Guernsey
enumeration	GN	Guinea
enumeration	GW	Guinea-Bissau
enumeration	GY	Guyana
enumeration	HT	Haiti
enumeration	HM	Heard Island and McDonald Islands
enumeration	VA	Holy See (Vatican City State)
enumeration	HN	Honduras
enumeration	HK	Hong Kong
enumeration	HU	Hungary



enumeration	IS	Iceland
enumeration	IN	India
enumeration	ID	Indonesia
enumeration	IR	Iran, Islamic Republic of
enumeration	IQ	Iraq
enumeration	IE	Ireland
enumeration	IM	Isle of Man
enumeration	IL	Israel
enumeration	IT	Italy
enumeration	JM	Jamaica
enumeration	JP	Japan
enumeration	JE	Jersey
enumeration	JO	Jordan
enumeration	KZ	Kazakhstan
enumeration	KE	Kenya
enumeration	KI	Kiribati
enumeration	KP	Korea, Democratic People's Republic of
enumeration	KR	Korea, Republic of
enumeration	KW	Kuwait
enumeration	KG	Kyrgyzstan
enumeration	LA	Lao People's Democratic Republic
enumeration	LV	Latvia
enumeration	LB	Lebanon
enumeration	LS	Lesotho
enumeration	LR	Liberia
enumeration	LY	Libyan Arab Jamahiriya
enumeration	LI	Liechtenstein
enumeration	LT	Lithuania
enumeration	LU	Luxembourg
enumeration	MO	Macao
enumeration	MK	Macedonia, the former Yugoslav Republic of
enumeration	MG	Madagascar
enumeration	MW	Malawi
enumeration	MY	Malaysia
enumeration	MV	Maldives
enumeration	ML	Mali
enumeration	MT	Malta
enumeration	MH	Marshall Islands
enumeration	MQ	Martinique
enumeration	MR	Mauritania
enumeration	MU	Mauritius
enumeration	YT	Mayotte
enumeration	MX	Mexico
enumeration	FM	Micronesia, Federated States of
enumeration	MD	Moldova, Republic of
enumeration	MC	Monaco
enumeration	MN	Mongolia
enumeration	ME	Montenegro
enumeration	MS	Montserrat

enumeration	MA	Morocco
enumeration	MZ	Mozambique
enumeration	MM	Myanmar
enumeration	NA	Namibia
enumeration	NR	Nauru
enumeration	NP	Nepal
enumeration	NL	Netherlands
enumeration	NC	New Caledonia
enumeration	NZ	New Zealand
enumeration	NI	Nicaragua
enumeration	NE	Niger
enumeration	NG	Nigeria
enumeration	NU	Niue
enumeration	NF	Norfolk Island
enumeration	MP	Northern Mariana Islands
enumeration	NO	Norway
enumeration	OM	Oman
enumeration	PK	Pakistan
enumeration	PW	Palau
enumeration	PS	Palestinian Territory, Occupied
enumeration	PA	Panama
enumeration	PG	Papua New Guinea
enumeration	PY	Paraguay
enumeration	PE	Peru
enumeration	PH	Philippines
enumeration	PN	Pitcairn
enumeration	PL	Poland
enumeration	PT	Portugal
enumeration	PR	Puerto Rico
enumeration	QA	Qatar
enumeration	RE	Réunion
enumeration	RO	Romania
enumeration	RU	Russian Federation
enumeration	RW	Rwanda
enumeration	BL	Saint Barthélemy
enumeration	SH	Saint Helena, Ascension and Tristan da Cunha
enumeration	KN	Saint Kitts and Nevis
enumeration	LC	Saint Lucia
enumeration	MF	Saint Martin (French part)
enumeration	PM	Saint Pierre and Miquelon
enumeration	VC	Saint Vincent and the Grenadines
enumeration	WS	Samoa
enumeration	SM	San Marino
enumeration	ST	Sao Tome and Principe
enumeration	SA	Saudi Arabia
enumeration	SN	Senegal
enumeration	RS	Serbia
enumeration	SC	Seychelles
enumeration	SL	Sierra Leone

enumeration	SG	Singapore
enumeration	SX	Sint Maarten (Dutch part)
enumeration	SK	Slovakia
enumeration	SI	Slovenia
enumeration	SB	Solomon Islands
enumeration	SO	Somalia
enumeration	ZA	South Africa
enumeration	GS	South Georgia and the South Sandwich Islands
enumeration	SS	South Sudan
enumeration	ES	Spain
enumeration	LK	Sri Lanka
enumeration	SD	Sudan
enumeration	SR	Suriname
enumeration	SJ	Svalbard and Jan Mayen
enumeration	SZ	Swaziland
enumeration	SE	Sweden
enumeration	CH	Switzerland
enumeration	SY	Syrian Arab Republic
enumeration	TW	Taiwan, Province of China
enumeration	TJ	Tajikistan
enumeration	TZ	Tanzania, United Republic of
enumeration	TH	Thailand
enumeration	TL	Timor-Leste
enumeration	TG	Togo
enumeration	TK	Tokelau
enumeration	TO	Tonga
enumeration	TT	Trinidad and Tobago
enumeration	TN	Tunisia
enumeration	TR	Turkey
enumeration	TM	Turkmenistan
enumeration	TC	Turks and Caicos Islands
enumeration	TV	Tuvalu
enumeration	UG	Uganda
enumeration	UA	Ukraine
enumeration	AE	United Arab Emirates
enumeration	GB	United Kingdom
enumeration	US	United States
enumeration	UM	United States Minor Outlying Islands
enumeration	UY	Uruguay
enumeration	UZ	Uzbekistan
enumeration	VU	Vanuatu
enumeration	VE	Venezuela, Bolivarian Republic of
enumeration	VN	Viet Nam
enumeration	VG	Virgin Islands, British
enumeration	VI	Virgin Islands, U.S.
enumeration	WF	Wallis and Futuna
enumeration	WW	WorldWide
enumeration	EH	Western Sahara
enumeration	YE	Yemen

	enumeration	ZM	Zambia
	enumeration	ZW	Zimbabwe
Source	<xsd:element name="origin_country" type="cc:countryCode" maxOccurs="1" minOccurs="0" />		

## Element information / main\_language

Namespace	No namespace		
Diagram			
Type	language		
Properties	content:	simple	
	minOccurs:	0	
	maxOccurs:	1	
Facets	enumeration	aa	Afar
	enumeration	ab	Abkhazian
	enumeration	af	Afrikaans
	enumeration	am	Amharic
	enumeration	ar	Arabic
	enumeration	as	Assamese
	enumeration	ay	Aymara
	enumeration	az	Azerbaijani
	enumeration	ba	Bashkir
	enumeration	be	Byelorussian
	enumeration	bg	Bulgarian
	enumeration	bh	Bihari
	enumeration	bi	Bislama
	enumeration	bn	Bengali; Bangla
	enumeration	bo	Tibetan
	enumeration	br	Breton
	enumeration	ca	Catalan
	enumeration	co	Corsican
	enumeration	cs	Czech
	enumeration	cy	Welsh
	enumeration	da	Danish
	enumeration	de	German
	enumeration	dz	Bhutani
	enumeration	el	Greek
	enumeration	en	English
	enumeration	eo	Esperanto
	enumeration	es	Spanish
	enumeration	et	Estonian
	enumeration	eu	Basque
	enumeration	fa	Persian
	enumeration	fi	Finnish
	enumeration	fj	Fiji
	enumeration	fo	Faroese
	enumeration	fr	French
	enumeration	fy	Frisian
	enumeration	ga	Irish

enumeration	gd	Scots Gaelic
enumeration	gl	Galician
enumeration	gn	Guarani
enumeration	gu	Gujarati
enumeration	ha	Hausa
enumeration	he	Hebrew
enumeration	hi	Hindi
enumeration	hr	Croatian
enumeration	hu	Hungarian
enumeration	hy	Armenian
enumeration	ia	Interlingua
enumeration	id	Indonesian
enumeration	ie	Interlingue
enumeration	ik	Inupiak
enumeration	is	Icelandic
enumeration	it	Italian
enumeration	iu	Inuktitut
enumeration	ja	Japanese
enumeration	jw	Javanese
enumeration	ka	Georgian
enumeration	kk	Kazakh
enumeration	kl	Greenlandic
enumeration	km	Cambodian
enumeration	kn	Kannada
enumeration	ko	Korean
enumeration	ks	Kashmiri
enumeration	ku	Kurdish
enumeration	ky	Kirghiz
enumeration	la	Latin
enumeration	ln	Lingala
enumeration	lo	Laothian
enumeration	lt	Lithuanian
enumeration	lv	Latvian; Lettish
enumeration	mg	Malagasy
enumeration	mi	Maori
enumeration	mk	Macedonian
enumeration	ml	Malayalam
enumeration	mn	Mongolian
enumeration	mo	Moldavian
enumeration	mr	Marathi
enumeration	ms	Malay
enumeration	mt	Maltese
enumeration	my	Burmese
enumeration	na	Nauru
enumeration	ne	Nepali
enumeration	nl	Dutch
enumeration	no	Norwegian
enumeration	oc	Occitan
enumeration	om	(Afan) Oromo

enumeration	or	Oriya
enumeration	pa	Punjabi
enumeration	pl	Polish
enumeration	ps	Pashto, Pushto
enumeration	pt	Portuguese
enumeration	qu	Quechua
enumeration	rm	Rhaeto-Romance
enumeration	rn	Kirundi
enumeration	ro	Romanian
enumeration	ru	Russian
enumeration	rw	Kinyarwanda
enumeration	sa	Sanskrit
enumeration	sd	Sindhi
enumeration	se	Sami (Northern)
enumeration	sg	Sangho
enumeration	sh	Serbo-Croatian
enumeration	si	Singhalese
enumeration	sk	Slovak
enumeration	sl	Slovenian
enumeration	sm	Samoan
enumeration	sn	Shona
enumeration	so	Somali
enumeration	sq	Albanian
enumeration	sr	Serbian
enumeration	ss	Siswati
enumeration	st	Sesotho
enumeration	su	Sundanese
enumeration	sv	Swedish
enumeration	sw	Swahili
enumeration	ta	Tamil
enumeration	te	Telugu
enumeration	tg	Tajik
enumeration	th	Thai
enumeration	ti	Tigrinya
enumeration	tk	Turkmen
enumeration	tl	Tagalog
enumeration	tn	Setswana
enumeration	to	Tonga
enumeration	tr	Turkish
enumeration	ts	Tsonga
enumeration	tt	Tatar
enumeration	tw	Twi
enumeration	ug	Uigur
enumeration	uk	Ukrainian
enumeration	ur	Urdu
enumeration	uz	Uzbek
enumeration	vi	Vietnamese
enumeration	vo	Volapuk
enumeration	wo	Wolof

	enumeration	xh	Xhosa
	enumeration	yi	Yiddish
	enumeration	yo	Yoruba
	enumeration	za	Zhuang
	enumeration	zh	Chinese
	enumeration	zu	Zulu
Source	<xsd:element name="main_language" type="l:language" maxOccurs="1" minOccurs="0"/>		

## Element information / related

Namespace	No namespace						
Diagram							
Type	related						
Properties	<table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>1</td></tr> </table>	content:	complex	minOccurs:	0	maxOccurs:	1
content:	complex						
minOccurs:	0						
maxOccurs:	1						
Model	physical_distributor*, utube{0,1}, bundle*						
Children	bundle, physical_distributor, utube						
Instance	<pre>&lt;related&gt;   &lt;physical_distributor publishable=""&gt;{0,unbounded}&lt;/physical_distributor&gt;   &lt;utube&gt;{0,1}&lt;/utube&gt;   &lt;bundle&gt;{0,unbounded}&lt;/bundle&gt; &lt;/related&gt;</pre>						
Source	<xsd:element name="related" type="related" maxOccurs="1" minOccurs="0"/>						

## Element related / physical\_distributor

Namespace	No namespace						
Diagram							
Type	physical_distributor						
Type hierarchy	<ul style="list-style-type: none"> <li>xsd:string             <ul style="list-style-type: none"> <li>notemptystring                 <ul style="list-style-type: none"> <li>physical_distributor</li> </ul> </li> </ul> </li> </ul>						
Properties	<table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table>	content:	complex	minOccurs:	0	maxOccurs:	unbounded
content:	complex						
minOccurs:	0						
maxOccurs:	unbounded						

Attributes	QName	Type	Fixed	Default	Use
	<b>publishable</b>	xsd:boolean			optional
Source	<code>&lt;xsd:element name="physical_distributor" type="physical_distributor" maxOccurs="unbounded" minOccurs="0" /&gt;</code>				


## Element related / utube

Namespace	No namespace						
Diagram							
Type	utube						
Properties	<table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr><tr><td>maxOccurs:</td><td>1</td></tr></table>	content:	complex	minOccurs:	0	maxOccurs:	1
content:	complex						
minOccurs:	0						
maxOccurs:	1						
Model	ALL(url{0,1} channel{0,1})						
Children	channel, url						
Instance	<pre>&lt;utube&gt;   &lt;url&gt;{0,1}&lt;/url&gt;   &lt;channel&gt;{0,1}&lt;/channel&gt; &lt;/utube&gt;</pre>						
Source	<pre>&lt;xsd:element name="utube" type="utube" maxOccurs="1" minOccurs="0"/&gt;</pre>						

## Element utube / url

Namespace	No namespace		
Diagram			
Type	notemptystring		
Properties	content:	simple	
	minOccurs:	0	
	maxOccurs:	1	
Facets	minLength	1	
Source	<code>&lt;xsd:element name="url" type="notemptystring" maxOccurs="1" minOccurs="0"/&gt;</code>		

## Element utube / channel

Namespace	No namespace		
Diagram			
Type	notemptystring		
Properties	content:	simple	
	minOccurs:	0	
	maxOccurs:	1	
Facets	minLength	1	
Source	<xsd:element name="channel" type="notemptystring" maxOccurs="1" minOccurs="0"/>		

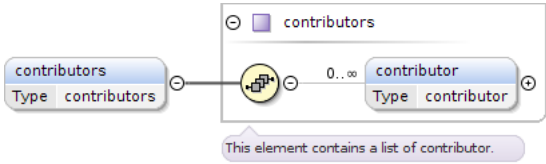


## Element related / bundle

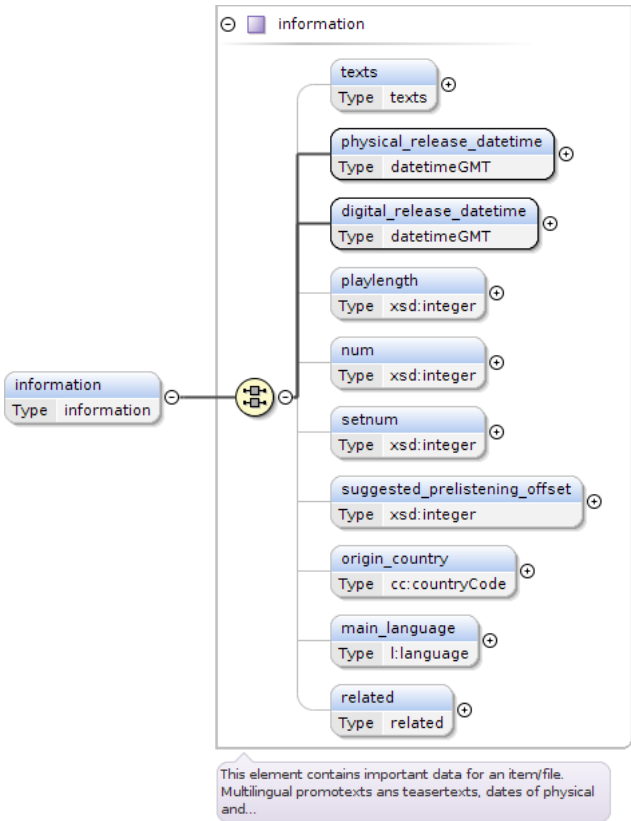
Namespace	No namespace						
Diagram	<p>On bundle level, there are information on how to handle a collection of "items". This is mainly an album/ep/single. A...</p>						
Type	bundle						
Properties	<table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table>	content:	complex	minOccurs:	0	maxOccurs:	unbounded
content:	complex						
minOccurs:	0						
maxOccurs:	unbounded						
Model	ALL(displayname{0,1} name{0,1} version{0,1} display_artistname{0,1} ids items{0,1} contributors{0,1} information{0,1} license_basis{0,1} license_specifics{0,1} reporting{0,1} tags{0,1} files{0,1} purchase{0,1})						
Children	contributors, display_artistname, displayname, files, ids, information, items, license_basis, license_specifics, name, purchase, reporting, tags, version						
Instance	<pre> &lt;bundle&gt;   &lt;displayname&gt;{0,1}&lt;/displayname&gt;   &lt;name&gt;{0,1}&lt;/name&gt;   &lt;version&gt;{0,1}&lt;/version&gt;   &lt;display_artistname&gt;{0,1}&lt;/display_artistname&gt;   &lt;ids&gt;{1,1}&lt;/ids&gt;   &lt;items&gt;{0,1}&lt;/items&gt;   &lt;contributors&gt;{0,1}&lt;/contributors&gt;   &lt;information&gt;{0,1}&lt;/information&gt;   &lt;license_basis&gt;{0,1}&lt;/license_basis&gt;   &lt;license_specifics&gt;{0,1}&lt;/license_specifics&gt;   &lt;reporting&gt;{0,1}&lt;/reporting&gt;   &lt;tags&gt;{0,1}&lt;/tags&gt;   &lt;files&gt;{0,1}&lt;/files&gt;   &lt;purchase&gt;{0,1}&lt;/purchase&gt; &lt;/bundle&gt; </pre>						

Source	<code>&lt;xsd:element name="bundle" type="bundle" maxOccurs="unbounded" minOccurs="0"/&gt;</code>
--------	---

## Element bundle / contributors

Namespace	No namespace						
Diagram							
Type	contributors						
Properties	<table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>1</td></tr> </table>	content:	complex	minOccurs:	0	maxOccurs:	1
content:	complex						
minOccurs:	0						
maxOccurs:	1						
Model	contributor*						
Children	contributor						
Instance	<pre> &lt;contributors&gt;   &lt;contributor num=""&gt;{0,unbounded}&lt;/contributor&gt; &lt;/contributors&gt; </pre>						
Source	<code>&lt;xsd:element name="contributors" type="contributors" maxOccurs="1" minOccurs="0"/&gt;</code>						

## Element bundle / information

Namespace	No namespace						
Diagram							
Type	information						
Properties	<table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>1</td></tr> </table>	content:	complex	minOccurs:	0	maxOccurs:	1
content:	complex						
minOccurs:	0						
maxOccurs:	1						
Model	ALL(texts{0,1} physical_release_datetime digital_release_datetime playlength{0,1} num{0,1} setnum{0,1} suggested_prelistening_offset{0,1} origin_country{0,1} main_language{0,1} related{0,1})						

Children	digital_release_datetime, main_language, num, origin_country, physical_release_datetime, playlength, related, setnum, suggested_prelistening_offset, texts
Instance	<pre> &lt;information&gt;   &lt;texts&gt;{0,1}&lt;/texts&gt;   &lt;physical_release_datetime&gt;{1,1}&lt;/physical_release_datetime&gt;   &lt;digital_release_datetime&gt;{1,1}&lt;/digital_release_datetime&gt;   &lt;playlength&gt;{0,1}&lt;/playlength&gt;   &lt;num&gt;{0,1}&lt;/num&gt;   &lt;setnum&gt;{0,1}&lt;/setnum&gt;   &lt;suggested_prelistening_offset&gt;{0,1}&lt;/suggested_prelistening_offset&gt;   &lt;origin_country&gt;{0,1}&lt;/origin_country&gt;   &lt;main_language&gt;{0,1}&lt;/main_language&gt;   &lt;related&gt;{0,1}&lt;/related&gt; &lt;/information&gt; </pre>
Source	<code>&lt;xsd:element name="information" type="information" maxOccurs="1" minOccurs="0"/&gt;</code>

## Element bundle / license\_basis

Namespace	No namespace						
Diagram							
Type	license_basis						
Properties	<table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>1</td></tr> </table>	content:	complex	minOccurs:	0	maxOccurs:	1
content:	complex						
minOccurs:	0						
maxOccurs:	1						
Model	ALL(territorial{0,1} timeframe pricing{0,1} streaming_allowed channels{0,1})						
Children	channels, pricing, streaming_allowed, territorial, timeframe						
Instance	<pre> &lt;license_basis&gt;   &lt;territorial&gt;{0,1}&lt;/territorial&gt;   &lt;timeframe&gt;{1,1}&lt;/timeframe&gt;   &lt;pricing&gt;{0,1}&lt;/pricing&gt;   &lt;streaming_allowed&gt;{1,1}&lt;/streaming_allowed&gt;   &lt;channels&gt;{0,1}&lt;/channels&gt; &lt;/license_basis&gt; </pre>						
Source	<code>&lt;xsd:element name="license_basis" type="license_basis" maxOccurs="1" minOccurs="0"/&gt;</code>						

## Element license\_basis / territorial

Namespace	No namespace				
Diagram					
Type	territorial				
Properties	<table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> </table>	content:	complex	minOccurs:	0
content:	complex				
minOccurs:	0				

	maxOccurs: 1
Model	territory*
Children	territory
Instance	<pre>&lt;territorial&gt;   &lt;territory type=""&gt;{0,unbounded}&lt;/territory&gt; &lt;/territorial&gt;</pre>
Source	<code>&lt;xsd:element name="territorial" type="territorial" maxOccurs="1" minOccurs="0" /&gt;</code>

## Element territorial / territory


Namespace	No namespace				
Diagram					
Type	territory				
Type hierarchy	<ul style="list-style-type: none"> <li>xsd:string</li> <li>countryCode</li> <li>territory</li> </ul>				
Properties	content:	complex			
	minOccurs:	0			
	maxOccurs:	unbounded			
Attributes	<b>QName</b>	<b>Type</b>	<b>Fixed</b>	<b>Default</b>	<b>Use</b>
	type	allowance			optional
Source	<code>&lt;xsd:element name="territory" type="territory" maxOccurs="unbounded" minOccurs="0" /&gt;</code>				

## Element license\_basis / timeframe


Namespace	No namespace		
Diagram			
Type	timeframe		
Properties	content:	complex	
	minOccurs:	1	
	maxOccurs:	1	
Model	from , to		
Children	from, to		
Instance	<pre>&lt;timeframe&gt;   &lt;from&gt;{1,1}&lt;/from&gt;   &lt;to&gt;{1,1}&lt;/to&gt; &lt;/timeframe&gt;</pre>		

Source	<code>&lt;xsd:element name="timeframe" type="timeframe" maxOccurs="1" minOccurs="1"/&gt;</code>
--------	---

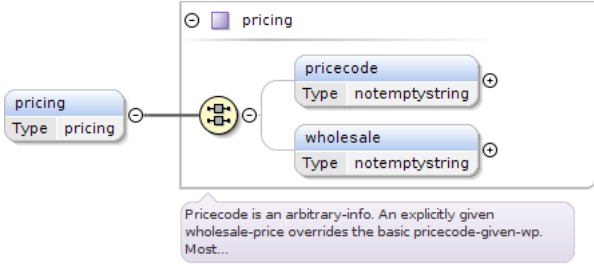
### Element timeframe / from

Namespace	No namespace
Diagram	
Type	datetimeGMT
Properties	content: simple
Facets	pattern <code>\d{4}-\d{2}-\d{2} \d{2}:</code> <code>\d{2}:\d{2} GMT\+\d{2}:</code> <code>\d{2}</code>
Source	<code>&lt;xsd:element name="from" type="datetimeGMT"/&gt;</code>


### Element timeframe / to

Namespace	No namespace
Diagram	
Type	datetimeGMT
Properties	content: simple
Facets	pattern <code>\d{4}-\d{2}-\d{2} \d{2}:</code> <code>\d{2}:\d{2} GMT\+\d{2}:</code> <code>\d{2}</code>
Source	<code>&lt;xsd:element name="to" type="datetimeGMT"/&gt;</code>

### Element license\_basis / pricing


Namespace	No namespace
Diagram	
Type	pricing
Properties	content: complex minOccurs: 0 maxOccurs: 1
Model	ALL(pricecode{0,1} wholesale{0,1})
Children	pricecode, wholesale
Instance	<pre> &lt;pricing&gt;   &lt;pricecode&gt;{0,1}&lt;/pricecode&gt;   &lt;wholesale&gt;{0,1}&lt;/wholesale&gt; &lt;/pricing&gt;           </pre>
Source	<code>&lt;xsd:element name="pricing" type="pricing" maxOccurs="1" minOccurs="0"/&gt;</code>

### Element pricing / pricecode


Namespace	No namespace
Diagram	
Type	notemptystring

Properties	content:	simple
	minOccurs:	0
	maxOccurs:	1
Facets	minLength	1
Source	<xsd:element name="pricecode" type="notemptystring" maxOccurs="1" minOccurs="0"/>	

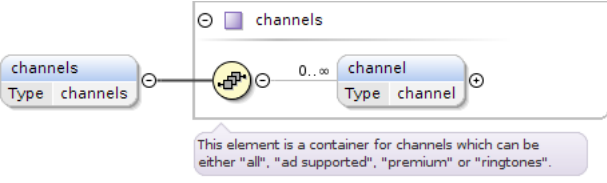
## Element pricing / wholesale

Namespace	No namespace	
Diagram		
Type	notemptystring	
Properties	content:	simple
	minOccurs:	0
	maxOccurs:	1
Facets	minLength	1
Source	<xsd:element name="wholesale" type="notemptystring" maxOccurs="1" minOccurs="0"/>	

## Element license\_basis / streaming\_allowed

Namespace	No namespace	
Diagram		
Type	xsd:boolean	
Properties	content:	simple
	minOccurs:	1
	maxOccurs:	1
Source	<xsd:element name="streaming_allowed" type="xsd:boolean" maxOccurs="1" minOccurs="1"/>	

## Element license\_basis / channels

Namespace	No namespace	
Diagram		
Type	channels	
Properties	content:	complex
	minOccurs:	0
	maxOccurs:	1
Model	channel*	
Children	channel	
Instance	<pre>&lt;channels&gt;   &lt;channel type=" " &gt;{0,unbounded}&lt;/channel&gt; &lt;/channels&gt;</pre>	
Source	<xsd:element name="channels" type="channels" maxOccurs="1" minOccurs="0"/>	

## Element channels / channel

Namespace	No namespace
-----------	--------------

Diagram					
Type	channel				
Properties	content:	complex			
	minOccurs:	0			
	maxOccurs:	unbounded			
Attributes	<b>QName</b>	<b>Type</b>	<b>Fixed</b>	<b>Default</b>	<b>Use</b>
	type	allowance			required
Source	<code>&lt;xsd:element name="channel" type="channel" maxOccurs="unbounded" minOccurs="0" /&gt;</code>				

## Element bundle / license\_specifics

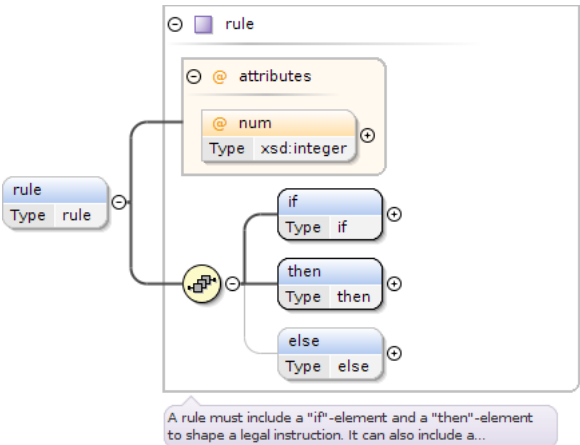
Namespace	No namespace	
Diagram		
Type	license_specifics	
Properties	content:	complex
	minOccurs:	0
	maxOccurs:	1
Model	ALL(rules{0,1})	
Children	rules	
Instance	<pre>&lt;license_specifics&gt;   &lt;rules&gt;{0,1}&lt;/rules&gt; &lt;/license_specifics&gt;</pre>	
Source	<pre>&lt;xsd:element name="license_specifics" type="license_specifics" maxOccurs="1" minOccurs="0"/&gt;</pre>	

## Element license\_specifics / rules

Namespace	No namespace		
Diagram	<p>The diagram illustrates a UML class diagram for a rules system. A container element labeled 'rules' (with a blue header and 'Type rules' below) is connected to a sequence of 'rule' elements (also with blue headers and 'Type rule' below). The sequence is represented by a yellow circle with a plus sign and a minus sign, with a multiplicity of '0..∞' and a direction arrow pointing to the 'rule' element. A callout box points to the 'rules' container with the text: 'This element is a container for rules. It needs an ordered mode here - first come first match.'</p>		
Type	rules		
Properties	content:	complex	
	minOccurs:	0	
	maxOccurs:	1	
Model	rule*		

Children	rule
Instance	<pre>&lt;rules&gt;   &lt;rule num=" "&gt;{0, unbounded}&lt;/rule&gt; &lt;/rules&gt;</pre>
Source	<code>&lt;xsd:element name="rules" type="rules" maxOccurs="1" minOccurs="0"/&gt;</code>

## Element rules / rule

Namespace	No namespace				
Diagram					
Type	rule				
Properties	content:	complex			
	minOccurs:	0			
	maxOccurs:	unbounded			
Model	if , then , else{0,1}				
Children	else, if, then				
Instance	<pre>&lt;rule num=" "&gt;   &lt;if&gt;{1,1}&lt;/if&gt;   &lt;then&gt;{1,1}&lt;/then&gt;   &lt;else&gt;{0,1}&lt;/else&gt; &lt;/rule&gt;</pre>				
Attributes	QName	Type	Fixed	Default	Use
	num	xsd:integer			optional
Source	<xsd:element name="rule" type="rule" maxOccurs="unbounded" minOccurs="0" />				


## Element rule / if

Namespace	No namespace
Diagram	
Type	if
Properties	content: complex
Model	what , operator , value
Children	operator, value, what
Instance	<if>




	<pre>&lt;what&gt;{1,1}&lt;/what&gt; &lt;operator&gt;{1,1}&lt;/operator&gt; &lt;value&gt;{1,1}&lt;/value&gt; &lt;/if&gt;</pre>
Source	<code>&lt;xsd:element name="if" type="if" /&gt;</code>


## Element if / what

Namespace	No namespace
Diagram	
Type	notemptystring
Properties	content: simple
Facets	minLength 1
Source	<code>&lt;xsd:element name="what" type="notemptystring" /&gt;</code>

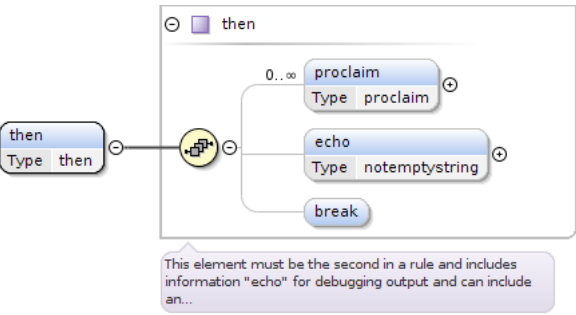
## Element if / operator

Namespace	No namespace
Diagram	
Type	operator
Properties	content: simple
Facets	enumeration equals enumeration before enumeration after enumeration contains enumeration containedin
Source	<code>&lt;xsd:element name="operator" type="operator" /&gt;</code>

## Element if / value

Namespace	No namespace
Diagram	
Type	notemptystring
Properties	content: simple
Facets	minLength 1
Source	<code>&lt;xsd:element name="value" type="notemptystring" /&gt;</code>

## Element rule / then

Namespace	No namespace
Diagram	
Type	then

Properties	content: complex
Model	proclaim*, echo{0,1} , break{0,1}
Children	break, echo, proclaim
Instance	<pre>&lt;then&gt;   &lt;proclaim&gt;{0,unbounded}&lt;/proclaim&gt;   &lt;echo&gt;{0,1}&lt;/echo&gt;   &lt;break&gt;{0,1}&lt;/break&gt; &lt;/then&gt;</pre>
Source	<code>&lt;xsd:element name="then" type="then"/&gt;</code>

## Element then / proclaim

Namespace	No namespace
Diagram	
Type	proclaim
Properties	content: complex minOccurs: 0 maxOccurs: unbounded
Model	what , for
Children	for, what
Instance	<pre>&lt;proclaim&gt;   &lt;what&gt;{1,1}&lt;/what&gt;   &lt;for&gt;{1,1}&lt;/for&gt; &lt;/proclaim&gt;</pre>
Source	<code>&lt;xsd:element name="proclaim" type="proclaim" maxOccurs="unbounded" minOccurs="0"/&gt;</code>

## Element proclaim / what


Namespace	No namespace
Diagram	
Type	notemptystring
Properties	content: simple
Facets	minLength 1
Source	<code>&lt;xsd:element name="what" type="notemptystring"/&gt;</code>

## Element proclaim / for


Namespace	No namespace
Diagram	
Type	notemptystring
Properties	content: simple
Facets	minLength 1
Source	<code>&lt;xsd:element name="for" type="notemptystring"/&gt;</code>

## Element then / echo

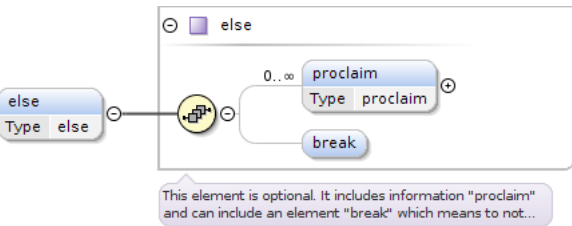
Namespace	No namespace
-----------	--------------

Diagram							
Type	notemptystring						
Properties	<table> <tr><td>content:</td><td>simple</td></tr> <tr><td>minOccurs:</td><td>0</td></tr> <tr><td>maxOccurs:</td><td>1</td></tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	<table> <tr><td>minLength</td><td>1</td></tr> </table>	minLength	1				
minLength	1						
Source	<code>&lt;xsd:element name="echo" type="notemptystring" maxOccurs="1" minOccurs="0"/&gt;</code>						

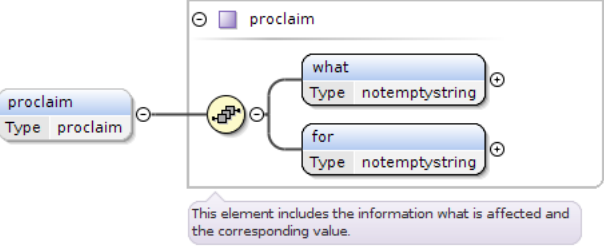
## Element then / break

Namespace	No namespace				
Diagram					
Properties	<table> <tr><td>minOccurs:</td><td>0</td></tr> <tr><td>maxOccurs:</td><td>1</td></tr> </table>	minOccurs:	0	maxOccurs:	1
minOccurs:	0				
maxOccurs:	1				
Source	<code>&lt;xsd:element name="break" maxOccurs="1" minOccurs="0"/&gt;</code>				

## Element rule / else


Namespace	No namespace						
Diagram							
Type	else						
Properties	<table> <tr><td>content:</td><td>complex</td></tr> <tr><td>minOccurs:</td><td>0</td></tr> <tr><td>maxOccurs:</td><td>1</td></tr> </table>	content:	complex	minOccurs:	0	maxOccurs:	1
content:	complex						
minOccurs:	0						
maxOccurs:	1						
Model	proclaim*, break{0,1}						
Children	break, proclaim						
Instance	<pre> &lt;else&gt;   &lt;proclaim&gt;{0,unbounded}&lt;/proclaim&gt;   &lt;break&gt;{0,1}&lt;/break&gt; &lt;/else&gt; </pre>						
Source	<code>&lt;xsd:element name="else" type="else" maxOccurs="1" minOccurs="0"/&gt;</code>						

## Element else / proclaim

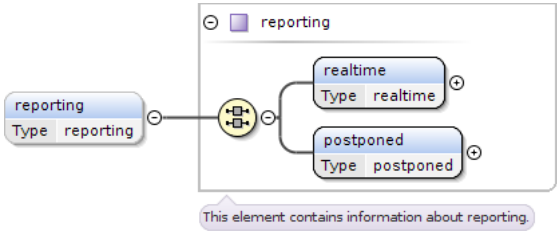
Namespace	No namespace				
Diagram					
Type	proclaim				
Properties	<table> <tr><td>content:</td><td>complex</td></tr> <tr><td>minOccurs:</td><td>0</td></tr> </table>	content:	complex	minOccurs:	0
content:	complex				
minOccurs:	0				

	maxOccurs: unbounded
Model	what , for
Children	for, what
Instance	<pre>&lt;proclaim&gt;   &lt;what&gt;{1,1}&lt;/what&gt;   &lt;for&gt;{1,1}&lt;/for&gt; &lt;/proclaim&gt;</pre>
Source	<code>&lt;xsd:element name="proclaim" type="proclaim" maxOccurs="unbounded" minOccurs="0"/&gt;</code>

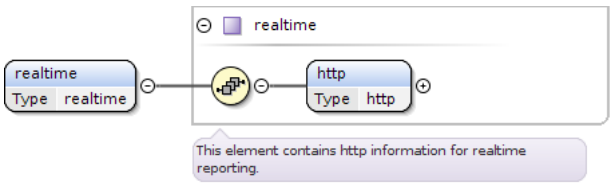
## Element else / break

Namespace	No namespace
Diagram	
Properties	minOccurs: 0 maxOccurs: 1
Source	<code>&lt;xsd:element name="break" maxOccurs="1" minOccurs="0"/&gt;</code>

## Element bundle / reporting

Namespace	No namespace
Diagram	
Type	reporting
Properties	content: complex minOccurs: 0 maxOccurs: 1
Model	ALL(realtime postponed)
Children	postponed, realtime
Instance	<pre>&lt;reporting&gt;   &lt;realtime&gt;{1,1}&lt;/realtime&gt;   &lt;postponed&gt;{1,1}&lt;/postponed&gt; &lt;/reporting&gt;</pre>
Source	<code>&lt;xsd:element name="reporting" type="reporting" maxOccurs="1" minOccurs="0"/&gt;</code>

## Element reporting / realtime

Namespace	No namespace
Diagram	
Type	realtime
Properties	content: complex
Model	http
Children	http
Instance	<pre>&lt;realtime&gt;   &lt;http&gt;{1,1}&lt;/http&gt; &lt;/realtime&gt;</pre>

Source	<code>&lt;xsd:element name="realtime" type="realtime"/&gt;</code>
--------	---

## Element realtime / http

Namespace	No namespace
Diagram	
Type	http
Type hierarchy	<ul style="list-style-type: none"> <li>• action</li> <li>• http</li> </ul>
Properties	content: complex
Model	ALL(url type addheader addparams)
Children	addheader, addparams, type, url
Instance	<pre>&lt;http&gt;   &lt;url&gt;{1,1}&lt;/url&gt;   &lt;type&gt;{1,1}&lt;/type&gt;   &lt;addheader&gt;{1,1}&lt;/addheader&gt;   &lt;addparams&gt;{1,1}&lt;/addparams&gt; &lt;/http&gt;</pre>
Source	<code>&lt;xsd:element name="http" type="http"/&gt;</code>

## Element reporting / postponed

Namespace	No namespace
Diagram	
Type	postponed
Properties	content: complex
Model	id
Children	id
Instance	<pre>&lt;postponed&gt;   &lt;id&gt;{1,1}&lt;/id&gt; &lt;/postponed&gt;</pre>
Source	<code>&lt;xsd:element name="postponed" type="postponed"/&gt;</code>

## Element postponed / id

Namespace	No namespace
Diagram	
Type	notemptystring

Properties	content:	simple
Facets	minLength	1
Source	<xsd:element name="id" type="notemptystring" />	

## Element bundle / tags

Namespace	No namespace
Diagram	
Type	tags
Properties	content: complex minOccurs: 0 maxOccurs: 1
Model	ALL(genres{0,1} bundle_only{0,1} explicit_lyrics{0,1} live{0,1} acoustic{0,1} instrumental{0,1})
Children	acoustic, bundle_only, explicit_lyrics, genres, instrumental, live
Instance	<pre>&lt;tags&gt;   &lt;genres&gt;{0,1}&lt;/genres&gt;   &lt;bundle_only&gt;{0,1}&lt;/bundle_only&gt;   &lt;explicit_lyrics&gt;{0,1}&lt;/explicit_lyrics&gt;   &lt;live&gt;{0,1}&lt;/live&gt;   &lt;acoustic&gt;{0,1}&lt;/acoustic&gt;   &lt;instrumental&gt;{0,1}&lt;/instrumental&gt; &lt;/tags&gt;</pre>
Source	<xsd:element name="tags" type="tags" maxOccurs="1" minOccurs="0"/>

## Element tags / genres

Namespace	No namespace
Diagram	
Type	genres
Properties	content: complex minOccurs: 0 maxOccurs: 1
Model	genre*
Children	genre
Instance	<pre>&lt;genres&gt;   &lt;genre&gt;{0,unbounded}&lt;/genre&gt; &lt;/genres&gt;</pre>

Source `<xsd:element name="genres" type="genres" maxOccurs="1" minOccurs="0" />`

## Element genres / genre

Namespace	No namespace	
Diagram		
Type	genre	
Properties	content:	simple
	minOccurs:	0
	maxOccurs:	unbounded
Facets	enumeration	Rock
	enumeration	Beat
	enumeration	Blues Rock
	enumeration	Rock'n'Roll
	enumeration	Art Rock
	enumeration	Classic Rock
	enumeration	Deutschrock
	enumeration	Emo
	enumeration	Experimental Rock
	enumeration	Glam Rock
	enumeration	Hard Rock
	enumeration	Krautrock
	enumeration	Progressive Rock
	enumeration	Psychedelic Rock
	enumeration	Psychobilly Rock
	enumeration	Rockabilly
	enumeration	Soft Rock
	enumeration	Southern Rock
	enumeration	Surf Rock
	enumeration	Alternative
	enumeration	Crossover
	enumeration	Dark Wave
	enumeration	Garage Rock
	enumeration	Goth / Industrial
	enumeration	Grunge
	enumeration	Hardcore
	enumeration	Indie Rock
	enumeration	New Wave
	enumeration	Punk
	enumeration	Funpunk
	enumeration	Black Metal
	enumeration	Death Metal
	enumeration	Heavy Metal
	enumeration	Power Metal
	enumeration	Thrash / Speed Metal
	enumeration	Doom Metal
	enumeration	Grind Core
	enumeration	Pop

enumeration	Britpop
enumeration	Dance Pop
enumeration	Deutschpop
enumeration	Disco
enumeration	Easy Listening
enumeration	Electropop
enumeration	Euro Dance
enumeration	Euro Pop
enumeration	French Pop
enumeration	Indie Pop
enumeration	Italo Pop
enumeration	J-Pop
enumeration	K-Pop
enumeration	Neue Deutsche Welle
enumeration	New Age
enumeration	Pop Rock
enumeration	Power Pop
enumeration	Schlager
enumeration	Singer / Songwriter
enumeration	Synthpop
enumeration	Teen Pop
enumeration	Country
enumeration	Alternative Country
enumeration	Bluegrass
enumeration	Contemporary Folk
enumeration	Country Gospel
enumeration	Honky-Tonk
enumeration	Jewish / Yiddish Music
enumeration	Nashville Sound
enumeration	Outlaw / Progressive Country
enumeration	Texas Country
enumeration	Traditional Country
enumeration	Western Swing
enumeration	Folk
enumeration	Americana
enumeration	Folk Rock
enumeration	Irish Folk
enumeration	German Folk / Volksmusik
enumeration	Jazz
enumeration	Acid Jazz
enumeration	Avantgarde
enumeration	Bebop
enumeration	Big Band
enumeration	Classic Jazz
enumeration	Cool Jazz
enumeration	Dixieland music
enumeration	Free jazz
enumeration	Hard Bop



enumeration	Jazz Fusion
enumeration	New Orleans Jazz
enumeration	Nu-Jazz
enumeration	Smooth Jazz
enumeration	Swing
enumeration	Vocal Jazz
enumeration	Hip Hop
enumeration	Alternative Hip Hop
enumeration	Crunk
enumeration	Dirty South
enumeration	G-Funk
enumeration	Gangsta Rap
enumeration	Golden Era
enumeration	Grime
enumeration	Hyphy
enumeration	Instrumental Hip Hop
enumeration	Miami Bass
enumeration	New School
enumeration	Old School
enumeration	Turntablism
enumeration	US Eastcoast
enumeration	US Midwest
enumeration	US Southern
enumeration	US Westcoast
enumeration	Blues
enumeration	Boogie-Woogie
enumeration	Electric Blues Guitar
enumeration	Modern Blues
enumeration	Regional Blues
enumeration	Traditional Blues
enumeration	Soul
enumeration	Motown Sound
enumeration	Neo Soul
enumeration	Philly Sound
enumeration	Funk
enumeration	R&B
enumeration	Contemporary R&B
enumeration	Doo-wop
enumeration	Electronic
enumeration	Ambient
enumeration	Chill Out
enumeration	Lounge
enumeration	Downbeat
enumeration	Electronica
enumeration	Indie Disco
enumeration	Industrial / EBM
enumeration	Techno
enumeration	Dance
enumeration	Electro

enumeration	Glitch hop
enumeration	House
enumeration	Acid House
enumeration	Deep House
enumeration	Disco House
enumeration	Electro House
enumeration	Fidget House
enumeration	Hard House
enumeration	Progressive House
enumeration	Soulful House
enumeration	Tech House
enumeration	Tribal
enumeration	Vocal House
enumeration	Big Beat
enumeration	Breakbeat
enumeration	Drum'n'Bass
enumeration	Dubstep
enumeration	Garage / UK Funky
enumeration	IDM
enumeration	Trip-Hop
enumeration	Trance
enumeration	Goa Trance
enumeration	Hard Trance
enumeration	Psychedelic Trance
enumeration	Gabba
enumeration	Jumpstyle / Hardstyle
enumeration	Classic
enumeration	Ancient music
enumeration	Medieval music
enumeration	Renaissance
enumeration	Baroque
enumeration	Classical period
enumeration	Romantic
enumeration	Neoromanticism
enumeration	Neoclassicism
enumeration	New Music / Contemporary Music
enumeration	Modern, 20th / 21st Century
enumeration	Postmodern Music
enumeration	Music and other Media / Arts
enumeration	Music and Word
enumeration	12-Tone Composition
enumeration	Anthem
enumeration	Ballet
enumeration	Cantata
enumeration	Chamber Music
enumeration	Choral

enumeration	Crossover / Popular Classicism
enumeration	Electronic Music / Computer Music
enumeration	Madrigal
enumeration	March
enumeration	Minimal Music
enumeration	Motet
enumeration	Musical
enumeration	Opera Arias
enumeration	Opera Baroque
enumeration	Opera Classical
enumeration	Opera Renaissance
enumeration	Opera Romantic
enumeration	Operetta
enumeration	Oratorio
enumeration	Passion
enumeration	Requiem
enumeration	Serialism
enumeration	Sonata
enumeration	Suite
enumeration	Symphonic Music / Orchestral Music
enumeration	Symphony
enumeration	Waltz
enumeration	Brass Ensemble
enumeration	Concerto / Solo Instrument with Orchestra
enumeration	Mixed Ensemble (Strings / Wind)
enumeration	Mixed Wind Ensemble (Woodwind / Brass)
enumeration	Several Solo Instruments
enumeration	Solo Instrument
enumeration	String Ensemble
enumeration	String Orchestra
enumeration	String Quartet
enumeration	String Trio
enumeration	Woodwind Ensemble
enumeration	A cappella
enumeration	Vocal Ensemble
enumeration	Vocal Music
enumeration	Choir
enumeration	Boy's Choir
enumeration	Children's Choir
enumeration	Choir with Orchestra
enumeration	Women's Choir
enumeration	Men's Choir
enumeration	Mixed Choir
enumeration	Soprano
enumeration	Mezzosoprano

enumeration	Alto
enumeration	Tenor
enumeration	Baritone
enumeration	Bass
enumeration	Accordion
enumeration	Ancient Instruments
enumeration	Bassoon
enumeration	Cembalo
enumeration	Clarinet
enumeration	Double Bass
enumeration	Flute
enumeration	Guitar
enumeration	Harp
enumeration	Harpsichord
enumeration	Horn
enumeration	Lute
enumeration	Mandolin
enumeration	Oboe
enumeration	Organ
enumeration	Percussion (Vibraphone etc.)
enumeration	Piano
enumeration	Recorder / English Flute
enumeration	Saxophone
enumeration	Trombone
enumeration	Trumpet
enumeration	Tuba
enumeration	Viola
enumeration	Violin
enumeration	Violoncello
enumeration	Miscellaneous Lead Instrument
enumeration	Reggae
enumeration	Contemporary Reggae
enumeration	Dancehall
enumeration	Dub
enumeration	Lover's Rock
enumeration	Reggaeton
enumeration	Roots
enumeration	Ska
enumeration	World
enumeration	African Music
enumeration	Afro Beat
enumeration	Afro Pop
enumeration	Asian Music
enumeration	Austropop
enumeration	Calypso
enumeration	Caribbean Music
enumeration	Celtic Music
enumeration	Chanson

enumeration	Coupé Decalé
enumeration	Enka
enumeration	European Music
enumeration	Ghazal
enumeration	Griot
enumeration	Gypsy
enumeration	Highlife
enumeration	Judaica Music / Yiddish / Klezmer
enumeration	Kuduro
enumeration	Kwaito
enumeration	Makossa
enumeration	Marching Band
enumeration	Mento
enumeration	Middle Eastern Music
enumeration	Nordic / Scandinavia
enumeration	North American Music
enumeration	South American Music
enumeration	Parang
enumeration	Polka
enumeration	Rai
enumeration	Soca
enumeration	Soukous
enumeration	Zouk
enumeration	Zulu
enumeration	Latin
enumeration	Bachata
enumeration	Banda
enumeration	Bhangra
enumeration	Bolero
enumeration	Bossa Nova
enumeration	Corridos
enumeration	Cumbia
enumeration	Fado
enumeration	Flamenco
enumeration	Grupero
enumeration	Mambo
enumeration	Mariachi
enumeration	Merengue
enumeration	Norteno
enumeration	Ranchero
enumeration	Rock En Espanol
enumeration	Salsa
enumeration	Samba
enumeration	Son Cubana
enumeration	Sonidero
enumeration	Tango
enumeration	Tejano
enumeration	Religious

enumeration	Christian Rock
enumeration	Christian Hip Hop
enumeration	Christian Pop
enumeration	Chants
enumeration	Gospel
enumeration	Gregorian Music
enumeration	Hymn
enumeration	Mass
enumeration	Spiritual
enumeration	Worship
enumeration	Miscellaneous
enumeration	Anime / Video Game Soundtracks
enumeration	Bollywood
enumeration	Instrumental
enumeration	Vocal
enumeration	Acoustic
enumeration	Unplugged
enumeration	Live
enumeration	Traditional
enumeration	Karaoke
enumeration	Movie Scores
enumeration	Movie Soundtracks
enumeration	Sound Effects
enumeration	Soundtrack
enumeration	TV Soundtrack
enumeration	Wedding Music
enumeration	Holiday
enumeration	Mashup
enumeration	Unclassifiable
enumeration	Word
enumeration	Business & Career
enumeration	Abstracts & Dossiers
enumeration	Accounting
enumeration	Business & Investing
enumeration	Communication
enumeration	Computers & Internet
enumeration	Economics
enumeration	Finance
enumeration	Management & Leadership
enumeration	Marketing & Sales
enumeration	Politics
enumeration	Self-Help
enumeration	Self-Organization
enumeration	Skills
enumeration	Small Business & Entrepreneurship
enumeration	Children's Audiobooks
enumeration	Popular Characters
enumeration	Animal Stories

enumeration	Children's Book Classics
enumeration	Children's Detective Stories
enumeration	Fairy Tales
enumeration	Fantasy & Spook
enumeration	Knowledge for Children
enumeration	Pirates, Knights & Historical
enumeration	Poems & Song
enumeration	Comedy & Humour
enumeration	Comedy & Cabaret
enumeration	Humoristic Novel
enumeration	Crime
enumeration	Detective Stories
enumeration	Detective Stories „Noir“
enumeration	Classic Detective Stories
enumeration	Scandinavian Detective Stories
enumeration	Temporary Detective Stories
enumeration	Education & Knowledge
enumeration	Art & Culture
enumeration	Biography & Memento
enumeration	Foreign Language
enumeration	History
enumeration	Pilosophy
enumeration	Politics & Current Affairs
enumeration	Science & Technology
enumeration	Health, Mind & Body
enumeration	Autogenous Training
enumeration	Creativity
enumeration	Esoteric
enumeration	Fitness
enumeration	Health
enumeration	Lifestyle
enumeration	Love & Erotic
enumeration	Meditation / Yoga
enumeration	Memory Training
enumeration	Mental Training
enumeration	Motivation
enumeration	Philosophy
enumeration	Positive Thinking & Attitude
enumeration	Psychology
enumeration	Spirituality & Religion
enumeration	Sports
enumeration	Wellness & Beauty
enumeration	Science Fiction & Fantasy
enumeration	Ancient World
enumeration	Fantasy-Romance

enumeration	Historical Thriller
enumeration	Horror Classics
enumeration	Medieval Times & Early Modern Era
enumeration	Thriller
enumeration	Mystery & Conspiracy
enumeration	Psychological Thriller
enumeration	Espionage, Politics & Justice
enumeration	Vatican & Secret Societies
enumeration	Science & Medicine
enumeration	Literature
enumeration	Novels
enumeration	Erotica
enumeration	Romance
enumeration	Contemporary Literature
enumeration	Contemporary German Literature
enumeration	Entertainment
enumeration	Youth
enumeration	Youth Detective Stories
enumeration	Fantasy
enumeration	For Girls
enumeration	Knowledge for Teenagers
enumeration	Mystery
enumeration	Youth Classics
enumeration	Youth Today
enumeration	Language
enumeration	Albanian
enumeration	Arabic
enumeration	Bengali
enumeration	Bosnian
enumeration	Bulgarian
enumeration	Cantonese / Yue
enumeration	Croatian
enumeration	Czech
enumeration	Danish
enumeration	Dutch
enumeration	English
enumeration	Finnish
enumeration	French
enumeration	German
enumeration	Greek
enumeration	Hebrew
enumeration	Hindi / Urdu
enumeration	Hungarian
enumeration	Italian
enumeration	Japanese
enumeration	Korean



enumeration	Macedonian
enumeration	Mandarin
enumeration	Norwegian
enumeration	Patois
enumeration	Portuguese
enumeration	Russian
enumeration	Serbian
enumeration	Spanish
enumeration	Swedish
enumeration	Tamil
enumeration	Turkish
enumeration	Vietnamese
enumeration	Afrikaans
enumeration	Film
enumeration	Action
enumeration	3D
enumeration	Adventure
enumeration	Animation
enumeration	Author's Film
enumeration	Biography
enumeration	Cartoon
enumeration	Children
enumeration	Comedy
enumeration	Crime & Gangster
enumeration	Disaster
enumeration	Documentary
enumeration	Drama
enumeration	Epic / Historical
enumeration	Erotic
enumeration	Expressionism
enumeration	Family
enumeration	Fantasy
enumeration	Film-Noir
enumeration	GLBT
enumeration	Horror
enumeration	Independent Film
enumeration	Martial-Arts / Eastern
enumeration	Monumental
enumeration	Musical / Dance
enumeration	Music
enumeration	Mystery
enumeration	Reality-TV
enumeration	Romantic
enumeration	Science Fiction
enumeration	Silent Movie
enumeration	Sport
enumeration	Thriller
enumeration	TV-Series
enumeration	Tragicomedy

enumeration	War / Anti-War
enumeration	Western
enumeration	Youth
enumeration	Time
enumeration	Middle Ages
enumeration	20's
enumeration	30's
enumeration	40's
enumeration	50's
enumeration	60's
enumeration	70'
enumeration	80's
enumeration	90's
enumeration	2000's
enumeration	2010's
enumeration	2020's
enumeration	Adult
enumeration	Children
enumeration	Age: up to 6 years
enumeration	Age: 6 years +
enumeration	Age: 8 years +
enumeration	Kids & Family
enumeration	Country
enumeration	United Arab Emirates (AE)
enumeration	Afghanistan (AF)
enumeration	Antigua and Barbuda (AG)
enumeration	Anguilla (AI)
enumeration	Albania (AL)
enumeration	Armenia (AM)
enumeration	Angola (AO)
enumeration	Antarctica (AQ)
enumeration	Argentina (AR)
enumeration	American Samoa (AS)
enumeration	Austria (AT)
enumeration	Australia (AU)
enumeration	Aruba (AW)
enumeration	Åland Islands (AX)
enumeration	Azerbaijan (AZ)
enumeration	Bosnia and Herzegovina (BA)
enumeration	Barbados (BB)
enumeration	Bangladesh (BD)
enumeration	Belgium (BE)
enumeration	Burkina Faso (BF)
enumeration	Bulgaria (BG)
enumeration	Bahrain (BH)
enumeration	Burundi (BI)
enumeration	Benin (BJ)
enumeration	Saint Barthélemy (BL)

enumeration	Bermuda (BM)
enumeration	Brunei Darussalam (BN)
enumeration	Bolivia Plurinational State of (BO)
enumeration	Bonaire Saint Eustatius and Saba (BQ)
enumeration	Brazil (BR)
enumeration	Bahamas (BS)
enumeration	Bhutan (BT)
enumeration	Bouvet Island (BV)
enumeration	Botswana (BW)
enumeration	Belarus (BY)
enumeration	Belize (BZ)
enumeration	Canada (CA)
enumeration	Cocos (Keeling) Islands (CC)
enumeration	Congo the Democratic Republic of the (CD)
enumeration	Central African Republic (CF)
enumeration	Congo (CG)
enumeration	Switzerland (CH)
enumeration	Côte d'Ivoire (CI)
enumeration	Cook Islands (CK)
enumeration	Chile (CL)
enumeration	Cameroon (CM)
enumeration	China (CN)
enumeration	Colombia (CO)
enumeration	Costa Rica (CR)
enumeration	Cuba (CU)
enumeration	Cape Verde (CV)
enumeration	Curaçao (CW)
enumeration	Christmas Island (CX)
enumeration	Cyprus (CY)
enumeration	Czech Republic (CZ)
enumeration	Germany (DE)
enumeration	Djibouti (DJ)
enumeration	Denmark (DK)
enumeration	Dominica (DM)
enumeration	Dominican Republic (DO)
enumeration	Algeria (DZ)
enumeration	Ecuador (EC)
enumeration	Estonia (EE)
enumeration	Egypt (EG)
enumeration	Western Sahara (EH)
enumeration	Eritrea (ER)
enumeration	Spain (ES)
enumeration	Ethiopia (ET)
enumeration	Finland (FI)
enumeration	Fiji (FJ)

enumeration	Falkland Islands (Malvinas) (FK)
enumeration	Micronesia Federated States of (FM)
enumeration	Faroe Islands (FO)
enumeration	France (FR)
enumeration	Gabon (GA)
enumeration	United Kingdom (GB)
enumeration	Grenada (GD)
enumeration	Georgia (GE)
enumeration	French Guiana (GF)
enumeration	Guernsey (GG)
enumeration	Ghana (GH)
enumeration	Gibraltar (GI)
enumeration	Greenland (GL)
enumeration	Gambia (GM)
enumeration	Guinea (GN)
enumeration	Guadeloupe (GP)
enumeration	Equatorial Guinea (GQ)
enumeration	Greece (GR)
enumeration	South Georgia and the South Sandwich Islands (GS)
enumeration	Guatemala (GT)
enumeration	Guam (GU)
enumeration	Guinea-Bissau (GW)
enumeration	Guyana (GY)
enumeration	Hong Kong (HK)
enumeration	Heard Island and McDonald Islands (HM)
enumeration	Honduras (HN)
enumeration	Croatia (HR)
enumeration	Haiti (HT)
enumeration	Hungary (HU)
enumeration	Indonesia (ID)
enumeration	Ireland (IE)
enumeration	Israel (IL)
enumeration	Isle of Man (IM)
enumeration	India (IN)
enumeration	British Indian Ocean Territory (IO)
enumeration	Iraq (IQ)
enumeration	Iran Islamic Republic of (IR)
enumeration	Iceland (IS)
enumeration	Italy (IT)
enumeration	Jersey (JE)
enumeration	Jamaica (JM)
enumeration	Jordan (JO)
enumeration	Japan (JP)
enumeration	Kenya (KE)


enumeration	Kyrgyzstan (KG)
enumeration	Cambodia (KH)
enumeration	Kiribati (KI)
enumeration	Comoros (KM)
enumeration	Saint Kitts and Nevis (KN)
enumeration	Korea Democratic People's Republic of (KP)
enumeration	Korea Republic of (KR)
enumeration	Kuwait (KW)
enumeration	Cayman Islands (KY)
enumeration	Kazakhstan (KZ)
enumeration	Lao People's Democratic Republic (LA)
enumeration	Lebanon (LB)
enumeration	Saint Lucia (LC)
enumeration	Liechtenstein (LI)
enumeration	Sri Lanka (LK)
enumeration	Liberia (LR)
enumeration	Lesotho (LS)
enumeration	Lithuania (LT)
enumeration	Luxembourg (LU)
enumeration	Latvia (LV)
enumeration	Libyan Arab Jamahiriya (LY)
enumeration	Morocco (MA)
enumeration	Monaco (MC)
enumeration	Moldova Republic of (MD)
enumeration	Montenegro (ME)
enumeration	Saint Martin (French part) (MF)
enumeration	Madagascar (MG)
enumeration	Marshall Islands (MH)
enumeration	Macedonia the former Yugoslav Republic of (MK)
enumeration	Mali (ML)
enumeration	Myanmar (MM)
enumeration	Mongolia (MN)
enumeration	Macao (MO)
enumeration	Northern Mariana Islands (MP)
enumeration	Martinique (MQ)
enumeration	Mauritania (MR)
enumeration	Montserrat (MS)
enumeration	Malta (MT)
enumeration	Mauritius (MU)
enumeration	Maldives (MV)
enumeration	Malawi (MW)
enumeration	Mexico (MX)
enumeration	Malaysia (MY)
enumeration	Mozambique (MZ)

enumeration	Namibia (NA)
enumeration	New Caledonia (NC)
enumeration	Niger (NE)
enumeration	Norfolk Island (NF)
enumeration	Nigeria (NG)
enumeration	Nicaragua (NI)
enumeration	Netherlands (NL)
enumeration	Norway (NO)
enumeration	Nepal (NP)
enumeration	Nauru (NR)
enumeration	Niue (NU)
enumeration	New Zealand (NZ)
enumeration	Oman (OM)
enumeration	Panama (PA)
enumeration	Peru (PE)
enumeration	French Polynesia (PF)
enumeration	Papua New Guinea (PG)
enumeration	Philippines (PH)
enumeration	Pakistan (PK)
enumeration	Poland (PL)
enumeration	Saint Pierre and Miquelon (PM)
enumeration	Pitcairn (PN)
enumeration	Puerto Rico (PR)
enumeration	Palestinian Territory Occupied (PS)
enumeration	Portugal (PT)
enumeration	Palau (PW)
enumeration	Paraguay (PY)
enumeration	Qatar (QA)
enumeration	Réunion (RE)
enumeration	Romania (RO)
enumeration	Serbia (RS)
enumeration	Russian Federation (RU)
enumeration	Rwanda (RW)
enumeration	Saudi Arabia (SA)
enumeration	Solomon Islands (SB)
enumeration	Seychelles (SC)
enumeration	Sudan (SD)
enumeration	Sweden (SE)
enumeration	Singapore (SG)
enumeration	Saint Helena Ascension and Tristan da Cunha (SH)
enumeration	Slovenia (SI)
enumeration	Svalbard and Jan Mayen (SJ)
enumeration	Slovakia (SK)
enumeration	Sierra Leone (SL)
enumeration	San Marino (SM)
enumeration	Senegal (SN)


enumeration	Somalia (SO)
enumeration	Suriname (SR)
enumeration	South Sudan (SS)
enumeration	Sao Tome and Principe (ST)
enumeration	El Salvador (SV)
enumeration	Sint Maarten (Dutch part) (SX)
enumeration	Syrian Arab Republic (SY)
enumeration	Swaziland (SZ)
enumeration	Turks and Caicos Islands (TC)
enumeration	Chad (TD)
enumeration	French Southern Territories (TF)
enumeration	Togo (TG)
enumeration	Thailand (TH)
enumeration	Tajikistan (TJ)
enumeration	Tokelau (TK)
enumeration	Timor-Leste (TL)
enumeration	Turkmenistan (TM)
enumeration	Tunisia (TN)
enumeration	Tonga (TO)
enumeration	Turkey (TR)
enumeration	Trinidad and Tobago (TT)
enumeration	Tuvalu (TV)
enumeration	Taiwan Province of China (TW)
enumeration	Tanzania United Republic of (TZ)
enumeration	Ukraine (UA)
enumeration	Uganda (UG)
enumeration	United States Minor Outlying Islands (UM)
enumeration	United States (US)
enumeration	Uruguay (UY)
enumeration	Uzbekistan (UZ)
enumeration	Holy See (Vatican City State) (VA)
enumeration	Saint Vincent and the Grenadines (VC)
enumeration	Venezuela Bolivarian Republic of (VE)
enumeration	Virgin Islands British (VG)
enumeration	Virgin Islands U.S. (VI)
enumeration	Viet Nam (VN)
enumeration	Vanuatu (VU)
enumeration	Wallis and Futuna (WF)
enumeration	Samoa (WS)
enumeration	Yemen (YE)
enumeration	Mayotte (YT)
enumeration	South Africa (ZA)

	enumeration	Zambia (ZM)
	enumeration	Zimbabwe (ZW)
Source	<xsd:element name="genre" type="g:genre" maxOccurs="unbounded" minOccurs="0"/>	


## Element tags / bundle\_only

Namespace	No namespace	
Diagram		
Type	xsd:boolean	
Properties	content:	simple
	minOccurs:	0
	maxOccurs:	1
Source	<xsd:element name="bundle_only" type="xsd:boolean" maxOccurs="1" minOccurs="0"/>	


## Element tags / explicit\_lyrics

Namespace	No namespace	
Diagram		
Type	explicitLyrics	
Properties	content:	simple
	minOccurs:	0
	maxOccurs:	1
Facets	enumeration	true
	enumeration	false
	enumeration	cleaned
Source	<xsd:element name="explicit_lyrics" type="explicitLyrics" maxOccurs="1" minOccurs="0"/>	

## Element tags / live

Namespace	No namespace	
Diagram		
Type	xsd:boolean	
Properties	content:	simple
	minOccurs:	0
	maxOccurs:	1
Source	<xsd:element name="live" type="xsd:boolean" maxOccurs="1" minOccurs="0"/>	


## Element tags / acoustic

Namespace	No namespace	
Diagram		
Type	xsd:boolean	

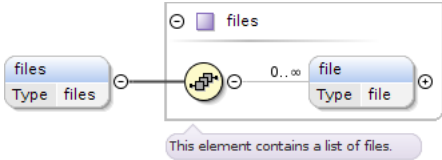


Properties	content:	simple
	minOccurs:	0
	maxOccurs:	1
Source	<xsd:element name="accoustic" type="xsd:boolean" maxOccurs="1" minOccurs="0"/>	

## Element tags / instrumental

Namespace	No namespace	
Diagram		
Type	xsd:boolean	
Properties	content:	simple
	minOccurs:	0
	maxOccurs:	1
Source	<xsd:element name="instrumental" type="xsd:boolean" maxOccurs="1" minOccurs="0"/>	

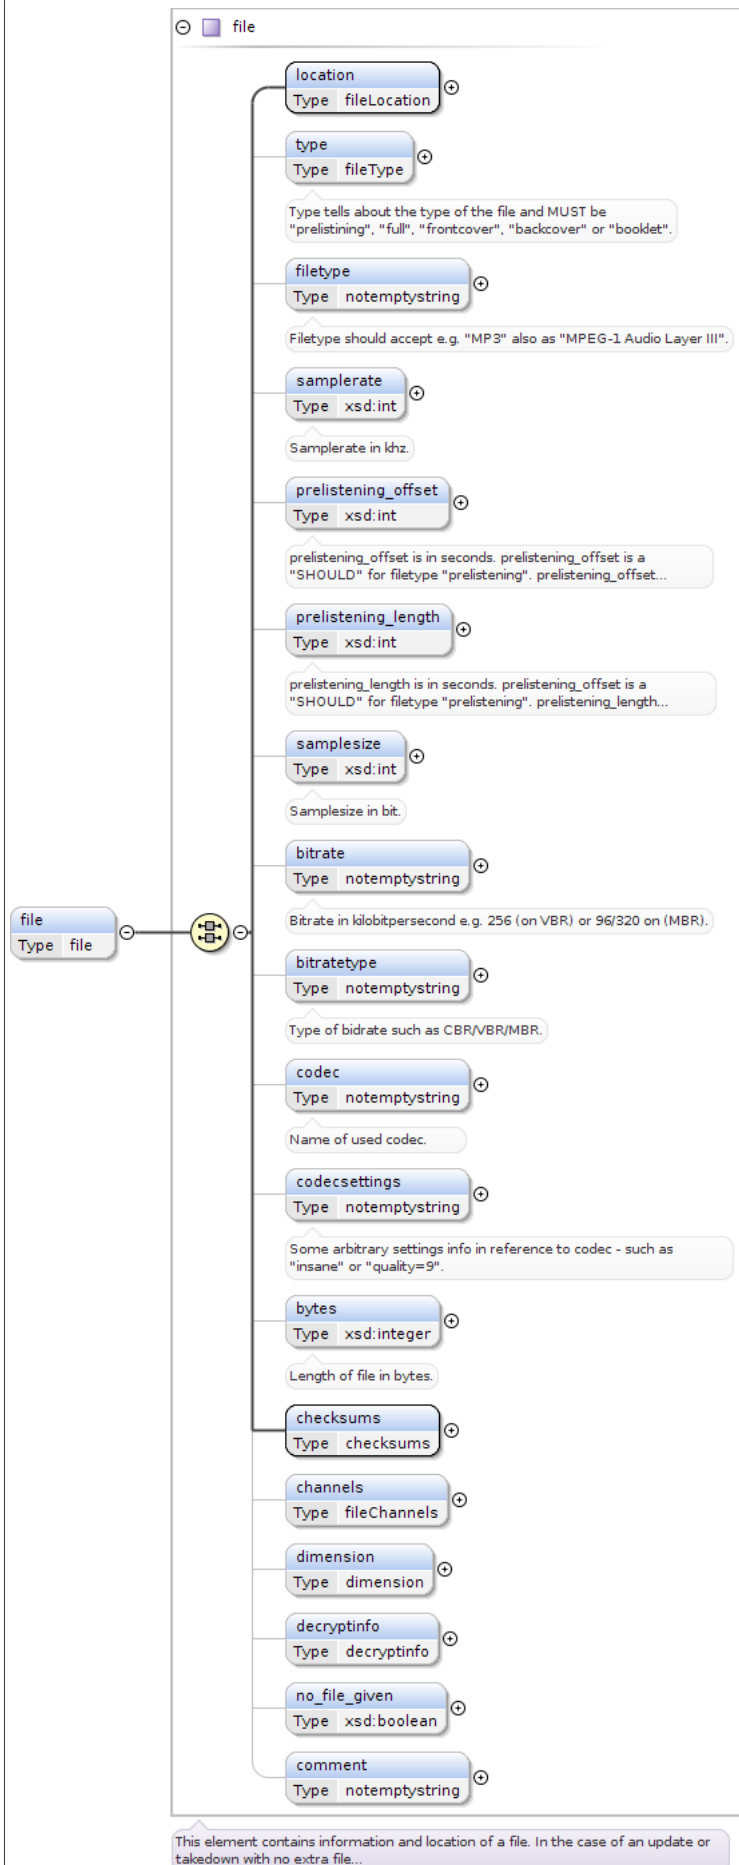
## Element bundle / files

Namespace	No namespace	
Diagram		
Type	files	
Properties	content:	complex
	minOccurs:	0
	maxOccurs:	1
Model	file*	
Children	file	
Instance	<pre>&lt;files&gt;   &lt;file&gt;{0,unbounded}&lt;/file&gt; &lt;/files&gt;</pre>	
Source	<xsd:element name="files" type="files" maxOccurs="1" minOccurs="0"/>	

## Element files / file

Namespace	No namespace
-----------	--------------

Diagram



Type	file
Properties	content: complex
	minOccurs: 0
	maxOccurs: unbounded
Model	ALL(location type{0,1} filetype{0,1} samplerate{0,1} prelistening_offset{0,1} prelistening_length{0,1} samplesize{0,1} bitrate{0,1} bitrate_type{0,1} codec{0,1} codecsettings{0,1} bytes{0,1} checksums channels{0,1} dimension{0,1} decryptinfo{0,1} no_file_given{0,1} comment{0,1})
Children	bitrate, bitrate_type, bytes, channels, checksums, codec, codecsettings, comment, decryptinfo, dimension, filetype, location, no_file_given, prelistening_length, prelistening_offset, samplerate, samplesize, type
Instance	<pre> &lt;file&gt;   &lt;location&gt;{1,1}&lt;/location&gt;   &lt;type&gt;{0,1}&lt;/type&gt;   &lt;filetype&gt;{0,1}&lt;/filetype&gt;   &lt;samplerate&gt;{0,1}&lt;/samplerate&gt;   &lt;prelistening_offset&gt;{0,1}&lt;/prelistening_offset&gt;   &lt;prelistening_length&gt;{0,1}&lt;/prelistening_length&gt;   &lt;samplesize&gt;{0,1}&lt;/samplesize&gt;   &lt;bitrate&gt;{0,1}&lt;/bitrate&gt;   &lt;bitrate_type&gt;{0,1}&lt;/bitrate_type&gt;   &lt;codec&gt;{0,1}&lt;/codec&gt;   &lt;codecsettings&gt;{0,1}&lt;/codecsettings&gt;   &lt;bytes&gt;{0,1}&lt;/bytes&gt;   &lt;checksums&gt;{1,1}&lt;/checksums&gt;   &lt;channels&gt;{0,1}&lt;/channels&gt;   &lt;dimension&gt;{0,1}&lt;/dimension&gt;   &lt;decryptinfo&gt;{0,1}&lt;/decryptinfo&gt;   &lt;no_file_given&gt;{0,1}&lt;/no_file_given&gt;   &lt;comment&gt;{0,1}&lt;/comment&gt; &lt;/file&gt; </pre>
Source	<code>&lt;xsd:element name="file" type="file" maxOccurs="unbounded" minOccurs="0"/&gt;</code>

## Element file / location

Namespace	No namespace
Diagram	
Type	fileLocation
Properties	content: complex
Model	ALL(origin_file{0,1} http{0,1} ftp{0,1} path{0,1})
Children	ftp, http, origin_file, path
Instance	<pre> &lt;location&gt;   &lt;origin_file&gt;{0,1}&lt;/origin_file&gt;   &lt;http&gt;{0,1}&lt;/http&gt;   &lt;ftp&gt;{0,1}&lt;/ftp&gt;   &lt;path&gt;{0,1}&lt;/path&gt; &lt;/location&gt; </pre>
Source	<code>&lt;xsd:element name="location" type="fileLocation"/&gt;</code>

## Element fileLocation / origin\_file

Namespace	No namespace
Diagram	

Type	notemptystring	
Properties	content:	simple
	minOccurs:	0
	maxOccurs:	1
Facets	minLength	1
Source	<xsd:element name="origin_file" type="notemptystring" maxOccurs="1" minOccurs="0"/>	

## Element fileLocation / http


Namespace	No namespace	
Diagram		
Type	fileHttp	
Type hierarchy	<ul style="list-style-type: none"> <li>action</li> <li>fileHttp</li> </ul>	
Properties	content:	complex
	minOccurs:	0
	maxOccurs:	1
Model	ALL(url user{0,1} pass{0,1} expiresdatetime)	
Children	expiresdatetime, pass, url, user	
Instance	<pre>&lt;http&gt;   &lt;url&gt;{1,1}&lt;/url&gt;   &lt;user&gt;{0,1}&lt;/user&gt;   &lt;pass&gt;{0,1}&lt;/pass&gt;   &lt;expiresdatetime&gt;{1,1}&lt;/expiresdatetime&gt; &lt;/http&gt;</pre>	
Source	<xsd:element name="http" type="fileHttp" maxOccurs="1" minOccurs="0"/>	

## Element fileHttp / url


Namespace	No namespace	
Diagram		
Type	url	
Properties	content:	simple
	minLength	1
	pattern	(http://.*\...*)  (https://.*\...*)
Source	<xsd:element name="url" type="url"/>	

## Element fileHttp / user


Namespace	No namespace	
-----------	--------------	--

Diagram							
Type	notemptystring						
Properties	<table> <tr><td>content:</td><td>simple</td></tr> <tr><td>minOccurs:</td><td>0</td></tr> <tr><td>maxOccurs:</td><td>1</td></tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	<table> <tr><td>minLength</td><td>1</td></tr> </table>	minLength	1				
minLength	1						
Source	<code>&lt;xsd:element name="user" type="notemptystring" maxOccurs="1" minOccurs="0"/&gt;</code>						

### Element fileHttp / pass

Namespace	No namespace						
Diagram							
Type	notemptystring						
Properties	<table> <tr><td>content:</td><td>simple</td></tr> <tr><td>minOccurs:</td><td>0</td></tr> <tr><td>maxOccurs:</td><td>1</td></tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	<table> <tr><td>minLength</td><td>1</td></tr> </table>	minLength	1				
minLength	1						
Source	<code>&lt;xsd:element name="pass" type="notemptystring" maxOccurs="1" minOccurs="0"/&gt;</code>						

### Element fileHttp / expiresdatetime

Namespace	No namespace		
Diagram			
Type	datetimeGMT		
Properties	<table> <tr><td>content:</td><td>simple</td></tr> </table>	content:	simple
content:	simple		
Facets	<table> <tr><td>pattern</td><td> \{4}-\{2}-\{2} \{2}:  \{2}:\{2} GMT\+\{2}:  \{2} </td></tr> </table>	pattern	\{4}-\{2}-\{2} \{2}: \{2}:\{2} GMT\+\{2}: \{2}
pattern	\{4}-\{2}-\{2} \{2}: \{2}:\{2} GMT\+\{2}: \{2}		
Source	<code>&lt;xsd:element name="expiresdatetime" type="datetimeGMT"/&gt;</code>		

### Element fileLocation / ftp

Namespace	No namespace
-----------	--------------

Diagram							
Type	fileFtp						
Type hierarchy	<ul style="list-style-type: none"> <li>• action</li> <li>• fileFtp</li> </ul>						
Properties	<table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>1</td></tr> </table>	content:	complex	minOccurs:	0	maxOccurs:	1
content:	complex						
minOccurs:	0						
maxOccurs:	1						
Model	ALL(server port path user{0,1} pass{0,1} expiresdatetime)						
Children	expiresdatetime, pass, path, port, server, user						
Instance	<pre> &lt;ftp&gt;   &lt;server&gt;{1,1}&lt;/server&gt;   &lt;port&gt;{1,1}&lt;/port&gt;   &lt;path&gt;{1,1}&lt;/path&gt;   &lt;user&gt;{0,1}&lt;/user&gt;   &lt;pass&gt;{0,1}&lt;/pass&gt;   &lt;expiresdatetime&gt;{1,1}&lt;/expiresdatetime&gt; &lt;/ftp&gt; </pre>						
Source	<code>&lt;xsd:element name="ftp" type="fileFtp" maxOccurs="1" minOccurs="0"/&gt;</code>						

## Element fileFtp / server


Namespace	No namespace
Diagram	
Type	notemptystring
Properties	content: simple
Facets	minLength 1
Source	<code>&lt;xsd:element name="server" type="notemptystring"/&gt;</code>

## Element fileFtp / port


Namespace	No namespace
Diagram	
Type	xsd:int

Properties	content: simple
Source	<code>&lt;xsd:element name="port" type="xsd:int"/&gt;</code>


### Element fileFtp / path

Namespace	No namespace
Diagram	
Type	notemptystring
Properties	content: simple
Facets	minLength 1
Source	<code>&lt;xsd:element name="path" type="notemptystring"/&gt;</code>


### Element fileFtp / user

Namespace	No namespace
Diagram	
Type	notemptystring
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	minLength 1
Source	<code>&lt;xsd:element name="user" type="notemptystring" maxOccurs="1" minOccurs="0"/&gt;</code>

### Element fileFtp / pass


Namespace	No namespace
Diagram	
Type	notemptystring
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	minLength 1
Source	<code>&lt;xsd:element name="pass" type="notemptystring" maxOccurs="1" minOccurs="0"/&gt;</code>

### Element fileFtp / expiresdatetime


Namespace	No namespace
Diagram	
Type	datetimeGMT
Properties	content: simple
Facets	pattern \d{4}-\d{2}-\d{2} \d{2}: \d{2}:\d{2} GMT\+\d{2}: \d{2}
Source	<code>&lt;xsd:element name="expiresdatetime" type="datetimeGMT"/&gt;</code>

### Element fileLocation / path


Namespace	No namespace
-----------	--------------

Diagram							
Type	notemptystring						
Properties	<table> <tr><td>content:</td><td>simple</td></tr> <tr><td>minOccurs:</td><td>0</td></tr> <tr><td>maxOccurs:</td><td>1</td></tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	<table> <tr><td>minLength</td><td>1</td></tr> </table>	minLength	1				
minLength	1						
Source	<code>&lt;xsd:element name="path" type="notemptystring" maxOccurs="1" minOccurs="0"/&gt;</code>						

## Element file / type


Namespace	No namespace										
Annotations	Type tells about the type of the file and MUST be "prelistening", "full", "frontcover", "backcover" or "booklet".										
Diagram											
Type	fileType										
Properties	<table> <tr><td>content:</td><td>simple</td></tr> <tr><td>minOccurs:</td><td>0</td></tr> <tr><td>maxOccurs:</td><td>1</td></tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1				
content:	simple										
minOccurs:	0										
maxOccurs:	1										
Facets	<table> <tr><td>enumeration</td><td>full</td></tr> <tr><td>enumeration</td><td>prelistening</td></tr> <tr><td>enumeration</td><td>frontcover</td></tr> <tr><td>enumeration</td><td>backcover</td></tr> <tr><td>enumeration</td><td>booklet</td></tr> </table>	enumeration	full	enumeration	prelistening	enumeration	frontcover	enumeration	backcover	enumeration	booklet
enumeration	full										
enumeration	prelistening										
enumeration	frontcover										
enumeration	backcover										
enumeration	booklet										
Source	<pre> &lt;xsd:element name="type" type="fileType" maxOccurs="1" minOccurs="0"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;Type tells about the type of the file and MUST be     "prelistening", "full", "frontcover", "backcover" or "booklet".&lt;/xsd:documentation&gt;   &lt;/xsd:annotation&gt; &lt;/xsd:element&gt; </pre>										

## Element file / filetype

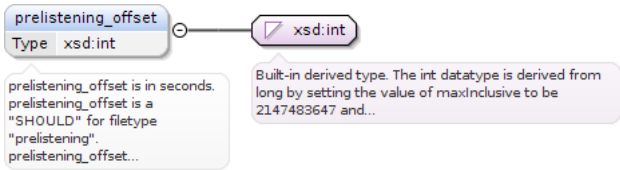
Namespace	No namespace						
Annotations	Filetype should accept e.g. "MP3" also as "MPEG-1 Audio Layer III".						
Diagram							
Type	notemptystring						
Properties	<table> <tr><td>content:</td><td>simple</td></tr> <tr><td>minOccurs:</td><td>0</td></tr> <tr><td>maxOccurs:</td><td>1</td></tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	<table> <tr><td>minLength</td><td>1</td></tr> </table>	minLength	1				
minLength	1						
Source	<pre> &lt;xsd:element name="filetype" type="notemptystring" maxOccurs="1" minOccurs="0"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;Filetype should accept e.g. "MP3" also as "MPEG-1 Audio Layer     III".&lt;/xsd:documentation&gt;   &lt;/xsd:annotation&gt; &lt;/xsd:element&gt; </pre>						



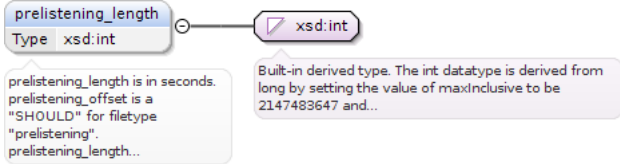
## Element file / samplerate

Namespace	No namespace						
Annotations	Samplerate in khz.						
Diagram							
Type	xsd:int						
Properties	<table><tr><td>content:</td><td>simple</td></tr><tr><td>minOccurs:</td><td>0</td></tr><tr><td>maxOccurs:</td><td>1</td></tr></table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Source	<pre>&lt;xsd:element name="samplerate" type="xsd:int" maxOccurs="1" minOccurs="0"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;Samplerate in khz.&lt;/xsd:documentation&gt;   &lt;/xsd:annotation&gt; &lt;/xsd:element&gt;</pre>						

## Element file / prelistening\_offset

Namespace	No namespace				
Annotations	prelistening_offset is in seconds. prelistening_offset is a "SHOULD" for filetype "prelistening". prelistening_offset is a MUST NOT for any other filetype.				
Diagram					
Type	xsd:int				
Properties	<table><tr><td>content:</td><td>simple</td></tr><tr><td>minOccurs:</td><td>0</td></tr></table>	content:	simple	minOccurs:	0
content:	simple				
minOccurs:	0				
Source	<pre>&lt;xsd:element minOccurs="0" name="prelistening_offset" type="xsd:int"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;prelistening_offset is in seconds. prelistening_offset is a "SHOULD" for filetype "prelistening". prelistening_offset is a MUST NOT for any other filetype.&lt;/ xsd:documentation&gt;   &lt;/xsd:annotation&gt; &lt;/xsd:element&gt;</pre>				

## Element file / prelistening\_length

Namespace	No namespace				
Annotations	prelistening_length is in seconds. prelistening_offset is a "SHOULD" for filetype "prelistening". prelistening_length is a MUST NOT for any other filetype.				
Diagram					
Type	xsd:int				
Properties	<table><tr><td>content:</td><td>simple</td></tr><tr><td>minOccurs:</td><td>0</td></tr></table>	content:	simple	minOccurs:	0
content:	simple				
minOccurs:	0				
Source	<pre>&lt;xsd:element minOccurs="0" name="prelistening_length" type="xsd:int"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;prelistening_length is in seconds. prelistening_offset is a "SHOULD" for filetype "prelistening". prelistening_length is a MUST NOT for any other filetype.&lt;/ xsd:documentation&gt;   &lt;/xsd:annotation&gt; &lt;/xsd:element&gt;</pre>				

```
</xsd:annotation>
</xsd:element>
```

## Element file / samplesize

Namespace	No namespace						
Annotations	Samplesize in bit.						
Diagram	<p>Diagram showing the 'samplesize' element with a type of 'xsd:int'. A note indicates it is a built-in derived type derived from 'xsd:int' by setting maxInclusive to 2147483647.</p>						
Type	xsd:int						
Properties	<table> <tr><td>content:</td><td>simple</td></tr> <tr><td>minOccurs:</td><td>0</td></tr> <tr><td>maxOccurs:</td><td>1</td></tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Source	<pre>&lt;xsd:element name="samplesize" type="xsd:int" maxOccurs="1" minOccurs="0"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;Samplesize in bit.&lt;/xsd:documentation&gt;   &lt;/xsd:annotation&gt; &lt;/xsd:element&gt;</pre>						

## Element file / bitrate


Namespace	No namespace						
Annotations	Bitrate in kilobitpersecond e.g. 256 (on VBR) or 96/320 on (MBR).						
Diagram	<p>Diagram showing the 'bitrate' element with a type of 'notemptystring'. A note indicates it is a type of bitrate in kilobitpersecond.</p>						
Type	notemptystring						
Properties	<table> <tr><td>content:</td><td>simple</td></tr> <tr><td>minOccurs:</td><td>0</td></tr> <tr><td>maxOccurs:</td><td>1</td></tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	<table> <tr><td>minLength</td><td>1</td></tr> </table>	minLength	1				
minLength	1						
Source	<pre>&lt;xsd:element name="bitrate" type="notemptystring" maxOccurs="1" minOccurs="0"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;Bitrate in kilobitpersecond e.g. 256 (on VBR) or 96/320 on     (MBR).&lt;/xsd:documentation&gt;   &lt;/xsd:annotation&gt; &lt;/xsd:element&gt;</pre>						

## Element file / bitratetype


Namespace	No namespace						
Annotations	Type of bidrate such as CBR/VBR/MBR.						
Diagram	<p>Diagram showing the 'bitratetype' element with a type of 'notemptystring'. A note indicates it is a type of bitrate such as CBR/VBR/MBR.</p>						
Type	notemptystring						
Properties	<table> <tr><td>content:</td><td>simple</td></tr> <tr><td>minOccurs:</td><td>0</td></tr> <tr><td>maxOccurs:</td><td>1</td></tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	<table> <tr><td>minLength</td><td>1</td></tr> </table>	minLength	1				
minLength	1						
Source	<pre>&lt;xsd:element name="bitratetype" type="notemptystring" maxOccurs="1" minOccurs="0"&gt;   &lt;xsd:annotation&gt;</pre>						

```
<xsd:documentation xml:lang="en">Type of bidrate such as CBR/VBR/MBR.</xsd:documentation>
</xsd:annotation>
</xsd:element>
```


## Element file / codec

Namespace	No namespace						
Annotations	Name of used codec.						
Diagram							
Type	notemptystring						
Properties	<table> <tr><td>content:</td><td>simple</td></tr> <tr><td>minOccurs:</td><td>0</td></tr> <tr><td>maxOccurs:</td><td>1</td></tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	<table> <tr><td>minLength</td><td>1</td></tr> </table>	minLength	1				
minLength	1						
Source	<pre>&lt;xsd:element name="codec" type="notemptystring" maxOccurs="1" minOccurs="0"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;Name of used codec.&lt;/xsd:documentation&gt;   &lt;/xsd:annotation&gt; &lt;/xsd:element&gt;</pre>						

## Element file / codecsettings

Namespace	No namespace						
Annotations	Some arbitrary settings info in reference to codec - such as "insane" or "quality=9".						
Diagram							
Type	notemptystring						
Properties	<table> <tr><td>content:</td><td>simple</td></tr> <tr><td>minOccurs:</td><td>0</td></tr> <tr><td>maxOccurs:</td><td>1</td></tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	<table> <tr><td>minLength</td><td>1</td></tr> </table>	minLength	1				
minLength	1						
Source	<pre>&lt;xsd:element name="codecsettings" type="notemptystring" maxOccurs="1" minOccurs="0"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;Some arbitrary settings info in reference to codec - such as     "insane" or "quality=9".&lt;/xsd:documentation&gt;   &lt;/xsd:annotation&gt; &lt;/xsd:element&gt;</pre>						

## Element file / bytes

Namespace	No namespace						
Annotations	Length of file in bytes.						
Diagram							
Type	xsd:integer						
Properties	<table> <tr><td>content:</td><td>simple</td></tr> <tr><td>minOccurs:</td><td>0</td></tr> <tr><td>maxOccurs:</td><td>1</td></tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Source	<pre>&lt;xsd:element name="bytes" type="xsd:integer" maxOccurs="1" minOccurs="0"&gt;   &lt;xsd:annotation&gt;</pre>						

```
<xsd:documentation xml:lang="en">Length of file in bytes.</xsd:documentation>
</xsd:annotation>
</xsd:element>
```

## Element file / checksums

Namespace	No namespace
Diagram	
Type	checksums
Properties	content: complex
Model	ALL(md5{0,1} sha1{0,1} sha256{0,1})
Children	md5, sha1, sha256
Instance	<pre>&lt;checksums&gt;   &lt;md5&gt;{0,1}&lt;/md5&gt;   &lt;sha1&gt;{0,1}&lt;/sha1&gt;   &lt;sha256&gt;{0,1}&lt;/sha256&gt; &lt;/checksums&gt;</pre>
Source	<code>&lt;xsd:element name="checksums" type="checksums" /&gt;</code>

## Element checksums / md5


Namespace	No namespace						
Diagram							
Type	md5						
Type hierarchy	<ul style="list-style-type: none"> <li>xsd:string</li> <li>notemptystring</li> <li>md5</li> </ul>						
Properties	<table> <tr> <td>content:</td><td>simple</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>1</td></tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	<table> <tr> <td>minLength</td><td>8</td></tr> <tr> <td>pattern</td><td>(([A-F0-9]{2}):){15}[A-F0-9]{2}) ([a-f0-9]{32})</td></tr> </table>	minLength	8	pattern	(([A-F0-9]{2}):){15}[A-F0-9]{2}) ([a-f0-9]{32})		
minLength	8						
pattern	(([A-F0-9]{2}):){15}[A-F0-9]{2}) ([a-f0-9]{32})						
Source	<code>&lt;xsd:element name="md5" type="md5" maxOccurs="1" minOccurs="0" /&gt;</code>						

## Element checksums / sha1


Namespace	No namespace
Diagram	
Type	sha1
Type hierarchy	<ul style="list-style-type: none"> <li>xsd:string</li> <li>notemptystring</li> <li>sha1</li> </ul>

Properties	content:	simple
	minOccurs:	0
	maxOccurs:	1
Facets	minLength	8
	pattern	(([A-F0-9]{2}:){19}[A-F0-9]{2}) ([a-f0-9]{40})
Source	<xsd:element name="sha1" type="sha1" maxOccurs="1" minOccurs="0"/>	

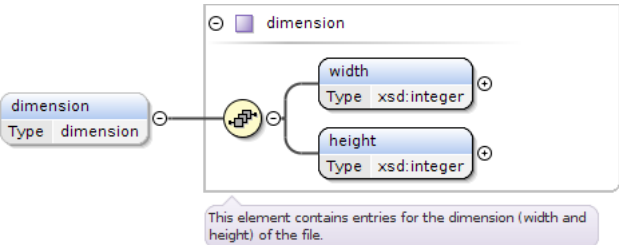
## Element checksums / sha256

Namespace	No namespace	
Diagram		
Type	sha256	
Type hierarchy	<ul style="list-style-type: none"> <li>xsd:string</li> <li>notemptystring</li> <li>sha256</li> </ul>	
Properties	content:	simple
	minOccurs:	0
	maxOccurs:	1
Facets	minLength	8
	pattern	([A-F0-9]{2}:){31}[A-F0-9]{2}
Source	<xsd:element name="sha256" type="sha256" maxOccurs="1" minOccurs="0"/>	

## Element file / channels

Namespace	No namespace	
Diagram		
Type	fileChannels	
Properties	content:	simple
	minOccurs:	0
	maxOccurs:	1
Facets	enumeration	mono
	enumeration	stereo
	enumeration	joint-stereo
	enumeration	5.1
Source	<xsd:element name="channels" type="fileChannels" maxOccurs="1" minOccurs="0"/>	

## Element file / dimension

Namespace	No namespace	
Diagram		

Type	dimension
Properties	content: complex
	minOccurs: 0
	maxOccurs: 1
Model	width , height
Children	height, width
Instance	<pre>&lt;dimension&gt;   &lt;width&gt;{1,1}&lt;/width&gt;   &lt;height&gt;{1,1}&lt;/height&gt; &lt;/dimension&gt;</pre>
Source	<code>&lt;xsd:element name="dimension" type="dimension" maxOccurs="1" minOccurs="0"/&gt;</code>

## Element dimension / width

Namespace	No namespace
Diagram	
Type	xsd:integer
Properties	content: simple
Source	<code>&lt;xsd:element name="width" type="xsd:integer"/&gt;</code>

## Element dimension / height

Namespace	No namespace
Diagram	
Type	xsd:integer
Properties	content: simple
Source	<code>&lt;xsd:element name="height" type="xsd:integer"/&gt;</code>

## Element file / decryptinfo

Namespace	No namespace
Diagram	
Type	decryptinfo
Properties	content: complex

	minOccurs: 0 maxOccurs: 1
Model	ALL(cipher{0,1} initvector{0,1} key{0,1} bytes{0,1} checksums{0,1})
Children	bytes, checksums, cipher, initvector, key
Instance	<pre>&lt;decryptinfo&gt;   &lt;cipher&gt;{0,1}&lt;/cipher&gt;   &lt;initvector&gt;{0,1}&lt;/initvector&gt;   &lt;key&gt;{0,1}&lt;/key&gt;   &lt;bytes&gt;{0,1}&lt;/bytes&gt;   &lt;checksums&gt;{0,1}&lt;/checksums&gt; &lt;/decryptinfo&gt;</pre>
Source	<code>&lt;xsd:element name="decryptinfo" type="decryptinfo" maxOccurs="1" minOccurs="0"/&gt;</code>

## Element decryptinfo / cipher

Namespace	No namespace
Annotations	Contains info about the cipher for decryption like AES, RIJNDAEL, XOR, Arcfour, whatever - should be "convenient".
Diagram	<p>The diagram shows a box labeled 'cipher' with a sub-label 'Type notemptystring'. A line connects this box to a constraint box labeled 'notemptystring'. A callout box points to the 'cipher' box with the text: 'Contains info about the cipher for decryption like AES, RIJNDAEL, XOR, Arcfour, whatever - should be "convenient".'</p>
Type	notemptystring
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	minLength 1
Source	<pre>&lt;xsd:element name="cipher" type="notemptystring" minOccurs="0" maxOccurs="1"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;Contains info about the cipher for decryption like AES,     RIJNDAEL, XOR, Arcfour, whatever - should be "convenient".&lt;/xsd:documentation&gt;   &lt;/xsd:annotation&gt; &lt;/xsd:element&gt;</pre>

## Element decryptinfo / initvector


Namespace	No namespace
Diagram	<p>The diagram shows a box labeled 'initvector' with a sub-label 'Type notemptystring'. A line connects this box to a constraint box labeled 'notemptystring'.</p>
Type	notemptystring
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	minLength 1
Source	<code>&lt;xsd:element name="initvector" type="notemptystring" minOccurs="0" maxOccurs="1"/&gt;</code>

## Element decryptinfo / key

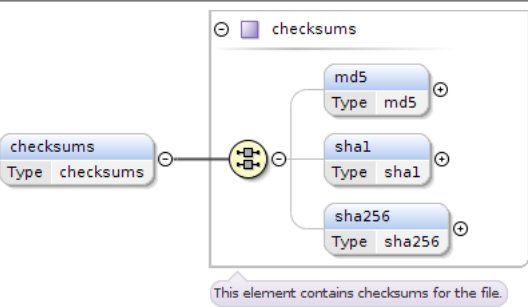
Namespace	No namespace
Diagram	<p>The diagram shows a box labeled 'key' with a sub-label 'Type notemptystring'. A line connects this box to a constraint box labeled 'notemptystring'.</p>
Type	notemptystring
Properties	content: simple minOccurs: 0

	maxOccurs:	1
Facets	minLength	1
Source	<code>&lt;xsd:element name="key" type="notemptystring" minOccurs="0" maxOccurs="1"/&gt;</code>	


## Element decryptinfo / bytes

Namespace	No namespace	
Diagram		
Type	notemptystring	
Properties	content:	simple
	minOccurs:	0
	maxOccurs:	1
Facets	minLength	1
Source	<code>&lt;xsd:element name="bytes" type="notemptystring" minOccurs="0" maxOccurs="1"/&gt;</code>	

## Element decryptinfo / checksums


Namespace	No namespace	
Diagram		
Type	checksums	
Properties	content:	complex
	minOccurs:	0
	maxOccurs:	1
Model	ALL(md5{0,1} sha1{0,1} sha256{0,1})	
Children	md5, sha1, sha256	
Instance	<pre>&lt;checksums&gt;   &lt;md5&gt;{0,1}&lt;/md5&gt;   &lt;sha1&gt;{0,1}&lt;/sha1&gt;   &lt;sha256&gt;{0,1}&lt;/sha256&gt; &lt;/checksums&gt;</pre>	
Source	<code>&lt;xsd:element name="checksums" type="checksums" minOccurs="0" maxOccurs="1"/&gt;</code>	

## Element file / no\_file\_given

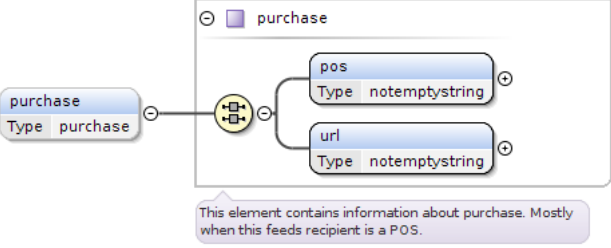
Namespace	No namespace	
Diagram		
Type	xsd:boolean	
Properties	content:	simple
	minOccurs:	0
	maxOccurs:	1
Source	<code>&lt;xsd:element name="no_file_given" type="xsd:boolean" maxOccurs="1" minOccurs="0"/&gt;</code>	




## Element file / comment

Namespace	No namespace
Diagram	
Type	notemptystring
Properties	content: simple minOccurs: 0
Facets	minLength 1
Source	<code>&lt;xsd:element name="comment" minOccurs="0" type="notemptystring"/&gt;</code>


## Element bundle / purchase

Namespace	No namespace
Diagram	
Type	purchase
Properties	content: complex minOccurs: 0 maxOccurs: 1
Model	ALL(pos url)
Children	pos, url
Instance	<pre>&lt;purchase&gt;   &lt;pos&gt;{1,1}&lt;/pos&gt;   &lt;url&gt;{1,1}&lt;/url&gt; &lt;/purchase&gt;</pre>
Source	<code>&lt;xsd:element name="purchase" type="purchase" maxOccurs="1" minOccurs="0"/&gt;</code>

## Element purchase / pos

Namespace	No namespace
Diagram	
Type	notemptystring
Properties	content: simple
Facets	minLength 1
Source	<code>&lt;xsd:element name="pos" type="notemptystring"/&gt;</code>

## Element purchase / url

Namespace	No namespace
Diagram	
Type	notemptystring
Properties	content: simple
Facets	minLength 1

Source	<code>&lt;xsd:element name="url" type="notemptystring"/&gt;</code>
--------	--

## Element item / license\_basis

Namespace	No namespace
Diagram	
Type	license_basis_item
Properties	content: complex
Model	ALL(territorial{0,1} timeframe{0,1} pricing{0,1} streaming_allowed{0,1} channels{0,1} as_on_bundle{0,1})
Children	as_on_bundle, channels, pricing, streaming_allowed, territorial, timeframe
Instance	<pre> &lt;license_basis&gt;   &lt;territorial&gt;{0,1}&lt;/territorial&gt;   &lt;timeframe&gt;{0,1}&lt;/timeframe&gt;   &lt;pricing&gt;{0,1}&lt;/pricing&gt;   &lt;streaming_allowed&gt;{0,1}&lt;/streaming_allowed&gt;   &lt;channels&gt;{0,1}&lt;/channels&gt;   &lt;as_on_bundle&gt;{0,1}&lt;/as_on_bundle&gt; &lt;/license_basis&gt; </pre>
Source	<code>&lt;xsd:element name="license_basis" type="license_basis_item"/&gt;</code>

## Element license\_basis\_item / territorial

Namespace	No namespace
Diagram	
Type	territorial
Properties	content: complex minOccurs: 0 maxOccurs: 1
Model	territory*
Children	territory
Instance	<pre> &lt;territorial&gt;   &lt;territory type=""&gt;{0,unbounded}&lt;/territory&gt; &lt;/territorial&gt; </pre>
Source	<code>&lt;xsd:element name="territorial" type="territorial" maxOccurs="1" minOccurs="0" /&gt;</code>

## Element license\_basis\_item / timeframe

Namespace	No namespace
-----------	--------------

Diagram							
Type	timeframe						
Properties	<table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>1</td></tr> </table>	content:	complex	minOccurs:	0	maxOccurs:	1
content:	complex						
minOccurs:	0						
maxOccurs:	1						
Model	from , to						
Children	from, to						
Instance	<pre>&lt;timeframe&gt;   &lt;from&gt;{1,1}&lt;/from&gt;   &lt;to&gt;{1,1}&lt;/to&gt; &lt;/timeframe&gt;</pre>						
Source	<code>&lt;xsd:element name="timeframe" type="timeframe" maxOccurs="1" minOccurs="0"/&gt;</code>						

### Element license\_basis\_item / pricing

Namespace	No namespace						
Diagram							
Type	pricing						
Properties	<table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>1</td></tr> </table>	content:	complex	minOccurs:	0	maxOccurs:	1
content:	complex						
minOccurs:	0						
maxOccurs:	1						
Model	ALL(pricecode{0,1} wholesale{0,1})						
Children	pricecode, wholesale						
Instance	<pre>&lt;pricing&gt;   &lt;pricecode&gt;{0,1}&lt;/pricecode&gt;   &lt;wholesale&gt;{0,1}&lt;/wholesale&gt; &lt;/pricing&gt;</pre>						
Source	<code>&lt;xsd:element name="pricing" type="pricing" maxOccurs="1" minOccurs="0"/&gt;</code>						

### Element license\_basis\_item / streaming\_allowed

Namespace	No namespace						
Diagram							
Type	xsd:boolean						
Properties	<table> <tr> <td>content:</td><td>simple</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>1</td></tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						

Source	<code>&lt;xsd:element name="streaming_allowed" type="xsd:boolean" maxOccurs="1" minOccurs="0"/&gt;</code>
--------	---

## Element license\_basis\_item / channels

Namespace	No namespace						
Diagram							
Type	channels						
Properties	<table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>1</td></tr> </table>	content:	complex	minOccurs:	0	maxOccurs:	1
content:	complex						
minOccurs:	0						
maxOccurs:	1						
Model	channel*						
Children	channel						
Instance	<pre>&lt;channels&gt;   &lt;channel type=""&gt;{0,unbounded}&lt;/channel&gt; &lt;/channels&gt;</pre>						
Source	<code>&lt;xsd:element name="channels" type="channels" maxOccurs="1" minOccurs="0"/&gt;</code>						

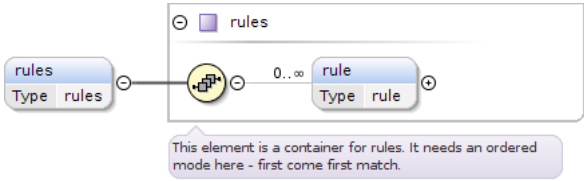
## Element license\_basis\_item / as\_on\_bundle

Namespace	No namespace						
Diagram							
Type	xsd:boolean						
Properties	<table> <tr> <td>content:</td><td>simple</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>1</td></tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Source	<code>&lt;xsd:element name="as_on_bundle" type="xsd:boolean" maxOccurs="1" minOccurs="0"/&gt;</code>						


## Element item / license\_specifics

Namespace	No namespace		
Diagram			
Type	license_specifics_item		
Properties	<table> <tr> <td>content:</td><td>complex</td></tr> </table>	content:	complex
content:	complex		
Model	rules{0,1}   as_on_bundle{0,1}		
Children	as_on_bundle, rules		
Instance	<pre>&lt;license_specifics&gt;   &lt;rules&gt;{0,1}&lt;/rules&gt;   &lt;as_on_bundle&gt;{0,1}&lt;/as_on_bundle&gt; &lt;/license_specifics&gt;</pre>		
Source	<code>&lt;xsd:element name="license_specifics" type="license_specifics_item"/&gt;</code>		

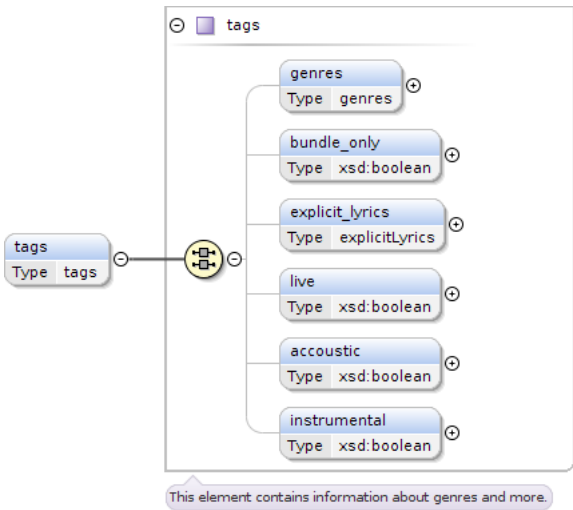
## Element license\_specifics\_item / rules

Namespace	No namespace						
Diagram							
Type	rules						
Properties	<table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>1</td></tr> </table>	content:	complex	minOccurs:	0	maxOccurs:	1
content:	complex						
minOccurs:	0						
maxOccurs:	1						
Model	rule*						
Children	rule						
Instance	<pre>&lt;rules&gt;   &lt;rule num=" "&gt;{0,unbounded}&lt;/rule&gt; &lt;/rules&gt;</pre>						
Source	<code>&lt;xsd:element name="rules" type="rules" maxOccurs="1" minOccurs="0"/&gt;</code>						

## Element license\_specifics\_item / as\_on\_bundle

Namespace	No namespace						
Diagram							
Type	xsd:boolean						
Properties	<table> <tr> <td>content:</td><td>simple</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>1</td></tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Source	<code>&lt;xsd:element name="as_on_bundle" type="xsd:boolean" maxOccurs="1" minOccurs="0"/&gt;</code>						

## Element item / tags

Namespace	No namespace				
Diagram					
Type	tags				
Properties	<table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> </table>	content:	complex	minOccurs:	0
content:	complex				
minOccurs:	0				

	maxOccurs: 1
Model	ALL(genres{0,1} bundle_only{0,1} explicit_lyrics{0,1} live{0,1} acoustic{0,1} instrumental{0,1})
Children	acoustic, bundle_only, explicit_lyrics, genres, instrumental, live
Instance	<pre>&lt;tags&gt;   &lt;genres&gt;{0,1}&lt;/genres&gt;   &lt;bundle_only&gt;{0,1}&lt;/bundle_only&gt;   &lt;explicit_lyrics&gt;{0,1}&lt;/explicit_lyrics&gt;   &lt;live&gt;{0,1}&lt;/live&gt;   &lt;acoustic&gt;{0,1}&lt;/acoustic&gt;   &lt;instrumental&gt;{0,1}&lt;/instrumental&gt; &lt;/tags&gt;</pre>
Source	<code>&lt;xsd:element name="tags" type="tags" maxOccurs="1" minOccurs="0"/&gt;</code>

## Element item / fingerprint

Namespace	No namespace						
Diagram							
Type	fingerprint						
Properties	<table> <tr><td>content:</td><td>complex</td></tr> <tr><td>minOccurs:</td><td>0</td></tr> <tr><td>maxOccurs:</td><td>1</td></tr> </table>	content:	complex	minOccurs:	0	maxOccurs:	1
content:	complex						
minOccurs:	0						
maxOccurs:	1						
Model	echoprint{0,1}						
Children	echoprint						
Instance	<pre>&lt;fingerprint&gt;   &lt;echoprint&gt;{0,1}&lt;/echoprint&gt; &lt;/fingerprint&gt;</pre>						
Source	<code>&lt;xsd:element name="fingerprint" type="fingerprint" maxOccurs="1" minOccurs="0"/&gt;</code>						

## Element fingerprint / echoprint

Namespace	No namespace						
Diagram							
Type	xsd:string						
Properties	<table> <tr><td>content:</td><td>simple</td></tr> <tr><td>minOccurs:</td><td>0</td></tr> <tr><td>maxOccurs:</td><td>1</td></tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Source	<code>&lt;xsd:element name="echoprint" type="xsd:string" maxOccurs="1" minOccurs="0"/&gt;</code>						

## Element item / reporting

Namespace	No namespace
Diagram	

Type	reporting
Properties	content: complex
	minOccurs: 0
	maxOccurs: 1
Model	ALL(realtime postponed)
Children	postponed, realtime
Instance	<pre>&lt;reporting&gt;   &lt;realtime&gt;{1,1}&lt;/realtime&gt;   &lt;postponed&gt;{1,1}&lt;/postponed&gt; &lt;/reporting&gt;</pre>
Source	<code>&lt;xsd:element name="reporting" type="reporting" maxOccurs="1" minOccurs="0"/&gt;</code>

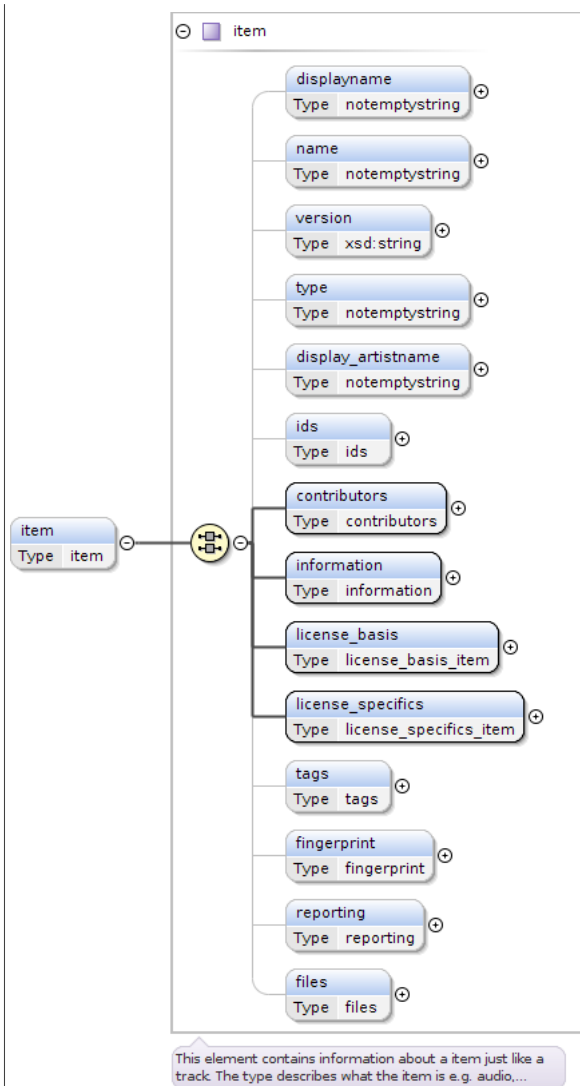
## Element item / files

Namespace	No namespace
Diagram	
Type	files
Properties	content: complex
	minOccurs: 0
	maxOccurs: 1
Model	file*
Children	file
Instance	<pre>&lt;files&gt;   &lt;file&gt;{0,unbounded}&lt;/file&gt; &lt;/files&gt;</pre>
Source	<code>&lt;xsd:element name="files" type="files" maxOccurs="1" minOccurs="0"/&gt;</code>

## Element feed / item

Namespace	No namespace
-----------	--------------

Diagram



Type	item
Properties	content: complex
	minOccurs: 0
	maxOccurs: unbounded
Model	ALL(displayname{0,1} name{0,1} version{0,1} type{0,1} display_artistname{0,1} ids{0,1} contributors information license_basis license_specifics tags{0,1} fingerprint{0,1} reporting{0,1} files{0,1})
Children	contributors, display_artistname, displayname, files, fingerprint, ids, information, license_basis, license_specifics, name, reporting, tags, type, version
Instance	<pre> &lt;item&gt;   &lt;displayname&gt;{0,1}&lt;/displayname&gt;   &lt;name&gt;{0,1}&lt;/name&gt;   &lt;version&gt;{0,1}&lt;/version&gt;   &lt;type&gt;{0,1}&lt;/type&gt;   &lt;display_artistname&gt;{0,1}&lt;/display_artistname&gt;   &lt;ids&gt;{0,1}&lt;/ids&gt;   &lt;contributors&gt;{1,1}&lt;/contributors&gt;   &lt;information&gt;{1,1}&lt;/information&gt;   &lt;license_basis&gt;{1,1}&lt;/license_basis&gt;   &lt;license_specifics&gt;{1,1}&lt;/license_specifics&gt;   &lt;tags&gt;{0,1}&lt;/tags&gt;   &lt;fingerprint&gt;{0,1}&lt;/fingerprint&gt;   &lt;reporting&gt;{0,1}&lt;/reporting&gt;   &lt;files&gt;{0,1}&lt;/files&gt; &lt;/item&gt; </pre>
Source	<xsd:element name="item" type="item" maxOccurs="unbounded" minOccurs="0"/>



## Complex Type(s)

### Complex Type feedinfo

Namespace	No namespace
Annotations	<p>On feedinfo-level there are the global information needed or at least valuable for ingesting / identifying the content sent.</p> <p>It is defined, when the feed was created, when it shall be come effective, who created the feed and who is the receiver of the feed. Also the sender (which can diverge from the creator) is to be stated.</p> <p>The licensor is also to be stated (which in turn can also diverge from the creator and/or the sender).</p> <p>There can be "actions" defined on the receiving-party's side which should be "done" when initially receiving this feed, or starting to process the feed for ingestion or finishing the feeds processing.</p> <p>Additionally when everything could be interpreted correctly (in the sense of the receiving party), a "full-success-action" could be issued; likewise if "some error" occurred while processing the feed, an "onerror-action" could be issued.</p> <p>Those actions are initially defined to be email-notifications or http-calls; we also included some action to have a "registered letter" and/or "fax" to be sent; wether this is accepted/handled by the receiving party is to be dealt with contractually (we included a field for stating how much the sending party will cover the fee max.).</p>
Diagram	
Used by	Element feed/feedinfo
Model	ALL(onlytest feedid creationdatetime effectivedatetime creator{0,1} receiver sender licensor licensee actions{0,1})
Children	actions, creationdatetime, creator, effectivedatetime, feedid, licensee, licensor, onlytest, receiver, sender
Source	<pre> &lt;xsd:complexType name="feedinfo"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;On feedinfo-level there are the global information needed or at least valuable for ingesting / identifying the content sent. It is defined, when the feed was created, when it shall be come effective, who created the feed and who is the receiver of the feed. Also the sender (which can diverge from the creator) is to be stated. The licensor is also to be stated (which in turn can also diverge from the creator and/or the sender). There can be "actions" defined on the receiving-party's side which should be "done" when initially receiving this feed, or starting to process the feed for ingestion or finishing the feeds processing. Additionally when everything could be interpreted correctly (in the sense of the receiving party), a "full-success- action" could be issued; likewise if "some error" occurred while processing the feed, an "onerror- action" could be issued. Those actions are initially defined to be email-notifications or http- calls; we also included some action to have a "registered letter" and/or "fax" to be sent; wether this is accepted/handled by the receiving party is to be dealt with contractually (we included a field for stating how much the sending party will cover the fee max.).&lt;/xsd:documentation&gt;     &lt;/xsd:annotation&gt;   &lt;xsd:all&gt;     &lt;xsd:element name="onlytest" type="xsd:boolean"/&gt;     &lt;xsd:element name="feedid" type="notemptystring"/&gt;     &lt;xsd:element name="creationdatetime" type="datetimeGMT"/&gt; </pre>

```
<xsd:element name="effectivedatetime" type="datetimeGMT"/>
<xsd:element name="creator" type="creator" maxOccurs="1" minOccurs="0"/>
<xsd:element name="receiver" type="receiver"/>
<xsd:element name="sender" type="sender"/>
<xsd:element name="licensor" type="licensor"/>
<xsd:element name="licensee" type="licensee"/>
<xsd:element name="actions" type="actions" maxOccurs="1" minOccurs="0"/>
</xsd:all>
</xsd:complexType>
```

## Complex Type creator

Namespace	No namespace
Annotations	This element contains information about the creator of that feed.
Diagram	
Used by	Element feedinfo/creator
Model	ALL(email userid{0,1} keyid{0,1})
Children	email, keyid, userid
Source	<pre>&lt;xsd:complexType name="creator"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;This element contains information about the creator of that     feed.&lt;/xsd:documentation&gt;   &lt;/xsd:annotation&gt;   &lt;xsd:all&gt;     &lt;xsd:element name="email" type="email"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation xml:lang="en"&gt;Content should be an email-address of the *user* on the         sending side.&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:element&gt;     &lt;xsd:element name="userid" type="userid" maxOccurs="1" minOccurs="0"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation xml:lang="en"&gt;This should be a unique id of the *user* on the sending         side.&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:element&gt;     &lt;xsd:element name="keyid" type="notemptystring" maxOccurs="1" minOccurs="0"/&gt;   &lt;/xsd:all&gt; &lt;/xsd:complexType&gt;</pre>

## Complex Type receiver

Namespace	No namespace
Annotations	This element contains information about the receiver of that feed.

Diagram	
Used by	Element feedinfo/receiver
Model	ALL(type servername serveripv4 serveripv6{0,1} authtype username{0,1} crypto{0,1} keyid{0,1})
Children	authtype, crypto, keyid, serveripv4, serveripv6, servername, type, username
Source	<pre> &lt;xsd:complexType name="receiver"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;This element contains information about the receiver of that feed.&lt;/xsd:documentation&gt;   &lt;/xsd:annotation&gt;   &lt;xsd:all&gt;     &lt;xsd:element name="type" type="receivertypes"/&gt;     &lt;xsd:element name="servername" type="iporhostname"/&gt;     &lt;xsd:element name="serveripv4" type="ipv4"/&gt;     &lt;xsd:element name="serveripv6" type="ipv6" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="authtype" type="authtype"/&gt;     &lt;xsd:element name="username" type="notemptystring" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="crypto" type="crypto" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="keyid" type="notemptystring" maxOccurs="1" minOccurs="0"/&gt;   &lt;/xsd:all&gt; &lt;/xsd:complexType&gt; </pre>

## Complex Type crypto

Namespace	No namespace
Annotations	This element contains crypto information for secure and authenticated transfer.
Diagram	
Used by	Element receiver/crypto
Model	ALL(relatedemail{0,1} usedkeyid{0,1} usedpubkey{0,1})
Children	relatedemail, usedkeyid, usedpubkey
Source	<pre> &lt;xsd:complexType name="crypto"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;This element contains crypto information for secure and authenticated transfer.&lt;/xsd:documentation&gt;   &lt;/xsd:annotation&gt;   &lt;xsd:all&gt;     &lt;xsd:element name="relatedemail" type="email" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="usedkeyid" type="keyid" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="usedpubkey" type="xsd:base64Binary" maxOccurs="1" minOccurs="0"/&gt;   &lt;/xsd:all&gt; &lt;/xsd:complexType&gt; </pre>

## Complex Type sender

Namespace	No namespace
Annotations	This element contains information about the sender of that feed.
Diagram	
Used by	Element feedinfo/sender
Model	ALL(contractpartnerid ourcontractpartnerid email{0,1} keyid{0,1})
Children	contractpartnerid, email, keyid, ourcontractpartnerid
Source	<pre> &lt;xsd:complexType name="sender"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;This element contains information about the sender of that     feed.&lt;/xsd:documentation&gt;   &lt;/xsd:annotation&gt;   &lt;xsd:all&gt;     &lt;xsd:element name="contractpartnerid" type="notemptystring"/&gt;     &lt;xsd:element name="ourcontractpartnerid" type="notemptystring"/&gt;     &lt;xsd:element name="email" type="email" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="keyid" type="notemptystring" maxOccurs="1" minOccurs="0"/&gt;   &lt;/xsd:all&gt; &lt;/xsd:complexType&gt; </pre>

## Complex Type licensord

Namespace	No namespace
Annotations	This element contains information about the licensord of that feed.
Diagram	
Used by	Element feedinfo/licensord
Model	ALL(contractpartnerid ourcontractpartnerid email{0,1} keyid{0,1})
Children	contractpartnerid, email, keyid, ourcontractpartnerid
Source	<pre> &lt;xsd:complexType name="licensord"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;This element contains information about the licensord of that     feed.&lt;/xsd:documentation&gt;   &lt;/xsd:annotation&gt;   &lt;xsd:all&gt;     &lt;xsd:element name="contractpartnerid" type="notemptystring"/&gt;     &lt;xsd:element name="ourcontractpartnerid" type="notemptystring"/&gt;     &lt;xsd:element name="email" type="email" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="keyid" type="notemptystring" maxOccurs="1" minOccurs="0"/&gt;   &lt;/xsd:all&gt; &lt;/xsd:complexType&gt; </pre>

## Complex Type licensee

Namespace	No namespace
Annotations	This element contains information about the licensee of that feed.

Diagram	
Used by	Element feedinfo/licensee
Model	ALL(contractpartnerid ourcontractpartnerid email{0,1} keyid{0,1})
Children	contractpartnerid, email, keyid, ourcontractpartnerid
Source	<pre> &lt;xsd:complexType name="licensee"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;This element contains information about the licensee of that feed.&lt;/xsd:documentation&gt;   &lt;/xsd:annotation&gt;   &lt;xsd:all&gt;     &lt;xsd:element name="contractpartnerid" type="notemptystring"/&gt;     &lt;xsd:element name="ourcontractpartnerid" type="notemptystring"/&gt;     &lt;xsd:element name="email" type="email" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="keyid" type="notemptystring" maxOccurs="1" minOccurs="0"/&gt;   &lt;/xsd:all&gt; &lt;/xsd:complexType&gt; </pre>

## Complex Type actions

Namespace	No namespace
Annotations	This element contains information about possible actions with the feed.
Diagram	
Used by	Element feedinfo/actions
Model	ALL(oninitialreceive{0,1} onprocessstart{0,1} onprocesssend{0,1} onfullsuccess{0,1} onerror{0,1})
Children	onerror, onfullsuccess, oninitialreceive, onprocesssend, onprocessstart
Source	<pre> &lt;xsd:complexType name="actions"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;This element contains information about possible actions with the feed.&lt;/xsd:documentation&gt;   &lt;/xsd:annotation&gt;   &lt;xsd:all&gt;     &lt;xsd:element name="oninitialreceive" type="event" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="onprocessstart" type="event" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="onprocesssend" type="event" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="onfullsuccess" type="event" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="onerror" type="event" maxOccurs="1" minOccurs="0"/&gt;   &lt;/xsd:all&gt; &lt;/xsd:complexType&gt; </pre>

## Complex Type event

Namespace	No namespace
Annotations	This element contains information about possible events and actions.


Diagram					
Used by	<table> <tr> <td>Elements</td><td>actions/onerror, actions/onfullsuccess, actions/oninitialreceive, actions/onprocessend, actions/onprocessstart</td></tr> <tr> <td>Complex Types</td><td>onerror, onfullsuccess, oninitialreceive, onprocessend, onprocessstart</td></tr> </table>	Elements	actions/onerror, actions/onfullsuccess, actions/oninitialreceive, actions/onprocessend, actions/onprocessstart	Complex Types	onerror, onfullsuccess, oninitialreceive, onprocessend, onprocessstart
Elements	actions/onerror, actions/onfullsuccess, actions/oninitialreceive, actions/onprocessend, actions/onprocessstart				
Complex Types	onerror, onfullsuccess, oninitialreceive, onprocessend, onprocessstart				
Model	mailto*, http*, fax*, letter*, nothing{0,1}				
Children	fax, http, letter, mailto, nothing				
Source	<pre> &lt;xsd:complexType name="event"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;This element contains information about possible events and actions.&lt;/xsd:documentation&gt;   &lt;/xsd:annotation&gt;   &lt;xsd:sequence&gt;     &lt;xsd:element name="mailto" type="mailto" minOccurs="0" maxOccurs="unbounded"/&gt;     &lt;xsd:element name="http" type="http" minOccurs="0" maxOccurs="unbounded"/&gt;     &lt;xsd:element name="fax" type="fax" minOccurs="0" maxOccurs="unbounded"/&gt;     &lt;xsd:element name="letter" type="letter" minOccurs="0" maxOccurs="unbounded"/&gt;     &lt;xsd:element name="nothing" type="nothing" minOccurs="0" maxOccurs="1"/&gt;   &lt;/xsd:sequence&gt; &lt;/xsd:complexType&gt; </pre>				

## Complex Type mailto

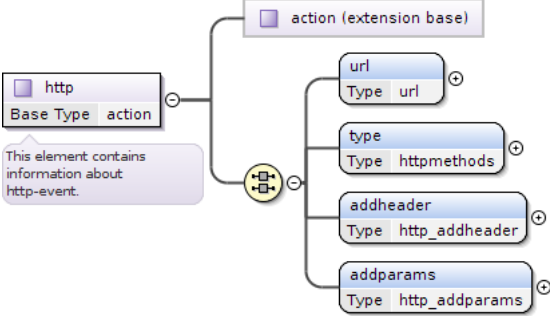
Namespace	No namespace
Annotations	This element contains information about mailto-event.
Diagram	
Type	extension of action
Type hierarchy	<ul style="list-style-type: none"> <li>action</li> <li>mailto</li> </ul>
Used by	Element event/mailto
Model	receiver+, subject, text
Children	receiver, subject, text
Source	<pre> &lt;xsd:complexType name="mailto"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;This element contains information about mailto-event.&lt;/xsd:documentation&gt;   &lt;/xsd:annotation&gt;   &lt;xsd:complexContent&gt;     &lt;xsd:extension base="action"&gt;       &lt;xsd:sequence&gt;         &lt;xsd:element name="receiver" type="emailist" minOccurs="1" maxOccurs="unbounded"/&gt;         &lt;xsd:element name="subject" type="notemptystring"/&gt;         &lt;xsd:element name="text" type="notemptystring"/&gt;       &lt;/xsd:sequence&gt;     &lt;/xsd:extension&gt;   &lt;/xsd:complexContent&gt; &lt;/xsd:complexType&gt; </pre>

</xsd:complexType>


## Complex Type action

Namespace	No namespace
Diagram	
Used by	Complex Types fax, fileFtp, fileHttp, http, mailto
Source	<xsd:complexType name="action" />

## Complex Type http


Namespace	No namespace
Annotations	This element contains information about http-event.
Diagram	
Type	extension of action
Type hierarchy	<ul style="list-style-type: none"> <li>action</li> <li>http</li> </ul>
Used by	Elements event/http, realtime/http
Model	ALL(url type addheader addparams)
Children	addheader, addparams, type, url
Source	<pre> &lt;xsd:complexType name="http"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;This element contains information about http-event.&lt;/xsd:documentation&gt;   &lt;/xsd:annotation&gt;   &lt;xsd:complexContent&gt;     &lt;xsd:extension base="action"&gt;       &lt;xsd:all&gt;         &lt;xsd:element name="url" type="url"/&gt;         &lt;xsd:element name="type" type="httpmethods"/&gt;         &lt;xsd:element name="addheader" type="http_addheader"/&gt;         &lt;xsd:element name="addparams" type="http_addparams"/&gt;       &lt;/xsd:all&gt;     &lt;/xsd:extension&gt;   &lt;/xsd:complexContent&gt; &lt;/xsd:complexType&gt; </pre>

## Complex Type http\_addheader


Namespace	No namespace
Diagram	
Type	extension of action_instruction
Type hierarchy	<ul style="list-style-type: none"> <li>action_instruction</li> <li>http_addheader</li> </ul>
Used by	Element http/addheader

Model	ANY element from ANY namespace
Source	<pre> &lt;xsd:complexType name="http_addheader"&gt;   &lt;xsd:complexContent mixed="false"&gt;     &lt;xsd:extension base="action_instruction"&gt;       &lt;xsd:sequence&gt;         &lt;xsd:any processContents="lax" maxOccurs="unbounded" /&gt;       &lt;/xsd:sequence&gt;     &lt;/xsd:extension&gt;   &lt;/xsd:complexContent&gt; &lt;/xsd:complexType&gt; </pre>


## Complex Type action\_instruction

Namespace	No namespace
Diagram	
Used by	Complex Types      http_addheader, http_addparams
Source	<pre>&lt;xsd:complexType name="action_instruction"/&gt;</pre>

## Complex Type http\_addparams

Namespace	No namespace
Diagram	
Type	extension of action_instruction
Type hierarchy	<ul style="list-style-type: none"> <li>action_instruction</li> <li>http_addparams</li> </ul>
Used by	Element      http/addparams
Model	ANY element from ANY namespace
Source	<pre> &lt;xsd:complexType name="http_addparams"&gt;   &lt;xsd:complexContent&gt;     &lt;xsd:extension base="action_instruction"&gt;       &lt;xsd:sequence&gt;         &lt;xsd:any processContents="lax" maxOccurs="unbounded" /&gt;       &lt;/xsd:sequence&gt;     &lt;/xsd:extension&gt;   &lt;/xsd:complexContent&gt; &lt;/xsd:complexType&gt; </pre>

## Complex Type fax

Namespace	No namespace
Diagram	
Type	extension of action
Type hierarchy	<ul style="list-style-type: none"> <li>action</li> <li>fax</li> </ul>
Used by	Element      event/fax
Model	ANY element from ANY namespace
Source	<pre> &lt;xsd:complexType name="fax"&gt;   &lt;xsd:complexContent&gt;     &lt;xsd:extension base="action"&gt;       &lt;xsd:sequence&gt;         &lt;xsd:any processContents="lax" maxOccurs="unbounded" /&gt;       &lt;/xsd:sequence&gt;     &lt;/xsd:extension&gt;   &lt;/xsd:complexContent&gt; &lt;/xsd:complexType&gt; </pre>



</xsd:complexType>

## Complex Type letter

Namespace	No namespace
Annotations	This element contains information about the letter event.
Diagram	
Used by	Element event/letter
Model	ALL(registered to text costscoveredby)
Children	costscoveredby, registered, text, to
Source	<pre> &lt;xsd:complexType name="letter"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;This element contains information about the letter event.&lt;/xsd:documentation&gt;   &lt;/xsd:annotation&gt;   &lt;xsd:all&gt;     &lt;xsd:element name="registered" type="xsd:boolean"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation xml:lang="en"&gt;This tells if letter must be registered or not.&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:element&gt;     &lt;xsd:element name="to" type="to"/&gt;     &lt;xsd:element name="text" type="notemptystring"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation xml:lang="en"&gt;This contains the content/text of letter.&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:element&gt;     &lt;xsd:element name="costscoveredby" type="costscoveredby"/&gt;   &lt;/xsd:all&gt; &lt;/xsd:complexType&gt; </pre>

## Complex Type to

Namespace	No namespace
Annotations	This element contains information about recipient.
Diagram	

Used by	Element letter/to
Model	ALL(name{0,1} department{0,1} nameperson{0,1} street postcode country additionaladdressinfo{0,1})
Children	additionaladdressinfo, country, department, name, nameperson, postcode, street
Source	<pre> &lt;xsd:complexType name="to"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;This element contains information about recipient.&lt;/ xsd:documentation&gt;   &lt;/xsd:annotation&gt;   &lt;xsd:all&gt;     &lt;xsd:element name="name" type="notemptystring" minOccurs="0" maxOccurs="1"/&gt;     &lt;xsd:element name="department" type="notemptystring" minOccurs="0" maxOccurs="1"/&gt;     &lt;xsd:element name="nameperson" type="notemptystring" minOccurs="0" maxOccurs="1"/&gt;     &lt;xsd:element name="street" type="notemptystring"/&gt;     &lt;xsd:element name="postcode" type="notemptystring"/&gt;     &lt;xsd:element name="country" type="cc:countryCode"/&gt;     &lt;xsd:element name="additionaladdressinfo" type="notemptystring" minOccurs="0" maxOccurs="1"/&gt;   &lt;/xsd:all&gt; &lt;/xsd:complexType&gt; </pre>

## Complex Type costscoveredby

Namespace	No namespace
Annotations	This element contains information about who covered the costs of event.
Diagram	
Used by	Element letter/costscoveredby
Model	ALL(contractpartnerid ourcontractpartnerid maxcostscovered{0,1})
Children	contractpartnerid, maxcostscovered, ourcontractpartnerid
Source	<pre> &lt;xsd:complexType name="costscoveredby"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;This element contains information about who covered the costs of event.&lt;/xsd:documentation&gt;   &lt;/xsd:annotation&gt;   &lt;xsd:all&gt;     &lt;xsd:element name="contractpartnerid" type="notemptystring"/&gt;     &lt;xsd:element name="ourcontractpartnerid" type="notemptystring"/&gt;     &lt;xsd:element name="maxcostscovered" type="notemptystring" minOccurs="0" maxOccurs="1"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation xml:lang="en"&gt;This contains the max amount that will be covered.&lt;/ xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:element&gt;   &lt;/xsd:all&gt; &lt;/xsd:complexType&gt; </pre>

## Complex Type bundle

Namespace	No namespace
Annotations	<p>On bundle level, there are information on how to handle a collection of "items". This is mainly an album/ep/single. A bundle is identified by one unique identifier, but more unique identifiers could and should be transmitted as well (see below "ids"). Most notably on the bundle-level is the "bundle name" which is basically the conjunction of the "name"- and the "version"-field. Also to have this easy at hand, there should be the desired "display_artistname"-string be present on this level. Of course, the receiver of the feed can still calculate the "correct" display_artistname by evaluating the contributors (see below) for this.</p>

Diagram	<p>On bundle level, there are information on how to handle a collection of "items". This is mainly an album/ep/single. A...</p>
Used by	Elements feed/bundle, related/bundle
Model	ALL(displayname{0,1} name{0,1} version{0,1} display_artistname{0,1} ids items{0,1} contributors{0,1} information{0,1} license_basis{0,1} license_specifics{0,1} reporting{0,1} tags{0,1} files{0,1} purchase{0,1})
Children	contributors, display_artistname, displayname, files, ids, information, items, license_basis, license_specifics, name, purchase, reporting, tags, version
Source	<pre> &lt;xsd:complexType name="bundle"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;On bundle level, there are information on how to handle a collection of "items". This is mainly an album/ep/single. A bundle is identified by one unique identifier, but more unique identifiers could and should be transmitted as well (see below "ids"). Most notably on the bundle-level is the "bundle name" which is basically the conjunction of the "name"- and the "version"-field. Also to have this easy at hand, there should be the desired "display_artistname"-string be present on this level. Of course, the receiver of the feed can still calculate the "correct" display_artistname by evaluating the contributors (see below) for this.&lt;/ xsd:documentation&gt;   &lt;/xsd:annotation&gt;   &lt;xsd:all&gt;     &lt;xsd:element name="displayname" type="notemptystring" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="name" type="notemptystring" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="version" type="xsd:string" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="display_artistname" type="notemptystring" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="ids" type="ids"/&gt;     &lt;xsd:element name="items" type="items" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="contributors" type="contributors" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="information" type="information" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="license_basis" type="license_basis" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="license_specifics" type="license_specifics" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="reporting" type="reporting" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="tags" type="tags" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="files" type="files" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="purchase" type="purchase" maxOccurs="1" minOccurs="0"/&gt;   &lt;/xsd:all&gt; &lt;/xsd:complexType&gt; </pre>

## Complex Type ids

Namespace	No namespace
Annotations	This Element is a container for all IDs which are available for the associated element.
Diagram	
Used by	Elements bundle/ids, contributor/ids, item/ids
Model	ALL(grid{0,1} upc{0,1} isrc{0,1} iswc{0,1} contentauth{0,1} labelordernum{0,1} amzn{0,1} isbn{0,1} finetunes{0,1} licensensor{0,1} licensee{0,1} gvl{0,1} amg{0,1})
Children	amg, amzn, contentauth, finetunes, grid, gvl, isbn, isrc, iswc, labelordernum, licensee, licensensor, upc
Source	<pre> &lt;xsd:complexType name="ids"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;This Element is a container for all IDs which are available for the associated element.&lt;/xsd:documentation&gt;   &lt;/xsd:annotation&gt;   &lt;xsd:all&gt;     &lt;xsd:element name="grid" type="grid" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="upc" type="upc" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="isrc" type="isrc" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="iswc" type="iswc" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="contentauth" type="contentauth" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="labelordernum" type="notemptystring" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="amzn" type="amzn" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="isbn" type="isbn" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="finetunes" type="finetunes" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="licensor" type="notemptystring" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="licensee" type="notemptystring" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="gvl" type="gvl" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="amg" type="amg" maxOccurs="1" minOccurs="0"/&gt;   &lt;/xsd:all&gt; &lt;/xsd:complexType&gt; </pre>

## Complex Type items

Namespace	No namespace
Annotations	This element is a container for item-elements.

Diagram	
Used by	Element bundle/items
Model	item+
Children	item
Source	<pre> &lt;xsd:complexType name="items"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;This element is a container for item-elements.&lt;/xsd:documentation&gt;   &lt;/xsd:annotation&gt;   &lt;xsd:sequence&gt;     &lt;xsd:element name="item" type="item" maxOccurs="unbounded" minOccurs="1"/&gt;   &lt;/xsd:sequence&gt; &lt;/xsd:complexType&gt; </pre>

## Complex Type item

Namespace	No namespace
Annotations	<p>This element contains information about a item just like a track.</p> <p>The type describes what the item is e.g. audio, video, android-app et cetera.</p> <p>The entry "version" is important if different versions of the bundle exist. The licens_basic and license_specifics contains information and rules about pricing, allowed and disallowed territories, channels an so on. The child "files" hold information for the associated files for this item.</p>
Diagram	
Used by	Elements feed/item, items/item
Model	ALL(displayname{0,1} name{0,1} version{0,1} type{0,1} display_artistname{0,1} ids{0,1} contributors information license_basis license_specifics tags{0,1} fingerprint{0,1} reporting{0,1} files{0,1})

Children	contributors, display_artistname, displayname, files, fingerprint, ids, information, license_basis, license_specifics, name, reporting, tags, type, version
Source	<pre> &lt;xsd:complexType name="item"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;This element contains information about a item just like a track. The type describes what the item is e.g. audio, video, android-app et cetera. The entry "version" is important if different versions of the bundle exist. The licens_basic and license_specifics contains information and rules about pricing, allowed and disallowed territories, channels an so on. The child "files" hold information for the associated files for this item.&lt;/ xsd:documentation&gt;   &lt;/xsd:annotation&gt;   &lt;xsd:all&gt;     &lt;xsd:element name="displayname" type="notemptystring" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="name" type="notemptystring" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="version" type="xsd:string" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="type" type="notemptystring" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="display_artistname" type="notemptystring" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="ids" type="ids" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="contributors" type="contributors"/&gt;     &lt;xsd:element name="information" type="information"/&gt;     &lt;xsd:element name="license_basis" type="license_basis_item"/&gt;     &lt;xsd:element name="license_specifics" type="license_specifics_item"/&gt;     &lt;xsd:element name="tags" type="tags" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="fingerprint" type="fingerprint" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="reporting" type="reporting" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="files" type="files" maxOccurs="1" minOccurs="0"/&gt;   &lt;/xsd:all&gt; &lt;/xsd:complexType&gt; </pre>

## Complex Type contributors

Namespace	No namespace
Annotations	This element contains a list of contributor.
Diagram	
Used by	Elements bundle/contributors, item/contributors
Model	contributor*
Children	contributor
Source	<pre> &lt;xsd:complexType name="contributors"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;This element contains a list of contributor.&lt;/ xsd:documentation&gt;   &lt;/xsd:annotation&gt;   &lt;xsd:sequence&gt;     &lt;xsd:element name="contributor" type="contributor" maxOccurs="unbounded" minOccurs="0"/&gt;   &lt;/xsd:sequence&gt; &lt;/xsd:complexType&gt; </pre>

## Complex Type contributor

Namespace	No namespace
Annotations	<p>This element contains information of one contributor.</p> <p>A contributor can be a label, performer, texter, editor, conductor, artist, singer, composer, mixer, remixer, producer, author, arranger, featuring-Artist, with-Artist, DJ, versus-Artist, meets-Artist, presents-Artist, compiler, copyright, production or clearinghouse. A year should be provided in case the type equals copyright or production.</p>

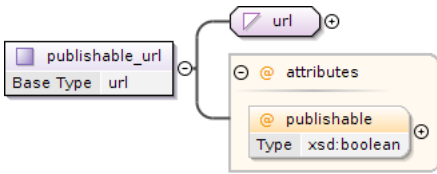
Diagram					
Used by	Element contributors/contributor				
Model	ALL(name type year{0,1} ids www{0,1})				
Children	ids, name, type, www, year				
Attributes	QName	Type	Fixed	Default	Use
	num	xsd:integer			optional
Source	<pre> &lt;xsd:complexType name="contributor"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;This element contains information of one contributor. A contributor can be a label, performer, texter, editor, conductor, artist, singer, composer, mixer, remixer, producer, author, arranger, featuring-Artist, with-Artist, DJ, versus-Artist, meets-Artist, presents-Artist, compiler, copyright, production or clearinghouse. A year should be provided in case the type equals copyright or production.&lt;/xsd:documentation&gt;   &lt;/xsd:annotation&gt;   &lt;xsd:all&gt;     &lt;xsd:element name="name" type="notemptystring"/&gt;     &lt;xsd:element name="type" type="contributorType"/&gt;     &lt;xsd:element name="year" type="year" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="ids" type="ids"/&gt;     &lt;xsd:element name="www" type="www" maxOccurs="1" minOccurs="0"/&gt;   &lt;/xsd:all&gt;   &lt;xsd:attribute name="num" type="xsd:integer"/&gt; &lt;/xsd:complexType&gt; </pre>				

## Complex Type www

Namespace	No namespace
Annotations	This Element is a container for the important web addresses and phone of the associated element (contributor e.g.). Phone should be in international format. Every single information-entry could be tagged "publishable" which would then mean whether customers of receiver are also allowed to be given this information. If publishable is not given, then this is granted.
Diagram	
Used by	Element contributor/www
Model	facebook{0,1} , myspace{0,1} , homepage{0,5} , twitter{0,1} , blog{0,5} , phone{0,1}

Children	blog, facebook, homepage, myspace, phone, twitter
Source	<pre> &lt;xsd:complexType name="www"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;This Element is a container for the important web addresses and     phone of the associated element (contributor e.g.). Phone should be in international format. Every     single information-entry cold be tagged "publishable" which would then mean whether customers of     receiver are also allowed to be given this information. If publishable is not given, then this is     granted.&lt;/xsd:documentation&gt;   &lt;/xsd:annotation&gt;   &lt;xsd:sequence&gt;     &lt;xsd:element name="facebook" type="publishable_url" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="myspace" type="publishable_url" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="homepage" type="publishable_url" maxOccurs="5" minOccurs="0"/&gt;     &lt;xsd:element name="twitter" type="publishable_url" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="blog" type="publishable_url" maxOccurs="5" minOccurs="0"/&gt;     &lt;xsd:element name="phone" type="publishable_url" maxOccurs="1" minOccurs="0"/&gt;   &lt;/xsd:sequence&gt; &lt;/xsd:complexType&gt; </pre>

## Complex Type publishable\_url

Namespace	No namespace				
Diagram					
Type	extension of url				
Type hierarchy	<ul style="list-style-type: none"> <li>xsd:anyURI</li> <li>url</li> <li>publishable_url</li> </ul>				
Used by	Elements      www/blog, www/facebook, www/homepage, www/myspace, www/phone, www/twitter				
Attributes	QName	Type	Fixed	Default	Use
	publishable	xsd:boolean			optional
Source	<pre> &lt;xsd:complexType name="publishable_url"&gt;   &lt;xsd:simpleContent&gt;     &lt;xsd:extension base="url"&gt;       &lt;xsd:attribute name="publishable" type="xsd:boolean"/&gt;     &lt;/xsd:extension&gt;   &lt;/xsd:simpleContent&gt; &lt;/xsd:complexType&gt; </pre>				

## Complex Type information

Namespace	No namespace
Annotations	<p>This element contains important data for an item/file. Multilingual promotexts and teasertexts, dates of physical and digital release, playlength of file, position of the file in relation to other file of bundle, number of set (e.g. 2 for cd 2), the suggested prelisting offset if the file not starts e.g. with significant content, origin country and main language of file and information about related bundles.</p>



Diagram	
Used by	Elements bundle/information, item/information
Model	ALL(texts{0,1} physical_release_datetime digital_release_datetime playlength{0,1} num{0,1} setnum{0,1} suggested_prelisting_offset{0,1} origin_country{0,1} main_language{0,1} related{0,1})
Children	digital_release_datetime, main_language, num, origin_country, physical_release_datetime, playlength, related, setnum, suggested_prelisting_offset, texts
Source	<pre> &lt;xsd:complexType name="information"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;This element contains important data for an item/file. Multilingual promotexts and teasertexts, dates of physical and digital release, playlength of file, position of the file in relation to other file of bundle, number of set (e.g. 2 for cd 2), the suggested prelisting offset if the file not starts e.g. with significant content, origin country and main language of file and information about related bundles.&lt;/xsd:documentation&gt;   &lt;/xsd:annotation&gt;   &lt;xsd:all&gt;     &lt;xsd:element name="texts" type="texts" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="physical_release_datetime" type="datetimeGMT"/&gt;     &lt;xsd:element name="digital_release_datetime" type="datetimeGMT"/&gt;     &lt;xsd:element name="playlength" type="xsd:integer" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="num" type="xsd:integer" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="setnum" type="xsd:integer" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="suggested_prelisting_offset" type="xsd:integer" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="origin_country" type="cc:countryCode" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="main_language" type="l:language" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="related" type="related" maxOccurs="1" minOccurs="0"/&gt;   &lt;/xsd:all&gt; &lt;/xsd:complexType&gt; </pre>

## Complex Type texts

Namespace	No namespace
Annotations	This element contains multilingual promotexts and teasertexts.
Diagram	
Used by	Element information/texts
Model	promotext*, teasertext*
Children	promotext, teasertext

Source	<pre> &lt;xsd:complexType name="texts"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;This element contains multilingual promotexts and     teasertexts.&lt;/xsd:documentation&gt;   &lt;/xsd:annotation&gt;   &lt;xsd:sequence&gt;     &lt;xsd:element name="promotext" type="promotext" maxOccurs="unbounded" minOccurs="0"/&gt;     &lt;xsd:element name="teasertext" type="teasertext" maxOccurs="unbounded" minOccurs="0"/&gt;   &lt;/xsd:sequence&gt; &lt;/xsd:complexType&gt; </pre>
--------	--

## Complex Type promotext

Namespace	No namespace				
Diagram					
Type	extension of xsd:string				
Used by	Element texts/promotext				
Attributes	<b>QName</b>	<b>Type</b>	<b>Fixed</b>	<b>Default</b>	<b>Use</b>
	lang	xsd:string			optional
Source	<pre> &lt;xsd:complexType name="promotext"&gt;   &lt;xsd:simpleContent&gt;     &lt;xsd:extension base="xsd:string"&gt;       &lt;xsd:attribute name="lang" type="xsd:string"/&gt;     &lt;/xsd:extension&gt;   &lt;/xsd:simpleContent&gt; &lt;/xsd:complexType&gt; </pre>				

## Complex Type teasertext

Namespace	No namespace				
Diagram					
Type	extension of xsd:string				
Used by	Element texts/teasertext				
Attributes	<b>QName</b>	<b>Type</b>	<b>Fixed</b>	<b>Default</b>	<b>Use</b>
	lang	xsd:string			optional
Source	<pre> &lt;xsd:complexType name="teasertext"&gt;   &lt;xsd:simpleContent&gt;     &lt;xsd:extension base="xsd:string"&gt;       &lt;xsd:attribute name="lang" type="xsd:string"/&gt;     &lt;/xsd:extension&gt;   &lt;/xsd:simpleContent&gt; &lt;/xsd:complexType&gt; </pre>				

## Complex Type related

Namespace	No namespace
Annotations	This element contains informations of bundles which are related to the bundle of the actual feed. It may includes one or more physical distributors and one element "utube"

	which could include information about channel and url at youtube.
Diagram	
Used by	Element information/related
Model	physical_distributor*, utube{0,1} , bundle*
Children	bundle, physical_distributor, utube
Source	<pre> &lt;xsd:complexType name="related"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;This element contains informations of bundles which are related to the bundle of the actual feed. It may includes one or more physical distributors and one element "utube" which could include information about channel and url at youtube.&lt;/xsd:documentation&gt;   &lt;/xsd:annotation&gt;   &lt;xsd:sequence&gt;     &lt;xsd:element name="physical_distributor" type="physical_distributor" maxOccurs="unbounded" minOccurs="0"/&gt;     &lt;xsd:element name="utube" type="utube" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="bundle" type="bundle" maxOccurs="unbounded" minOccurs="0"/&gt;   &lt;/xsd:sequence&gt; &lt;/xsd:complexType&gt; </pre>

## Complex Type physical\_distributor

Namespace	No namespace				
Diagram					
Type	extension of notemptystring				
Type hierarchy	<ul style="list-style-type: none"> <li>xsd:string</li> <li>notemptystring</li> <li>physical_distributor</li> </ul>				
Used by	Element related/physical_distributor				
Attributes	QName	Type	Fixed	Default	Use
	publishable	xsd:boolean			optional
Source	<pre> &lt;xsd:complexType name="physical_distributor"&gt;   &lt;xsd:simpleContent&gt;     &lt;xsd:extension base="notemptystring"&gt;       &lt;xsd:attribute name="publishable" type="xsd:boolean"/&gt;     &lt;/xsd:extension&gt;   &lt;/xsd:simpleContent&gt; &lt;/xsd:complexType&gt; </pre>				

## Complex Type utube

Namespace	No namespace				
Annotations	Contains optional information about youtube url und channel.				
Diagram					

Used by	Element related/utube
Model	ALL(url{0,1} channel{0,1})
Children	channel, url
Source	<pre> &lt;xsd:complexType name="utube"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;Contains optional information about youtube url und channel.&lt;/xsd:documentation&gt;   &lt;/xsd:annotation&gt;   &lt;xsd:all&gt;     &lt;xsd:element name="url" type="notemptystring" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="channel" type="notemptystring" maxOccurs="1" minOccurs="0"/&gt;   &lt;/xsd:all&gt; &lt;/xsd:complexType&gt; </pre>

## Complex Type license\_basis

Namespace	No namespace
Annotations	This element includes the basic rules and information under which this bundle is provided. The optional element "streaming_allowed" tells if streaming is allowed or not.
Diagram	
Used by	Element bundle/license_basis
Model	ALL(territorial{0,1} timeframe pricing{0,1} streaming_allowed channels{0,1})
Children	channels, pricing, streaming_allowed, territorial, timeframe
Source	<pre> &lt;xsd:complexType name="license_basis"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;This element includes the basic rules and information under which this bundle is provided. The optional element "streaming_allowed" tells if streaming is allowed or not.&lt;/xsd:documentation&gt;   &lt;/xsd:annotation&gt;   &lt;xsd:all&gt;     &lt;xsd:element name="territorial" type="territorial" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="timeframe" type="timeframe" maxOccurs="1" minOccurs="1"/&gt;     &lt;xsd:element name="pricing" type="pricing" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="streaming_allowed" type="xsd:boolean" maxOccurs="1" minOccurs="1"/&gt;     &lt;xsd:element name="channels" type="channels" maxOccurs="1" minOccurs="0"/&gt;   &lt;/xsd:all&gt; &lt;/xsd:complexType&gt; </pre>

## Complex Type territorial

Namespace	No namespace
Annotations	This Element is a container for territories. There should be a entry for all territories (ISO 3166-1 country code) with a attribute if distribution is allowed or not. "WW" means "World Wide" and is a wildcard for all territories.
Diagram	
Used by	Elements license_basis/territorial, license_basis_item/territorial
Model	territory*

Children	territory
Source	<pre> &lt;xsd:complexType name="territorial"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;This Element is a container for territories. There should be a     entry for all territories (ISO 3166-1 country code) with a attribute if distribution is allowed or     not. "WW" means "World Wide" and is a wildcard for all territories.&lt;/xsd:documentation&gt;   &lt;/xsd:annotation&gt;   &lt;xsd:sequence&gt;     &lt;xsd:element name="territory" type="territory" maxOccurs="unbounded" minOccurs="0"/&gt;   &lt;/xsd:sequence&gt; &lt;/xsd:complexType&gt; </pre>

## Complex Type territory

Namespace	No namespace				
Annotations	A territory includes one country code an the required attribute "type". Type can be "allow" or "disallow" and tells about the allowance of corresponding territory.				
Diagram					
Type	extension of countryCode				
Type hierarchy	<ul style="list-style-type: none"> <li>xsd:string</li> <li>countryCode</li> <li>territory</li> </ul>				
Used by	Element	territorial/territory			
Attributes	QName	Type	Fixed	Default	Use
	type	allowance			optional
Source	<pre> &lt;xsd:complexType name="territory"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;A territory includes one country code an the required     attribute "type". Type can be "allow" or "disallow" and tells about the allowance of corresponding     territory.&lt;/xsd:documentation&gt;   &lt;/xsd:annotation&gt;   &lt;xsd:simpleContent&gt;     &lt;xsd:extension base="cc:countryCode"&gt;       &lt;xsd:attribute name="type" type="allowance" use="optional"/&gt;     &lt;/xsd:extension&gt;   &lt;/xsd:simpleContent&gt; &lt;/xsd:complexType&gt; </pre>				

## Complex Type timeframe

Namespace	No namespace
Annotations	Timeframe contains the most-recent-release-date from which on receiver may use this and the cancellation-date.
Diagram	<p>UML diagram illustrating the structure of the <code>timeframe</code> complex type. The diagram shows a box labeled <code>timeframe</code> (with a purple icon) connected to a central node (a yellow circle with a black border). This central node is connected to two child nodes, both labeled <code>from</code> and <code>to</code> (with blue icons). Both child nodes are of type <code>datetimeGMT</code> (indicated by the text 'Type datetimeGMT' and a blue icon). A callout box points to the <code>timeframe</code> box, stating: 'Timeframe contains the most-recent-release-date from which on receiver may use this and the cancellation-date.'</p>
Used by	Elements license_basis/timeframe, license_basis_item/timeframe
Model	from , to
Children	from, to
Source	<pre>&lt;xsd:complexType name="timeframe"&gt;   &lt;xsd:annotation&gt;</pre>

```

<xsd:documentation xml:lang="en">Timeframe contains the most-recent-release-date from which on
receiver may use this and the cancellation-date.</xsd:documentation>
</xsd:annotation>
<xsd:sequence>
  <xsd:element name="from" type="datetimeGMT" />
  <xsd:element name="to" type="datetimeGMT" />
</xsd:sequence>
</xsd:complexType>

```

## Complex Type pricing

Namespace	No namespace
Annotations	Pricecode is an arbitrary-info. An explicitly given wholesale-price overrides the basic pricecode-given-wp. Most probably either one of pricecode OR wholesaleprice should be given.
Diagram	
Used by	Elements license_basis/pricing, license_basis_item/pricing
Model	ALL(pricecode{0,1} wholesale{0,1})
Children	pricecode, wholesale
Source	<pre> &lt;xsd:complexType name="pricing"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;Pricecode is an arbitrary-info. An explicitly given wholesale-price overrides the basic pricecode-given-wp. Most probably either one of pricecode OR wholesaleprice should be given.&lt;/xsd:documentation&gt;   &lt;/xsd:annotation&gt;   &lt;xsd:all&gt;     &lt;xsd:element name="pricecode" type="notemptystring" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="wholesale" type="notemptystring" maxOccurs="1" minOccurs="0"/&gt;   &lt;/xsd:all&gt; &lt;/xsd:complexType&gt; </pre>

## Complex Type channels

Namespace	No namespace
Annotations	This element is a container for channels which can be either "all", "ad supported", "premium" or "ringtones".
Diagram	
Used by	Elements license_basis/channels, license_basis_item/channels
Model	channel*
Children	channel
Source	<pre> &lt;xsd:complexType name="channels"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;This element is a container for channels which can be either "all", "ad supported", "premium" or "ringtones".&lt;/xsd:documentation&gt;   &lt;/xsd:annotation&gt;   &lt;xsd:sequence&gt;     &lt;xsd:element name="channel" type="channel" maxOccurs="unbounded" minOccurs="0"/&gt;   &lt;/xsd:sequence&gt; &lt;/xsd:complexType&gt; </pre>

## Complex Type channel

Namespace	No namespace
-----------	--------------

Annotations	A channels can be either "all", "ad supported", "premium" or "ringtones". The required attribute "type" regards to the allowance in reference to the channel. Type can be "allow" or "disallow".				
Diagram					
Type	extension of xsd:string				
Used by	Element channels/channel				
Attributes	QName	Type	Fixed	Default	Use
	type	allowance			required
Source	<pre> &lt;xsd:complexType name="channel"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;A channels can be either "all", "ad supported", "premium" or "ringtones". The required attribute "type" regards to the allowance in reference to the channel. Type can be "allow" or "disallow".&lt;/xsd:documentation&gt;   &lt;/xsd:annotation&gt;   &lt;xsd:simpleContent&gt;     &lt;xsd:extension base="xsd:string"&gt;       &lt;xsd:attribute name="type" type="allowance" use="required"/&gt;     &lt;/xsd:extension&gt;   &lt;/xsd:simpleContent&gt; &lt;/xsd:complexType&gt; </pre>				

## Complex Type license\_specifics

Namespace	No namespace				
Annotations	This element includes specific rules which should be applied.				
Diagram					
Used by	Element bundle/license_specifics				
Model	ALL(rules{0,1})				
Children	rules				
Source	<pre> &lt;xsd:complexType name="license_specifics"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;This element includes specific rules which should be applied.&lt;/xsd:documentation&gt;   &lt;/xsd:annotation&gt;   &lt;xsd:all&gt;     &lt;xsd:element name="rules" type="rules" maxOccurs="1" minOccurs="0"/&gt;   &lt;/xsd:all&gt; &lt;/xsd:complexType&gt; </pre>				

## Complex Type rules

Namespace	No namespace				
Annotations	This element is a container for rules. It needs an ordered mode here - first come first match.				
Diagram					
Used by	Elements license_specifics/rules, license_specifics_item/rules				
Model	rule*				

Children	rule
Source	<pre> &lt;xsd:complexType name="rules"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;This element is a container for rules. It needs an ordered mode here - first come first match.&lt;/xsd:documentation&gt;   &lt;/xsd:annotation&gt;   &lt;xsd:sequence&gt;     &lt;xsd:element name="rule" type="rule" maxOccurs="unbounded" minOccurs="0"/&gt;   &lt;/xsd:sequence&gt; &lt;/xsd:complexType&gt; </pre>

## Complex Type rule

Namespace	No namespace														
Annotations	A rule must include a "if"-element and a "then"-element to shape a legal instruction. It can also include a "else"-element.														
Diagram															
Used by	Element	rules/rule													
Model	if , then , else{0,1}														
Children	else, if, then														
Attributes	<table><tr><th>QName</th><th>Type</th><th>Fixed</th><th>Default</th><th>Use</th></tr><tr><td>num</td><td>xsd:integer</td><td></td><td></td><td>optional</td></tr></table>	QName	Type	Fixed	Default	Use	num	xsd:integer			optional				
QName	Type	Fixed	Default	Use											
num	xsd:integer			optional											
Source	<pre>&lt;xsd:complexType name="rule"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;A rule must include a "if"-element and a "then"-element to     shape a legal instruction. It can also include a "else"-element.&lt;/xsd:documentation&gt;   &lt;/xsd:annotation&gt;   &lt;xsd:sequence&gt;     &lt;xsd:element name="if" type="if"/&gt;     &lt;xsd:element name="then" type="then"/&gt;     &lt;xsd:element name="else" type="else" maxOccurs="1" minOccurs="0"/&gt;   &lt;/xsd:sequence&gt;   &lt;xsd:attribute name="num" type="xsd:integer"/&gt; &lt;/xsd:complexType&gt;</pre>														

## Complex Type if

Namespace	No namespace				
Annotations	This element must be the first element in a rule. It includes the information what is affected by the rule, an operator like "equals", "before", "after", "contains" or "containedin" and a value which will be compared.				
Diagram					
Used by	Element rule/if				
Model	what , operator , value				
Children	operator, value, what				



Source	<pre> &lt;xsd:complexType name="if"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;This element must be the first element in a rule.     It includes the information what is affected by the rule, an operator like "equals",     "before", "after", "contains" or "containedin" and a value which will be compared.&lt;/   &lt;/xsd:documentation&gt; &lt;/xsd:annotation&gt; &lt;xsd:sequence&gt;   &lt;xsd:element name="what" type="notemptystring"/&gt;   &lt;xsd:element name="operator" type="operator"/&gt;   &lt;xsd:element name="value" type="notemptystring"/&gt; &lt;/xsd:sequence&gt; &lt;/xsd:complexType&gt; </pre>
--------	--

## Complex Type then

Namespace	No namespace
Annotations	This element must be the second in a rule and includes information "echo" for debugging output and can include an element "break" which means to not process any more rules. It also could include information "proclaim".
Diagram	
Used by	Element rule/then
Model	proclaim*, echo{0,1} , break{0,1}
Children	break, echo, proclaim
Source	<pre> &lt;xsd:complexType name="then"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;This element must be the second in a rule and includes     information "echo" for debugging output and can include an element "break" which means to not     process any more rules. It also could include information "proclaim".&lt;/xsd:documentation&gt;   &lt;/xsd:annotation&gt;   &lt;xsd:sequence&gt;     &lt;xsd:element name="proclaim" type="proclaim" maxOccurs="unbounded" minOccurs="0"/&gt;     &lt;xsd:element name="echo" type="notemptystring" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="break" type="notemptystring" maxOccurs="1" minOccurs="0"/&gt;   &lt;/xsd:sequence&gt; &lt;/xsd:complexType&gt; </pre>

## Complex Type proclaim

Namespace	No namespace
Annotations	This element includes the information what is affected and the corresponding value.
Diagram	
Used by	Elements else/proclaim, then/proclaim
Model	what , for
Children	for, what
Source	<pre> &lt;xsd:complexType name="proclaim"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;This element includes the information what is affected and the     corresponding value.&lt;/xsd:documentation&gt;   &lt;/xsd:annotation&gt;   &lt;xsd:sequence&gt;     &lt;xsd:element name="what" type="notemptystring"/&gt;     &lt;xsd:element name="for" type="notemptystring"/&gt;   &lt;/xsd:sequence&gt; &lt;/xsd:complexType&gt; </pre>

```
</xsd:sequence>
</xsd:complexType>
```

## Complex Type **else**

Namespace	No namespace
Annotations	This element is optional. It includes information "proclaim" and can include an element "break" which means to not process any more rules.
Diagram	
Used by	Element rule/else
Model	proclaim*, break{0,1}
Children	break, proclaim
Source	<pre>&lt;xsd:complexType name="else"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;This element is optional. It includes information "proclaim"     and can include an element "break" which means to not process any more rules.&lt;/xsd:documentation&gt;   &lt;/xsd:annotation&gt;   &lt;xsd:sequence&gt;     &lt;xsd:element name="proclaim" type="proclaim" maxOccurs="unbounded" minOccurs="0"/&gt;     &lt;xsd:element name="break" maxOccurs="1" minOccurs="0"/&gt;   &lt;/xsd:sequence&gt; &lt;/xsd:complexType&gt;</pre>

## Complex Type **reporting**

Namespace	No namespace
Annotations	This element contains information about reporting.
Diagram	
Used by	Elements bundle/reporting, item/reporting
Model	ALL(realtime postponed)
Children	postponed, realtime
Source	<pre>&lt;xsd:complexType name="reporting"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;This element contains information about reporting.&lt;/ xsd:documentation&gt;   &lt;/xsd:annotation&gt;   &lt;xsd:all&gt;     &lt;xsd:element name="realtime" type="realtime"/&gt;     &lt;xsd:element name="postponed" type="postponed"/&gt;   &lt;/xsd:all&gt; &lt;/xsd:complexType&gt;</pre>

## Complex Type **realtime**

Namespace	No namespace
Annotations	This element contains http information for realtime reporting.
Diagram	

Used by	Element reporting/realtime
Model	http
Children	http
Source	<pre> &lt;xsd:complexType name="realtime"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;This element contains http information for realtime reporting.&lt;/xsd:documentation&gt;   &lt;/xsd:annotation&gt;   &lt;xsd:sequence&gt;     &lt;xsd:element name="http" type="http" /&gt;   &lt;/xsd:sequence&gt; &lt;/xsd:complexType&gt; </pre>

## Complex Type postponed

Namespace	No namespace
Annotations	This element contains some info on reporting when doing the "usual" time-gap-reporting. Id is a ID of a reporting or similar.
Diagram	
Used by	Element reporting/postponed
Model	id
Children	id
Source	<pre> &lt;xsd:complexType name="postponed"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;This element contains some info on reporting when doing the "usual" time-gap-reporting. Id is a ID of a reporting or similar.&lt;/xsd:documentation&gt;   &lt;/xsd:annotation&gt;   &lt;xsd:sequence&gt;     &lt;xsd:element name="id" type="notemptystring"/&gt;   &lt;/xsd:sequence&gt; &lt;/xsd:complexType&gt; </pre>

## Complex Type tags

Namespace	No namespace
Annotations	This element contains information about genres and more.
Diagram	
Used by	Elements bundle/tags, item/tags
Model	ALL(genres{0,1} bundle_only{0,1} explicit_lyrics{0,1} live{0,1} acoustic{0,1} instrumental{0,1})
Children	acoustic, bundle_only, explicit_lyrics, genres, instrumental, live
Source	<pre> &lt;xsd:complexType name="tags"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;This element contains information about genres and more.&lt;/xsd:documentation&gt;   &lt;/xsd:annotation&gt; </pre>

```

</xsd:annotation>
<xsd:all>
  <xsd:element name="genres" type="genres" maxOccurs="1" minOccurs="0"/>
  <xsd:element name="bundle_only" type="xsd:boolean" maxOccurs="1" minOccurs="0"/>
  <xsd:element name="explicit_lyrics" type="explicitLyrics" maxOccurs="1" minOccurs="0"/>
  <xsd:element name="live" type="xsd:boolean" maxOccurs="1" minOccurs="0"/>
  <xsd:element name="accoustic" type="xsd:boolean" maxOccurs="1" minOccurs="0"/>
  <xsd:element name="instrumental" type="xsd:boolean" maxOccurs="1" minOccurs="0"/>
</xsd:all>
</xsd:complexType>

```

## Complex Type genres

Namespace	No namespace
Annotations	This element contains a list of genres.
Diagram	
Used by	Element tags/genres
Model	genre*
Children	genre
Source	<pre> &lt;xsd:complexType name="genres"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;This element contains a list of genres.&lt;/xsd:documentation&gt;   &lt;/xsd:annotation&gt;   &lt;xsd:sequence&gt;     &lt;xsd:element name="genre" type="g:genre" maxOccurs="unbounded" minOccurs="0"/&gt;   &lt;/xsd:sequence&gt; &lt;/xsd:complexType&gt; </pre>

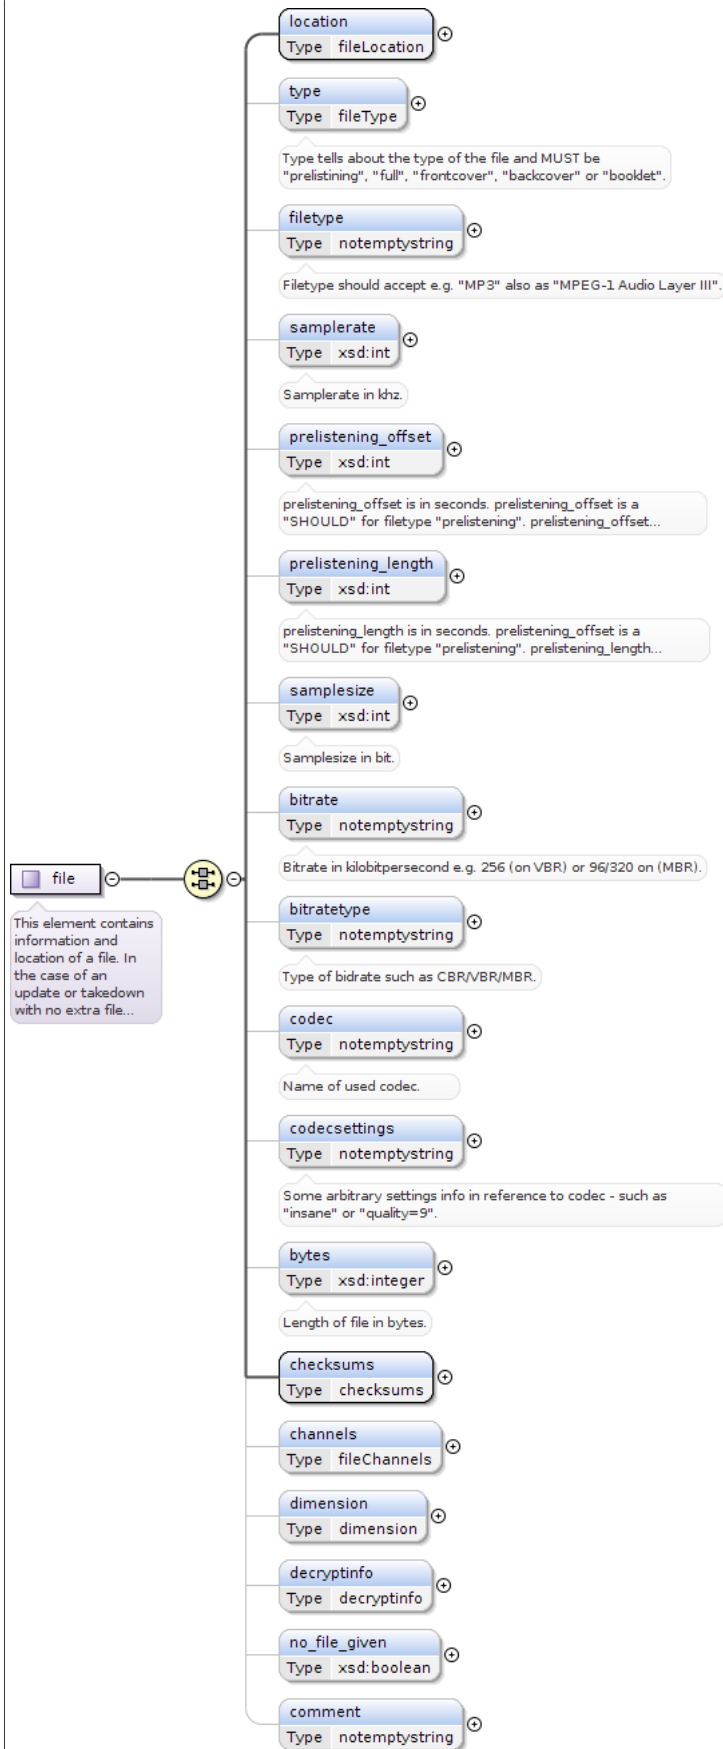
## Complex Type files

Namespace	No namespace
Annotations	This element contains a list of files.
Diagram	
Used by	Elements bundle/files, item/files
Model	file*
Children	file
Source	<pre> &lt;xsd:complexType name="files"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;This element contains a list of files.&lt;/xsd:documentation&gt;   &lt;/xsd:annotation&gt;   &lt;xsd:sequence&gt;     &lt;xsd:element name="file" type="file" maxOccurs="unbounded" minOccurs="0"/&gt;   &lt;/xsd:sequence&gt; &lt;/xsd:complexType&gt; </pre>

## Complex Type file

Namespace	No namespace
Annotations	<p>This element contains information and location of a file.</p> <p>In the case of an update or takedown with no extra file given, set "no_file_given" to "true"</p>

Diagram



Used by

Element

files/file

Model	ALL(location type{0,1} filetype{0,1} samplerate{0,1} prelistening_offset{0,1} prelistening_length{0,1} samplesize{0,1} bitrate{0,1} bitrate{0,1} codec{0,1} codecsettings{0,1} bytes{0,1} checksums channels{0,1} dimension{0,1} decryptinfo{0,1} no_file_given{0,1} comment{0,1})
Children	bitrate, bitrate, bytes, channels, checksums, codec, codecsettings, comment, decryptinfo, dimension, filetype, location, no_file_given, prelistening_length, prelistening_offset, samplerate, samplesize, type
Source	<pre> &lt;xsd:complexType name="file"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;This element contains information and location of a file.     In the case of an update or takedown with no extra file given, set "no_file_given" to "true"&lt;/   &lt;/xsd:documentation&gt;   &lt;/xsd:annotation&gt;   &lt;xsd:all&gt;     &lt;xsd:element name="location" type="fileLocation"/&gt;     &lt;xsd:element name="type" type="fileType" maxOccurs="1" minOccurs="0"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation xml:lang="en"&gt;Type tells about the type of the file and MUST be         "prelistening", "full", "frontcover", "backcover" or "booklet".&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:element&gt;     &lt;xsd:element name="filetype" type="notemptystring" maxOccurs="1" minOccurs="0"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation xml:lang="en"&gt;Filetype should accept e.g. "MP3" also as "MPEG-1 Audio         Layer III".&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:element&gt;     &lt;xsd:element name="samplerate" type="xsd:int" maxOccurs="1" minOccurs="0"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation xml:lang="en"&gt;Samplerate in khz.&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:element&gt;     &lt;xsd:element minOccurs="0" name="prelistening_offset" type="xsd:int"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation xml:lang="en"&gt;prelistening_offset is in seconds. prelistening_offset is         a "SHOULD" for filetype "prelistening". prelistening_offset is a MUST NOT for any other filetype.&lt;/       &lt;/xsd:documentation&gt;     &lt;/xsd:annotation&gt;     &lt;/xsd:element&gt;     &lt;xsd:element minOccurs="0" name="prelistening_length" type="xsd:int"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation xml:lang="en"&gt;prelistening_length is in seconds. prelistening_offset is         a "SHOULD" for filetype "prelistening". prelistening_length is a MUST NOT for any other filetype.&lt;/       &lt;/xsd:documentation&gt;     &lt;/xsd:annotation&gt;     &lt;/xsd:element&gt;     &lt;xsd:element name="samplesize" type="xsd:int" maxOccurs="1" minOccurs="0"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation xml:lang="en"&gt;Samplesize in bit.&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:element&gt;     &lt;xsd:element name="bitrate" type="notemptystring" maxOccurs="1" minOccurs="0"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation xml:lang="en"&gt;Bitrate in kilobitpersecond e.g. 256 (on VBR) or 96/320 on         (MBR).&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:element&gt;     &lt;xsd:element name="bitratetype" type="notemptystring" maxOccurs="1" minOccurs="0"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation xml:lang="en"&gt;Type of bitrate such as CBR/VBR/MBR.&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:element&gt;     &lt;xsd:element name="codec" type="notemptystring" maxOccurs="1" minOccurs="0"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation xml:lang="en"&gt;Name of used codec.&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:element&gt;     &lt;xsd:element name="codecsettings" type="notemptystring" maxOccurs="1" minOccurs="0"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation xml:lang="en"&gt;Some arbitrary settings info in reference to codec - such         as "insane" or "quality=9".&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:element&gt;     &lt;xsd:element name="bytes" type="xsd:integer" maxOccurs="1" minOccurs="0"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation xml:lang="en"&gt;Length of file in bytes.&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:element&gt;     &lt;xsd:element name="checksums" type="checksums"/&gt;     &lt;xsd:element name="channels" type="fileChannels" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="dimension" type="dimension" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="decryptinfo" type="decryptinfo" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="no_file_given" type="xsd:boolean" maxOccurs="1" minOccurs="0"/&gt; </pre>

```
<xsd:element name="comment" minOccurs="0" type="notemptystring"/>
</xsd:all>
</xsd:complexType>
```

## Complex Type fileLocation

Namespace	No namespace
Annotations	This element contains the path to the corresponding file. File can be accessible via path, http or ftp.
Diagram	
Used by	Element file/location
Model	ALL(origin_file{0,1} http{0,1} ftp{0,1} path{0,1})
Children	ftp, http, origin_file, path
Source	<pre>&lt;xsd:complexType name="fileLocation"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;This element contains the path to the corresponding file. File     can be accessible via path, http or ftp.&lt;/xsd:documentation&gt;   &lt;/xsd:annotation&gt;   &lt;xsd:all&gt;     &lt;xsd:element name="origin_file" type="notemptystring" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="http" type="fileHttp" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="ftp" type="fileFtp" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="path" type="notemptystring" maxOccurs="1" minOccurs="0"/&gt;   &lt;/xsd:all&gt; &lt;/xsd:complexType&gt;</pre>

## Complex Type fileHttp

Namespace	No namespace
Annotations	This element contains information about http access to file.
Diagram	
Type	extension of action
Type hierarchy	<ul style="list-style-type: none"> <li>action</li> <li>fileHttp</li> </ul>
Used by	Element fileLocation/http
Model	ALL(url user{0,1} pass{0,1} expiresdatetime)
Children	expiresdatetime, pass, url, user
Source	<pre>&lt;xsd:complexType name="fileHttp"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;This element contains information about http access to file.&lt;/     xsd:documentation&gt;   &lt;/xsd:annotation&gt;   &lt;xsd:complexContent&gt;</pre>

```
<xsd:extension base="action">
  <xsd:all>
    <xsd:element name="url" type="url"/>
    <xsd:element name="user" type="notemptystring" maxOccurs="1" minOccurs="0"/>
    <xsd:element name="pass" type="notemptystring" maxOccurs="1" minOccurs="0"/>
    <xsd:element name="expiresdatetime" type="datetimeGMT"/>
  </xsd:all>
</xsd:extension>
</xsd:complexContent>
</xsd:complexType>
```

## Complex Type fileFtp

Namespace	No namespace
Annotations	This element contains information about ftp access to file just like server, port, path to file and credentials (user / password). The expiresdate tells until when this file is definitely available to be called.
Diagram	
Type	extension of action
Type hierarchy	<ul style="list-style-type: none"> <li>action</li> <li>fileFtp</li> </ul>
Used by	Element fileLocation/ftp
Model	ALL(server port path user{0,1} pass{0,1} expiresdatetime)
Children	expiresdatetime, pass, path, port, server, user
Source	<pre>&lt;xsd:complexType name="fileFtp"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;This element contains information about ftp access to file just like server, port, path to file and credentials (user / password). The expiresdate tells until when this file is definitely available to be called.&lt;/xsd:documentation&gt;   &lt;/xsd:annotation&gt;   &lt;xsd:complexContent&gt;     &lt;xsd:extension base="action"&gt;       &lt;xsd:all&gt;         &lt;xsd:element name="server" type="notemptystring"/&gt;         &lt;xsd:element name="port" type="xsd:int"/&gt;         &lt;xsd:element name="path" type="notemptystring"/&gt;         &lt;xsd:element name="user" type="notemptystring" maxOccurs="1" minOccurs="0"/&gt;         &lt;xsd:element name="pass" type="notemptystring" maxOccurs="1" minOccurs="0"/&gt;         &lt;xsd:element name="expiresdatetime" type="datetimeGMT"/&gt;       &lt;/xsd:all&gt;     &lt;/xsd:extension&gt;   &lt;/xsd:complexContent&gt; &lt;/xsd:complexType&gt;</pre>

## Complex Type checksums

Namespace	No namespace
Annotations	This element contains checksums for the file.



Diagram	
Used by	Elements decryptinfo/checksums, file/checksums
Model	ALL(md5{0,1} sha1{0,1} sha256{0,1})
Children	md5, sha1, sha256
Source	<pre> &lt;xsd:complexType name="checksums"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;This element contains checksums for the file.&lt;/xsd:documentation&gt;   &lt;/xsd:annotation&gt;   &lt;xsd:all&gt;     &lt;xsd:element name="md5" type="md5" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="sha1" type="sha1" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="sha256" type="sha256" maxOccurs="1" minOccurs="0"/&gt;   &lt;/xsd:all&gt; &lt;/xsd:complexType&gt; </pre>

## Complex Type dimension

Namespace	No namespace
Annotations	This element contains entries for the dimension (width and height) of the file.
Diagram	
Used by	Element file/dimension
Model	width , height
Children	height, width
Source	<pre> &lt;xsd:complexType name="dimension"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;This element contains entries for the dimension (width and height) of the file.&lt;/xsd:documentation&gt;   &lt;/xsd:annotation&gt;   &lt;xsd:sequence&gt;     &lt;xsd:element name="width" type="xsd:integer"/&gt;     &lt;xsd:element name="height" type="xsd:integer"/&gt;   &lt;/xsd:sequence&gt; &lt;/xsd:complexType&gt; </pre>

## Complex Type decryptinfo

Namespace	No namespace
Annotations	This element contains information about decryption of corresponding file.

Diagram	
Used by	Element file/decryptinfo
Model	ALL(cipher{0,1} initvector{0,1} key{0,1} bytes{0,1} checksums{0,1})
Children	bytes, checksums, cipher, initvector, key
Source	<pre> &lt;xsd:complexType name="decryptinfo"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;This element contains information about decryption of     corresponding file.&lt;/xsd:documentation&gt;   &lt;/xsd:annotation&gt;   &lt;xsd:all&gt;     &lt;xsd:element name="cipher" type="notemptystring" minOccurs="0" maxOccurs="1"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation xml:lang="en"&gt;Contains info about the cipher for decryption like AES,         RIJNDAEL, XOR, Arcfour, whatever - should be "convenient".&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:element&gt;     &lt;xsd:element name="initvector" type="notemptystring" minOccurs="0" maxOccurs="1"/&gt;     &lt;xsd:element name="key" type="notemptystring" minOccurs="0" maxOccurs="1"/&gt;     &lt;xsd:element name="bytes" type="notemptystring" minOccurs="0" maxOccurs="1"/&gt;     &lt;xsd:element name="checksums" type="checksums" minOccurs="0" maxOccurs="1"/&gt;   &lt;/xsd:all&gt; &lt;/xsd:complexType&gt; </pre>

## Complex Type purchase

Namespace	No namespace
Annotations	This element contains information about purchase. Mostly when this feeds recipient is a POS.
Diagram	
Used by	Element bundle/purchase
Model	ALL(pos url)
Children	pos, url
Source	<pre> &lt;xsd:complexType name="purchase"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;This element contains information about purchase. Mostly when     this feeds recipient is a POS.&lt;/xsd:documentation&gt;   &lt;/xsd:annotation&gt;   &lt;xsd:all&gt;     &lt;xsd:element name="pos" type="notemptystring"/&gt;     &lt;xsd:element name="url" type="notemptystring"/&gt;   &lt;/xsd:all&gt; &lt;/xsd:complexType&gt; </pre>

## Complex Type license\_basis\_item

Namespace	No namespace
-----------	--------------

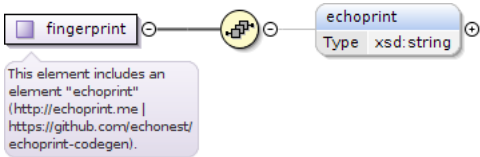
Annotations	This element includes the basic rules and information under which this bundle is provided. The optional element "streaming_allowed" tells if streaming is allowed or not
Diagram	
Used by	Element item/license_basis
Model	ALL(territorial{0,1} timeframe{0,1} pricing{0,1} streaming_allowed{0,1} channels{0,1} as_on_bundle{0,1})
Children	as_on_bundle, channels, pricing, streaming_allowed, territorial, timeframe
Source	<pre> &lt;xsd:complexType name="license_basis_item"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;This element includes the basic rules and information under which this bundle is provided. The optional element "streaming_allowed" tells if streaming is allowed or not&lt;/xsd:documentation&gt;   &lt;/xsd:annotation&gt;   &lt;xsd:all&gt;     &lt;xsd:element name="territorial" type="territorial" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="timeframe" type="timeframe" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="pricing" type="pricing" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="streaming_allowed" type="xsd:boolean" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="channels" type="channels" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="as_on_bundle" type="xsd:boolean" maxOccurs="1" minOccurs="0"/&gt;   &lt;/xsd:all&gt; &lt;/xsd:complexType&gt; </pre>

## Complex Type license\_specifics\_item

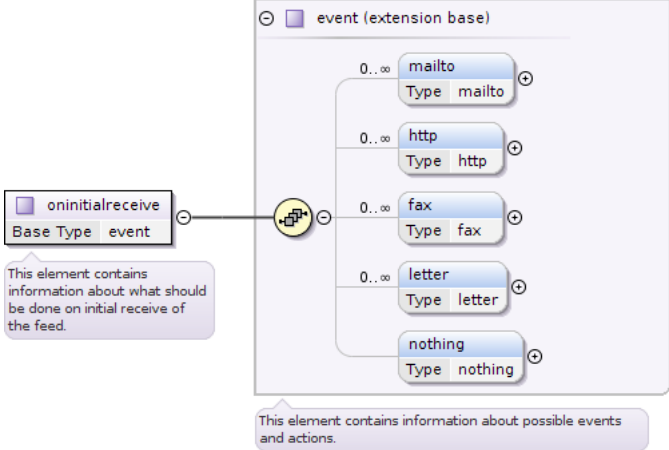
Namespace	No namespace
Annotations	This element includes specific rules which should be applied.
Diagram	
Used by	Element item/license_specifics
Model	rules{0,1}   as_on_bundle{0,1}
Children	as_on_bundle, rules
Source	<pre> &lt;xsd:complexType name="license_specifics_item"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;This element includes specific rules which should be applied.&lt;/xsd:documentation&gt;   &lt;/xsd:annotation&gt;   &lt;xsd:choice minOccurs="1" maxOccurs="2"&gt;     &lt;xsd:element name="rules" type="rules" maxOccurs="1" minOccurs="0"/&gt;     &lt;xsd:element name="as_on_bundle" type="xsd:boolean" maxOccurs="1" minOccurs="0"/&gt;   &lt;/xsd:choice&gt; &lt;/xsd:complexType&gt; </pre>

## Complex Type fingerprint

Namespace	No namespace
Annotations	This element includes an element "echoprint" ( <a href="http://echoprint.me">http://echoprint.me</a>   <a href="https://github.com/echonest/echoprint-codegen">https://github.com/echonest/echoprint-codegen</a> ).

Diagram	 <p>The diagram shows a box for the 'fingerprint' element. A callout bubble points to it with the text: 'This element includes an element "echoprint" (http://echoprint.me   https://github.com/echonest/echoprint-codegen).' To the right, a sequence diagram shows 'fingerprint' connected to a connector, which is then connected to an 'echoprint' element box. The 'echoprint' box has 'Type xsd:string' written below it.</p>
Used by	Element item/fingerprint
Model	echoprint{0,1}
Children	echoprint
Source	<pre>&lt;xsd:complexType name="fingerprint"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;This element includes an element "echoprint" (http://echoprint.me   https://github.com/echonest/echoprint-codegen).&lt;/xsd:documentation&gt;   &lt;/xsd:annotation&gt;   &lt;xsd:sequence&gt;     &lt;xsd:element name="echoprint" type="xsd:string" maxOccurs="1" minOccurs="0"/&gt;   &lt;/xsd:sequence&gt; &lt;/xsd:complexType&gt;</pre>

## Complex Type oninitialreceive

Namespace	No namespace
Annotations	This element contains information about what should be done on initial receive of the feed.
Diagram	 <p>The diagram shows a box for the 'oninitialreceive' element with 'Base Type event' written below it. A callout bubble points to it with the text: 'This element contains information about what should be done on initial receive of the feed.' To the right, a large box represents the 'event (extension base)' type. Inside this box, there is a sequence diagram showing 'oninitialreceive' connected to a connector, which is then connected to a list of five elements: 'mailto' (Type mailto), 'http' (Type http), 'fax' (Type fax), 'letter' (Type letter), and 'nothing' (Type nothing). Each of these elements has a cardinality of '0..∞'. A callout bubble points to the 'event' box with the text: 'This element contains information about possible events and actions.'</p>
Type	extension of event
Type hierarchy	<ul style="list-style-type: none"> <li>event</li> <li>oninitialreceive</li> </ul>
Model	mailto*, http*, fax*, letter*, nothing{0,1}
Children	fax, http, letter, mailto, nothing
Source	<pre>&lt;xsd:complexType name="oninitialreceive"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;This element contains information about what should be done on initial receive of the feed.&lt;/xsd:documentation&gt;   &lt;/xsd:annotation&gt;   &lt;xsd:complexContent&gt;     &lt;xsd:extension base="event"/&gt;   &lt;/xsd:complexContent&gt; &lt;/xsd:complexType&gt;</pre>

## Complex Type onprocessstart

Namespace	No namespace
Annotations	This element contains information about what should be done on the start of processing the feed.

Diagram	
Type	extension of event
Type hierarchy	<ul style="list-style-type: none"> <li>event</li> <li>onprocessstart</li> </ul>
Model	mailto*, http*, fax*, letter*, nothing{0,1}
Children	fax, http, letter, mailto, nothing
Source	<pre> &lt;xsd:complexType name="onprocessstart"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;This element contains information about what should be done on the start of processing the feed.&lt;/xsd:documentation&gt;   &lt;/xsd:annotation&gt;   &lt;xsd:complexContent&gt;     &lt;xsd:extension base="event" /&gt;   &lt;/xsd:complexContent&gt; &lt;/xsd:complexType&gt; </pre>

## Complex Type onprocessend

Namespace	No namespace
Annotations	This element contains information about what should be done on the end of processing the feed.
Diagram	
Type	extension of event
Type hierarchy	<ul style="list-style-type: none"> <li>event</li> <li>onprocessend</li> </ul>
Model	mailto*, http*, fax*, letter*, nothing{0,1}
Children	fax, http, letter, mailto, nothing
Source	<pre> &lt;xsd:complexType name="onprocessend"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;This element contains information about what should be done on the end of processing the feed.&lt;/xsd:documentation&gt;   &lt;/xsd:annotation&gt; </pre>

```
<xsd:complexContent>
  <xsd:extension base="event" />
</xsd:complexContent>
</xsd:complexType>
```

## Complex Type onfullsuccess

Namespace	No namespace
Annotations	This element contains information about what should be done on full success processing the feed.
Diagram	<p>The diagram illustrates the structure of the <code>onfullsuccess</code> complex type. It is shown as an extension of the <code>event</code> base type. The <code>event</code> base type is represented by a large box containing five child elements: <code>mailto</code>, <code>http</code>, <code>fax</code>, <code>letter</code>, and <code>nothing</code>. Each child element has a cardinality of <code>0..∞</code> and a type of <code>mailto</code>, <code>http</code>, <code>fax</code>, <code>letter</code>, and <code>nothing</code> respectively. A note points to the <code>event</code> box, stating: "This element contains information about possible events and actions." Another note points to the <code>onfullsuccess</code> box, stating: "This element contains information about what should be done on full success processing the feed."</p>
Type	extension of event
Type hierarchy	<ul style="list-style-type: none"> <li>event</li> <li>onfullsuccess</li> </ul>
Model	mailto*, http*, fax*, letter*, nothing{0,1}
Children	fax, http, letter, mailto, nothing
Source	<pre>&lt;xsd:complexType name="onfullsuccess"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;This element contains information about what should be done on     full success processing the feed.&lt;/xsd:documentation&gt;   &lt;/xsd:annotation&gt;   &lt;xsd:complexContent&gt;     &lt;xsd:extension base="event" /&gt;   &lt;/xsd:complexContent&gt; &lt;/xsd:complexType&gt;</pre>


## Complex Type onerror

Namespace	No namespace
Annotations	This element contains information about what should be done on error processing the feed.
Diagram	<p>The diagram illustrates the structure of the <code>onerror</code> complex type. It is shown as an extension of the <code>event</code> base type. The <code>event</code> base type is represented by a large box containing five child elements: <code>mailto</code>, <code>http</code>, <code>fax</code>, <code>letter</code>, and <code>nothing</code>. Each child element has a cardinality of <code>0..∞</code> and a type of <code>mailto</code>, <code>http</code>, <code>fax</code>, <code>letter</code>, and <code>nothing</code> respectively. A note points to the <code>event</code> box, stating: "This element contains information about possible events and actions." Another note points to the <code>onerror</code> box, stating: "This element contains information about what should be done on error processing the feed."</p>
Type	extension of event


Type hierarchy	<ul style="list-style-type: none"> <li>event</li> <li>onerror</li> </ul>
Model	mailto* , http* , fax* , letter* , nothing{0,1}
Children	fax, http, letter, mailto, nothing
Source	<pre>&lt;xsd:complexType name="onerror"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;This element contains information about what should be done on     error processing the feed.&lt;/xsd:documentation&gt;   &lt;/xsd:annotation&gt;   &lt;xsd:complexContent&gt;     &lt;xsd:extension base="event" /&gt;   &lt;/xsd:complexContent&gt; &lt;/xsd:complexType&gt;</pre>

## Simple Type(s)

### Simple Type notemptystring

Namespace	No namespace	
Diagram		
Type	restriction of xsd:string	
Facets	minLength	1
Used by	Elements	bundle/display_artistname, bundle/displayname, bundle/name, contributor/name, costscoveredby/contractpartnerid, costscoveredby/maxcostscovered, costscoveredby/ourcontractpartnerid, creator/keyid, decryptinfo/bytes, decryptinfo/cipher, decryptinfo/initvector, decryptinfo/key, feedinfo/feedid, file/bitrate, file/bitratetype, file/codecs, file/codecssettings, file/comment, file/filetype, fileFtp/pass, fileFtp/path, fileFtp/server, fileFtp/user, fileHttp/pass, fileHttp/user, fileLocation/origin_file, fileLocation/path, ids/labelordernum, ids/licensee, ids/licensor, if/value, if/what, item/display_artistname, item/displayname, item/name, item/type, letter/text, licensee/contractpartnerid, licensee/keyid, licensee/ourcontractpartnerid, licensor/contractpartnerid, licensor/keyid, licensor/ourcontractpartnerid, mailto/subject, mailto/text, postponed/id, pricing/pricecode, pricing/wholesale, proclaim/for, proclaim/what, purchase/pos, purchase/url, receiver/keyid, receiver/username, sender/contractpartnerid, sender/keyid, sender/ourcontractpartnerid, then/echo, to/additionaladdressinfo, to/department, to/name, to/nameperson, to/postcode, to/street, utube/channel, utube/url
	Complex Type	physical_distributor
	Simple Types	md5, sha1, sha256
Source	<pre>&lt;xsd:simpleType name="notemptystring"&gt;   &lt;xsd:restriction base="xsd:string"&gt;     &lt;xsd:minLength value="1" /&gt;   &lt;/xsd:restriction&gt; &lt;/xsd:simpleType&gt;</pre>	

### Simple Type datetimeGMT

Namespace	No namespace	
Diagram		
Type	restriction of xsd:string	
Facets	pattern	<pre>\d{4}-\d{2}-\d{2} \d{2}: \d{2}:\d{2} GMT\+\d{2}: \d{2}</pre>
Used by	Elements	feedinfo/creationdatetime, feedinfo/effectivedatetime, fileFtp/expiresdatetime, fileHttp/expiresdatetime, information/digital_release_datetime, information/physical_release_datetime, timeframe/from, timeframe/to
Source	<pre>&lt;xsd:simpleType name="datetimeGMT"&gt;   &lt;xsd:restriction base="xsd:string"&gt;     &lt;xsd:pattern value="\d{4}-\d{2}-\d{2} \d{2}:\d{2}:\d{2} GMT\+\d{2}:\d{2}" /&gt;     &lt;!-- "2010-01-31 00:00:00 GMT+00:00" - should be altered to some NMTOKENS or such ... --&gt;   &lt;/xsd:restriction&gt; &lt;/xsd:simpleType&gt;</pre>	

## Simple Type email

Namespace	No namespace
Diagram	
Type	restriction of xsd:string
Facets	<p>pattern</p> $(( [a-zA-Z0-9\_-\.\ ]+ )@[a-zA-Z0-9-]+\.( [a-zA-Z]{2,3} ))?$
Used by	<p>Elements</p> <p>creator/email, crypto/relatedemail, licensee/email, licensor/email, sender/email</p>
Source	<pre>&lt;xsd:simpleType name="email"&gt;   &lt;xsd:restriction base="xsd:string"&gt;     &lt;xsd:pattern value="(( [a-zA-Z0-9\_-\.\ ]+ )@[a-zA-Z0-9-]+\.( [a-zA-Z]{2,3} ))?" /&gt;   &lt;/xsd:restriction&gt; &lt;/xsd:simpleType&gt;</pre>

## Simple Type userid

Namespace	No namespace
Diagram	
Type	xsd:string
Used by	<p>Element</p> <p>creator/userid</p>
Source	<pre>&lt;xsd:simpleType name="userid"&gt;   &lt;xsd:restriction base="xsd:string" /&gt; &lt;/xsd:simpleType&gt;</pre>

## Simple Type receivertypes

Namespace	No namespace										
Diagram											
Type	restriction of xsd:string										
Facets	<table> <tr><td>enumeration</td><td>ftp</td></tr> <tr><td>enumeration</td><td>ftps</td></tr> <tr><td>enumeration</td><td>sftp</td></tr> <tr><td>enumeration</td><td>webdav</td></tr> <tr><td>enumeration</td><td>openSDX fileserver</td></tr> </table>	enumeration	ftp	enumeration	ftps	enumeration	sftp	enumeration	webdav	enumeration	openSDX fileserver
enumeration	ftp										
enumeration	ftps										
enumeration	sftp										
enumeration	webdav										
enumeration	openSDX fileserver										
Used by	<p>Element</p> <p>receiver/type</p>										
Source	<pre>&lt;xsd:simpleType name="receivertypes"&gt;   &lt;xsd:restriction base="xsd:string"&gt;     &lt;xsd:enumeration value="ftp" /&gt;     &lt;xsd:enumeration value="ftps" /&gt;     &lt;xsd:enumeration value="sftp" /&gt;     &lt;xsd:enumeration value="webdav" /&gt;     &lt;xsd:enumeration value="openSDX fileserver" /&gt;   &lt;/xsd:restriction&gt; &lt;/xsd:simpleType&gt;</pre>										


## Simple Type iporhostname

Namespace	No namespace
Diagram	
Type	xsd:string



Used by	Element receiver/servername
Source	<pre>&lt;xsd:simpleType name="iporhostname"&gt;   &lt;xsd:restriction base="xsd:string" /&gt; &lt;/xsd:simpleType&gt;</pre>


## Simple Type ipv4

Namespace	No namespace		
Diagram			
Type	restriction of xsd:string		
Facets	<table> <tr> <td>pattern</td> <td> <pre>(25[0-5] 2[0-4][0-9]  1[0-9][0-9] 0[0-9]{1,2}) (\.(25[0-5] 2[0-4][0-9]  1[0-9][0-9] 0[0-9]{1,2})) {3}</pre> </td></tr> </table>	pattern	<pre>(25[0-5] 2[0-4][0-9]  1[0-9][0-9] 0[0-9]{1,2}) (\.(25[0-5] 2[0-4][0-9]  1[0-9][0-9] 0[0-9]{1,2})) {3}</pre>
pattern	<pre>(25[0-5] 2[0-4][0-9]  1[0-9][0-9] 0[0-9]{1,2}) (\.(25[0-5] 2[0-4][0-9]  1[0-9][0-9] 0[0-9]{1,2})) {3}</pre>		
Used by	Element receiver/serveripv4		
Source	<pre>&lt;xsd:simpleType name="ipv4"&gt;   &lt;xsd:restriction base="xsd:string"&gt;     &lt;xsd:pattern value="(25[0-5] 2[0-4][0-9] 1[0-9][0-9] 0[0-9]{1,2}) (25[0-5] 2[0-4][0-9] 1[0-9][0-9] 0[0-9]{1,2})) {3}" /&gt;     &lt;xsd:annotation&gt;       &lt;xsd:documentation xml:lang="en"&gt;Internet Protocol version 4 (IPv4) is the fourth revision in the development of the Internet Protocol (IP) and the first version of the protocol to be widely deployed. Validate ipv4-addresses includes four dotted separated blocks with digits between 0 and 255.&lt;/xsd:documentation&gt;     &lt;/xsd:annotation&gt;   &lt;/xsd:restriction&gt; &lt;/xsd:simpleType&gt;</pre>		

## Simple Type ipv6


Namespace	No namespace
Diagram	
Type	xsd:string
Used by	Element receiver/serveripv6
Source	<pre>&lt;xsd:simpleType name="ipv6"&gt;   &lt;xsd:restriction base="xsd:string"&gt;     &lt;!-- not pattern defined yet... --&gt;   &lt;/xsd:restriction&gt; &lt;/xsd:simpleType&gt;</pre>

## Simple Type authtype


Namespace	No namespace										
Diagram											
Type	restriction of xsd:string										
Facets	<table> <tr> <td>enumeration</td> <td>login</td> </tr> <tr> <td>enumeration</td> <td>keyfile</td> </tr> <tr> <td>enumeration</td> <td>kerberos</td> </tr> <tr> <td>enumeration</td> <td>keyfile+login</td> </tr> <tr> <td>enumeration</td> <td>keyfile+username</td> </tr> </table>	enumeration	login	enumeration	keyfile	enumeration	kerberos	enumeration	keyfile+login	enumeration	keyfile+username
enumeration	login										
enumeration	keyfile										
enumeration	kerberos										
enumeration	keyfile+login										
enumeration	keyfile+username										
Used by	Element receiver/authtype										
Source	<pre>&lt;xsd:simpleType name="authtype"&gt;</pre>										

```
<xsd:restriction base="xsd:string">
  <xsd:enumeration value="login"/>
  <xsd:enumeration value="keyfile"/>
  <xsd:enumeration value="kerberos"/>
  <xsd:enumeration value="keyfile+login"/>
  <xsd:enumeration value="keyfile+username"/>
</xsd:restriction>
</xsd:simpleType>
```


## Simple Type keyid

Namespace	No namespace
Diagram	
Type	xsd:string
Used by	Element          crypto/usedkeyid
Source	<pre>&lt;xsd:simpleType name="keyid"&gt;   &lt;xsd:restriction base="xsd:string"&gt;   &lt;/xsd:restriction&gt; &lt;/xsd:simpleType&gt;</pre>


## Simple Type emailist

Namespace	No namespace
Diagram	
Type	xsd:string
Used by	Element          mailto/receiver
Source	<pre>&lt;xsd:simpleType name="emailist"&gt;   &lt;xsd:restriction base="xsd:string"/&gt;   &lt;!-- make to NMTOKENS or such... --&gt; &lt;/xsd:simpleType&gt;</pre>

## Simple Type url1


Namespace	No namespace				
Diagram					
Type	restriction of xsd:anyURI				
Facets	<table border="1"> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>pattern</td><td>(http://.*\...*)   (https://.*\...*)</td></tr> </table>	minLength	1	pattern	(http://.*\...*)   (https://.*\...*)
minLength	1				
pattern	(http://.*\...*)   (https://.*\...*)				
Used by	<table border="1"> <tr> <td>Elements</td><td>fileHttp/url, http/url</td></tr> <tr> <td>Complex Type</td><td>publishable_url</td></tr> </table>	Elements	fileHttp/url, http/url	Complex Type	publishable_url
Elements	fileHttp/url, http/url				
Complex Type	publishable_url				
Source	<pre>&lt;xsd:simpleType name="url1"&gt;   &lt;xsd:restriction base="xsd:anyURI"&gt;     &lt;xsd:minLength value="1"/&gt;     &lt;xsd:pattern value="http://.*\...*" /&gt;     &lt;xsd:pattern value="https://.*\...*" /&gt;   &lt;/xsd:restriction&gt; &lt;/xsd:simpleType&gt;</pre>				

## Simple Type httpmethods

Namespace	No namespace
Diagram	

Type	restriction of xsd:string	
Facets	enumeration	GET
	enumeration	POST
	enumeration	HEAD
Used by	Element	http/type
Source	<pre> &lt;xsd:simpleType name="httpmethods"&gt;   &lt;xsd:restriction base="xsd:string"&gt;     &lt;xsd:enumeration value="GET"/&gt;     &lt;xsd:enumeration value="POST"/&gt;     &lt;xsd:enumeration value="HEAD"/&gt;   &lt;/xsd:restriction&gt; &lt;/xsd:simpleType&gt; </pre>	

## Simple Type nothing

Namespace	No namespace	
Diagram	 <p>Built-in primitive type. The string datatype represents character strings in XML.</p>	
Type	restriction of xsd:string	
Facets	length	0
Used by	Element	event/nothing
Source	<pre> &lt;xsd:simpleType name="nothing"&gt;   &lt;xsd:restriction base="xsd:string"&gt;     &lt;xsd:length value="0"/&gt;   &lt;/xsd:restriction&gt; &lt;/xsd:simpleType&gt; </pre>	

## Simple Type grid

Namespace	No namespace	
Diagram	 <p>Built-in primitive type. The string datatype represents character strings in XML.</p>	
Type	restriction of xsd:string	
Facets	minLength	18
Used by	Element	ids/grid
Source	<pre> &lt;xsd:simpleType name="grid"&gt;   &lt;!-- examples: http://en.wikipedia.org/wiki/Global_Release_Identifier       A12425GABC1234002M       A1-2425G-ABC1234002-M       GRid:A1-2425G-ABC1234002-M --&gt;   &lt;xsd:restriction base="xsd:string"&gt;     &lt;xsd:minLength value="18"/&gt;   &lt;/xsd:restriction&gt; &lt;/xsd:simpleType&gt; </pre>	

## Simple Type upc


Namespace	No namespace	
Diagram	 <p>Built-in primitive type. The string datatype represents character strings in XML.</p>	
Type	restriction of xsd:string	
Facets	pattern	(\d{10,13})
Used by	Element	ids/upc
Source	<pre> &lt;xsd:simpleType name="upc"&gt;   &lt;xsd:restriction base="xsd:string"&gt;     &lt;xsd:pattern value="(\d{10,13})"&gt; </pre>	

```


<xsd:annotation>
  <xsd:documentation xml:lang="en">The Universal Product Code (UPC) is a barcode symbology
  (i.e., a specific type of barcode), that is widely used in North America, and in countries
  including the UK, Australia, and New Zealand for tracking trade items in stores. Its most common
  form, the UPC-A, consists of 12 numerical digits, which are uniquely assigned to each trade item.
  Along with the related EAN barcode, the UPC is the only barcode allowed for scanning trade items at
  the point of sale, per GS1 standards.</xsd:documentation>
</xsd:annotation>
</xsd:pattern>
</xsd:restriction>
</xsd:simpleType>

```


## Simple Type isrc

Namespace	No namespace				
Diagram					
Type	restriction of xsd:string				
Facets	<table> <tr> <td>minLength</td><td>1</td></tr> <tr> <td>pattern</td><td> <math>([a-zA-Z]\{2\}(\backslash-)?[0-9a-zA-Z]\{3\}(\backslash-)?\backslash d\{2\}(\backslash-)?\backslash d\{5\})</math> </td></tr> </table>	minLength	1	pattern	$([a-zA-Z]\{2\}(\backslash-)?[0-9a-zA-Z]\{3\}(\backslash-)?\backslash d\{2\}(\backslash-)?\backslash d\{5\})$
minLength	1				
pattern	$([a-zA-Z]\{2\}(\backslash-)?[0-9a-zA-Z]\{3\}(\backslash-)?\backslash d\{2\}(\backslash-)?\backslash d\{5\})$				
Used by	Element ids/isrc				
Source	<pre> &lt;xsd:simpleType name="isrc"&gt;   &lt;xsd:restriction base="xsd:string"&gt;     &lt;xsd:pattern value="([a-zA-Z]\{2\}(\backslash-)?[0-9a-zA-Z]\{3\}(\backslash-)?\backslash d\{2\}(\backslash-)?\backslash d\{5\})"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation xml:lang="en"&gt;The International Standard Recording Code (ISRC), defined         by ISO 3901, is an international standard code for uniquely identifying sound recordings and music         video recordings.&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:pattern&gt;     &lt;xsd:minLength value="1"/&gt;   &lt;/xsd:restriction&gt; &lt;/xsd:simpleType&gt; </pre>				

## Simple Type iswc

Namespace	No namespace		
Diagram			
Type	restriction of xsd:string		
Facets	<table> <tr> <td>minLength</td><td>1</td></tr> </table>	minLength	1
minLength	1		
Used by	Element ids/iswc		
Source	<pre> &lt;xsd:simpleType name="iswc"&gt;   &lt;xsd:restriction base="xsd:string"&gt;     &lt;xsd:minLength value="1"/&gt;   &lt;/xsd:restriction&gt; &lt;/xsd:simpleType&gt; </pre>		

## Simple Type contentauth

Namespace	No namespace		
Diagram			
Type	restriction of xsd:string		
Facets	<table> <tr> <td>minLength</td><td>1</td></tr> </table>	minLength	1
minLength	1		
Used by	Element ids/contentauth		
Source	<pre> &lt;xsd:simpleType name="contentauth"&gt;   &lt;xsd:restriction base="xsd:string"&gt; </pre>		

```
<xsd:minLength value="1"/>
</xsd:restriction>
</xsd:simpleType>
```

## Simple Type amzn

Namespace	No namespace
Diagram	
Type	restriction of xsd:integer
Facets	minExclusive 0
Used by	Element ids/amzn
Source	<pre>&lt;xsd:simpleType name="amzn"&gt;   &lt;!-- example: http://de.wikipedia.org/wiki/Amazon_Standard_Identification_Number --&gt;   &lt;xsd:restriction base="xsd:integer"&gt;     &lt;xsd:minExclusive value="0"/&gt;   &lt;/xsd:restriction&gt; &lt;/xsd:simpleType&gt;</pre>

## Simple Type isbn


Namespace	No namespace
Diagram	
Type	restriction of xsd:string
Facets	pattern (\d{1}-\d{5}-\d{3}-\d{1}   \d{1}-\d{3}-\d{5}-\d{1}   \d{1}-\d{2}-\d{6}-\d{1}   \d{3}-\d{1}-\d{6}-\d{2}- \d{1})
Used by	Element ids/isbn
Source	<pre>&lt;xsd:simpleType name="isbn"&gt;   &lt;!-- 978-3-943061-03-1        ISBN-10: 3943061035 - ISBN-13: 9783943061031 --&gt;   &lt;xsd:restriction base="xsd:string"&gt;     &lt;xsd:pattern value="(\d{1}-\d{5}-\d{3}-\d{1} \d{1}-\d{3}-\d{5}-\d{1} \d{1}-\d{2}-\d{6}-\d{1}  \d{3}-\d{1}-\d{6}-\d{2}-\d{1})"&gt;     &lt;xsd:annotation&gt;       &lt;xsd:documentation xml:lang="en"&gt;The International Standard Book Number (ISBN) is a unique numeric commercial book identifier based upon the 9-digit Standard Book Numbering (SBN) code.&lt;/ xsd:documentation&gt;     &lt;/xsd:annotation&gt;   &lt;/xsd:pattern&gt; &lt;/xsd:restriction&gt; &lt;/xsd:simpleType&gt;</pre>

## Simple Type finetunes


Namespace	No namespace								
Diagram									
Type	restriction of xsd:long								
Facets	<table> <tr> <td>totalDigits</td><td>13</td></tr> <tr> <td>maxExclusive</td><td>2000000000000</td></tr> <tr> <td>minExclusive</td><td>1000000000000</td></tr> <tr> <td>pattern</td><td>([\-+]?[0-9]+) &amp; ([0-9]{13})</td></tr> </table>	totalDigits	13	maxExclusive	2000000000000	minExclusive	1000000000000	pattern	([\-+]?[0-9]+) & ([0-9]{13})
totalDigits	13								
maxExclusive	2000000000000								
minExclusive	1000000000000								
pattern	([\-+]?[0-9]+) & ([0-9]{13})								
Used by	Element ids/finetunes								

Source	<pre> &lt;xsd:simpleType name="finetunes"&gt;   &lt;xsd:restriction base="xsd:long"&gt;     &lt;xsd:annotation&gt;       &lt;xsd:documentation xml:lang="en"&gt;The 13 digits long identifier of a item at finetunes.&lt;/xsd:documentation&gt;     &lt;/xsd:annotation&gt;     &lt;xsd:totalDigits value="13"/&gt;     &lt;xsd:minExclusive value="10000000000000"/&gt;     &lt;xsd:maxExclusive value="20000000000000"/&gt;     &lt;xsd:pattern value="[0-9]{13}"/&gt;   &lt;/xsd:restriction&gt; &lt;/xsd:simpleType&gt; </pre>
--------	--


## Simple Type gvl

Namespace	No namespace				
Diagram					
Type	restriction of xsd:string				
Facets	<table> <tr> <td>minLength</td><td>8</td></tr> <tr> <td>pattern</td><td>LC \d{5}</td></tr> </table>	minLength	8	pattern	LC \d{5}
minLength	8				
pattern	LC \d{5}				
Used by	Element ids/gvl				
Source	<pre> &lt;xsd:simpleType name="gvl"&gt;   &lt;xsd:restriction base="xsd:string"&gt;     &lt;xsd:minLength value="8"/&gt;     &lt;xsd:pattern value="LC \d{5}"/&gt;   &lt;/xsd:restriction&gt; &lt;/xsd:simpleType&gt; </pre>				

## Simple Type amg

Namespace	No namespace		
Diagram			
Type	restriction of xsd:string		
Facets	<table> <tr> <td>minLength</td><td>1</td></tr> </table>	minLength	1
minLength	1		
Used by	Element ids/amg		
Source	<pre> &lt;xsd:simpleType name="amg"&gt;   &lt;xsd:restriction base="xsd:string"&gt;     &lt;xsd:minLength value="1"/&gt;   &lt;/xsd:restriction&gt; &lt;/xsd:simpleType&gt; </pre>		

## Simple Type contributorType

Namespace	No namespace																
Diagram																	
Type	restriction of xsd:string																
Facets	<table> <tr><td>enumeration</td><td>label</td></tr> <tr><td>enumeration</td><td>performer</td></tr> <tr><td>enumeration</td><td>texter</td></tr> <tr><td>enumeration</td><td>editor</td></tr> <tr><td>enumeration</td><td>conductor</td></tr> <tr><td>enumeration</td><td>orchestra</td></tr> <tr><td>enumeration</td><td>display_artist</td></tr> <tr><td>enumeration</td><td>singer</td></tr> </table>	enumeration	label	enumeration	performer	enumeration	texter	enumeration	editor	enumeration	conductor	enumeration	orchestra	enumeration	display_artist	enumeration	singer
enumeration	label																
enumeration	performer																
enumeration	texter																
enumeration	editor																
enumeration	conductor																
enumeration	orchestra																
enumeration	display_artist																
enumeration	singer																

	enumeration	composer
	enumeration	mixer
	enumeration	remixer
	enumeration	producer
	enumeration	author
	enumeration	arranger
	enumeration	featuring
	enumeration	with
	enumeration	DJ
	enumeration	versus
	enumeration	meets
	enumeration	presents
	enumeration	compiler
	enumeration	copyright
	enumeration	production
	enumeration	publisher
	enumeration	clearinghouse
Used by	Element	contributor/type
Source	<pre> &lt;xsd:simpleType name="contributorType"&gt;   &lt;xsd:restriction base="xsd:string"&gt;     &lt;xsd:enumeration value="label"/&gt;     &lt;xsd:enumeration value="performer"/&gt;     &lt;xsd:enumeration value="texter"/&gt;     &lt;xsd:enumeration value="editor"/&gt;     &lt;xsd:enumeration value="conductor"/&gt;     &lt;xsd:enumeration value="orchestra"/&gt;     &lt;xsd:enumeration value="display_artist"/&gt;     &lt;xsd:enumeration value="singer"/&gt;     &lt;xsd:enumeration value="composer"/&gt;     &lt;xsd:enumeration value="mixer"/&gt;     &lt;xsd:enumeration value="remixer"/&gt;     &lt;xsd:enumeration value="producer"/&gt;     &lt;xsd:enumeration value="author"/&gt;     &lt;xsd:enumeration value="arranger"/&gt;     &lt;xsd:enumeration value="featuring"/&gt;     &lt;xsd:enumeration value="with"/&gt;     &lt;xsd:enumeration value="DJ"/&gt;     &lt;xsd:enumeration value="versus"/&gt;     &lt;xsd:enumeration value="meets"/&gt;     &lt;xsd:enumeration value="presents"/&gt;     &lt;xsd:enumeration value="compiler"/&gt;     &lt;xsd:enumeration value="copyright"/&gt;     &lt;xsd:enumeration value="production"/&gt;     &lt;xsd:enumeration value="publisher"/&gt;     &lt;xsd:enumeration value="clearinghouse"/&gt;   &lt;/xsd:restriction&gt; &lt;/xsd:simpleType&gt; </pre>	


## Simple Type year

Namespace	No namespace	
Diagram		
Type	restriction of xsd:integer	
Facets	totalDigits	4
Used by	Element	contributor/year
Source	<pre> &lt;xsd:simpleType name="year"&gt;   &lt;xsd:restriction base="xsd:integer"&gt;     &lt;xsd:totalDigits value="4"/&gt;   &lt;/xsd:restriction&gt; &lt;/xsd:simpleType&gt; </pre>	


## Simple Type allowance

Namespace	No namespace	
Diagram		
Type	restriction of xsd:string	
Facets	enumeration	allow
	enumeration	disallow
Used by	Attributes	channel/@type, territory/@type
Source	<pre>&lt;xsd:simpleType name="allowance"&gt;   &lt;xsd:restriction base="xsd:string"&gt;     &lt;xsd:enumeration value="allow"/&gt;     &lt;xsd:enumeration value="disallow"/&gt;   &lt;/xsd:restriction&gt; &lt;/xsd:simpleType&gt;</pre>	

## Simple Type operator

Namespace	No namespace	
Diagram		
Type	restriction of xsd:string	
Facets	enumeration	equals
	enumeration	before
	enumeration	after
	enumeration	contains
	enumeration	containedin
Used by	Element	if/operator
Source	<pre>&lt;xsd:simpleType name="operator"&gt;   &lt;xsd:restriction base="xsd:string"&gt;     &lt;xsd:enumeration value="equals"/&gt;     &lt;xsd:enumeration value="before"/&gt;     &lt;xsd:enumeration value="after"/&gt;     &lt;xsd:enumeration value="contains"/&gt;     &lt;xsd:enumeration value="containedin"/&gt;   &lt;/xsd:restriction&gt; &lt;/xsd:simpleType&gt;</pre>	

## Simple Type explicitLyrics


Namespace	No namespace	
Diagram		
Type	restriction of xsd:string	
Facets	enumeration	true
	enumeration	false
	enumeration	cleaned
Used by	Element	tags/explicit_lyrics
Source	<pre>&lt;xsd:simpleType name="explicitLyrics"&gt;   &lt;xsd:restriction base="xsd:string"&gt;     &lt;xsd:enumeration value="true"/&gt;     &lt;xsd:enumeration value="false"/&gt;     &lt;xsd:enumeration value="cleaned"/&gt;   &lt;/xsd:restriction&gt; &lt;/xsd:simpleType&gt;</pre>	




## Simple Type fileType

Namespace	No namespace										
Diagram											
Type	restriction of xsd:string										
Facets	<table> <tr><td>enumeration</td><td>full</td></tr> <tr><td>enumeration</td><td>prelistening</td></tr> <tr><td>enumeration</td><td>frontcover</td></tr> <tr><td>enumeration</td><td>backcover</td></tr> <tr><td>enumeration</td><td>booklet</td></tr> </table>	enumeration	full	enumeration	prelistening	enumeration	frontcover	enumeration	backcover	enumeration	booklet
enumeration	full										
enumeration	prelistening										
enumeration	frontcover										
enumeration	backcover										
enumeration	booklet										
Used by	Element          fileType										
Source	<pre> &lt;xsd:simpleType name="fileType"&gt;   &lt;xsd:restriction base="xsd:string"&gt;     &lt;xsd:enumeration value="full"/&gt;     &lt;xsd:enumeration value="prelistening"/&gt;     &lt;xsd:enumeration value="frontcover"/&gt;     &lt;xsd:enumeration value="backcover"/&gt;     &lt;xsd:enumeration value="booklet"/&gt;   &lt;/xsd:restriction&gt; &lt;/xsd:simpleType&gt; </pre>										

## Simple Type md5

Namespace	No namespace				
Diagram					
Type	restriction of notemptystring				
Type hierarchy	<ul style="list-style-type: none"> <li>xsd:string           <ul style="list-style-type: none"> <li>notemptystring               <ul style="list-style-type: none"> <li>md5</li> </ul> </li> </ul> </li> </ul>				
Facets	<table> <tr><td>minLength</td><td>8</td></tr> <tr><td>pattern</td><td>(([A-F0-9]{2}:){15}[A-F0-9]{2}) ([a-f0-9]{32})</td></tr> </table>	minLength	8	pattern	(([A-F0-9]{2}:){15}[A-F0-9]{2}) ([a-f0-9]{32})
minLength	8				
pattern	(([A-F0-9]{2}:){15}[A-F0-9]{2}) ([a-f0-9]{32})				
Used by	Element          checksums/md5				
Source	<pre> &lt;xsd:simpleType name="md5"&gt;   &lt;xsd:restriction base="notemptystring"&gt;     &lt;xsd:minLength value="8"/&gt;     &lt;xsd:pattern value="([A-F0-9]{2}:){15}[A-F0-9]{2}" /&gt;     &lt;xsd:pattern value="[a-f0-9]{32}" /&gt;   &lt;/xsd:restriction&gt; &lt;/xsd:simpleType&gt; </pre>				

## Simple Type sha1

Namespace	No namespace				
Diagram					
Type	restriction of notemptystring				
Type hierarchy	<ul style="list-style-type: none"> <li>xsd:string           <ul style="list-style-type: none"> <li>notemptystring               <ul style="list-style-type: none"> <li>sha1</li> </ul> </li> </ul> </li> </ul>				
Facets	<table> <tr><td>minLength</td><td>8</td></tr> <tr><td>pattern</td><td>(([A-F0-9]{2}:){19}[A-F0-9]{2}) ([a-f0-9]{40})</td></tr> </table>	minLength	8	pattern	(([A-F0-9]{2}:){19}[A-F0-9]{2}) ([a-f0-9]{40})
minLength	8				
pattern	(([A-F0-9]{2}:){19}[A-F0-9]{2}) ([a-f0-9]{40})				
Used by	Element          checksums/sha1				

Source	<pre> &lt;xsd:simpleType name="sha1"&gt;   &lt;!-- example: E8:27:4E:86:68:9E:CC:67:F0:93:BC:AC:A6:E2:09:C1:C6:25:7D:7B 44                b2f5171e85760127d04390a7f549da3b669755 --&gt;   &lt;xsd:restriction base="notemptystring"&gt;     &lt;xsd:minLength value="8"/&gt;     &lt;xsd:pattern value="([A-F0-9]{2}:){19}[A-F0-9]{2}"/&gt;     &lt;xsd:pattern value="[a-f0-9]{40}"/&gt;   &lt;/xsd:restriction&gt; &lt;/xsd:simpleType&gt; </pre>
--------	---

## Simple Type sha256

Namespace	No namespace				
Diagram	<pre> graph LR     sha256[sha256] --- notemptystring[notemptystring] </pre>				
Type	restriction of notemptystring				
Type hierarchy	<ul style="list-style-type: none"> <li>xsd:string             <ul style="list-style-type: none"> <li>notemptystring                     <ul style="list-style-type: none"> <li>sha256</li> </ul> </li> </ul> </li> </ul>				
Facets	<table> <tr> <td>minLength</td><td>8</td></tr> <tr> <td>pattern</td><td>([A-F0-9]{2}:){31}[A-F0-9]{2}</td></tr> </table>	minLength	8	pattern	([A-F0-9]{2}:){31}[A-F0-9]{2}
minLength	8				
pattern	([A-F0-9]{2}:){31}[A-F0-9]{2}				
Used by	Element checksums/sha256				
Source	<pre> &lt;xsd:simpleType name="sha256"&gt;   &lt;!-- example:                7E:DB:34:A2:E8:38:1C:FE:58:67:97:D0:4F:1A:37:0D:6C:CD:0D:87:62:00:75:FF:FA:71:47:80:DA:A4:8F:38 --&gt;   &lt;xsd:restriction base="notemptystring"&gt;     &lt;xsd:minLength value="8"/&gt;     &lt;xsd:pattern value="([A-F0-9]{2}:){31}[A-F0-9]{2}"/&gt;   &lt;/xsd:restriction&gt; &lt;/xsd:simpleType&gt; </pre>				

## Simple Type fileChannels

Namespace	No namespace								
Diagram	<pre> graph LR     fileChannels[fileChannels] --- xsd_string[xsd:string] </pre>								
Type	restriction of xsd:string								
Facets	<table> <tr> <td>enumeration</td><td>mono</td></tr> <tr> <td>enumeration</td><td>stereo</td></tr> <tr> <td>enumeration</td><td>joint-stereo</td></tr> <tr> <td>enumeration</td><td>5.1</td></tr> </table>	enumeration	mono	enumeration	stereo	enumeration	joint-stereo	enumeration	5.1
enumeration	mono								
enumeration	stereo								
enumeration	joint-stereo								
enumeration	5.1								
Used by	Element file/channels								
Source	<pre> &lt;xsd:simpleType name="fileChannels"&gt;   &lt;xsd:restriction base="xsd:string"&gt;     &lt;xsd:enumeration value="mono"/&gt;     &lt;xsd:enumeration value="stereo"/&gt;     &lt;xsd:enumeration value="joint-stereo"/&gt;     &lt;xsd:enumeration value="5.1"/&gt;   &lt;/xsd:restriction&gt; &lt;/xsd:simpleType&gt; </pre>								

## Attribute(s)

### Attribute publishable\_url / @publishable

Namespace	No namespace
Type	xsd:boolean
Properties	content: simple
Used by	Complex Type publishable_url

Source	<code>&lt;xsd:attribute name="publishable" type="xsd:boolean"/&gt;</code>
--------	---

#### Attribute contributor / @num

Namespace	No namespace	
Type	xsd:integer	
Properties	content:	simple
Used by	Complex Type	contributor
Source	<code>&lt;xsd:attribute name="num" type="xsd:integer"/&gt;</code>	

#### Attribute promotext / @lang

Namespace	No namespace	
Type	xsd:string	
Properties	content:	simple
Used by	Complex Type	promotext
Source	<code>&lt;xsd:attribute name="lang" type="xsd:string"/&gt;</code>	

#### Attribute teasertext / @lang

Namespace	No namespace	
Type	xsd:string	
Properties	content:	simple
Used by	Complex Type	teasertext
Source	<code>&lt;xsd:attribute name="lang" type="xsd:string"/&gt;</code>	

#### Attribute physical\_distributor / @publishable

Namespace	No namespace	
Type	xsd:boolean	
Properties	content:	simple
Used by	Complex Type	physical_distributor
Source	<code>&lt;xsd:attribute name="publishable" type="xsd:boolean"/&gt;</code>	

#### Attribute territory / @type

Namespace	No namespace	
Type	allowance	
Properties	use:	optional
Facets	enumeration	allow
	enumeration	disallow
Used by	Complex Type	territory
Source	<code>&lt;xsd:attribute name="type" type="allowance" use="optional"/&gt;</code>	

#### Attribute channel / @type

Namespace	No namespace	
Type	allowance	
Properties	use:	required
Facets	enumeration	allow
	enumeration	disallow
Used by	Complex Type	channel
Source	<code>&lt;xsd:attribute name="type" type="allowance" use="required"/&gt;</code>	

## Attribute rule / @num

Namespace	No namespace	
Type	xsd:integer	
Properties	content:	simple
Used by	Complex Type	rule
Source	<xsd:attribute name="num" type="xsd:integer" />	

## Namespace: "http://fnppl.org/opensdx/countrycodes"

### Schema(s)

#### Imported schema openSDX\_countryCodes.xsd

Namespace	http://fnppl.org/opensdx/countrycodes	
Properties	attribute form default:	unqualified
	element form default:	unqualified

### Simple Type(s)

#### Simple Type countryCode

Namespace	http://fnppl.org/opensdx/countrycodes		
Annotations	This element includes a list of ISO 3166-1 country codes.		
Diagram			
Type	restriction of xsd:string		
Facets	enumeration	AF	Afghanistan
	enumeration	AX	Åland Islands
	enumeration	AL	Albania
	enumeration	DZ	Algeria
	enumeration	AS	American Samoa
	enumeration	AD	Andorra
	enumeration	AO	Angola
	enumeration	AI	Anguilla
	enumeration	AQ	Antarctica
	enumeration	AG	Antigua and Barbuda
	enumeration	AR	Argentina
	enumeration	AM	Armenia
	enumeration	AW	Aruba
	enumeration	AU	Australia
	enumeration	AT	Austria
	enumeration	AZ	Azerbaijan
	enumeration	BS	Bahamas
	enumeration	BH	Bahrain
	enumeration	BD	Bangladesh
	enumeration	BB	Barbados
	enumeration	BY	Belarus
	enumeration	BE	Belgium
	enumeration	BZ	Belize
	enumeration	BJ	Benin
	enumeration	BM	Bermuda

enumeration	BT	Bhutan
enumeration	BO	Bolivia, Plurinational State of
enumeration	BQ	Bonaire, Sint Eustatius and Saba
enumeration	BA	Bosnia and Herzegovina
enumeration	BW	Botswana
enumeration	BV	Bouvet Island
enumeration	BR	Brazil
enumeration	IO	British Indian Ocean Territory
enumeration	BN	Brunei Darussalam
enumeration	BG	Bulgaria
enumeration	BF	Burkina Faso
enumeration	BI	Burundi
enumeration	KH	Cambodia
enumeration	CM	Cameroon
enumeration	CA	Canada
enumeration	CV	Cape Verde
enumeration	KY	Cayman Islands
enumeration	CF	Central African Republic
enumeration	TD	Chad
enumeration	CL	Chile
enumeration	CN	China
enumeration	CX	Christmas Island
enumeration	CC	Cocos (Keeling) Islands
enumeration	CO	Colombia
enumeration	KM	Comoros
enumeration	CG	Congo
enumeration	CD	Congo, the Democratic Republic of the
enumeration	CK	Cook Islands
enumeration	CR	Costa Rica
enumeration	CI	Côte d'Ivoire
enumeration	HR	Croatia
enumeration	CU	Cuba
enumeration	CW	Curaçao
enumeration	CY	Cyprus
enumeration	CZ	Czech Republic
enumeration	DK	Denmark
enumeration	DJ	Djibouti
enumeration	DM	Dominica
enumeration	DO	Dominican Republic
enumeration	EC	Ecuador
enumeration	EG	Egypt
enumeration	SV	El Salvador
enumeration	GQ	Equatorial Guinea
enumeration	ER	Eritrea
enumeration	EE	Estonia
enumeration	ET	Ethiopia
enumeration	FK	Falkland Islands (Malvinas)
enumeration	FO	Faroe Islands
enumeration	FJ	Fiji

enumeration	FI	Finland
enumeration	FR	France
enumeration	GF	French Guiana
enumeration	PF	French Polynesia
enumeration	TF	French Southern Territories
enumeration	GA	Gabon
enumeration	GM	Gambia
enumeration	GE	Georgia
enumeration	DE	Germany
enumeration	GH	Ghana
enumeration	GI	Gibraltar
enumeration	GR	Greece
enumeration	GL	Greenland
enumeration	GD	Grenada
enumeration	GP	Guadeloupe
enumeration	GU	Guam
enumeration	GT	Guatemala
enumeration	GG	Guernsey
enumeration	GN	Guinea
enumeration	GW	Guinea-Bissau
enumeration	GY	Guyana
enumeration	HT	Haiti
enumeration	HM	Heard Island and McDonald Islands
enumeration	VA	Holy See (Vatican City State)
enumeration	HN	Honduras
enumeration	HK	Hong Kong
enumeration	HU	Hungary
enumeration	IS	Iceland
enumeration	IN	India
enumeration	ID	Indonesia
enumeration	IR	Iran, Islamic Republic of
enumeration	IQ	Iraq
enumeration	IE	Ireland
enumeration	IM	Isle of Man
enumeration	IL	Israel
enumeration	IT	Italy
enumeration	JM	Jamaica
enumeration	JP	Japan
enumeration	JE	Jersey
enumeration	JO	Jordan
enumeration	KZ	Kazakhstan
enumeration	KE	Kenya
enumeration	KI	Kiribati
enumeration	KP	Korea, Democratic People's Republic of
enumeration	KR	Korea, Republic of
enumeration	KW	Kuwait
enumeration	KG	Kyrgyzstan
enumeration	LA	Lao People's Democratic Republic
enumeration	LV	Latvia

enumeration	LB	Lebanon
enumeration	LS	Lesotho
enumeration	LR	Liberia
enumeration	LY	Libyan Arab Jamahiriya
enumeration	LI	Liechtenstein
enumeration	LT	Lithuania
enumeration	LU	Luxembourg
enumeration	MO	Macao
enumeration	MK	Macedonia, the former Yugoslav Republic of
enumeration	MG	Madagascar
enumeration	MW	Malawi
enumeration	MY	Malaysia
enumeration	MV	Maldives
enumeration	ML	Mali
enumeration	MT	Malta
enumeration	MH	Marshall Islands
enumeration	MQ	Martinique
enumeration	MR	Mauritania
enumeration	MU	Mauritius
enumeration	YT	Mayotte
enumeration	MX	Mexico
enumeration	FM	Micronesia, Federated States of
enumeration	MD	Moldova, Republic of
enumeration	MC	Monaco
enumeration	MN	Mongolia
enumeration	ME	Montenegro
enumeration	MS	Montserrat
enumeration	MA	Morocco
enumeration	MZ	Mozambique
enumeration	MM	Myanmar
enumeration	NA	Namibia
enumeration	NR	Nauru
enumeration	NP	Nepal
enumeration	NL	Netherlands
enumeration	NC	New Caledonia
enumeration	NZ	New Zealand
enumeration	NI	Nicaragua
enumeration	NE	Niger
enumeration	NG	Nigeria
enumeration	NU	Niue
enumeration	NF	Norfolk Island
enumeration	MP	Northern Mariana Islands
enumeration	NO	Norway
enumeration	OM	Oman
enumeration	PK	Pakistan
enumeration	PW	Palau
enumeration	PS	Palestinian Territory, Occupied
enumeration	PA	Panama
enumeration	PG	Papua New Guinea

enumeration	PY	Paraguay
enumeration	PE	Peru
enumeration	PH	Philippines
enumeration	PN	Pitcairn
enumeration	PL	Poland
enumeration	PT	Portugal
enumeration	PR	Puerto Rico
enumeration	QA	Qatar
enumeration	RE	Réunion
enumeration	RO	Romania
enumeration	RU	Russian Federation
enumeration	RW	Rwanda
enumeration	BL	Saint Barthélemy
enumeration	SH	Saint Helena, Ascension and Tristan da Cunha
enumeration	KN	Saint Kitts and Nevis
enumeration	LC	Saint Lucia
enumeration	MF	Saint Martin (French part)
enumeration	PM	Saint Pierre and Miquelon
enumeration	VC	Saint Vincent and the Grenadines
enumeration	WS	Samoa
enumeration	SM	San Marino
enumeration	ST	Sao Tome and Principe
enumeration	SA	Saudi Arabia
enumeration	SN	Senegal
enumeration	RS	Serbia
enumeration	SC	Seychelles
enumeration	SL	Sierra Leone
enumeration	SG	Singapore
enumeration	SX	Sint Maarten (Dutch part)
enumeration	SK	Slovakia
enumeration	SI	Slovenia
enumeration	SB	Solomon Islands
enumeration	SO	Somalia
enumeration	ZA	South Africa
enumeration	GS	South Georgia and the South Sandwich Islands
enumeration	SS	South Sudan
enumeration	ES	Spain
enumeration	LK	Sri Lanka
enumeration	SD	Sudan
enumeration	SR	Suriname
enumeration	SJ	Svalbard and Jan Mayen
enumeration	SZ	Swaziland
enumeration	SE	Sweden
enumeration	CH	Switzerland
enumeration	SY	Syrian Arab Republic
enumeration	TW	Taiwan, Province of China
enumeration	TJ	Tajikistan
enumeration	TZ	Tanzania, United Republic of
enumeration	TH	Thailand



	enumeration	TL	Timor-Leste
	enumeration	TG	Togo
	enumeration	TK	Tokelau
	enumeration	TO	Tonga
	enumeration	TT	Trinidad and Tobago
	enumeration	TN	Tunisia
	enumeration	TR	Turkey
	enumeration	TM	Turkmenistan
	enumeration	TC	Turks and Caicos Islands
	enumeration	TV	Tuvalu
	enumeration	UG	Uganda
	enumeration	UA	Ukraine
	enumeration	AE	United Arab Emirates
	enumeration	GB	United Kingdom
	enumeration	US	United States
	enumeration	UM	United States Minor Outlying Islands
	enumeration	UY	Uruguay
	enumeration	UZ	Uzbekistan
	enumeration	VU	Vanuatu
	enumeration	VE	Venezuela, Bolivarian Republic of
	enumeration	VN	Viet Nam
	enumeration	VG	Virgin Islands, British
	enumeration	VI	Virgin Islands, U.S.
	enumeration	WF	Wallis and Futuna
	enumeration	WW	WorldWide
	enumeration	EH	Western Sahara
	enumeration	YE	Yemen
	enumeration	ZM	Zambia
	enumeration	ZW	Zimbabwe
Used by	Elements	information/origin_country, to/country	
	Complex Type	territory	
Source	<pre>&lt;xsd:simpleType name="countryCode"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;This element includes a list of ISO 3166-1 country codes.&lt;/ xsd:documentation&gt;   &lt;/xsd:annotation&gt;   &lt;xsd:restriction base="xsd:string"&gt;     &lt;xsd:enumeration value="AF"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Afghanistan&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="AX"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Åland Islands&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="AL"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Albania&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="DZ"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Algeria&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="AS"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;American Samoa&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;   &lt;/xsd:restriction&gt; &lt;/xsd:simpleType&gt;</pre>		

```

</xsd:enumeration>
<xsd:enumeration value="AD">
  <xsd:annotation>
    <xsd:documentation>Andorra</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="AO">
  <xsd:annotation>
    <xsd:documentation>Angola</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="AI">
  <xsd:annotation>
    <xsd:documentation>Anguilla</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="AQ">
  <xsd:annotation>
    <xsd:documentation>Antarctica</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="AG">
  <xsd:annotation>
    <xsd:documentation>Antigua and Barbuda</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="AR">
  <xsd:annotation>
    <xsd:documentation>Argentina</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="AM">
  <xsd:annotation>
    <xsd:documentation>Armenia</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="AW">
  <xsd:annotation>
    <xsd:documentation>Aruba</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="AU">
  <xsd:annotation>
    <xsd:documentation>Australia</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="AT">
  <xsd:annotation>
    <xsd:documentation>Austria</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="AZ">
  <xsd:annotation>
    <xsd:documentation>Azerbaijan</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="BS">
  <xsd:annotation>
    <xsd:documentation>Bahamas</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="BH">
  <xsd:annotation>
    <xsd:documentation>Bahrain</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="BD">
  <xsd:annotation>
    <xsd:documentation>Bangladesh</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="BB">
  <xsd:annotation>
    <xsd:documentation>Barbados</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="BY">
  <xsd:annotation>
    <xsd:documentation>Belarus</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="BE">
  <xsd:annotation>

```

```

        <xsd:documentation>Belgium</xsd:documentation>
    </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="BZ">
    <xsd:annotation>
        <xsd:documentation>Belize</xsd:documentation>
    </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="BJ">
    <xsd:annotation>
        <xsd:documentation>Benin</xsd:documentation>
    </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="BM">
    <xsd:annotation>
        <xsd:documentation>Bermuda</xsd:documentation>
    </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="BT">
    <xsd:annotation>
        <xsd:documentation>Bhutan</xsd:documentation>
    </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="BO">
    <xsd:annotation>
        <xsd:documentation>Bolivia, Plurinational State of</xsd:documentation>
    </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="BQ">
    <xsd:annotation>
        <xsd:documentation>Bonaire, Sint Eustatius and Saba</xsd:documentation>
    </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="BA">
    <xsd:annotation>
        <xsd:documentation>Bosnia and Herzegovina</xsd:documentation>
    </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="BW">
    <xsd:annotation>
        <xsd:documentation>Botswana</xsd:documentation>
    </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="BV">
    <xsd:annotation>
        <xsd:documentation>Bouvet Island</xsd:documentation>
    </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="BR">
    <xsd:annotation>
        <xsd:documentation>Brazil</xsd:documentation>
    </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="IO">
    <xsd:annotation>
        <xsd:documentation>British Indian Ocean Territory</xsd:documentation>
    </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="BN">
    <xsd:annotation>
        <xsd:documentation>Brunei Darussalam</xsd:documentation>
    </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="BG">
    <xsd:annotation>
        <xsd:documentation>Bulgaria</xsd:documentation>
    </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="BF">
    <xsd:annotation>
        <xsd:documentation>Burkina Faso</xsd:documentation>
    </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="BI">
    <xsd:annotation>
        <xsd:documentation>Burundi</xsd:documentation>
    </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="KH">
    <xsd:annotation>
        <xsd:documentation>Cambodia</xsd:documentation>
    </xsd:annotation>
</xsd:enumeration>

```

```

<xsd:enumeration value="CM">
  <xsd:annotation>
    <xsd:documentation>Cameroon</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="CA">
  <xsd:annotation>
    <xsd:documentation>Canada</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="CV">
  <xsd:annotation>
    <xsd:documentation>Cape Verde</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="KY">
  <xsd:annotation>
    <xsd:documentation>Cayman Islands</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="CF">
  <xsd:annotation>
    <xsd:documentation>Central African Republic</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="TD">
  <xsd:annotation>
    <xsd:documentation>Chad</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="CL">
  <xsd:annotation>
    <xsd:documentation>Chile</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="CN">
  <xsd:annotation>
    <xsd:documentation>China</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="CX">
  <xsd:annotation>
    <xsd:documentation>Christmas Island</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="CC">
  <xsd:annotation>
    <xsd:documentation>Cocos (Keeling) Islands</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="CO">
  <xsd:annotation>
    <xsd:documentation>Colombia</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="KM">
  <xsd:annotation>
    <xsd:documentation>Comoros</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="CG">
  <xsd:annotation>
    <xsd:documentation>Congo</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="CD">
  <xsd:annotation>
    <xsd:documentation>Congo, the Democratic Republic of the</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="CK">
  <xsd:annotation>
    <xsd:documentation>Cook Islands</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="CR">
  <xsd:annotation>
    <xsd:documentation>Costa Rica</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="CI">
  <xsd:annotation>
    <xsd:documentation>Côte d'Ivoire</xsd:documentation>
  </xsd:annotation>

```

```

    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="HR">
    <xsd:annotation>
      <xsd:documentation>Croatia</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="CU">
    <xsd:annotation>
      <xsd:documentation>Cuba</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="CW">
    <xsd:annotation>
      <xsd:documentation>Curaçao</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="CY">
    <xsd:annotation>
      <xsd:documentation>Cyprus</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="CZ">
    <xsd:annotation>
      <xsd:documentation>Czech Republic</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="DK">
    <xsd:annotation>
      <xsd:documentation>Denmark</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="DJ">
    <xsd:annotation>
      <xsd:documentation>Djibouti</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="DM">
    <xsd:annotation>
      <xsd:documentation>Dominica</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="DO">
    <xsd:annotation>
      <xsd:documentation>Dominican Republic</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="EC">
    <xsd:annotation>
      <xsd:documentation>Ecuador</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="EG">
    <xsd:annotation>
      <xsd:documentation>Egypt</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="SV">
    <xsd:annotation>
      <xsd:documentation>El Salvador</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="GQ">
    <xsd:annotation>
      <xsd:documentation>Equatorial Guinea</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="ER">
    <xsd:annotation>
      <xsd:documentation>Eritrea</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="EE">
    <xsd:annotation>
      <xsd:documentation>Estonia</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="ET">
    <xsd:annotation>
      <xsd:documentation>Ethiopia</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="FK">

```

```

<xsd:annotation>
  <xsd:documentation>Falkland Islands (Malvinas)</xsd:documentation>
</xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="FO">
  <xsd:annotation>
    <xsd:documentation>Faroe Islands</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="FJ">
  <xsd:annotation>
    <xsd:documentation>Fiji</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="FI">
  <xsd:annotation>
    <xsd:documentation>Finland</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="FR">
  <xsd:annotation>
    <xsd:documentation>France</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="GF">
  <xsd:annotation>
    <xsd:documentation>French Guiana</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="PF">
  <xsd:annotation>
    <xsd:documentation>French Polynesia</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="TF">
  <xsd:annotation>
    <xsd:documentation>French Southern Territories</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="GA">
  <xsd:annotation>
    <xsd:documentation>Gabon</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="GM">
  <xsd:annotation>
    <xsd:documentation>Gambia</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="GE">
  <xsd:annotation>
    <xsd:documentation>Georgia</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="DE">
  <xsd:annotation>
    <xsd:documentation>Germany</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="GH">
  <xsd:annotation>
    <xsd:documentation>Ghana</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="GI">
  <xsd:annotation>
    <xsd:documentation>Gibraltar</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="GR">
  <xsd:annotation>
    <xsd:documentation>Greece</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="GL">
  <xsd:annotation>
    <xsd:documentation>Greenland</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="GD">
  <xsd:annotation>
    <xsd:documentation>Grenada</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>

```

```

</xsd:enumeration>
<xsd:enumeration value="GP">
  <xsd:annotation>
    <xsd:documentation>Guadeloupe</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="GU">
  <xsd:annotation>
    <xsd:documentation>Guam</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="GT">
  <xsd:annotation>
    <xsd:documentation>Guatemala</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="GG">
  <xsd:annotation>
    <xsd:documentation>Guernsey</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="GN">
  <xsd:annotation>
    <xsd:documentation>Guinea</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="GW">
  <xsd:annotation>
    <xsd:documentation>Guinea-Bissau</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="GY">
  <xsd:annotation>
    <xsd:documentation>Guyana</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="HT">
  <xsd:annotation>
    <xsd:documentation>Haiti</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="HM">
  <xsd:annotation>
    <xsd:documentation>Heard Island and McDonald Islands</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="VA">
  <xsd:annotation>
    <xsd:documentation>Holy See (Vatican City State)</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="HN">
  <xsd:annotation>
    <xsd:documentation>Honduras</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="HK">
  <xsd:annotation>
    <xsd:documentation>Hong Kong</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="HU">
  <xsd:annotation>
    <xsd:documentation>Hungary</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="IS">
  <xsd:annotation>
    <xsd:documentation>Iceland</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="IN">
  <xsd:annotation>
    <xsd:documentation>India</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="ID">
  <xsd:annotation>
    <xsd:documentation>Indonesia</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="IR">
  <xsd:annotation>

```

```

        <xsd:documentation>Iran, Islamic Republic of</xsd:documentation>
    </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="IQ">
    <xsd:annotation>
        <xsd:documentation>Iraq</xsd:documentation>
    </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="IE">
    <xsd:annotation>
        <xsd:documentation>Ireland</xsd:documentation>
    </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="IM">
    <xsd:annotation>
        <xsd:documentation>Isle of Man</xsd:documentation>
    </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="IL">
    <xsd:annotation>
        <xsd:documentation>Israel</xsd:documentation>
    </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="IT">
    <xsd:annotation>
        <xsd:documentation>Italy</xsd:documentation>
    </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="JM">
    <xsd:annotation>
        <xsd:documentation>Jamaica</xsd:documentation>
    </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="JP">
    <xsd:annotation>
        <xsd:documentation>Japan</xsd:documentation>
    </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="JE">
    <xsd:annotation>
        <xsd:documentation>Jersey</xsd:documentation>
    </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="JO">
    <xsd:annotation>
        <xsd:documentation>Jordan</xsd:documentation>
    </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="KZ">
    <xsd:annotation>
        <xsd:documentation>Kazakhstan</xsd:documentation>
    </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="KE">
    <xsd:annotation>
        <xsd:documentation>Kenya</xsd:documentation>
    </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="KI">
    <xsd:annotation>
        <xsd:documentation>Kiribati</xsd:documentation>
    </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="KP">
    <xsd:annotation>
        <xsd:documentation>Korea, Democratic People's Republic of</xsd:documentation>
    </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="KR">
    <xsd:annotation>
        <xsd:documentation>Korea, Republic of</xsd:documentation>
    </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="KW">
    <xsd:annotation>
        <xsd:documentation>Kuwait</xsd:documentation>
    </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="KG">
    <xsd:annotation>
        <xsd:documentation>Kyrgyzstan</xsd:documentation>
    </xsd:annotation>
</xsd:enumeration>

```



```

<xsd:enumeration value="LA">
  <xsd:annotation>
    <xsd:documentation>Lao People's Democratic Republic</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="LV">
  <xsd:annotation>
    <xsd:documentation>Latvia</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="LB">
  <xsd:annotation>
    <xsd:documentation>Lebanon</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="LS">
  <xsd:annotation>
    <xsd:documentation>Lesotho</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="LR">
  <xsd:annotation>
    <xsd:documentation>Liberia</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="LY">
  <xsd:annotation>
    <xsd:documentation>Libyan Arab Jamahiriya</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="LI">
  <xsd:annotation>
    <xsd:documentation>Liechtenstein</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="LT">
  <xsd:annotation>
    <xsd:documentation>Lithuania</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="LU">
  <xsd:annotation>
    <xsd:documentation>Luxembourg</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="MO">
  <xsd:annotation>
    <xsd:documentation>Macao</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="MK">
  <xsd:annotation>
    <xsd:documentation>Macedonia, the former Yugoslav Republic of</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="MG">
  <xsd:annotation>
    <xsd:documentation>Madagascar</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="MW">
  <xsd:annotation>
    <xsd:documentation>Malawi</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="MY">
  <xsd:annotation>
    <xsd:documentation>Malaysia</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="MV">
  <xsd:annotation>
    <xsd:documentation>Maldives</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="ML">
  <xsd:annotation>
    <xsd:documentation>Mali</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="MT">
  <xsd:annotation>
    <xsd:documentation>Malta</xsd:documentation>
  </xsd:annotation>

```

```

    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="MH">
    <xsd:annotation>
      <xsd:documentation>Marshall Islands</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="MQ">
    <xsd:annotation>
      <xsd:documentation>Martinique</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="MR">
    <xsd:annotation>
      <xsd:documentation>Mauritania</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="MU">
    <xsd:annotation>
      <xsd:documentation>Mauritius</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="YT">
    <xsd:annotation>
      <xsd:documentation>Mayotte</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="MX">
    <xsd:annotation>
      <xsd:documentation>Mexico</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="FM">
    <xsd:annotation>
      <xsd:documentation>Micronesia, Federated States of</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="MD">
    <xsd:annotation>
      <xsd:documentation>Moldova, Republic of</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="MC">
    <xsd:annotation>
      <xsd:documentation>Monaco</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="MN">
    <xsd:annotation>
      <xsd:documentation>Mongolia</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="ME">
    <xsd:annotation>
      <xsd:documentation>Montenegro</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="MS">
    <xsd:annotation>
      <xsd:documentation>Montserrat</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="MA">
    <xsd:annotation>
      <xsd:documentation>Morocco</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="MZ">
    <xsd:annotation>
      <xsd:documentation>Mozambique</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="MM">
    <xsd:annotation>
      <xsd:documentation>Myanmar</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="NA">
    <xsd:annotation>
      <xsd:documentation>Namibia</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="NR">

```

```

<xsd:annotation>
  <xsd:documentation>Nauru</xsd:documentation>
</xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="NP">
  <xsd:annotation>
    <xsd:documentation>Nepal</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="NL">
  <xsd:annotation>
    <xsd:documentation>Netherlands</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="NC">
  <xsd:annotation>
    <xsd:documentation>New Caledonia</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="NZ">
  <xsd:annotation>
    <xsd:documentation>New Zealand</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="NI">
  <xsd:annotation>
    <xsd:documentation>Nicaragua</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="NE">
  <xsd:annotation>
    <xsd:documentation>Niger</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="NG">
  <xsd:annotation>
    <xsd:documentation>Nigeria</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="NU">
  <xsd:annotation>
    <xsd:documentation>Niue</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="NF">
  <xsd:annotation>
    <xsd:documentation>Norfolk Island</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="MP">
  <xsd:annotation>
    <xsd:documentation>Northern Mariana Islands</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="NO">
  <xsd:annotation>
    <xsd:documentation>Norway</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="OM">
  <xsd:annotation>
    <xsd:documentation>Oman</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="PK">
  <xsd:annotation>
    <xsd:documentation>Pakistan</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="PW">
  <xsd:annotation>
    <xsd:documentation>Palau</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="PS">
  <xsd:annotation>
    <xsd:documentation>Palestinian Territory, Occupied</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="PA">
  <xsd:annotation>
    <xsd:documentation>Panama</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>

```

```

</xsd:enumeration>
<xsd:enumeration value="PG">
  <xsd:annotation>
    <xsd:documentation>Papua New Guinea</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="PY">
  <xsd:annotation>
    <xsd:documentation>Paraguay</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="PE">
  <xsd:annotation>
    <xsd:documentation>Peru</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="PH">
  <xsd:annotation>
    <xsd:documentation>Philippines</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="PN">
  <xsd:annotation>
    <xsd:documentation>Pitcairn</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="PL">
  <xsd:annotation>
    <xsd:documentation>Poland</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="PT">
  <xsd:annotation>
    <xsd:documentation>Portugal</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="PR">
  <xsd:annotation>
    <xsd:documentation>Puerto Rico</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="QA">
  <xsd:annotation>
    <xsd:documentation>Qatar</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="RE">
  <xsd:annotation>
    <xsd:documentation>Réunion</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="RO">
  <xsd:annotation>
    <xsd:documentation>Romania</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="RU">
  <xsd:annotation>
    <xsd:documentation>Russian Federation</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="RW">
  <xsd:annotation>
    <xsd:documentation>Rwanda</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="BL">
  <xsd:annotation>
    <xsd:documentation>Saint Barthélemy</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="SH">
  <xsd:annotation>
    <xsd:documentation>Saint Helena, Ascension and Tristan da Cunha</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="KN">
  <xsd:annotation>
    <xsd:documentation>Saint Kitts and Nevis</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="LC">
  <xsd:annotation>

```

```

        <xsd:documentation>Saint Lucia</xsd:documentation>
    </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="MF">
    <xsd:annotation>
        <xsd:documentation>Saint Martin (French part)</xsd:documentation>
    </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="PM">
    <xsd:annotation>
        <xsd:documentation>Saint Pierre and Miquelon</xsd:documentation>
    </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="VC">
    <xsd:annotation>
        <xsd:documentation>Saint Vincent and the Grenadines</xsd:documentation>
    </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="WS">
    <xsd:annotation>
        <xsd:documentation>Samoa</xsd:documentation>
    </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="SM">
    <xsd:annotation>
        <xsd:documentation>San Marino</xsd:documentation>
    </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="ST">
    <xsd:annotation>
        <xsd:documentation>Sao Tome and Principe</xsd:documentation>
    </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="SA">
    <xsd:annotation>
        <xsd:documentation>Saudi Arabia</xsd:documentation>
    </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="SN">
    <xsd:annotation>
        <xsd:documentation>Senegal</xsd:documentation>
    </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="RS">
    <xsd:annotation>
        <xsd:documentation>Serbia</xsd:documentation>
    </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="SC">
    <xsd:annotation>
        <xsd:documentation>Seychelles</xsd:documentation>
    </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="SL">
    <xsd:annotation>
        <xsd:documentation>Sierra Leone</xsd:documentation>
    </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="SG">
    <xsd:annotation>
        <xsd:documentation>Singapore</xsd:documentation>
    </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="SX">
    <xsd:annotation>
        <xsd:documentation>Sint Maarten (Dutch part)</xsd:documentation>
    </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="SK">
    <xsd:annotation>
        <xsd:documentation>Slovakia</xsd:documentation>
    </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="SI">
    <xsd:annotation>
        <xsd:documentation>Slovenia</xsd:documentation>
    </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="SB">
    <xsd:annotation>
        <xsd:documentation>Solomon Islands</xsd:documentation>
    </xsd:annotation>
</xsd:enumeration>

```

```

<xsd:enumeration value="SO">
  <xsd:annotation>
    <xsd:documentation>Somalia</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="ZA">
  <xsd:annotation>
    <xsd:documentation>South Africa</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="GS">
  <xsd:annotation>
    <xsd:documentation>South Georgia and the South Sandwich Islands</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="SS">
  <xsd:annotation>
    <xsd:documentation>South Sudan</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="ES">
  <xsd:annotation>
    <xsd:documentation>Spain</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="LK">
  <xsd:annotation>
    <xsd:documentation>Sri Lanka</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="SD">
  <xsd:annotation>
    <xsd:documentation>Sudan</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="SR">
  <xsd:annotation>
    <xsd:documentation>Suriname</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="SJ">
  <xsd:annotation>
    <xsd:documentation>Svalbard and Jan Mayen</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="SZ">
  <xsd:annotation>
    <xsd:documentation>Swaziland</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="SE">
  <xsd:annotation>
    <xsd:documentation>Sweden</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="CH">
  <xsd:annotation>
    <xsd:documentation>Switzerland</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="SY">
  <xsd:annotation>
    <xsd:documentation>Syrian Arab Republic</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="TW">
  <xsd:annotation>
    <xsd:documentation>Taiwan, Province of China</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="TJ">
  <xsd:annotation>
    <xsd:documentation>Tajikistan</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="TZ">
  <xsd:annotation>
    <xsd:documentation>Tanzania, United Republic of</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="TH">
  <xsd:annotation>
    <xsd:documentation>Thailand</xsd:documentation>
  </xsd:annotation>

```

```

    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="TL">
    <xsd:annotation>
      <xsd:documentation>Timor-Leste</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="TG">
    <xsd:annotation>
      <xsd:documentation>Togo</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="TK">
    <xsd:annotation>
      <xsd:documentation>Tokelau</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="TO">
    <xsd:annotation>
      <xsd:documentation>Tonga</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="TT">
    <xsd:annotation>
      <xsd:documentation>Trinidad and Tobago</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="TN">
    <xsd:annotation>
      <xsd:documentation>Tunisia</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="TR">
    <xsd:annotation>
      <xsd:documentation>Turkey</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="TM">
    <xsd:annotation>
      <xsd:documentation>Turkmenistan</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="TC">
    <xsd:annotation>
      <xsd:documentation>Turks and Caicos Islands</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="TV">
    <xsd:annotation>
      <xsd:documentation>Tuvalu</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="UG">
    <xsd:annotation>
      <xsd:documentation>Uganda</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="UA">
    <xsd:annotation>
      <xsd:documentation>Ukraine</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="AE">
    <xsd:annotation>
      <xsd:documentation>United Arab Emirates</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="GB">
    <xsd:annotation>
      <xsd:documentation>United Kingdom</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="US">
    <xsd:annotation>
      <xsd:documentation>United States</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="UM">
    <xsd:annotation>
      <xsd:documentation>United States Minor Outlying Islands</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="UY">

```

```

<xsd:annotation>
  <xsd:documentation>Uruguay</xsd:documentation>
</xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="UZ">
  <xsd:annotation>
    <xsd:documentation>Uzbekistan</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="VU">
  <xsd:annotation>
    <xsd:documentation>Vanuatu</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="VE">
  <xsd:annotation>
    <xsd:documentation>Venezuela, Bolivarian Republic of</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="VN">
  <xsd:annotation>
    <xsd:documentation>Viet Nam</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="VG">
  <xsd:annotation>
    <xsd:documentation>Virgin Islands, British</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="VI">
  <xsd:annotation>
    <xsd:documentation>Virgin Islands, U.S.</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="WF">
  <xsd:annotation>
    <xsd:documentation>Wallis and Futuna</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="WW">
  <xsd:annotation>
    <xsd:documentation>WorldWide</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="EH">
  <xsd:annotation>
    <xsd:documentation>Western Sahara</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="YE">
  <xsd:annotation>
    <xsd:documentation>Yemen</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="ZM">
  <xsd:annotation>
    <xsd:documentation>Zambia</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="ZW">
  <xsd:annotation>
    <xsd:documentation>Zimbabwe</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
</xsd:restriction>
</xsd:simpleType>

```

**Namespace: "http://fnppl.org/opensdx/genres"**

**Schema(s)**

**Imported schema openSDX\_genres.xsd**

Namespace	http://fnppl.org/opensdx/genres	
Properties	attribute form default:	unqualified
	element form default:	unqualified



## Simple Type(s)

### Simple Type genre

Namespace	http://fnppl.org/opensdx/genres	
Annotations	This element includes a list of openSDX-genres.	
Diagram		
Type	restriction of xsd:string	
Facets	enumeration	Rock
	enumeration	Beat
	enumeration	Blues Rock
	enumeration	Rock'n'Roll
	enumeration	Art Rock
	enumeration	Classic Rock
	enumeration	Deutschrock
	enumeration	Emo
	enumeration	Experimental Rock
	enumeration	Glam Rock
	enumeration	Hard Rock
	enumeration	Krautrock
	enumeration	Progressive Rock
	enumeration	Psychedelic Rock
	enumeration	Psychobilly Rock
	enumeration	Rockabilly
	enumeration	Soft Rock
	enumeration	Southern Rock
	enumeration	Surf Rock
	enumeration	Alternative
	enumeration	Crossover
	enumeration	Dark Wave
	enumeration	Garage Rock
	enumeration	Goth / Industrial
	enumeration	Grunge
	enumeration	Hardcore
	enumeration	Indie Rock
	enumeration	New Wave
	enumeration	Punk
	enumeration	Funpunk
	enumeration	Black Metal
	enumeration	Death Metal
	enumeration	Heavy Metal
	enumeration	Power Metal
	enumeration	Thrash / Speed Metal
	enumeration	Doom Metal
	enumeration	Grind Core
	enumeration	Pop
	enumeration	Britpop
	enumeration	Dance Pop

enumeration	Deutschpop
enumeration	Disco
enumeration	Easy Listening
enumeration	Electropop
enumeration	Euro Dance
enumeration	Euro Pop
enumeration	French Pop
enumeration	Indie Pop
enumeration	Italo Pop
enumeration	J-Pop
enumeration	K-Pop
enumeration	Neue Deutsche Welle
enumeration	New Age
enumeration	Pop Rock
enumeration	Power Pop
enumeration	Schlager
enumeration	Singer / Songwriter
enumeration	Synthpop
enumeration	Teen Pop
enumeration	Country
enumeration	Alternative Country
enumeration	Bluegrass
enumeration	Contemporary Folk
enumeration	Country Gospel
enumeration	Honky-Tonk
enumeration	Jewish / Yiddish Music
enumeration	Nashville Sound
enumeration	Outlaw / Progressive Country
enumeration	Texas Country
enumeration	Traditional Country
enumeration	Western Swing
enumeration	Folk
enumeration	Americana
enumeration	Folk Rock
enumeration	Irish Folk
enumeration	German Folk / Volksmusik
enumeration	Jazz
enumeration	Acid Jazz
enumeration	Avantgarde
enumeration	Bebop
enumeration	Big Band
enumeration	Classic Jazz
enumeration	Cool Jazz
enumeration	Dixieland music
enumeration	Free jazz
enumeration	Hard Bop
enumeration	Jazz Fusion
enumeration	New Orleans Jazz

enumeration	Nu-Jazz
enumeration	Smooth Jazz
enumeration	Swing
enumeration	Vocal Jazz
enumeration	Hip Hop
enumeration	Alternative Hip Hop
enumeration	Crunk
enumeration	Dirty South
enumeration	G-Funk
enumeration	Gangsta Rap
enumeration	Golden Era
enumeration	Grime
enumeration	Hyphy
enumeration	Instrumental Hip Hop
enumeration	Miami Bass
enumeration	New School
enumeration	Old School
enumeration	Turntablism
enumeration	US Eastcoast
enumeration	US Midwest
enumeration	US Southern
enumeration	US Westcoast
enumeration	Blues
enumeration	Boogie-Woogie
enumeration	Electric Blues Guitar
enumeration	Modern Blues
enumeration	Regional Blues
enumeration	Traditional Blues
enumeration	Soul
enumeration	Motown Sound
enumeration	Neo Soul
enumeration	Philly Sound
enumeration	Funk
enumeration	R&B
enumeration	Contemporary R&B
enumeration	Doo-wop
enumeration	Electronic
enumeration	Ambient
enumeration	Chill Out
enumeration	Lounge
enumeration	Downbeat
enumeration	Electronica
enumeration	Indie Disco
enumeration	Industrial / EBM
enumeration	Techno
enumeration	Dance
enumeration	Electro
enumeration	Glitch hop
enumeration	House

enumeration	Acid House
enumeration	Deep House
enumeration	Disco House
enumeration	Electro House
enumeration	Fidget House
enumeration	Hard House
enumeration	Progressive House
enumeration	Soulful House
enumeration	Tech House
enumeration	Tribal
enumeration	Vocal House
enumeration	Big Beat
enumeration	Breakbeat
enumeration	Drum'n'Bass
enumeration	Dubstep
enumeration	Garage / UK Funky
enumeration	IDM
enumeration	Trip-Hop
enumeration	Trance
enumeration	Goa Trance
enumeration	Hard Trance
enumeration	Psychedelic Trance
enumeration	Gabba
enumeration	Jumpstyle / Hardstyle
enumeration	Classic
enumeration	Ancient music
enumeration	Medieval music
enumeration	Renaissance
enumeration	Baroque
enumeration	Classical period
enumeration	Romantic
enumeration	Neoromanticism
enumeration	Neoclassicism
enumeration	New Music / Contemporary Music
enumeration	Modern, 20th / 21st Century
enumeration	Postmodern Music
enumeration	Music and other Media / Arts
enumeration	Music and Word
enumeration	12-Tone Composition
enumeration	Anthem
enumeration	Ballet
enumeration	Cantata
enumeration	Chamber Music
enumeration	Choral
enumeration	Crossover / Popular Classicism
enumeration	Electronic Music / Computer Music

enumeration	Madrigal
enumeration	March
enumeration	Minimal Music
enumeration	Motet
enumeration	Musical
enumeration	Opera Arias
enumeration	Opera Baroque
enumeration	Opera Classical
enumeration	Opera Renaissance
enumeration	Opera Romantic
enumeration	Operetta
enumeration	Oratorio
enumeration	Passion
enumeration	Requiem
enumeration	Serialism
enumeration	Sonata
enumeration	Suite
enumeration	Symphonic Music / Orchestral Music
enumeration	Symphony
enumeration	Waltz
enumeration	Brass Ensemble
enumeration	Concerto / Solo Instrument with Orchestra
enumeration	Mixed Ensemble (Strings / Wind)
enumeration	Mixed Wind Ensemble (Woodwind / Brass)
enumeration	Several Solo Instruments
enumeration	Solo Instrument
enumeration	String Ensemble
enumeration	String Orchestra
enumeration	String Quartet
enumeration	String Trio
enumeration	Woodwind Ensemble
enumeration	A cappella
enumeration	Vocal Ensemble
enumeration	Vocal Music
enumeration	Choir
enumeration	Boy's Choir
enumeration	Children's Choir
enumeration	Choir with Orchestra
enumeration	Women's Choir
enumeration	Men's Choir
enumeration	Mixed Choir
enumeration	Soprano
enumeration	Mezzosoprano
enumeration	Alto
enumeration	Tenor
enumeration	Baritone

enumeration	Bass
enumeration	Accordion
enumeration	Ancient Instruments
enumeration	Bassoon
enumeration	Cembalo
enumeration	Clarinet
enumeration	Double Bass
enumeration	Flute
enumeration	Guitar
enumeration	Harp
enumeration	Harpsichord
enumeration	Horn
enumeration	Lute
enumeration	Mandolin
enumeration	Oboe
enumeration	Organ
enumeration	Percussion (Vibraphone etc.)
enumeration	Piano
enumeration	Recorder / English Flute
enumeration	Saxophone
enumeration	Trombone
enumeration	Trumpet
enumeration	Tuba
enumeration	Viola
enumeration	Violin
enumeration	Violoncello
enumeration	Miscellaneous Lead Instrument
enumeration	Reggae
enumeration	Contemporary Reggae
enumeration	Dancehall
enumeration	Dub
enumeration	Lover's Rock
enumeration	Reggaeton
enumeration	Roots
enumeration	Ska
enumeration	World
enumeration	African Music
enumeration	Afro Beat
enumeration	Afro Pop
enumeration	Asian Music
enumeration	Austropop
enumeration	Calypso
enumeration	Caribbean Music
enumeration	Celtic Music
enumeration	Chanson
enumeration	Coupé Decalé
enumeration	Enka
enumeration	European Music

enumeration	Ghazal
enumeration	Griot
enumeration	Gypsy
enumeration	Highlife
enumeration	Judaica Music / Yiddish / Klezmer
enumeration	Kuduro
enumeration	Kwaito
enumeration	Makossa
enumeration	Marching Band
enumeration	Mento
enumeration	Middle Eastern Music
enumeration	Nordic / Scandinavia
enumeration	North American Music
enumeration	South American Music
enumeration	Parang
enumeration	Polka
enumeration	Rai
enumeration	Soca
enumeration	Soukous
enumeration	Zouk
enumeration	Zulu
enumeration	Latin
enumeration	Bachata
enumeration	Banda
enumeration	Bhangra
enumeration	Bolero
enumeration	Bossa Nova
enumeration	Corridos
enumeration	Cumbia
enumeration	Fado
enumeration	Flamenco
enumeration	Grupero
enumeration	Mambo
enumeration	Mariachi
enumeration	Merengue
enumeration	Norteno
enumeration	Ranchero
enumeration	Rock En Espanol
enumeration	Salsa
enumeration	Samba
enumeration	Son Cubana
enumeration	Sonidero
enumeration	Tango
enumeration	Tejano
enumeration	Religious
enumeration	Christian Rock
enumeration	Christian Hip Hop
enumeration	Christian Pop

enumeration	Chants
enumeration	Gospel
enumeration	Gregorian Music
enumeration	Hymn
enumeration	Mass
enumeration	Spiritual
enumeration	Worship
enumeration	Miscellaneous
enumeration	Anime / Video Game Soundtracks
enumeration	Bollywood
enumeration	Instrumental
enumeration	Vocal
enumeration	Acoustic
enumeration	Unplugged
enumeration	Live
enumeration	Traditional
enumeration	Karaoke
enumeration	Movie Scores
enumeration	Movie Soundtracks
enumeration	Sound Effects
enumeration	Soundtrack
enumeration	TV Soundtrack
enumeration	Wedding Music
enumeration	Holiday
enumeration	Mashup
enumeration	Unclassifiable
enumeration	Word
enumeration	Business & Career
enumeration	Abstracts & Dossiers
enumeration	Accounting
enumeration	Business & Investing
enumeration	Communication
enumeration	Computers & Internet
enumeration	Economics
enumeration	Finance
enumeration	Management & Leadership
enumeration	Marketing & Sales
enumeration	Politics
enumeration	Self-Help
enumeration	Self-Organization
enumeration	Skills
enumeration	Small Business & Entrepreneurship
enumeration	Children's Audiobooks
enumeration	Popular Characters
enumeration	Animal Stories
enumeration	Children's Book Classics
enumeration	Children's Detective Stories



enumeration	Fairy Tales
enumeration	Fantasy & Spook
enumeration	Knowledge for Children
enumeration	Pirates, Knights & Historical
enumeration	Poems & Song
enumeration	Comedy & Humour
enumeration	Comedy & Cabaret
enumeration	Humoristic Novel
enumeration	Crime
enumeration	Detective Stories
enumeration	Detective Stories „Noir“
enumeration	Classic Detective Stories
enumeration	Scandinavian Detective Stories
enumeration	Temporary Detective Stories
enumeration	Education & Knowledge
enumeration	Art & Culture
enumeration	Biography & Memento
enumeration	Foreign Language
enumeration	History
enumeration	Pilosophy
enumeration	Politics & Current Affairs
enumeration	Science & Technology
enumeration	Health, Mind & Body
enumeration	Autogenous Training
enumeration	Creativity
enumeration	Esoteric
enumeration	Fitness
enumeration	Health
enumeration	Lifestyle
enumeration	Love & Erotic
enumeration	Meditation / Yoga
enumeration	Memory Training
enumeration	Mental Training
enumeration	Motivation
enumeration	Philosophy
enumeration	Positive Thinking & Attitude
enumeration	Psychology
enumeration	Spirituality & Religion
enumeration	Sports
enumeration	Wellness & Beauty
enumeration	Science Fiction & Fantasy
enumeration	Ancient World
enumeration	Fantasy-Romance
enumeration	Historical Thriller
enumeration	Horror Classics

enumeration	Medieval Times & Early Modern Era
enumeration	Thriller
enumeration	Mystery & Conspiracy
enumeration	Psychological Thriller
enumeration	Espionage, Politics & Justice
enumeration	Vatican & Secret Societies
enumeration	Science & Medicine
enumeration	Literature
enumeration	Novels
enumeration	Erotica
enumeration	Romance
enumeration	Contemporary Literature
enumeration	Contemporary German Literature
enumeration	Entertainment
enumeration	Youth
enumeration	Youth Detective Stories
enumeration	Fantasy
enumeration	For Girls
enumeration	Knowledge for Teenagers
enumeration	Mystery
enumeration	Youth Classics
enumeration	Youth Today
enumeration	Language
enumeration	Albanian
enumeration	Arabic
enumeration	Bengali
enumeration	Bosnian
enumeration	Bulgarian
enumeration	Cantonese / Yue
enumeration	Croatian
enumeration	Czech
enumeration	Danish
enumeration	Dutch
enumeration	English
enumeration	Finnish
enumeration	French
enumeration	German
enumeration	Greek
enumeration	Hebrew
enumeration	Hindi / Urdu
enumeration	Hungarian
enumeration	Italian
enumeration	Japanese
enumeration	Korean
enumeration	Macedonian
enumeration	Mandarin

enumeration	Norwegian
enumeration	Patois
enumeration	Portuguese
enumeration	Russian
enumeration	Serbian
enumeration	Spanish
enumeration	Swedish
enumeration	Tamil
enumeration	Turkish
enumeration	Vietnamese
enumeration	Afrikaans
enumeration	Film
enumeration	Action
enumeration	3D
enumeration	Adventure
enumeration	Animation
enumeration	Author's Film
enumeration	Biography
enumeration	Cartoon
enumeration	Children
enumeration	Comedy
enumeration	Crime & Gangster
enumeration	Disaster
enumeration	Documentary
enumeration	Drama
enumeration	Epic / Historical
enumeration	Erotic
enumeration	Expressionism
enumeration	Family
enumeration	Fantasy
enumeration	Film-Noir
enumeration	GLBT
enumeration	Horror
enumeration	Independent Film
enumeration	Martial-Arts / Eastern
enumeration	Monumental
enumeration	Musical / Dance
enumeration	Music
enumeration	Mystery
enumeration	Reality-TV
enumeration	Romantic
enumeration	Science Fiction
enumeration	Silent Movie
enumeration	Sport
enumeration	Thriller
enumeration	TV-Series
enumeration	Tragicomedy
enumeration	War / Anti-War
enumeration	Western

enumeration	Youth
enumeration	Time
enumeration	Middle Ages
enumeration	20's
enumeration	30's
enumeration	40's
enumeration	50's
enumeration	60's
enumeration	70'
enumeration	80's
enumeration	90's
enumeration	2000's
enumeration	2010's
enumeration	2020's
enumeration	Adult
enumeration	Children
enumeration	Age: up to 6 years
enumeration	Age: 6 years +
enumeration	Age: 8 years +
enumeration	Kids & Family
enumeration	Country
enumeration	United Arab Emirates (AE)
enumeration	Afghanistan (AF)
enumeration	Antigua and Barbuda (AG)
enumeration	Anguilla (AI)
enumeration	Albania (AL)
enumeration	Armenia (AM)
enumeration	Angola (AO)
enumeration	Antarctica (AQ)
enumeration	Argentina (AR)
enumeration	American Samoa (AS)
enumeration	Austria (AT)
enumeration	Australia (AU)
enumeration	Aruba (AW)
enumeration	Åland Islands (AX)
enumeration	Azerbaijan (AZ)
enumeration	Bosnia and Herzegovina (BA)
enumeration	Barbados (BB)
enumeration	Bangladesh (BD)
enumeration	Belgium (BE)
enumeration	Burkina Faso (BF)
enumeration	Bulgaria (BG)
enumeration	Bahrain (BH)
enumeration	Burundi (BI)
enumeration	Benin (BJ)
enumeration	Saint Barthélemy (BL)
enumeration	Bermuda (BM)
enumeration	Brunei Darussalam (BN)

enumeration	Bolivia Plurinational State of (BO)
enumeration	Bonaire Saint Eustatius and Saba (BQ)
enumeration	Brazil (BR)
enumeration	Bahamas (BS)
enumeration	Bhutan (BT)
enumeration	Bouvet Island (BV)
enumeration	Botswana (BW)
enumeration	Belarus (BY)
enumeration	Belize (BZ)
enumeration	Canada (CA)
enumeration	Cocos (Keeling) Islands (CC)
enumeration	Congo the Democratic Republic of the (CD)
enumeration	Central African Republic (CF)
enumeration	Congo (CG)
enumeration	Switzerland (CH)
enumeration	Côte d'Ivoire (CI)
enumeration	Cook Islands (CK)
enumeration	Chile (CL)
enumeration	Cameroon (CM)
enumeration	China (CN)
enumeration	Colombia (CO)
enumeration	Costa Rica (CR)
enumeration	Cuba (CU)
enumeration	Cape Verde (CV)
enumeration	Curaçao (CW)
enumeration	Christmas Island (CX)
enumeration	Cyprus (CY)
enumeration	Czech Republic (CZ)
enumeration	Germany (DE)
enumeration	Djibouti (DJ)
enumeration	Denmark (DK)
enumeration	Dominica (DM)
enumeration	Dominican Republic (DO)
enumeration	Algeria (DZ)
enumeration	Ecuador (EC)
enumeration	Estonia (EE)
enumeration	Egypt (EG)
enumeration	Western Sahara (EH)
enumeration	Eritrea (ER)
enumeration	Spain (ES)
enumeration	Ethiopia (ET)
enumeration	Finland (FI)
enumeration	Fiji (FJ)
enumeration	Falkland Islands (Malvinas) (FK)

enumeration	Micronesia Federated States of (FM)
enumeration	Faroe Islands (FO)
enumeration	France (FR)
enumeration	Gabon (GA)
enumeration	United Kingdom (GB)
enumeration	Grenada (GD)
enumeration	Georgia (GE)
enumeration	French Guiana (GF)
enumeration	Guernsey (GG)
enumeration	Ghana (GH)
enumeration	Gibraltar (GI)
enumeration	Greenland (GL)
enumeration	Gambia (GM)
enumeration	Guinea (GN)
enumeration	Guadeloupe (GP)
enumeration	Equatorial Guinea (GQ)
enumeration	Greece (GR)
enumeration	South Georgia and the South Sandwich Islands (GS)
enumeration	Guatemala (GT)
enumeration	Guam (GU)
enumeration	Guinea-Bissau (GW)
enumeration	Guyana (GY)
enumeration	Hong Kong (HK)
enumeration	Heard Island and McDonald Islands (HM)
enumeration	Honduras (HN)
enumeration	Croatia (HR)
enumeration	Haiti (HT)
enumeration	Hungary (HU)
enumeration	Indonesia (ID)
enumeration	Ireland (IE)
enumeration	Israel (IL)
enumeration	Isle of Man (IM)
enumeration	India (IN)
enumeration	British Indian Ocean Territory (IO)
enumeration	Iraq (IQ)
enumeration	Iran Islamic Republic of (IR)
enumeration	Iceland (IS)
enumeration	Italy (IT)
enumeration	Jersey (JE)
enumeration	Jamaica (JM)
enumeration	Jordan (JO)
enumeration	Japan (JP)
enumeration	Kenya (KE)
enumeration	Kyrgyzstan (KG)
enumeration	Cambodia (KH)

enumeration	Kiribati (KI)
enumeration	Comoros (KM)
enumeration	Saint Kitts and Nevis (KN)
enumeration	Korea Democratic People's Republic of (KP)
enumeration	Korea Republic of (KR)
enumeration	Kuwait (KW)
enumeration	Cayman Islands (KY)
enumeration	Kazakhstan (KZ)
enumeration	Lao People's Democratic Republic (LA)
enumeration	Lebanon (LB)
enumeration	Saint Lucia (LC)
enumeration	Liechtenstein (LI)
enumeration	Sri Lanka (LK)
enumeration	Liberia (LR)
enumeration	Lesotho (LS)
enumeration	Lithuania (LT)
enumeration	Luxembourg (LU)
enumeration	Latvia (LV)
enumeration	Libyan Arab Jamahiriya (LY)
enumeration	Morocco (MA)
enumeration	Monaco (MC)
enumeration	Moldova Republic of (MD)
enumeration	Montenegro (ME)
enumeration	Saint Martin (French part) (MF)
enumeration	Madagascar (MG)
enumeration	Marshall Islands (MH)
enumeration	Macedonia the former Yugoslav Republic of (MK)
enumeration	Mali (ML)
enumeration	Myanmar (MM)
enumeration	Mongolia (MN)
enumeration	Macao (MO)
enumeration	Northern Mariana Islands (MP)
enumeration	Martinique (MQ)
enumeration	Mauritania (MR)
enumeration	Montserrat (MS)
enumeration	Malta (MT)
enumeration	Mauritius (MU)
enumeration	Maldives (MV)
enumeration	Malawi (MW)
enumeration	Mexico (MX)
enumeration	Malaysia (MY)
enumeration	Mozambique (MZ)
enumeration	Namibia (NA)
enumeration	New Caledonia (NC)

enumeration	Niger (NE)
enumeration	Norfolk Island (NF)
enumeration	Nigeria (NG)
enumeration	Nicaragua (NI)
enumeration	Netherlands (NL)
enumeration	Norway (NO)
enumeration	Nepal (NP)
enumeration	Nauru (NR)
enumeration	Niue (NU)
enumeration	New Zealand (NZ)
enumeration	Oman (OM)
enumeration	Panama (PA)
enumeration	Peru (PE)
enumeration	French Polynesia (PF)
enumeration	Papua New Guinea (PG)
enumeration	Philippines (PH)
enumeration	Pakistan (PK)
enumeration	Poland (PL)
enumeration	Saint Pierre and Miquelon (PM)
enumeration	Pitcairn (PN)
enumeration	Puerto Rico (PR)
enumeration	Palestinian Territory Occupied (PS)
enumeration	Portugal (PT)
enumeration	Palau (PW)
enumeration	Paraguay (PY)
enumeration	Qatar (QA)
enumeration	Réunion (RE)
enumeration	Romania (RO)
enumeration	Serbia (RS)
enumeration	Russian Federation (RU)
enumeration	Rwanda (RW)
enumeration	Saudi Arabia (SA)
enumeration	Solomon Islands (SB)
enumeration	Seychelles (SC)
enumeration	Sudan (SD)
enumeration	Sweden (SE)
enumeration	Singapore (SG)
enumeration	Saint Helena Ascension and Tristan da Cunha (SH)
enumeration	Slovenia (SI)
enumeration	Svalbard and Jan Mayen (SJ)
enumeration	Slovakia (SK)
enumeration	Sierra Leone (SL)
enumeration	San Marino (SM)
enumeration	Senegal (SN)
enumeration	Somalia (SO)
enumeration	Suriname (SR)



enumeration	South Sudan (SS)
enumeration	Sao Tome and Principe (ST)
enumeration	El Salvador (SV)
enumeration	Sint Maarten (Dutch part) (SX)
enumeration	Syrian Arab Republic (SY)
enumeration	Swaziland (SZ)
enumeration	Turks and Caicos Islands (TC)
enumeration	Chad (TD)
enumeration	French Southern Territories (TF)
enumeration	Togo (TG)
enumeration	Thailand (TH)
enumeration	Tajikistan (TJ)
enumeration	Tokelau (TK)
enumeration	Timor-Leste (TL)
enumeration	Turkmenistan (TM)
enumeration	Tunisia (TN)
enumeration	Tonga (TO)
enumeration	Turkey (TR)
enumeration	Trinidad and Tobago (TT)
enumeration	Tuvalu (TV)
enumeration	Taiwan Province of China (TW)
enumeration	Tanzania United Republic of (TZ)
enumeration	Ukraine (UA)
enumeration	Uganda (UG)
enumeration	United States Minor Outlying Islands (UM)
enumeration	United States (US)
enumeration	Uruguay (UY)
enumeration	Uzbekistan (UZ)
enumeration	Holy See (Vatican City State) (VA)
enumeration	Saint Vincent and the Grenadines (VC)
enumeration	Venezuela Bolivarian Republic of (VE)
enumeration	Virgin Islands British (VG)
enumeration	Virgin Islands U.S. (VI)
enumeration	Viet Nam (VN)
enumeration	Vanuatu (VU)
enumeration	Wallis and Futuna (WF)
enumeration	Samoa (WS)
enumeration	Yemen (YE)
enumeration	Mayotte (YT)
enumeration	South Africa (ZA)
enumeration	Zambia (ZM)

	enumeration	Zimbabwe (ZW)
Used by	Element	genres/genre
Source	<pre> &lt;xsd:simpleType name="genre"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;This element includes a list of openSDX-genres.&lt;/ xsd:documentation&gt;   &lt;/xsd:annotation&gt;   &lt;xsd:restriction base="xsd:string"&gt;     &lt;xsd:enumeration value="Rock"/&gt;     &lt;xsd:enumeration value="Beat"/&gt;     &lt;xsd:enumeration value="Blues Rock"/&gt;     &lt;xsd:enumeration value="Rock'n'Roll"/&gt;     &lt;xsd:enumeration value="Art Rock"/&gt;     &lt;xsd:enumeration value="Classic Rock"/&gt;     &lt;xsd:enumeration value="Deutschrock"/&gt;     &lt;xsd:enumeration value="Emo"/&gt;     &lt;xsd:enumeration value="Experimental Rock"/&gt;     &lt;xsd:enumeration value="Glam Rock"/&gt;     &lt;xsd:enumeration value="Hard Rock"/&gt;     &lt;xsd:enumeration value="Krautrock"/&gt;     &lt;xsd:enumeration value="Progressive Rock"/&gt;     &lt;xsd:enumeration value="Psychedelic Rock"/&gt;     &lt;xsd:enumeration value="Psychobilly Rock"/&gt;     &lt;xsd:enumeration value="Rockabilly"/&gt;     &lt;xsd:enumeration value="Soft Rock"/&gt;     &lt;xsd:enumeration value="Southern Rock"/&gt;     &lt;xsd:enumeration value="Surf Rock"/&gt;     &lt;xsd:enumeration value="Alternative"/&gt;     &lt;xsd:enumeration value="Crossover"/&gt;     &lt;xsd:enumeration value="Dark Wave"/&gt;     &lt;xsd:enumeration value="Garage Rock"/&gt;     &lt;xsd:enumeration value="Goth / Industrial"/&gt;     &lt;xsd:enumeration value="Grunge"/&gt;     &lt;xsd:enumeration value="Hardcore"/&gt;     &lt;xsd:enumeration value="Indie Rock"/&gt;     &lt;xsd:enumeration value="New Wave"/&gt;     &lt;xsd:enumeration value="Punk"/&gt;     &lt;xsd:enumeration value="Funpunk"/&gt;     &lt;xsd:enumeration value="Black Metal"/&gt;     &lt;xsd:enumeration value="Death Metal"/&gt;     &lt;xsd:enumeration value="Heavy Metal"/&gt;     &lt;xsd:enumeration value="Power Metal"/&gt;     &lt;xsd:enumeration value="Thrash / Speed Metal"/&gt;     &lt;xsd:enumeration value="Doom Metal"/&gt;     &lt;xsd:enumeration value="Grind Core"/&gt;     &lt;xsd:enumeration value="Pop"/&gt;     &lt;xsd:enumeration value="Britpop"/&gt;     &lt;xsd:enumeration value="Dance Pop"/&gt;     &lt;xsd:enumeration value="Deutschpop"/&gt;     &lt;xsd:enumeration value="Disco"/&gt;     &lt;xsd:enumeration value="Easy Listening"/&gt;     &lt;xsd:enumeration value="Electropop"/&gt;     &lt;xsd:enumeration value="Euro Dance"/&gt;     &lt;xsd:enumeration value="Euro Pop"/&gt;     &lt;xsd:enumeration value="French Pop"/&gt;     &lt;xsd:enumeration value="Indie Pop"/&gt;     &lt;xsd:enumeration value="Italo Pop"/&gt;     &lt;xsd:enumeration value="J-Pop"/&gt;     &lt;xsd:enumeration value="K-Pop"/&gt;     &lt;xsd:enumeration value="Neue Deutsche Welle"/&gt;     &lt;xsd:enumeration value="New Age"/&gt;     &lt;xsd:enumeration value="Pop Rock"/&gt;     &lt;xsd:enumeration value="Power Pop"/&gt;     &lt;xsd:enumeration value="Schlager"/&gt;     &lt;xsd:enumeration value="Singer / Songwriter"/&gt;     &lt;xsd:enumeration value="Synthpop"/&gt;     &lt;xsd:enumeration value="Teen Pop"/&gt;     &lt;xsd:enumeration value="Country"/&gt;     &lt;xsd:enumeration value="Alternative Country"/&gt;     &lt;xsd:enumeration value="Bluegrass"/&gt;     &lt;xsd:enumeration value="Contemporary Folk"/&gt;     &lt;xsd:enumeration value="Country Gospel"/&gt;     &lt;xsd:enumeration value="Honky-Tonk"/&gt;     &lt;xsd:enumeration value="Jewish / Yiddish Music"/&gt;     &lt;xsd:enumeration value="Nashville Sound"/&gt;     &lt;xsd:enumeration value="Outlaw / Progressive Country"/&gt;     &lt;xsd:enumeration value="Texas Country"/&gt;     &lt;xsd:enumeration value="Traditional Country"/&gt;     &lt;xsd:enumeration value="Western Swing"/&gt;     &lt;xsd:enumeration value="Folk"/&gt; </pre>	

```

<xsd:enumeration value="Americana"/>
<xsd:enumeration value="Folk Rock"/>
<xsd:enumeration value="Irish Folk"/>
<xsd:enumeration value="German Folk / Volksmusik"/>
<xsd:enumeration value="Jazz"/>
<xsd:enumeration value="Acid Jazz"/>
<xsd:enumeration value="Avantgarde"/>
<xsd:enumeration value="Bebop"/>
<xsd:enumeration value="Big Band"/>
<xsd:enumeration value="Classic Jazz"/>
<xsd:enumeration value="Cool Jazz"/>
<xsd:enumeration value="Dixieland music"/>
<xsd:enumeration value="Free jazz"/>
<xsd:enumeration value="Hard Bop"/>
<xsd:enumeration value="Jazz Fusion"/>
<xsd:enumeration value="New Orleans Jazz"/>
<xsd:enumeration value="Nu-Jazz"/>
<xsd:enumeration value="Smooth Jazz"/>
<xsd:enumeration value="Swing"/>
<xsd:enumeration value="Vocal Jazz"/>
<xsd:enumeration value="Hip Hop"/>
<xsd:enumeration value="Alternative Hip Hop"/>
<xsd:enumeration value="Crunk"/>
<xsd:enumeration value="Dirty South"/>
<xsd:enumeration value="G-Funk"/>
<xsd:enumeration value="Gangsta Rap"/>
<xsd:enumeration value="Golden Era"/>
<xsd:enumeration value="Grime"/>
<xsd:enumeration value="Hyphy"/>
<xsd:enumeration value="Instrumental Hip Hop"/>
<xsd:enumeration value="Miami Bass"/>
<xsd:enumeration value="New School"/>
<xsd:enumeration value="Old School"/>
<xsd:enumeration value="Turntablism"/>
<xsd:enumeration value="US Eastcoast"/>
<xsd:enumeration value="US Midwest"/>
<xsd:enumeration value="US Southern"/>
<xsd:enumeration value="US Westcoast"/>
<xsd:enumeration value="Blues"/>
<xsd:enumeration value="Boogie-Woogie"/>
<xsd:enumeration value="Electric Blues Guitar"/>
<xsd:enumeration value="Modern Blues"/>
<xsd:enumeration value="Regional Blues"/>
<xsd:enumeration value="Traditional Blues"/>
<xsd:enumeration value="Soul"/>
<xsd:enumeration value="Motown Sound"/>
<xsd:enumeration value="Neo Soul"/>
<xsd:enumeration value="Philly Sound"/>
<xsd:enumeration value="Funk"/>
<xsd:enumeration value="R&B"/>
<xsd:enumeration value="Contemporary R&B"/>
<xsd:enumeration value="Doo-wop"/>
<xsd:enumeration value="Electronic"/>
<xsd:enumeration value="Ambient"/>
<xsd:enumeration value="Chill Out"/>
<xsd:enumeration value="Lounge"/>
<xsd:enumeration value="Downbeat"/>
<xsd:enumeration value="Electronica"/>
<xsd:enumeration value="Indie Disco"/>
<xsd:enumeration value="Industrial / EBM"/>
<xsd:enumeration value="Techno"/>
<xsd:enumeration value="Dance"/>
<xsd:enumeration value="Electro"/>
<xsd:enumeration value="Glitch hop"/>
<xsd:enumeration value="House"/>
<xsd:enumeration value="Acid House"/>
<xsd:enumeration value="Deep House"/>
<xsd:enumeration value="Disco House"/>
<xsd:enumeration value="Electro House"/>
<xsd:enumeration value="Fidget House"/>
<xsd:enumeration value="Hard House"/>
<xsd:enumeration value="Progressive House"/>
<xsd:enumeration value="Soulful House"/>
<xsd:enumeration value="Tech House"/>
<xsd:enumeration value="Tribal"/>
<xsd:enumeration value="Vocal House"/>
<xsd:enumeration value="Big Beat"/>
<xsd:enumeration value="Breakbeat"/>
<xsd:enumeration value="Drum'n'Bass"/>
<xsd:enumeration value="Dubstep"/>
<xsd:enumeration value="Garage / UK Funky"/>
<xsd:enumeration value="IDM"/>
<xsd:enumeration value="Trip-Hop"/>

```

```

<xsd:enumeration value="Trance"/>
<xsd:enumeration value="Goa Trance"/>
<xsd:enumeration value="Hard Trance"/>
<xsd:enumeration value="Psychedelic Trance"/>
<xsd:enumeration value="Gabba"/>
<xsd:enumeration value="Jumpstyle / Hardstyle"/>
<xsd:enumeration value="Classic"/>
<xsd:enumeration value="Ancient music"/>
<xsd:enumeration value="Medieval music"/>
<xsd:enumeration value="Renaissance"/>
<xsd:enumeration value="Baroque"/>
<xsd:enumeration value="Classical period"/>
<xsd:enumeration value="Romantic"/>
<xsd:enumeration value="Neoromanticism"/>
<xsd:enumeration value="Neoclassicism"/>
<xsd:enumeration value="New Music / Contemporary Music"/>
<xsd:enumeration value="Modern, 20th / 21st Century"/>
<xsd:enumeration value="Postmodern Music"/>
<xsd:enumeration value="Music and other Media / Arts"/>
<xsd:enumeration value="Music and Word"/>
<xsd:enumeration value="12-Tone Composition"/>
<xsd:enumeration value="Anthem"/>
<xsd:enumeration value="Ballet"/>
<xsd:enumeration value="Cantata"/>
<xsd:enumeration value="Chamber Music"/>
<xsd:enumeration value="Choral"/>
<xsd:enumeration value="Crossover / Popular Classicism"/>
<xsd:enumeration value="Electronic Music / Computer Music"/>
<xsd:enumeration value="Madrigal"/>
<xsd:enumeration value="March"/>
<xsd:enumeration value="Minimal Music"/>
<xsd:enumeration value="Motet"/>
<xsd:enumeration value="Musical"/>
<xsd:enumeration value="Opera Arias"/>
<xsd:enumeration value="Opera Baroque"/>
<xsd:enumeration value="Opera Classical"/>
<xsd:enumeration value="Opera Renaissance"/>
<xsd:enumeration value="Opera Romantic"/>
<xsd:enumeration value="Operetta"/>
<xsd:enumeration value="Oratorio"/>
<xsd:enumeration value="Passion"/>
<xsd:enumeration value="Requiem"/>
<xsd:enumeration value="Serialism"/>
<xsd:enumeration value="Sonata"/>
<xsd:enumeration value="Suite"/>
<xsd:enumeration value="Symphonic Music / Orchestral Music"/>
<xsd:enumeration value="Symphony"/>
<xsd:enumeration value="Waltz"/>
<xsd:enumeration value="Brass Ensemble"/>
<xsd:enumeration value="Concerto / Solo Instrument with Orchestra"/>
<xsd:enumeration value="Mixed Ensemble (Strings / Wind)"/>
<xsd:enumeration value="Mixed Wind Ensemble (Woodwind / Brass)"/>
<xsd:enumeration value="Several Solo Instruments"/>
<xsd:enumeration value="Solo Instrument"/>
<xsd:enumeration value="String Ensemble"/>
<xsd:enumeration value="String Orchestra"/>
<xsd:enumeration value="String Quartet"/>
<xsd:enumeration value="String Trio"/>
<xsd:enumeration value="Woodwind Ensemble"/>
<xsd:enumeration value="A cappella"/>
<xsd:enumeration value="Vocal Ensemble"/>
<xsd:enumeration value="Vocal Music"/>
<xsd:enumeration value="Choir"/>
<xsd:enumeration value="Boy's Choir"/>
<xsd:enumeration value="Children's Choir"/>
<xsd:enumeration value="Choir with Orchestra"/>
<xsd:enumeration value="Women's Choir"/>
<xsd:enumeration value="Men's Choir"/>
<xsd:enumeration value="Mixed Choir"/>
<xsd:enumeration value="Soprano"/>
<xsd:enumeration value="Mezzosoprano"/>
<xsd:enumeration value="Alto"/>
<xsd:enumeration value="Tenor"/>
<xsd:enumeration value="Baritone"/>
<xsd:enumeration value="Bass"/>
<xsd:enumeration value="Accordion"/>
<xsd:enumeration value="Ancient Instruments"/>
<xsd:enumeration value="Bassoon"/>
<xsd:enumeration value="Cembalo"/>
<xsd:enumeration value="Clarinet"/>
<xsd:enumeration value="Double Bass"/>
<xsd:enumeration value="Flute"/>
<xsd:enumeration value="Guitar"/>

```

```

<xsd:enumeration value="Harp"/>
<xsd:enumeration value="Harpsichord"/>
<xsd:enumeration value="Horn"/>
<xsd:enumeration value="Lute"/>
<xsd:enumeration value="Mandolin"/>
<xsd:enumeration value="Oboe"/>
<xsd:enumeration value="Organ"/>
<xsd:enumeration value="Percussion (Vibraphone etc.)"/>
<xsd:enumeration value="Piano"/>
<xsd:enumeration value="Recorder / English Flute"/>
<xsd:enumeration value="Saxophone"/>
<xsd:enumeration value="Trombone"/>
<xsd:enumeration value="Trumpet"/>
<xsd:enumeration value="Tuba"/>
<xsd:enumeration value="Viola"/>
<xsd:enumeration value="Violin"/>
<xsd:enumeration value="Violoncello"/>
<xsd:enumeration value="Miscellaneous Lead Instrument"/>
<xsd:enumeration value="Reggae"/>
<xsd:enumeration value="Contemporary Reggae"/>
<xsd:enumeration value="Dancehall"/>
<xsd:enumeration value="Dub"/>
<xsd:enumeration value="Lover's Rock"/>
<xsd:enumeration value="Reggaeton"/>
<xsd:enumeration value="Roots"/>
<xsd:enumeration value="Ska"/>
<xsd:enumeration value="World"/>
<xsd:enumeration value="African Music"/>
<xsd:enumeration value="Afro Beat"/>
<xsd:enumeration value="Afro Pop"/>
<xsd:enumeration value="Asian Music"/>
<xsd:enumeration value="Austropop"/>
<xsd:enumeration value="Calypso"/>
<xsd:enumeration value="Caribbean Music"/>
<xsd:enumeration value="Celtic Music"/>
<xsd:enumeration value="Chanson"/>
<xsd:enumeration value="Coupé Decalé"/>
<xsd:enumeration value="Enka"/>
<xsd:enumeration value="European Music"/>
<xsd:enumeration value="Ghazal"/>
<xsd:enumeration value="Griot"/>
<xsd:enumeration value="Gypsy"/>
<xsd:enumeration value="Highlife"/>
<xsd:enumeration value="Judaica Music / Yiddish / Klezmer"/>
<xsd:enumeration value="Kuduro"/>
<xsd:enumeration value="Kwaito"/>
<xsd:enumeration value="Makossa"/>
<xsd:enumeration value="Marching Band"/>
<xsd:enumeration value="Mento"/>
<xsd:enumeration value="Middle Eastern Music"/>
<xsd:enumeration value="Nordic / Scandinavia"/>
<xsd:enumeration value="North American Music"/>
<xsd:enumeration value="South American Music"/>
<xsd:enumeration value="Parang"/>
<xsd:enumeration value="Polka"/>
<xsd:enumeration value="Rai"/>
<xsd:enumeration value="Soca"/>
<xsd:enumeration value="Soukous"/>
<xsd:enumeration value="Zouk"/>
<xsd:enumeration value="Zulu"/>
<xsd:enumeration value="Latin"/>
<xsd:enumeration value="Bachata"/>
<xsd:enumeration value="Banda"/>
<xsd:enumeration value="Bhangra"/>
<xsd:enumeration value="Bolero"/>
<xsd:enumeration value="Bossa Nova"/>
<xsd:enumeration value="Corridos"/>
<xsd:enumeration value="Cumbia"/>
<xsd:enumeration value="Fado"/>
<xsd:enumeration value="Flamenco"/>
<xsd:enumeration value="Grupero"/>
<xsd:enumeration value="Mambo"/>
<xsd:enumeration value="Mariachi"/>
<xsd:enumeration value="Merengue"/>
<xsd:enumeration value="Norteno"/>
<xsd:enumeration value="Ranchero"/>
<xsd:enumeration value="Rock En Español"/>
<xsd:enumeration value="Salsa"/>
<xsd:enumeration value="Samba"/>
<xsd:enumeration value="Son Cubana"/>
<xsd:enumeration value="Sonidero"/>
<xsd:enumeration value="Tango"/>
<xsd:enumeration value="Tejano"/>

```

```

<xsd:enumeration value="Religious"/>
<xsd:enumeration value="Christian Rock"/>
<xsd:enumeration value="Christian Hip Hop"/>
<xsd:enumeration value="Christian Pop"/>
<xsd:enumeration value="Chants"/>
<xsd:enumeration value="Gospel"/>
<xsd:enumeration value="Gregorian Music"/>
<xsd:enumeration value="Hymn"/>
<xsd:enumeration value="Mass"/>
<xsd:enumeration value="Spiritual"/>
<xsd:enumeration value="Worship"/>
<xsd:enumeration value="Miscellaneous"/>
<xsd:enumeration value="Anime / Video Game Soundtracks"/>
<xsd:enumeration value="Bollywood"/>
<xsd:enumeration value="Instrumental"/>
<xsd:enumeration value="Vocal"/>
<xsd:enumeration value="Acoustic"/>
<xsd:enumeration value="Unplugged"/>
<xsd:enumeration value="Live"/>
<xsd:enumeration value="Traditional"/>
<xsd:enumeration value="Karaoke"/>
<xsd:enumeration value="Movie Scores"/>
<xsd:enumeration value="Movie Soundtracks"/>
<xsd:enumeration value="Sound Effects"/>
<xsd:enumeration value="Soundtrack"/>
<xsd:enumeration value="TV Soundtrack"/>
<xsd:enumeration value="Wedding Music"/>
<xsd:enumeration value="Holiday"/>
<xsd:enumeration value="Mashup"/>
<xsd:enumeration value="Unclassifiable"/>
<xsd:enumeration value="Word"/>
<xsd:enumeration value="Business & Career"/>
<xsd:enumeration value="Abstracts & Dossiers"/>
<xsd:enumeration value="Accounting"/>
<xsd:enumeration value="Business & Investing"/>
<xsd:enumeration value="Communication"/>
<xsd:enumeration value="Computers & Internet"/>
<xsd:enumeration value="Economics"/>
<xsd:enumeration value="Finance"/>
<xsd:enumeration value="Management & Leadership"/>
<xsd:enumeration value="Marketing & Sales"/>
<xsd:enumeration value="Politics"/>
<xsd:enumeration value="Self-Help"/>
<xsd:enumeration value="Self-Organization"/>
<xsd:enumeration value="Skills"/>
<xsd:enumeration value="Small Business & Entrepreneurship"/>
<xsd:enumeration value="Children's Audiobooks"/>
<xsd:enumeration value="Popular Characters"/>
<xsd:enumeration value="Animal Stories"/>
<xsd:enumeration value="Children's Book Classics"/>
<xsd:enumeration value="Children's Detective Stories"/>
<xsd:enumeration value="Fairy Tales"/>
<xsd:enumeration value="Fantasy & Spook"/>
<xsd:enumeration value="Knowledge for Children"/>
<xsd:enumeration value="Pirates, Knights & Historical"/>
<xsd:enumeration value="Poems & Song"/>
<xsd:enumeration value="Comedy & Humour"/>
<xsd:enumeration value="Comedy & Cabaret"/>
<xsd:enumeration value="Humoristic Novel"/>
<xsd:enumeration value="Crime"/>
<xsd:enumeration value="Detective Stories"/>
<xsd:enumeration value="Detective Stories „Noir“"/>
<xsd:enumeration value="Classic Detective Stories"/>
<xsd:enumeration value="Scandinavian Detective Stories"/>
<xsd:enumeration value="Temporary Detective Stories"/>
<xsd:enumeration value="Education & Knowledge"/>
<xsd:enumeration value="Art & Culture"/>
<xsd:enumeration value="Biography & Memento"/>
<xsd:enumeration value="Foreign Language"/>
<xsd:enumeration value="History"/>
<xsd:enumeration value="Philosophy"/>
<xsd:enumeration value="Politics & Current Affairs"/>
<xsd:enumeration value="Science & Technology"/>
<xsd:enumeration value="Health, Mind & Body"/>
<xsd:enumeration value="Autogenous Training"/>
<xsd:enumeration value="Creativity"/>
<xsd:enumeration value="Esoteric"/>
<xsd:enumeration value="Fitness"/>
<xsd:enumeration value="Health"/>
<xsd:enumeration value="Lifestyle"/>
<xsd:enumeration value="Love & Erotic"/>
<xsd:enumeration value="Meditation / Yoga"/>
<xsd:enumeration value="Memory Training"/>

```

```

<xsd:enumeration value="Mental Training"/>
<xsd:enumeration value="Motivation"/>
<xsd:enumeration value="Philosophy"/>
<xsd:enumeration value="Positive Thinking & Attitude"/>
<xsd:enumeration value="Psychology"/>
<xsd:enumeration value="Spirituality & Religion"/>
<xsd:enumeration value="Sports"/>
<xsd:enumeration value="Wellness & Beauty"/>
<xsd:enumeration value="Science Fiction & Fantasy"/>
<xsd:enumeration value="Ancient World"/>
<xsd:enumeration value="Fantasy-Romance"/>
<xsd:enumeration value="Historical Thriller"/>
<xsd:enumeration value="Horror Classics"/>
<xsd:enumeration value="Medieval Times & Early Modern Era"/>
<xsd:enumeration value="Thriller"/>
<xsd:enumeration value="Mystery & Conspiracy"/>
<xsd:enumeration value="Psychological Thriller"/>
<xsd:enumeration value="Espionage, Politics & Justice"/>
<xsd:enumeration value="Vatican & Secret Societies"/>
<xsd:enumeration value="Science & Medicine"/>
<xsd:enumeration value="Literature"/>
<xsd:enumeration value="Novels"/>
<xsd:enumeration value="Erotica"/>
<xsd:enumeration value="Romance"/>
<xsd:enumeration value="Contemporary Literature"/>
<xsd:enumeration value="Contemporary German Literature"/>
<xsd:enumeration value="Entertainment"/>
<xsd:enumeration value="Youth"/>
<xsd:enumeration value="Youth Detective Stories"/>
<xsd:enumeration value="Fantasy"/>
<xsd:enumeration value="For Girls"/>
<xsd:enumeration value="Knowledge for Teenagers"/>
<xsd:enumeration value="Mystery"/>
<xsd:enumeration value="Youth Classics"/>
<xsd:enumeration value="Youth Today"/>
<xsd:enumeration value="Language"/>
<xsd:enumeration value="Albanian"/>
<xsd:enumeration value="Arabic"/>
<xsd:enumeration value="Bengali"/>
<xsd:enumeration value="Bosnian"/>
<xsd:enumeration value="Bulgarian"/>
<xsd:enumeration value="Cantonese / Yue"/>
<xsd:enumeration value="Croatian"/>
<xsd:enumeration value="Czech"/>
<xsd:enumeration value="Danish"/>
<xsd:enumeration value="Dutch"/>
<xsd:enumeration value="English"/>
<xsd:enumeration value="Finnish"/>
<xsd:enumeration value="French"/>
<xsd:enumeration value="German"/>
<xsd:enumeration value="Greek"/>
<xsd:enumeration value="Hebrew"/>
<xsd:enumeration value="Hindi / Urdu"/>
<xsd:enumeration value="Hungarian"/>
<xsd:enumeration value="Italian"/>
<xsd:enumeration value="Japanese"/>
<xsd:enumeration value="Korean"/>
<xsd:enumeration value="Macedonian"/>
<xsd:enumeration value="Mandarin"/>
<xsd:enumeration value="Norwegian"/>
<xsd:enumeration value="Patois"/>
<xsd:enumeration value="Portuguese"/>
<xsd:enumeration value="Russian"/>
<xsd:enumeration value="Serbian"/>
<xsd:enumeration value="Spanish"/>
<xsd:enumeration value="Swedish"/>
<xsd:enumeration value="Tamil"/>
<xsd:enumeration value="Turkish"/>
<xsd:enumeration value="Vietnamese"/>
<xsd:enumeration value="Afrikaans"/>
<xsd:enumeration value="Film"/>
<xsd:enumeration value="Action"/>
<xsd:enumeration value="3D"/>
<xsd:enumeration value="Adventure"/>
<xsd:enumeration value="Animation"/>
<xsd:enumeration value="Author's Film"/>
<xsd:enumeration value="Biography"/>
<xsd:enumeration value="Cartoon"/>
<xsd:enumeration value="Children"/>
<xsd:enumeration value="Comedy"/>
<xsd:enumeration value="Crime & Gangster"/>
<xsd:enumeration value="Disaster"/>
<xsd:enumeration value="Documentary"/>

```



```

<xsd:enumeration value="Drama"/>
<xsd:enumeration value="Epic / Historical"/>
<xsd:enumeration value="Erotic"/>
<xsd:enumeration value="Expressionism"/>
<xsd:enumeration value="Family"/>
<xsd:enumeration value="Fantasy"/>
<xsd:enumeration value="Film-Noir"/>
<xsd:enumeration value="GLBT"/>
<xsd:enumeration value="Horror"/>
<xsd:enumeration value="Independent Film"/>
<xsd:enumeration value="Martial-Arts / Eastern"/>
<xsd:enumeration value="Monumental"/>
<xsd:enumeration value="Musical / Dance"/>
<xsd:enumeration value="Music"/>
<xsd:enumeration value="Mystery"/>
<xsd:enumeration value="Reality-TV"/>
<xsd:enumeration value="Romantic"/>
<xsd:enumeration value="Science Fiction"/>
<xsd:enumeration value="Silent Movie"/>
<xsd:enumeration value="Sport"/>
<xsd:enumeration value="Thriller"/>
<xsd:enumeration value="TV-Series"/>
<xsd:enumeration value="Tragicomedy"/>
<xsd:enumeration value="War / Anti-War"/>
<xsd:enumeration value="Western"/>
<xsd:enumeration value="Youth"/>
<xsd:enumeration value="Time"/>
<xsd:enumeration value="Middle Ages"/>
<xsd:enumeration value="20's"/>
<xsd:enumeration value="30's"/>
<xsd:enumeration value="40's"/>
<xsd:enumeration value="50's"/>
<xsd:enumeration value="60's"/>
<xsd:enumeration value="70's"/>
<xsd:enumeration value="80's"/>
<xsd:enumeration value="90's"/>
<xsd:enumeration value="2000's"/>
<xsd:enumeration value="2010's"/>
<xsd:enumeration value="2020's"/>
<xsd:enumeration value="Adult"/>
<xsd:enumeration value="Children"/>
<xsd:enumeration value="Age: up to 6 years"/>
<xsd:enumeration value="Age: 6 years +"/>
<xsd:enumeration value="Age: 8 years +"/>
<xsd:enumeration value="Kids & Family"/>
<xsd:enumeration value="Country"/>
<xsd:enumeration value="United Arab Emirates (AE)"/>
<xsd:enumeration value="Afghanistan (AF)"/>
<xsd:enumeration value="Antigua and Barbuda (AG)"/>
<xsd:enumeration value="Anguilla (AI)"/>
<xsd:enumeration value="Albania (AL)"/>
<xsd:enumeration value="Armenia (AM)"/>
<xsd:enumeration value="Angola (AO)"/>
<xsd:enumeration value="Antarctica (AQ)"/>
<xsd:enumeration value="Argentina (AR)"/>
<xsd:enumeration value="American Samoa (AS)"/>
<xsd:enumeration value="Austria (AT)"/>
<xsd:enumeration value="Australia (AU)"/>
<xsd:enumeration value="Aruba (AW)"/>
<xsd:enumeration value="Åland Islands (AX)"/>
<xsd:enumeration value="Azerbaijan (AZ)"/>
<xsd:enumeration value="Bosnia and Herzegovina (BA)"/>
<xsd:enumeration value="Barbados (BB)"/>
<xsd:enumeration value="Bangladesh (BD)"/>
<xsd:enumeration value="Belgium (BE)"/>
<xsd:enumeration value="Burkina Faso (BF)"/>
<xsd:enumeration value="Bulgaria (BG)"/>
<xsd:enumeration value="Bahrain (BH)"/>
<xsd:enumeration value="Burundi (BI)"/>
<xsd:enumeration value="Benin (BJ)"/>
<xsd:enumeration value="Saint Barthélemy (BL)"/>
<xsd:enumeration value="Bermuda (BM)"/>
<xsd:enumeration value="Brunei Darussalam (BN)"/>
<xsd:enumeration value="Bolivia Plurinational State of (BO)"/>
<xsd:enumeration value="Bonaire Saint Eustatius and Saba (BQ)"/>
<xsd:enumeration value="Brazil (BR)"/>
<xsd:enumeration value="Bahamas (BS)"/>
<xsd:enumeration value="Bhutan (BT)"/>
<xsd:enumeration value="Bouvet Island (BV)"/>
<xsd:enumeration value="Botswana (BW)"/>
<xsd:enumeration value="Belarus (BY)"/>
<xsd:enumeration value="Belize (BZ)"/>
<xsd:enumeration value="Canada (CA)"/>

```



```

<xsd:enumeration value="Cocos (Keeling) Islands (CC)"/>
<xsd:enumeration value="Congo the Democratic Republic of the (CD)"/>
<xsd:enumeration value="Central African Republic (CF)"/>
<xsd:enumeration value="Congo (CG)"/>
<xsd:enumeration value="Switzerland (CH)"/>
<xsd:enumeration value="Côte d'Ivoire (CI)"/>
<xsd:enumeration value="Cook Islands (CK)"/>
<xsd:enumeration value="Chile (CL)"/>
<xsd:enumeration value="Cameroon (CM)"/>
<xsd:enumeration value="China (CN)"/>
<xsd:enumeration value="Colombia (CO)"/>
<xsd:enumeration value="Costa Rica (CR)"/>
<xsd:enumeration value="Cuba (CU)"/>
<xsd:enumeration value="Cape Verde (CV)"/>
<xsd:enumeration value="Curaçao (CW)"/>
<xsd:enumeration value="Christmas Island (CX)"/>
<xsd:enumeration value="Cyprus (CY)"/>
<xsd:enumeration value="Czech Republic (CZ)"/>
<xsd:enumeration value="Germany (DE)"/>
<xsd:enumeration value="Djibouti (DJ)"/>
<xsd:enumeration value="Denmark (DK)"/>
<xsd:enumeration value="Dominica (DM)"/>
<xsd:enumeration value="Dominican Republic (DO)"/>
<xsd:enumeration value="Algeria (DZ)"/>
<xsd:enumeration value="Ecuador (EC)"/>
<xsd:enumeration value="Estonia (EE)"/>
<xsd:enumeration value="Egypt (EG)"/>
<xsd:enumeration value="Western Sahara (EH)"/>
<xsd:enumeration value="Eritrea (ER)"/>
<xsd:enumeration value="Spain (ES)"/>
<xsd:enumeration value="Ethiopia (ET)"/>
<xsd:enumeration value="Finland (FI)"/>
<xsd:enumeration value="Fiji (FJ)"/>
<xsd:enumeration value="Falkland Islands (Malvinas) (FK)"/>
<xsd:enumeration value="Micronesia Federated States of (FM)"/>
<xsd:enumeration value="Faroe Islands (FO)"/>
<xsd:enumeration value="France (FR)"/>
<xsd:enumeration value="Gabon (GA)"/>
<xsd:enumeration value="United Kingdom (GB)"/>
<xsd:enumeration value="Grenada (GD)"/>
<xsd:enumeration value="Georgia (GE)"/>
<xsd:enumeration value="French Guiana (GF)"/>
<xsd:enumeration value="Guernsey (GG)"/>
<xsd:enumeration value="Ghana (GH)"/>
<xsd:enumeration value="Gibraltar (GI)"/>
<xsd:enumeration value="Greenland (GL)"/>
<xsd:enumeration value="Gambia (GM)"/>
<xsd:enumeration value="Guinea (GN)"/>
<xsd:enumeration value="Guadeloupe (GP)"/>
<xsd:enumeration value="Equatorial Guinea (GQ)"/>
<xsd:enumeration value="Greece (GR)"/>
<xsd:enumeration value="South Georgia and the South Sandwich Islands (GS)"/>
<xsd:enumeration value="Guatemala (GT)"/>
<xsd:enumeration value="Guam (GU)"/>
<xsd:enumeration value="Guinea-Bissau (GW)"/>
<xsd:enumeration value="Guyana (GY)"/>
<xsd:enumeration value="Hong Kong (HK)"/>
<xsd:enumeration value="Heard Island and McDonald Islands (HM)"/>
<xsd:enumeration value="Honduras (HN)"/>
<xsd:enumeration value="Croatia (HR)"/>
<xsd:enumeration value="Haiti (HT)"/>
<xsd:enumeration value="Hungary (HU)"/>
<xsd:enumeration value="Indonesia (ID)"/>
<xsd:enumeration value="Ireland (IE)"/>
<xsd:enumeration value="Israel (IL)"/>
<xsd:enumeration value="Isle of Man (IM)"/>
<xsd:enumeration value="India (IN)"/>
<xsd:enumeration value="British Indian Ocean Territory (IO)"/>
<xsd:enumeration value="Iraq (IQ)"/>
<xsd:enumeration value="Iran Islamic Republic of (IR)"/>
<xsd:enumeration value="Iceland (IS)"/>
<xsd:enumeration value="Italy (IT)"/>
<xsd:enumeration value="Jersey (JE)"/>
<xsd:enumeration value="Jamaica (JM)"/>
<xsd:enumeration value="Jordan (JO)"/>
<xsd:enumeration value="Japan (JP)"/>
<xsd:enumeration value="Kenya (KE)"/>
<xsd:enumeration value="Kyrgyzstan (KG)"/>
<xsd:enumeration value="Cambodia (KH)"/>
<xsd:enumeration value="Kiribati (KI)"/>
<xsd:enumeration value="Comoros (KM)"/>
<xsd:enumeration value="Saint Kitts and Nevis (KN)"/>
<xsd:enumeration value="Korea Democratic People's Republic of (KP)"/>

```

```

<xsd:enumeration value="Korea Republic of (KR)"/>
<xsd:enumeration value="Kuwait (KW)"/>
<xsd:enumeration value="Cayman Islands (KY)"/>
<xsd:enumeration value="Kazakhstan (KZ)"/>
<xsd:enumeration value="Lao People's Democratic Republic (LA)"/>
<xsd:enumeration value="Lebanon (LB)"/>
<xsd:enumeration value="Saint Lucia (LC)"/>
<xsd:enumeration value="Liechtenstein (LI)"/>
<xsd:enumeration value="Sri Lanka (LK)"/>
<xsd:enumeration value="Liberia (LR)"/>
<xsd:enumeration value="Lesotho (LS)"/>
<xsd:enumeration value="Lithuania (LT)"/>
<xsd:enumeration value="Luxembourg (LU)"/>
<xsd:enumeration value="Latvia (LV)"/>
<xsd:enumeration value="Libyan Arab Jamahiriya (LY)"/>
<xsd:enumeration value="Morocco (MA)"/>
<xsd:enumeration value="Monaco (MC)"/>
<xsd:enumeration value="Moldova Republic of (MD)"/>
<xsd:enumeration value="Montenegro (ME)"/>
<xsd:enumeration value="Saint Martin (French part) (MF)"/>
<xsd:enumeration value="Madagascar (MG)"/>
<xsd:enumeration value="Marshall Islands (MH)"/>
<xsd:enumeration value="Macedonia the former Yugoslav Republic of (MK)"/>
<xsd:enumeration value="Mali (ML)"/>
<xsd:enumeration value="Myanmar (MM)"/>
<xsd:enumeration value="Mongolia (MN)"/>
<xsd:enumeration value="Macao (MO)"/>
<xsd:enumeration value="Northern Mariana Islands (MP)"/>
<xsd:enumeration value="Martinique (MQ)"/>
<xsd:enumeration value="Mauritania (MR)"/>
<xsd:enumeration value="Montserrat (MS)"/>
<xsd:enumeration value="Malta (MT)"/>
<xsd:enumeration value="Mauritius (MU)"/>
<xsd:enumeration value="Maldives (MV)"/>
<xsd:enumeration value="Malawi (MW)"/>
<xsd:enumeration value="Mexico (MX)"/>
<xsd:enumeration value="Malaysia (MY)"/>
<xsd:enumeration value="Mozambique (MZ)"/>
<xsd:enumeration value="Namibia (NA)"/>
<xsd:enumeration value="New Caledonia (NC)"/>
<xsd:enumeration value="Niger (NE)"/>
<xsd:enumeration value="Norfolk Island (NF)"/>
<xsd:enumeration value="Nigeria (NG)"/>
<xsd:enumeration value="Nicaragua (NI)"/>
<xsd:enumeration value="Netherlands (NL)"/>
<xsd:enumeration value="Norway (NO)"/>
<xsd:enumeration value="Nepal (NP)"/>
<xsd:enumeration value="Nauru (NR)"/>
<xsd:enumeration value="Niue (NU)"/>
<xsd:enumeration value="New Zealand (NZ)"/>
<xsd:enumeration value="Oman (OM)"/>
<xsd:enumeration value="Panama (PA)"/>
<xsd:enumeration value="Peru (PE)"/>
<xsd:enumeration value="French Polynesia (PF)"/>
<xsd:enumeration value="Papua New Guinea (PG)"/>
<xsd:enumeration value="Philippines (PH)"/>
<xsd:enumeration value="Pakistan (PK)"/>
<xsd:enumeration value="Poland (PL)"/>
<xsd:enumeration value="Saint Pierre and Miquelon (PM)"/>
<xsd:enumeration value="Pitcairn (PN)"/>
<xsd:enumeration value="Puerto Rico (PR)"/>
<xsd:enumeration value="Palestinian Territory Occupied (PS)"/>
<xsd:enumeration value="Portugal (PT)"/>
<xsd:enumeration value="Palau (PW)"/>
<xsd:enumeration value="Paraguay (PY)"/>
<xsd:enumeration value="Qatar (QA)"/>
<xsd:enumeration value="Réunion (RE)"/>
<xsd:enumeration value="Romania (RO)"/>
<xsd:enumeration value="Serbia (RS)"/>
<xsd:enumeration value="Russian Federation (RU)"/>
<xsd:enumeration value="Rwanda (RW)"/>
<xsd:enumeration value="Saudi Arabia (SA)"/>
<xsd:enumeration value="Solomon Islands (SB)"/>
<xsd:enumeration value="Seychelles (SC)"/>
<xsd:enumeration value="Sudan (SD)"/>
<xsd:enumeration value="Sweden (SE)"/>
<xsd:enumeration value="Singapore (SG)"/>
<xsd:enumeration value="Saint Helena Ascension and Tristan da Cunha (SH)"/>
<xsd:enumeration value="Slovenia (SI)"/>
<xsd:enumeration value="Svalbard and Jan Mayen (SJ)"/>
<xsd:enumeration value="Slovakia (SK)"/>
<xsd:enumeration value="Sierra Leone (SL)"/>
<xsd:enumeration value="San Marino (SM)"/>

```

```

<xsd:enumeration value="Senegal (SN)"/>
<xsd:enumeration value="Somalia (SO)"/>
<xsd:enumeration value="Suriname (SR)"/>
<xsd:enumeration value="South Sudan (SS)"/>
<xsd:enumeration value="Sao Tome and Principe (ST)"/>
<xsd:enumeration value="El Salvador (SV)"/>
<xsd:enumeration value="Sint Maarten (Dutch part) (SX)"/>
<xsd:enumeration value="Syrian Arab Republic (SY)"/>
<xsd:enumeration value="Swaziland (SZ)"/>
<xsd:enumeration value="Turks and Caicos Islands (TC)"/>
<xsd:enumeration value="Chad (TD)"/>
<xsd:enumeration value="French Southern Territories (TF)"/>
<xsd:enumeration value="Togo (TG)"/>
<xsd:enumeration value="Thailand (TH)"/>
<xsd:enumeration value="Tajikistan (TJ)"/>
<xsd:enumeration value="Tokelau (TK)"/>
<xsd:enumeration value="Timor-Leste (TL)"/>
<xsd:enumeration value="Turkmenistan (TM)"/>
<xsd:enumeration value="Tunisia (TN)"/>
<xsd:enumeration value="Tonga (TO)"/>
<xsd:enumeration value="Turkey (TR)"/>
<xsd:enumeration value="Trinidad and Tobago (TT)"/>
<xsd:enumeration value="Tuvalu (TV)"/>
<xsd:enumeration value="Taiwan Province of China (TW)"/>
<xsd:enumeration value="Tanzania United Republic of (TZ)"/>
<xsd:enumeration value="Ukraine (UA)"/>
<xsd:enumeration value="Uganda (UG)"/>
<xsd:enumeration value="United States Minor Outlying Islands (UM)"/>
<xsd:enumeration value="United States (US)"/>
<xsd:enumeration value="Uruguay (UY)"/>
<xsd:enumeration value="Uzbekistan (UZ)"/>
<xsd:enumeration value="Holy See (Vatican City State) (VA)"/>
<xsd:enumeration value="Saint Vincent and the Grenadines (VC)"/>
<xsd:enumeration value="Venezuela Bolivarian Republic of (VE)"/>
<xsd:enumeration value="Virgin Islands British (VG)"/>
<xsd:enumeration value="Virgin Islands U.S. (VI)"/>
<xsd:enumeration value="Viet Nam (VN)"/>
<xsd:enumeration value="Vanuatu (VU)"/>
<xsd:enumeration value="Wallis and Futuna (WF)"/>
<xsd:enumeration value="Samoa (WS)"/>
<xsd:enumeration value="Yemen (YE)"/>
<xsd:enumeration value="Mayotte (YT)"/>
<xsd:enumeration value="South Africa (ZA)"/>
<xsd:enumeration value="Zambia (ZM)"/>
<xsd:enumeration value="Zimbabwe (ZW)"/>
</xsd:restriction>
</xsd:simpleType>

```

**Namespace: "http://fnppl.org/opensdx/languages"**

## Schema(s)

Imported schema **openSDX\_languages.xsd**

Namespace	http://fnppl.org/opensdx/languages
Properties	attribute form default: unqualified
	element form default: unqualified

## Simple Type(s)

### Simple Type language

Namespace	http://fnppl.org/opensdx/languages		
Annotations	This element includes a list of ISO 639-1 language codes.		
Diagram			
Type	restriction of xsd:string		
Facets	enumeration	aa	Afar
	enumeration	ab	Abkhazian
	enumeration	af	Afrikaans

enumeration	am	Amharic
enumeration	ar	Arabic
enumeration	as	Assamese
enumeration	ay	Aymara
enumeration	az	Azerbaijani
enumeration	ba	Bashkir
enumeration	be	Byelorussian
enumeration	bg	Bulgarian
enumeration	bh	Bihari
enumeration	bi	Bislama
enumeration	bn	Bengali; Bangla
enumeration	bo	Tibetan
enumeration	br	Breton
enumeration	ca	Catalan
enumeration	co	Corsican
enumeration	cs	Czech
enumeration	cy	Welsh
enumeration	da	Danish
enumeration	de	German
enumeration	dz	Bhutani
enumeration	el	Greek
enumeration	en	English
enumeration	eo	Esperanto
enumeration	es	Spanish
enumeration	et	Estonian
enumeration	eu	Basque
enumeration	fa	Persian
enumeration	fi	Finnish
enumeration	fj	Fiji
enumeration	fo	Faroese
enumeration	fr	French
enumeration	fy	Frisian
enumeration	ga	Irish
enumeration	gd	Scots Gaelic
enumeration	gl	Galician
enumeration	gn	Guarani
enumeration	gu	Gujarati
enumeration	ha	Hausa
enumeration	he	Hebrew
enumeration	hi	Hindi
enumeration	hr	Croatian
enumeration	hu	Hungarian
enumeration	hy	Armenian
enumeration	ia	Interlingua
enumeration	id	Indonesian
enumeration	ie	Interlingue
enumeration	ik	Inupiak
enumeration	is	Icelandic
enumeration	it	Italian

enumeration	iu	Inuktitut
enumeration	ja	Japanese
enumeration	jw	Javanese
enumeration	ka	Georgian
enumeration	kk	Kazakh
enumeration	kl	Greenlandic
enumeration	km	Cambodian
enumeration	kn	Kannada
enumeration	ko	Korean
enumeration	ks	Kashmiri
enumeration	ku	Kurdish
enumeration	ky	Kirghiz
enumeration	la	Latin
enumeration	ln	Lingala
enumeration	lo	Laothian
enumeration	lt	Lithuanian
enumeration	lv	Latvian; Lettish
enumeration	mg	Malagasy
enumeration	mi	Maori
enumeration	mk	Macedonian
enumeration	ml	Malayalam
enumeration	mn	Mongolian
enumeration	mo	Moldavian
enumeration	mr	Marathi
enumeration	ms	Malay
enumeration	mt	Maltese
enumeration	my	Burmese
enumeration	na	Nauru
enumeration	ne	Nepali
enumeration	nl	Dutch
enumeration	no	Norwegian
enumeration	oc	Occitan
enumeration	om	(Afan) Oromo
enumeration	or	Oriya
enumeration	pa	Punjabi
enumeration	pl	Polish
enumeration	ps	Pashto, Pushto
enumeration	pt	Portuguese
enumeration	qu	Quechua
enumeration	rm	Rhaeto-Romance
enumeration	rn	Kirundi
enumeration	ro	Romanian
enumeration	ru	Russian
enumeration	rw	Kinyarwanda
enumeration	sa	Sanskrit
enumeration	sd	Sindhi
enumeration	se	Sami (Northern)
enumeration	sg	Sangho
enumeration	sh	Serbo-Croatian

	enumeration	si	Singhalese
	enumeration	sk	Slovak
	enumeration	sl	Slovenian
	enumeration	sm	Samoan
	enumeration	sn	Shona
	enumeration	so	Somali
	enumeration	sq	Albanian
	enumeration	sr	Serbian
	enumeration	ss	Siswati
	enumeration	st	Sesotho
	enumeration	su	Sundanese
	enumeration	sv	Swedish
	enumeration	sw	Swahili
	enumeration	ta	Tamil
	enumeration	te	Telugu
	enumeration	tg	Tajik
	enumeration	th	Thai
	enumeration	ti	Tigrinya
	enumeration	tk	Turkmen
	enumeration	tl	Tagalog
	enumeration	tn	Setswana
	enumeration	to	Tonga
	enumeration	tr	Turkish
	enumeration	ts	Tsonga
	enumeration	tt	Tatar
	enumeration	tw	Twi
	enumeration	ug	Uigur
	enumeration	uk	Ukrainian
	enumeration	ur	Urdu
	enumeration	uz	Uzbek
	enumeration	vi	Vietnamese
	enumeration	vo	Volapuk
	enumeration	wo	Wolof
	enumeration	xh	Xhosa
	enumeration	yi	Yiddish
	enumeration	yo	Yoruba
	enumeration	za	Zhuang
	enumeration	zh	Chinese
	enumeration	zu	Zulu
	Used by	Element	information/main_language
Source	<pre>&lt;xsd:simpleType name="language"&gt;   &lt;xsd:annotation&gt;     &lt;xsd:documentation xml:lang="en"&gt;This element includes a list of ISO 639-1 language codes.&lt;/ xsd:documentation&gt;   &lt;/xsd:annotation&gt;   &lt;xsd:restriction base="xsd:string"&gt;     &lt;xsd:enumeration value="aa"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Afar&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="ab"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Abkhazians&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="af"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Afrikaans&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="ak"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Akan&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="am"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Amharic&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="an"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Aragonese&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="ar"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Arabic&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="as"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Assamese&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="ay"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Aymara&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="az"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Azerbaijani&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="ba"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Bashkir&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="bb"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Bambara&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="be"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Belarusian&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="bg"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Bulgarian&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="bh"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Bihari&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="bi"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Bislama&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="bj"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Bjeldjese&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="bm"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Bambara&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="bn"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Bengali&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="bo"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Tibetan&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="br"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Breton&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="bs"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Bosnian&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="ca"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Catalan&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="ce"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Chechen&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="ch"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Chamorro&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="co"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Corsican&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="cs"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Czech&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="cu"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Church Slavonic&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="cv"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Chuvash&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="cy"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Welsh&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="da"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Danish&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="de"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;German&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="dv"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Divehi&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="dz"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Dzongkha&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="ee"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Ewe&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="el"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Greek&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="en"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;English&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="eo"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Esperanto&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="es"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Spanish&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="et"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Estonian&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="eu"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Basque&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="fa"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Persian&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="ff"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Fula&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="fi"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Finnish&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="fj"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Fijian&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="fo"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Faroese&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="fr"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;French&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="fy"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Frisian&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="ga"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Irish Gaelic&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="gd"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Gaelic&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="ge"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Georgian&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="gl"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Galician&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="gn"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Guaraní&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="gu"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Gujarati&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="gv"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Gaelic&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="ha"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Hausa&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="he"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Hebrew&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="hi"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Hindi&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="ho"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Hiri Motu&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="hr"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Croatian&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="hs"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;High German&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="hu"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Hungarian&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="hy"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Armenian&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="ia"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Interlingua&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="id"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Indonesian&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="ie"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Interlingua&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="ig"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Igbo&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="ik"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Inuktitut&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="io"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Ido&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="is"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Icelandic&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="it"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Italian&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="ja"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Japanese&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="jv"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Javanese&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="ka"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Georgian&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="kk"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Kazakh&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="kl"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Kalaallisut&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="km"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Khmer&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="kn"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Kannada&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="ko"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Korean&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="ks"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Kashmiri&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="ku"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Kurdish&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="kv"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Karelian&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="kw"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Kernewek&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="ky"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Kyrgyz&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="la"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Laotian&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="lb"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Luxembourgish&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="le"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Lele&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="lg"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Luganda&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="li"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Limburgish&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="ln"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Lingala&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="lo"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Lao&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="lt"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Lithuanian&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="lv"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Latvian&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="mg"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Malagasy&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="mh"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Marshallese&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="mi"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Maori&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="mk"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Macedonian&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="ml"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Malayalam&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="mn"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Mongolian&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="mo"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Moldavian&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="mr"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Marathi&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="ms"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Malay&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="mt"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Maltese&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="my"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Burmese&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="na"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Nama&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="nb"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Norwegian Bokmål&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="nd"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Ndebele&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="ne"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Nepali&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="ng"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Ngoni&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="nl"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Dutch&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="nn"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Norwegian Nynorsk&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="no"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Norwegian&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="nv"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Navaho&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="ny"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Nyanja&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="oc"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Occitan&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="oj"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Ojibwa&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="om"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Oromo&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="or"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Oriya&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="os"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Ossetian&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="pa"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Punjabi&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="pi"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Pali&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="pl"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Polish&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="ps"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Pushto&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="pt"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Portuguese&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="qu"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Quechua&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="rm"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Rhaeto-Romanic&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="rn"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Rundi&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="ro"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Romanian&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="ru"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Russian&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="rw"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Rwanda&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="sa"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Sanskrit&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="sc"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Sardinian&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="sd"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Sindhi&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="se"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Sami&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="sg"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Sango&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="sh"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Serbo-Croatian&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="si"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Sinhalese&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="sk"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Slovak&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="sl"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Slovenian&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="sm"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Samoan&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="sn"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Shona&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="so"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Somali&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="sq"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Albanian&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="sr"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Serbian&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="ss"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Siswati&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="st"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Sesotho&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="su"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Sundanese&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="sv"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Swedish&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="sw"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Swahili&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="ta"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Tamil&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="te"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Telugu&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="tg"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Tajik&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="th"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Thai&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="ti"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Tigrinya&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="tk"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Turkmen&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="tl"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Tagalog&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="tn"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Setswana&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="to"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Tonga&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="tr"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Turkish&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="ts"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Tsonga&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="tt"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Tatar&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="tw"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Twi&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="ug"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Uigur&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="uk"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Ukrainian&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="ur"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Urdu&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="uz"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Uzbek&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="vi"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Vietnamese&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="vo"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Volapuk&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="wo"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Wolof&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="xh"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Xhosa&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="yi"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Yiddish&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&gt;     &lt;xsd:enumeration value="yo"&gt;       &lt;xsd:annotation&gt;         &lt;xsd:documentation&gt;Yoruba&lt;/xsd:documentation&gt;       &lt;/xsd:annotation&gt;     &lt;/xsd:enumeration&amp;gt</pre>		

```

    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="af">
    <xsd:annotation>
      <xsd:documentation>Afrikaans</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="am">
    <xsd:annotation>
      <xsd:documentation>Amharic</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="ar">
    <xsd:annotation>
      <xsd:documentation>Arabic</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="as">
    <xsd:annotation>
      <xsd:documentation>Assamese</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="ay">
    <xsd:annotation>
      <xsd:documentation>Aymara</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="az">
    <xsd:annotation>
      <xsd:documentation>Azerbaijani</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="ba">
    <xsd:annotation>
      <xsd:documentation>Bashkir</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="be">
    <xsd:annotation>
      <xsd:documentation>Byelorussian</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="bg">
    <xsd:annotation>
      <xsd:documentation>Bulgarian</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="bh">
    <xsd:annotation>
      <xsd:documentation>Bihari</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="bi">
    <xsd:annotation>
      <xsd:documentation>Bislama</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="bn">
    <xsd:annotation>
      <xsd:documentation>Bengali; Bangla</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="bo">
    <xsd:annotation>
      <xsd:documentation>Tibetan</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="br">
    <xsd:annotation>
      <xsd:documentation>Breton</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="ca">
    <xsd:annotation>
      <xsd:documentation>Catalan</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="co">
    <xsd:annotation>
      <xsd:documentation>Corsican</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="cs">

```

```

<xsd:annotation>
  <xsd:documentation>Czech</xsd:documentation>
</xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="cy">
  <xsd:annotation>
    <xsd:documentation>Welsh</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="da">
  <xsd:annotation>
    <xsd:documentation>Danish</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="de">
  <xsd:annotation>
    <xsd:documentation>German</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="dz">
  <xsd:annotation>
    <xsd:documentation>Bhutani</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="el">
  <xsd:annotation>
    <xsd:documentation>Greek</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="en">
  <xsd:annotation>
    <xsd:documentation>English</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="eo">
  <xsd:annotation>
    <xsd:documentation>Esperanto</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="es">
  <xsd:annotation>
    <xsd:documentation>Spanish</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="et">
  <xsd:annotation>
    <xsd:documentation>Estonian</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="eu">
  <xsd:annotation>
    <xsd:documentation>Basque</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="fa">
  <xsd:annotation>
    <xsd:documentation>Persian</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="fi">
  <xsd:annotation>
    <xsd:documentation>Finnish</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="fj">
  <xsd:annotation>
    <xsd:documentation>Fiji</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="fo">
  <xsd:annotation>
    <xsd:documentation>Faroese</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="fr">
  <xsd:annotation>
    <xsd:documentation>French</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="fy">
  <xsd:annotation>
    <xsd:documentation>Frisian</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>

```



```

</xsd:enumeration>
<xsd:enumeration value="ga">
  <xsd:annotation>
    <xsd:documentation>Irish</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="gd">
  <xsd:annotation>
    <xsd:documentation>Scots Gaelic</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="gl">
  <xsd:annotation>
    <xsd:documentation>Galician</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="gn">
  <xsd:annotation>
    <xsd:documentation>Guarani</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="gu">
  <xsd:annotation>
    <xsd:documentation>Gujarati</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="ha">
  <xsd:annotation>
    <xsd:documentation>Hausa</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="he">
  <xsd:annotation>
    <xsd:documentation>Hebrew</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="hi">
  <xsd:annotation>
    <xsd:documentation>Hindi</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="hr">
  <xsd:annotation>
    <xsd:documentation>Croatian</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="hu">
  <xsd:annotation>
    <xsd:documentation>Hungarian</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="hy">
  <xsd:annotation>
    <xsd:documentation>Armenian</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="ia">
  <xsd:annotation>
    <xsd:documentation>Interlingua</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="id">
  <xsd:annotation>
    <xsd:documentation>Indonesian</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="ie">
  <xsd:annotation>
    <xsd:documentation>Interlingue</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="ik">
  <xsd:annotation>
    <xsd:documentation>Inupiak</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="is">
  <xsd:annotation>
    <xsd:documentation>Icelandic</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="it">
  <xsd:annotation>

```

```

        <xsd:documentation>Italian</xsd:documentation>
      </xsd:annotation>
    </xsd:enumeration>
    <xsd:enumeration value="iu">
      <xsd:annotation>
        <xsd:documentation>Inuktitut</xsd:documentation>
      </xsd:annotation>
    </xsd:enumeration>
    <xsd:enumeration value="ja">
      <xsd:annotation>
        <xsd:documentation>Japanese</xsd:documentation>
      </xsd:annotation>
    </xsd:enumeration>
    <xsd:enumeration value="jw">
      <xsd:annotation>
        <xsd:documentation>Javanese</xsd:documentation>
      </xsd:annotation>
    </xsd:enumeration>
    <xsd:enumeration value="ka">
      <xsd:annotation>
        <xsd:documentation>Georgian</xsd:documentation>
      </xsd:annotation>
    </xsd:enumeration>
    <xsd:enumeration value="kk">
      <xsd:annotation>
        <xsd:documentation>Kazakh</xsd:documentation>
      </xsd:annotation>
    </xsd:enumeration>
    <xsd:enumeration value="kl">
      <xsd:annotation>
        <xsd:documentation>Greenlandic</xsd:documentation>
      </xsd:annotation>
    </xsd:enumeration>
    <xsd:enumeration value="km">
      <xsd:annotation>
        <xsd:documentation>Cambodian</xsd:documentation>
      </xsd:annotation>
    </xsd:enumeration>
    <xsd:enumeration value="kn">
      <xsd:annotation>
        <xsd:documentation>Kannada</xsd:documentation>
      </xsd:annotation>
    </xsd:enumeration>
    <xsd:enumeration value="ko">
      <xsd:annotation>
        <xsd:documentation>Korean</xsd:documentation>
      </xsd:annotation>
    </xsd:enumeration>
    <xsd:enumeration value="ks">
      <xsd:annotation>
        <xsd:documentation>Kashmiri</xsd:documentation>
      </xsd:annotation>
    </xsd:enumeration>
    <xsd:enumeration value="ku">
      <xsd:annotation>
        <xsd:documentation>Kurdish</xsd:documentation>
      </xsd:annotation>
    </xsd:enumeration>
    <xsd:enumeration value="ky">
      <xsd:annotation>
        <xsd:documentation>Kirghiz</xsd:documentation>
      </xsd:annotation>
    </xsd:enumeration>
    <xsd:enumeration value="la">
      <xsd:annotation>
        <xsd:documentation>Latin</xsd:documentation>
      </xsd:annotation>
    </xsd:enumeration>
    <xsd:enumeration value="ln">
      <xsd:annotation>
        <xsd:documentation>Lingala</xsd:documentation>
      </xsd:annotation>
    </xsd:enumeration>
    <xsd:enumeration value="lo">
      <xsd:annotation>
        <xsd:documentation>Laothian</xsd:documentation>
      </xsd:annotation>
    </xsd:enumeration>
    <xsd:enumeration value="lt">
      <xsd:annotation>
        <xsd:documentation>Lithuanian</xsd:documentation>
      </xsd:annotation>
    </xsd:enumeration>

```

```

<xsd:enumeration value="lv">
  <xsd:annotation>
    <xsd:documentation>Latvian; Lettish</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="mg">
  <xsd:annotation>
    <xsd:documentation>Malagasy</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="mi">
  <xsd:annotation>
    <xsd:documentation>Maori</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="mk">
  <xsd:annotation>
    <xsd:documentation>Macedonian</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="ml">
  <xsd:annotation>
    <xsd:documentation>Malayalam</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="mn">
  <xsd:annotation>
    <xsd:documentation>Mongolian</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="mo">
  <xsd:annotation>
    <xsd:documentation>Moldavian</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="mr">
  <xsd:annotation>
    <xsd:documentation>Marathi</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="ms">
  <xsd:annotation>
    <xsd:documentation>Malay</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="mt">
  <xsd:annotation>
    <xsd:documentation>Maltese</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="my">
  <xsd:annotation>
    <xsd:documentation>Burmese</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="na">
  <xsd:annotation>
    <xsd:documentation>Nauru</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="ne">
  <xsd:annotation>
    <xsd:documentation>Nepali</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="nl">
  <xsd:annotation>
    <xsd:documentation>Dutch</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="no">
  <xsd:annotation>
    <xsd:documentation>Norwegian</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="oc">
  <xsd:annotation>
    <xsd:documentation>Occitan</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="om">
  <xsd:annotation>
    <xsd:documentation>(Afan) Oromo</xsd:documentation>
  </xsd:annotation>

```

```

    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="or">
    <xsd:annotation>
      <xsd:documentation>Oriya</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="pa">
    <xsd:annotation>
      <xsd:documentation>Punjabi</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="pl">
    <xsd:annotation>
      <xsd:documentation>Polish</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="ps">
    <xsd:annotation>
      <xsd:documentation>Pashto, Pushto</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="pt">
    <xsd:annotation>
      <xsd:documentation>Portuguese</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="qu">
    <xsd:annotation>
      <xsd:documentation>Quechua</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="rm">
    <xsd:annotation>
      <xsd:documentation>Rhaeto-Romance</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="rn">
    <xsd:annotation>
      <xsd:documentation>Kirundi</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="ro">
    <xsd:annotation>
      <xsd:documentation>Romanian</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="ru">
    <xsd:annotation>
      <xsd:documentation>Russian</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="rw">
    <xsd:annotation>
      <xsd:documentation>Kinyarwanda</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="sa">
    <xsd:annotation>
      <xsd:documentation>Sanskrit</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="sd">
    <xsd:annotation>
      <xsd:documentation>Sindhi</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="se">
    <xsd:annotation>
      <xsd:documentation>Sami (Northern)</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="sg">
    <xsd:annotation>
      <xsd:documentation>Sangho</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="sh">
    <xsd:annotation>
      <xsd:documentation>Serbo-Croatian</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="si">

```

```

<xsd:annotation>
  <xsd:documentation>Singhalese</xsd:documentation>
</xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="sk">
  <xsd:annotation>
    <xsd:documentation>Slovak</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="sl">
  <xsd:annotation>
    <xsd:documentation>Slovenian</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="sm">
  <xsd:annotation>
    <xsd:documentation>Samoan</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="sn">
  <xsd:annotation>
    <xsd:documentation>Shona</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="so">
  <xsd:annotation>
    <xsd:documentation>Somali</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="sq">
  <xsd:annotation>
    <xsd:documentation>Albanian</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="sr">
  <xsd:annotation>
    <xsd:documentation>Serbian</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="ss">
  <xsd:annotation>
    <xsd:documentation>Siswati</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="st">
  <xsd:annotation>
    <xsd:documentation>Sesotho</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="su">
  <xsd:annotation>
    <xsd:documentation>Sundanese</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="sv">
  <xsd:annotation>
    <xsd:documentation>Swedish</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="sw">
  <xsd:annotation>
    <xsd:documentation>Swahili</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="ta">
  <xsd:annotation>
    <xsd:documentation>Tamil</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="te">
  <xsd:annotation>
    <xsd:documentation>Telugu</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="tg">
  <xsd:annotation>
    <xsd:documentation>Tajik</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="th">
  <xsd:annotation>
    <xsd:documentation>Thai</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>

```

```

</xsd:enumeration>
<xsd:enumeration value="ti">
  <xsd:annotation>
    <xsd:documentation>Tigrinya</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="tk">
  <xsd:annotation>
    <xsd:documentation>Turkmen</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="tl">
  <xsd:annotation>
    <xsd:documentation>Tagalog</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="tn">
  <xsd:annotation>
    <xsd:documentation>Setswana</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="to">
  <xsd:annotation>
    <xsd:documentation>Tonga</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="tr">
  <xsd:annotation>
    <xsd:documentation>Turkish</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="ts">
  <xsd:annotation>
    <xsd:documentation>Tsonga</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="tt">
  <xsd:annotation>
    <xsd:documentation>Tatar</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="tw">
  <xsd:annotation>
    <xsd:documentation>Twi</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="ug">
  <xsd:annotation>
    <xsd:documentation>Uigur</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="uk">
  <xsd:annotation>
    <xsd:documentation>Ukrainian</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="ur">
  <xsd:annotation>
    <xsd:documentation>Urdu</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="uz">
  <xsd:annotation>
    <xsd:documentation>Uzbek</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="vi">
  <xsd:annotation>
    <xsd:documentation>Vietnamese</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="vo">
  <xsd:annotation>
    <xsd:documentation>Volapuk</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="wo">
  <xsd:annotation>
    <xsd:documentation>Wolof</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="xh">
  <xsd:annotation>

```

```
<xsd:documentation>Xhosa</xsd:documentation>
</xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="yi">
  <xsd:annotation>
    <xsd:documentation>Yiddish</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="yo">
  <xsd:annotation>
    <xsd:documentation>Yoruba</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="za">
  <xsd:annotation>
    <xsd:documentation>Zhuang</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="zh">
  <xsd:annotation>
    <xsd:documentation>Chinese</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="zu">
  <xsd:annotation>
    <xsd:documentation>Zulu</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
</xsd:restriction>
</xsd:simpleType>
```