

Schema documentation for openSDX_00-00-00-01.xsd

march 25, 2013

Table of Contents

Resource hierarchy:	6
Namespace: ""	6
Schema(s)	6
Main schema openSDX_00-00-00-01.xsd	6
Element(s)	6
Element feed	6
Element feed / feedinfo	7
Element feedinfo / onlytest	8
Element feedinfo / feedid	8
Element feedinfo / creationdatetime	8
Element feedinfo / effectivedatetime	8
Element feedinfo / creator	8
Element creator / email	9
Element creator / userid	9
Element creator / keyid	10
Element feedinfo / receiver	10
Element receiver / type	11
Element receiver / servername	11
Element receiver / serveripv4	11
Element receiver / serveripv6	11
Element receiver / authtype	12
Element receiver / username	12
Element receiver / crypto	12
Element crypto / relatedemail	13
Element crypto / usedkeyid	13
Element crypto / usedpubkey	13
Element receiver / keyid	13
Element feedinfo / sender	13
Element sender / contractpartnerid	14
Element sender / ourcontractpartnerid	14
Element sender / email	14
Element sender / keyid	15
Element feedinfo / licensor	15
Element licensor / contractpartnerid	15
Element licensor / ourcontractpartnerid	16
Element licensor / email	16
Element licensor / keyid	16
Element feedinfo / licensee	16
Element licensee / contractpartnerid	17
Element licensee / ourcontractpartnerid	17
Element licensee / email	17
Element licensee / keyid	17
Element feedinfo / actions	18
Element actions / oninitialreceive	18
Element event / mailto	19
Element mailto / receiver	19
Element mailto / subject	20
Element mailto / text	20
Element event / http	20
Element http / url	21
Element http / type	21
Element http / addheader	21
Element http / addparams	21
Element event / fax	22
Element event / letter	22
Element letter / registered	23
Element letter / to	23
Element to / name	23
Element to / department	24
Element to / nameperson	24

Element to / street	24
Element to / postcode	24
Element to / country	25
Element to / additionaladdressinfo	30
Element letter / text	30
Element letter / costscoveredby	30
Element costscoveredby / contractpartnerid	31
Element costscoveredby / ourcontractpartnerid	31
Element costscoveredby / maxcostscovered	31
Element event / nothing	32
Element actions / onprocessstart	32
Element actions / onprocessend	32
Element actions / onfullsuccess	33
Element actions / onerror	34
Element feed / bundle	34
Element bundle / displayname	36
Element bundle / name	36
Element bundle / version	36
Element bundle / display_artistname	36
Element bundle / ids	36
Element ids / grid	37
Element ids / upc	38
Element ids / isrc	38
Element ids / iswc	38
Element ids / contentauth	38
Element ids / labelordernum	39
Element ids / amzn	39
Element ids / isbn	39
Element ids / finetunes	39
Element ids / licensor	40
Element ids / licensee	40
Element ids / gvl	40
Element ids / amg	41
Element bundle / items	41
Element items / item	41
Element item / displayname	43
Element item / name	43
Element item / version	43
Element item / type	43
Element item / display_artistname	43
Element item / ids	44
Element item / contributors	45
Element contributors / contributor	45
Element contributor / name	46
Element contributor / type	46
Element contributor / year	47
Element contributor / ids	47
Element contributor / www	48
Element www / facebook	48
Element www / myspace	49
Element www / homepage	49
Element www / twitter	50
Element www / blog	50
Element www / phone	51
Element item / information	51
Element information / texts	52
Element texts / promotext	53
Element texts / teasertext	53
Element information / physical_release_datetime	54
Element information / digital_release_datetime	54
Element information / playlength	54
Element information / num	54
Element information / setnum	55
Element information / suggested_prelistening_offset	55
Element information / origin_country	55
Element information / main_language	60
Element information / compositiontype	64
Element information / recordingtype	65
Element information / related	65
Element related / physical_distributor	66
Element related / utube	66
Element utube / url	66

Element utube / channel	67
Element related / bundle	67
Element bundle / contributors	68
Element bundle / information	68
Element bundle / license_basis	69
Element license_basis / territorial	70
Element territorial / territory	70
Element license_basis / timeframe	71
Element timeframe / from	71
Element timeframe / to	72
Element license_basis / pricing	72
Element pricing / pricecode	72
Element pricing / wholesale	72
Element license_basis / download_allowed	73
Element license_basis / streaming_allowed	73
Element license_basis / channels	73
Element channels / channel	74
Element bundle / license_specifics	74
Element license_specifics / rules	74
Element rules / rule	75
Element rule / if	75
Element if / what	76
Element if / operator	76
Element if / value	76
Element rule / then	77
Element then / proclaim	77
Element proclaim / what	77
Element proclaim / for	78
Element then / echo	78
Element then / break	78
Element rule / else	78
Element else / proclaim	79
Element else / break	79
Element bundle / reporting	79
Element reporting / realtime	79
Element realtime / http	80
Element reporting / postponed	80
Element postponed / id	81
Element bundle / tags	81
Element tags / genres	82
Element genres / genre	82
Element tags / bundle_only	101
Element tags / explicit_lyrics	101
Element tags / recommended_age_from	102
Element tags / live	102
Element tags / accoustic	102
Element tags / instrumental	102
Element tags / abridged	103
Element bundle / files	103
Element files / file	103
Element file / location	105
Element fileLocation / origin_file	105
Element fileLocation / http	106
Element fileHttp / url	106
Element fileHttp / user	106
Element fileHttp / pass	107
Element fileHttp / expiresdatetime	107
Element fileLocation / ftp	107
Element fileFtp / server	108
Element fileFtp / port	108
Element fileFtp / path	109
Element fileFtp / user	109
Element fileFtp / pass	109
Element fileFtp / expiresdatetime	109
Element fileLocation / path	109
Element file / type	110
Element file / filetype	110
Element file / samplerate	111
Element file / prelistening_offset	111
Element file / prelistening_length	111
Element file / samplesize	112
Element file / bitrate	112

Element file / bitratetype	112
Element file / codec	113
Element file / codecsettings	113
Element file / bytes	113
Element file / checksums	114
Element checksums / md5	114
Element checksums / sha1	114
Element checksums / sha256	115
Element file / channels	115
Element file / dimension	115
Element dimension / width	116
Element dimension / height	116
Element file / decryptinfo	116
Element decryptinfo / cipher	117
Element decryptinfo / initvector	117
Element decryptinfo / key	117
Element decryptinfo / bytes	118
Element decryptinfo / checksums	118
Element file / no_file_given	118
Element file / comment	119
Element bundle / purchase	119
Element purchase / pos	119
Element purchase / url	119
Element item / license_basis	120
Element license_basis_item / territorial	120
Element license_basis_item / timeframe	121
Element license_basis_item / pricing	121
Element license_basis_item / download_allowed	121
Element license_basis_item / streaming_allowed	122
Element license_basis_item / channels	122
Element license_basis_item / as_on_bundle	122
Element item / license_specifics	123
Element license_specifics_item / rules	123
Element license_specifics_item / as_on_bundle	123
Element item / tags	124
Element item / fingerprint	124
Element fingerprint / echoprint	125
Element item / reporting	125
Element item / files	125
Element feed / item	126
Complex Type(s)	127
Complex Type feedinfo	127
Complex Type creator	128
Complex Type receiver	128
Complex Type crypto	129
Complex Type sender	130
Complex Type licensor	130
Complex Type licensee	130
Complex Type actions	131
Complex Type event	131
Complex Type mailto	132
Complex Type action	133
Complex Type http	133
Complex Type http_addheader	133
Complex Type action_instruction	134
Complex Type http_addparams	134
Complex Type fax	134
Complex Type letter	135
Complex Type to	135
Complex Type costscoveredby	136
Complex Type bundle	136
Complex Type ids	138
Complex Type items	138
Complex Type item	139
Complex Type contributors	140
Complex Type contributor	140
Complex Type www	141
Complex Type publishable_url	142
Complex Type information	142
Complex Type texts	143
Complex Type promotext	144
Complex Type teasertext	144

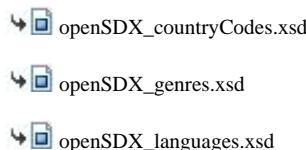
Complex Type related	145
Complex Type physical_distributor	145
Complex Type utube	146
Complex Type license_basis	146
Complex Type territorial	147
Complex Type territory	147
Complex Type timeframe	147
Complex Type pricing	148
Complex Type channels	148
Complex Type channel	149
Complex Type license_specifics	149
Complex Type rules	150
Complex Type rule	150
Complex Type if	151
Complex Type then	151
Complex Type proclaim	152
Complex Type else	152
Complex Type reporting	152
Complex Type realtime	153
Complex Type postponed	153
Complex Type tags	153
Complex Type genres	154
Complex Type files	154
Complex Type file	155
Complex Type fileLocation	158
Complex Type fileHttp	158
Complex Type fileFtp	159
Complex Type checksums	159
Complex Type dimension	160
Complex Type decryptinfo	160
Complex Type purchase	161
Complex Type license_basis_item	161
Complex Type license_specifics_item	162
Complex Type fingerprint	162
Complex Type oninitialreceive	163
Complex Type onprocessstart	163
Complex Type onprocessend	164
Complex Type onfullsuccess	165
Complex Type onerror	165
Simple Type(s)	166
Simple Type notemptystring	166
Simple Type datetimeGMT	166
Simple Type email	167
Simple Type userid	167
Simple Type receivertypes	167
Simple Type iporhostname	167
Simple Type ipv4	168
Simple Type ipv6	168
Simple Type authtype	168
Simple Type keyid	169
Simple Type emaillist	169
Simple Type url	169
Simple Type httpmethods	169
Simple Type nothing	170
Simple Type grid	170
Simple Type upc	170
Simple Type isrc	171
Simple Type iswc	171
Simple Type contentauth	171
Simple Type amzn	172
Simple Type isbn	172
Simple Type finetunes	172
Simple Type gvl	173
Simple Type amg	173
Simple Type contributorType	173
Simple Type year	174
Simple Type compositionType	175
Simple Type recordingType	175
Simple Type allowance	176
Simple Type operator	176
Simple Type explicitLyrics	176
Simple Type fileType	177

Simple Type md5	177
Simple Type sha1	177
Simple Type sha256	178
Simple Type fileChannels	178
Attribute(s)	179
Attribute publishable_url / @publishable	179
Attribute contributor / @num	179
Attribute promotext / @lang	179
Attribute teasertext / @lang	179
Attribute physical_distributor / @publishable	179
Attribute territory / @type	179
Attribute channel / @type	180
Attribute channel / @download_allowed	180
Attribute channel / @streaming_allowed	180
Attribute rule / @num	180
Namespace: "http://fnppl.org/opensdx/countrycodes"	180
Schema(s)	180
Imported schema openSDX_countryCodes.xsd	180
Simple Type(s)	181
Simple Type countryCode	181
Namespace: "http://fnppl.org/opensdx/genres"	201
Schema(s)	201
Imported schema openSDX_genres.xsd	201
Simple Type(s)	201
Simple Type genre	201
Namespace: "http://fnppl.org/opensdx/languages"	231
Schema(s)	231
Imported schema openSDX_languages.xsd	231
Simple Type(s)	231
Simple Type language	231

Resource hierarchy:

Legend: Import, Include, Redefine, Cycle detected

openSDX_00-00-00-01.xsd



Namespace: ""

Schema(s)

Main schema openSDX_00-00-00-01.xsd

Namespace	No namespace
Properties	attribute form default: unqualified element form default: unqualified

Element(s)

Element feed

Namespace	No namespace
Annotations	General Element for the whole XML-Doc (root)
Diagram	<pre> classDiagram class feed { General Element for the whole XML-Doc (root) } class feedinfo { Type feedinfo } class bundle { Type bundle } class item { Type item } feed "0..1" *-- "1..1" feedinfo feed "0..1" *-- "1..1" bundle feed "0..1" *-- "1..1" item </pre>

Properties	content: complex
Model	feedinfo , bundle* , item*
Children	bundle, feedinfo, item
Instance	<pre><feed> <feedinfo>{1,1}</feedinfo> <bundle>{0,unbounded}</bundle> <item>{0,unbounded}</item> </feed></pre>
Source	<pre><xsd:element name="feed"> <xsd:annotation> <xsd:documentation xml:lang="en">General Element for the whole XML-Doc (root)</xsd:documentation> </xsd:annotation> <xsd:complexType> <xsd:sequence> <xsd:element name="feedinfo" type="feedinfo" /> <xsd:element name="bundle" type="bundle" maxOccurs="unbounded" minOccurs="0" /> <xsd:element name="item" type="item" maxOccurs="unbounded" minOccurs="0" /> </xsd:sequence> </xsd:complexType> </xsd:element></pre>

Element feed / feedinfo

Namespace	No namespace
Diagram	<pre> classDiagram class feedinfo { onlytest : xsd:boolean feedid : notemptystring creationdatetime : datetimeGMT effectivedatetime : datetimeGMT creator : creator receiver : receiver sender : sender licensor : licensor licensee : licensee actions : actions } feedinfo < -- feed </pre> <p>On feedinfo-level there are the global information needed or at least valuable for ingesting / identifying the content...</p>
Type	feedinfo
Properties	content: complex
Model	ALL(onlytest feedid creationdatetime effectivedatetime creator{0,1} receiver sender licensor licensee actions{0,1})
Children	actions, creationdatetime, creator, effectivedatetime, feedid, licensee, licensor, onlytest, receiver, sender
Instance	<pre><feedinfo> <onlytest>{1,1}</onlytest> <feedid>{1,1}</feedid> <creationdatetime>{1,1}</creationdatetime> <effectivedatetime>{1,1}</effectivedatetime> <creator>{0,1}</creator> <receiver>{1,1}</receiver> <sender>{1,1}</sender> <licensor>{1,1}</licensor></pre>

	<pre><licensee>{1,1}</licensee> <actions>{0,1}</actions> </feedinfo></pre>
Source	<code><xsd:element name="feedinfo" type="feedinfo" /></code>

Element feedinfo / onlytest

Namespace	No namespace
Diagram	<p>The diagram shows the 'onlytest' element (Type: xsd:boolean) connected to the 'xsd:boolean' type. A tooltip for 'xsd:boolean' states: 'Built-in primitive type. It defines the boolean values true and false.'</p>
Type	xsd:boolean
Properties	content: simple
Source	<code><xsd:element name="onlytest" type="xsd:boolean" /></code>

Element feedinfo / feedid

Namespace	No namespace
Diagram	<p>The diagram shows the 'feedid' element (Type: notemptystring) connected to the 'notemptystring' type.</p>
Type	notemptystring
Properties	content: simple
Facets	minLength 1
Source	<code><xsd:element name="feedid" type="notemptystring" /></code>

Element feedinfo / creationdatetime

Namespace	No namespace
Diagram	<p>The diagram shows the 'creationdatetime' element (Type: datetimeGMT) connected to the 'datetimeGMT' type.</p>
Type	datetimeGMT
Properties	content: simple
Facets	pattern \d{4}-\d{2}-\d{2} \d{2}:\d{2}:\d{2} GMT
Source	<code><xsd:element name="creationdatetime" type="datetimeGMT" /></code>

Element feedinfo / effectivedatetime

Namespace	No namespace
Diagram	<p>The diagram shows the 'effectivedatetime' element (Type: datetimeGMT) connected to the 'datetimeGMT' type.</p>
Type	datetimeGMT
Properties	content: simple
Facets	pattern \d{4}-\d{2}-\d{2} \d{2}:\d{2}:\d{2}
Source	<code><xsd:element name="effectivedatetime" type="datetimeGMT" /></code>

Element feedinfo / creator

Namespace	No namespace
-----------	--------------

Diagram	<pre> classDiagram class creator { email Type email Content should be an email-address of the *user* on the sending side. userid Type userid This should be an unique id of the *user* on the sending side. keyid Type notemptystring } creator < -- creator </pre> <p>This element contains information about the creator of that feed.</p>						
Type	creator						
Properties	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 2px;">content:</td><td style="padding: 2px;">complex</td></tr> <tr> <td style="padding: 2px;">minOccurs:</td><td style="padding: 2px;">0</td></tr> <tr> <td style="padding: 2px;">maxOccurs:</td><td style="padding: 2px;">1</td></tr> </table>	content:	complex	minOccurs:	0	maxOccurs:	1
content:	complex						
minOccurs:	0						
maxOccurs:	1						
Model	ALL(email userid{0,1} keyid{0,1})						
Children	email, keyid, userid						
Instance	<pre> <creator> <email>{1,1}</email> <userid>{0,1}</userid> <keyid>{0,1}</keyid> </creator> </pre>						
Source	<pre><xsd:element name="creator" type="creator" maxOccurs="1" minOccurs="0"/></pre>						

Element creator / email


Namespace	No namespace		
Annotations	Content should be an email-address of the *user* on the sending side.		
Diagram	<pre> classDiagram class email { <--> email <--> creator } </pre> <p>Content should be an email-address of the *user* on the sending side.</p>		
Type	email		
Properties	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 2px;">content:</td><td style="padding: 2px;">simple</td></tr> </table>	content:	simple
content:	simple		
Facets	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 2px;">pattern</td><td style="padding: 2px;">(([a-zA-Z0-9_-]\.\.]+@[a-zA-Z0-9-]+\.(\.?[a-zA-Z]{2,3}))?</td></tr> </table>	pattern	(([a-zA-Z0-9_-]\.\.]+@[a-zA-Z0-9-]+\.(\.?[a-zA-Z]{2,3}))?
pattern	(([a-zA-Z0-9_-]\.\.]+@[a-zA-Z0-9-]+\.(\.?[a-zA-Z]{2,3}))?		
Source	<pre><xsd:element name="email" type="email"> <xsd:annotation> <xsd:documentation xml:lang="en">Content should be an email-address of the *user* on the sending side.</xsd:documentation> </xsd:annotation> </xsd:element></pre>		

Element creator / userid

Namespace	No namespace
Annotations	This should be an unique id of the *user* on the sending side.
Diagram	<pre> classDiagram class userid { <--> userid <--> creator } </pre> <p>This should be an unique id of the *user* on the sending side.</p>
Type	userid

Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<pre><xsd:element name="userid" type="userid" maxOccurs="1" minOccurs="0"> <xsd:annotation> <xsd:documentation xml:lang="en">This should be an unique id of the *user* on the sending side.</xsd:documentation> </xsd:annotation> </xsd:element></pre>

Element creator / keyid

Namespace	No namespace
Diagram	
Type	notemptystring
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	minLength 1
Source	<pre><xsd:element name="keyid" type="notemptystring" maxOccurs="1" minOccurs="0" /></pre>

Element feedinfo / receiver

Namespace	No namespace
Diagram	
Type	receiver
Properties	content: complex
Model	ALL(type servername serveripv4 serveripv6{0,1} authtype username{0,1} crypto{0,1} keyid{0,1})
Children	authtype, crypto, keyid, serveripv4, serveripv6, servername, type, username
Instance	<pre><receiver> <type>{1,1}</type> <servername>{1,1}</servername> <serveripv4>{1,1}</serveripv4> <serveripv6>{0,1}</serveripv6> <authtype>{1,1}</authtype> <username>{0,1}</username></pre>

	<pre><crypto>{0,1}</crypto> <keyid>{0,1}</keyid> </receiver></pre>
Source	<code><xsd:element name="receiver" type="receiver" /></code>

Element receiver / type

Namespace	No namespace										
Diagram											
Type	receivertypes										
Properties	content: simple										
Facets	<table border="1"> <tr> <td>enumeration</td> <td>ftp</td> </tr> <tr> <td>enumeration</td> <td>ftps</td> </tr> <tr> <td>enumeration</td> <td>sftp</td> </tr> <tr> <td>enumeration</td> <td>webdav</td> </tr> <tr> <td>enumeration</td> <td>openSDX fileserver</td> </tr> </table>	enumeration	ftp	enumeration	ftps	enumeration	sftp	enumeration	webdav	enumeration	openSDX fileserver
enumeration	ftp										
enumeration	ftps										
enumeration	sftp										
enumeration	webdav										
enumeration	openSDX fileserver										
Source	<code><xsd:element name="type" type="receivertypes" /></code>										

Element receiver / servername

Namespace	No namespace
Diagram	
Type	iporhostname
Properties	content: simple
Source	<code><xsd:element name="servername" type="iporhostname" /></code>

Element receiver / serveripv4


Namespace	No namespace
Diagram	
Type	ipv4
Properties	content: simple
Facets	<p>pattern</p> $(25[0-5] 2[0-4][0-9] 1[0-9][0-9] [0-9]\{1,2\})\\(\.(25[0-5] 2[0-4][0-9] 1[0-9][0-9] [0-9]\{1,2\}))\{3\}$
Source	<code><xsd:element name="serveripv4" type="ipv4" /></code>

Element receiver / serveripv6

Namespace	No namespace						
Diagram							
Type	ipv6						
Properties	<table border="1"> <tr> <td>content:</td> <td>simple</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						

Source	<code><xsd:element name="serveripv6" type="ipv6" maxOccurs="1" minOccurs="0" /></code>
--------	--

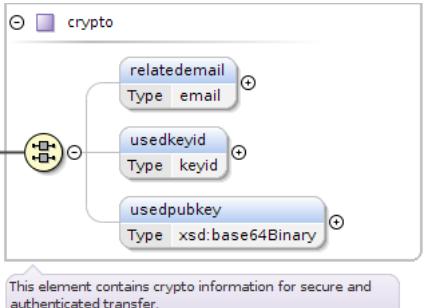
Element receiver / authtype

Namespace	No namespace
Diagram	
Type	authtype
Properties	content: simple
Facets	enumeration login enumeration keyfile enumeration kerberos enumeration keyfile+login enumeration keyfile+username
Source	<code><xsd:element name="authtype" type="authtype" /></code>

Element receiver / username

Namespace	No namespace
Diagram	
Type	notemptystring
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	minLength 1
Source	<code><xsd:element name="username" type="notemptystring" maxOccurs="1" minOccurs="0" /></code>

Element receiver / crypto

Namespace	No namespace
Diagram	 <p>This element contains crypto information for secure and authenticated transfer.</p>
Type	crypto
Properties	content: complex minOccurs: 0 maxOccurs: 1
Model	ALL(relatedemail{0,1} usedkeyid{0,1} usedpubkey{0,1})
Children	relatedemail, usedkeyid, usedpubkey
Instance	<code><crypto> <relatedemail>{0,1}</relatedemail> <usedkeyid>{0,1}</usedkeyid> <usedpubkey>{0,1}</usedpubkey> </crypto></code>
Source	<code><xsd:element name="crypto" type="crypto" maxOccurs="1" minOccurs="0" /></code>

Element crypto / relatedemail

Namespace	No namespace						
Diagram	<pre> graph LR relatedemail[relatedemail] --> email[email] </pre>						
Type	email						
Properties	<table> <tr> <td>content:</td> <td>simple</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	<p>pattern</p> $(([a-zA-Z0-9_\-\.\.]+@[a-zA-Z0-9\-.]+\.\.[a-zA-Z0-9\-.]+)*(\.\.[a-zA-Z]{2,3}))?$						
Source	<pre><xsd:element name="relatedemail" type="email" maxOccurs="1" minOccurs="0" /></pre>						

Element crypto / usedkeyid

Namespace	No namespace						
Diagram	<pre> graph LR usedkeyid[usedkeyid] --> keyid[keyid] </pre>						
Type	keyid						
Properties	<table> <tr> <td>content:</td> <td>simple</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Source	<pre><xsd:element name="usedkeyid" type="keyid" maxOccurs="1" minOccurs="0" /></pre>						

Element crypto / usedpubkey

Namespace	No namespace						
Diagram	<pre> graph LR usedpubkey[usedpubkey] --> xsdbase64Binary[xsd:base64Binary] </pre> <p>Built-in primitive type. The base64Binary datatype represents Base64-encoded arbitrary binary data.</p>						
Type	xsd:base64Binary						
Properties	<table> <tr> <td>content:</td> <td>simple</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Source	<pre><xsd:element name="usedpubkey" type="xsd:base64Binary" maxOccurs="1" minOccurs="0" /></pre>						

Element receiver / keyid

Namespace	No namespace						
Diagram	<pre> graph LR keyid[keyid] --> notemptystring[notemptystring] </pre>						
Type	notemptystring						
Properties	<table> <tr> <td>content:</td> <td>simple</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	<p>minLength</p> <p>1</p>						
Source	<pre><xsd:element name="keyid" type="notemptystring" maxOccurs="1" minOccurs="0" /></pre>						

Element feedinfo / sender

Namespace	No namespace
-----------	--------------

Diagram	<pre> classDiagram class sender { contractpartnerid "notemptystring" ourcontractpartnerid "notemptystring" email "email" keyid "notemptystring" } <--> sender note over sender: This element contains information about the sender of that feed. </pre>
Type	sender
Properties	content: complex
Model	ALL(contractpartnerid ourcontractpartnerid email{0,1} keyid{0,1})
Children	contractpartnerid, email, keyid, ourcontractpartnerid
Instance	<pre> <sender> <contractpartnerid>{1,1}</contractpartnerid> <ourcontractpartnerid>{1,1}</ourcontractpartnerid> <email>{0,1}</email> <keyid>{0,1}</keyid> </sender> </pre>
Source	<xsd:element name="sender" type="sender"/>

Element sender / contractpartnerid

Namespace	No namespace
Diagram	<pre> attributeDiagram contractpartnerid "notemptystring" </pre>
Type	notemptystring
Properties	content: simple
Facets	minLength 1
Source	<xsd:element name="contractpartnerid" type="notemptystring"/>

Element sender / ourcontractpartnerid

Namespace	No namespace
Diagram	<pre> attributeDiagram ourcontractpartnerid "notemptystring" </pre>
Type	notemptystring
Properties	content: simple
Facets	minLength 1
Source	<xsd:element name="ourcontractpartnerid" type="notemptystring"/>

Element sender / email

Namespace	No namespace						
Diagram	<pre> attributeDiagram email "email" </pre>						
Type	email						
Properties	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>content:</td> <td>simple</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						

Facets	pattern	(([a-zA-Z0-9_-\.\.]+)@[a-zA-Z0-9-]+\.([a-zA-Z0-9-]+)*)\.([a-zA-Z]{2,3}))?
Source		<xsd:element name="email" type="email" maxOccurs="1" minOccurs="0" />

Element sender / keyid

Namespace	No namespace						
Diagram	<pre> graph LR keyid[keyid Type notemptystring] --> notemptystring[notemptystring] </pre>						
Type	notemptystring						
Properties	<table border="1"> <tr> <td>content:</td> <td>simple</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	<table border="1"> <tr> <td>minLength</td> <td>1</td> </tr> </table>	minLength	1				
minLength	1						
Source	<xsd:element name="keyid" type="notemptystring" maxOccurs="1" minOccurs="0" />						

Element feedinfo / licensor

Namespace	No namespace		
Diagram	<pre> graph TD licensor[licensor Type licensor] --> contractpartnerid[contractpartnerid Type notemptystring] licensor --> ourcontractpartnerid[ourcontractpartnerid Type notemptystring] licensor --> email[email Type email] licensor --> keyid[keyid Type notemptystring] </pre> <p>This element contains information about the licensor of that feed.</p>		
Type	licensor		
Properties	<table border="1"> <tr> <td>content:</td> <td>complex</td> </tr> </table>	content:	complex
content:	complex		
Model	ALL(contractpartnerid ourcontractpartnerid email{0,1} keyid{0,1})		
Children	contractpartnerid, email, keyid, ourcontractpartnerid		
Instance	<licensor> <contractpartnerid>{1,1}</contractpartnerid> <ourcontractpartnerid>{1,1}</ourcontractpartnerid> <email>{0,1}</email> <keyid>{0,1}</keyid> </licensor>		
Source	<xsd:element name="licensor" type="licensor" />		

Element licensor / contractpartnerid

Namespace	No namespace		
Diagram	<pre> graph LR contractpartnerid[contractpartnerid Type notemptystring] --> notemptystring[notemptystring] </pre>		
Type	notemptystring		
Properties	<table border="1"> <tr> <td>content:</td> <td>simple</td> </tr> </table>	content:	simple
content:	simple		
Facets	<table border="1"> <tr> <td>minLength</td> <td>1</td> </tr> </table>	minLength	1
minLength	1		
Source	<xsd:element name="contractpartnerid" type="notemptystring" />		

Element licensor / ourcontractpartnerid

Namespace	No namespace
Diagram	
Type	notemptystring
Properties	content: simple
Facets	minLength 1
Source	<code><xsd:element name="ourcontractpartnerid" type="notemptystring"/></code>

Element licensor / email

Namespace	No namespace
Diagram	
Type	email
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	pattern <code>(([a-zA-Z0-9_\-\.\.]+@[a-zA-Z0-9\-.]+\.\.[a-zA-Z0-9\-.]+)*(\.\[a-zA-Z\]{2,3}))?</code>
Source	<code><xsd:element name="email" type="email" maxOccurs="1" minOccurs="0"/></code>

Element licensor / keyid

Namespace	No namespace
Diagram	
Type	notemptystring
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	minLength 1
Source	<code><xsd:element name="keyid" type="notemptystring" maxOccurs="1" minOccurs="0"/></code>

Element feedinfo / licensee

Namespace	No namespace
Diagram	

Type	licensee
Properties	content: complex
Model	ALL(contractpartnerid ourcontractpartnerid email{0,1} keyid{0,1})
Children	contractpartnerid, email, keyid, ourcontractpartnerid
Instance	<pre><licensee> <contractpartnerid>{1,1}</contractpartnerid> <ourcontractpartnerid>{1,1}</ourcontractpartnerid> <email>{0,1}</email> <keyid>{0,1}</keyid> </licensee></pre>
Source	<code><xsd:element name="licensee" type="licensee" /></code>

Element licensee / contractpartnerid

Namespace	No namespace
Diagram	
Type	notemptystring
Properties	content: simple
Facets	minLength 1
Source	<code><xsd:element name="contractpartnerid" type="notemptystring" /></code>

Element licensee / ourcontractpartnerid

Namespace	No namespace
Diagram	
Type	notemptystring
Properties	content: simple
Facets	minLength 1
Source	<code><xsd:element name="ourcontractpartnerid" type="notemptystring" /></code>

Element licensee / email

Namespace	No namespace						
Diagram							
Type	email						
Properties	<table border="1"> <tr> <td>content:</td> <td>simple</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	<p>pattern</p> $(([a-zA-Z0-9_\-\.\,]+@[a-zA-Z0-9\-\.]+\([a-zA-Z0-9\-\.]+\)*(\.\[a-zA-Z\]{2,3}))?$						
Source	<code><xsd:element name="email" type="email" maxOccurs="1" minOccurs="0" /></code>						

Element licensee / keyid

Namespace	No namespace
Diagram	
Type	notemptystring

Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	minLength 1
Source	<xsd:element name="keyid" type="notemptystring" maxOccurs="1" minOccurs="0" />

Element feedinfo / actions

Namespace	No namespace
Diagram	<pre> graph TD actions[actions] --> oninitialreceive[oninitialreceive] actions --> onprocessstart[onprocessstart] actions --> onprocessend[onprocessend] actions --> onfullsuccess[onfullsuccess] actions --> onerror[onerror] </pre> <p>This element contains information about possible actions with the feed.</p>
Type	actions
Properties	content: complex minOccurs: 0 maxOccurs: 1
Model	ALL(oninitialreceive{0,1} onprocessstart{0,1} onprocessend{0,1} onfullsuccess{0,1} onerror{0,1})
Children	onerror, onfullsuccess, oninitialreceive, onprocessend, onprocessstart
Instance	<pre> <actions> <oninitialreceive>{0,1}</oninitialreceive> <onprocessstart>{0,1}</onprocessstart> <onprocessend>{0,1}</onprocessend> <onfullsuccess>{0,1}</onfullsuccess> <onerror>{0,1}</onerror> </actions> </pre>
Source	<xsd:element name="actions" type="actions" maxOccurs="1" minOccurs="0" />

Element actions / oninitialreceive

Namespace	No namespace
Diagram	<pre> graph TD oninitialreceive[oninitialreceive] --> mailto["mailto
0..∞"] oninitialreceive --> http["http
0..∞"] oninitialreceive --> fax["fax
0..∞"] oninitialreceive --> letter["letter
0..∞"] oninitialreceive --> nothing["nothing
0..∞"] </pre> <p>This element contains information about possible events and actions.</p>

Type	event
Properties	<p>content: complex</p> <p>minOccurs: 0</p> <p>maxOccurs: 1</p>
Model	mailto* , http* , fax* , letter* , nothing{0,1}
Children	fax, http, letter, mailto, nothing
Instance	<pre><oninitialreceive> <mailto>{0,unbounded}</mailto> <http>{0,unbounded}</http> <fax>{0,unbounded}</fax> <letter>{0,unbounded}</letter> <nothing>{0,1}</nothing> </oninitialreceive></pre>
Source	<code><xsd:element name="oninitialreceive" type="event" maxOccurs="1" minOccurs="0" /></code>

Element event / mailto

Namespace	No namespace
Diagram	<pre> classDiagram class mailto { <<action>> } class mailto { <<mailto>> <<Type mailto>> } class receiver { <<emaillist>> "1..∞" -- "mailto" } class subject { <<notemptystring>> -- "mailto" } class text { <<notemptystring>> -- "mailto" } receiver "1..∞" -- "mailto" subject -- "mailto" text -- "mailto" </pre> <p>This element contains information about mailto-event.</p>
Type	mailto
Type hierarchy	<ul style="list-style-type: none"> • action • mailto
Properties	<p>content: complex</p> <p>minOccurs: 0</p> <p>maxOccurs: unbounded</p>
Model	receiver+ , subject , text
Children	receiver, subject, text
Instance	<pre><mailto> <receiver>{1,unbounded}</receiver> <subject>{1,1}</subject> <text>{1,1}</text> </mailto></pre>
Source	<code><xsd:element name="mailto" type="mailto" minOccurs="0" maxOccurs="unbounded" /></code>


Element mailto / receiver

Namespace	No namespace
Diagram	<pre> classDiagram class receiver { <<emaillist>> } </pre>
Type	emaillist
Properties	<p>content: simple</p> <p>minOccurs: 1</p> <p>maxOccurs: unbounded</p>
Source	<code><xsd:element name="receiver" type="emaillist" minOccurs="1" maxOccurs="unbounded" /></code>

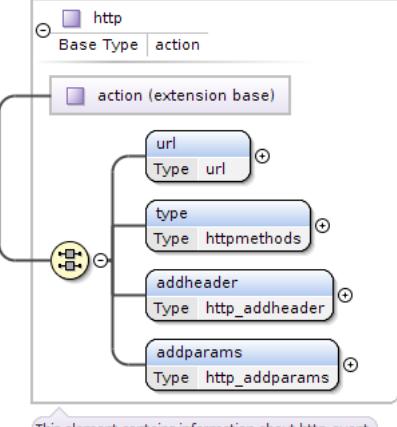
Element mailto / subject

Namespace	No namespace
Diagram	
Type	notemptystring
Properties	content: simple
Facets	minLength 1
Source	<xsd:element name="subject" type="notemptystring"/>


Element mailto / text

Namespace	No namespace
Diagram	
Type	notemptystring
Properties	content: simple
Facets	minLength 1
Source	<xsd:element name="text" type="notemptystring"/>


Element event / http

Namespace	No namespace
Diagram	
Type	http
Type hierarchy	<ul style="list-style-type: none"> • action • http
Properties	<p>content: complex</p> <p>minOccurs: 0</p> <p>maxOccurs: unbounded</p>
Model	ALL(url type addheader addparams)
Children	addheader, addparams, type, url
Instance	<pre> <http> <url>{1,1}</url> <type>{1,1}</type> <addheader>{1,1}</addheader> <addparams>{1,1}</addparams> </http> </pre>
Source	<xsd:element name="http" type="http" minOccurs="0" maxOccurs="unbounded"/>

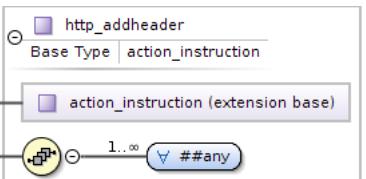
Element http / url

Namespace	No namespace
Diagram	
Type	url
Properties	content: simple
Facets	minLength 1 pattern $(http://...*\....*) $ $(https://...*\....*)$
Source	<code><xsd:element name="url" type="url"/></code>

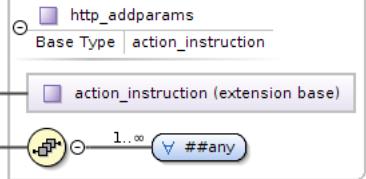
Element http / type

Namespace	No namespace
Diagram	
Type	httpmethods
Properties	content: simple
Facets	enumeration GET enumeration POST enumeration HEAD
Source	<code><xsd:element name="type" type="httpmethods"/></code>

Element http / addheader

Namespace	No namespace
Diagram	
Type	http_addheader
Type hierarchy	• action_instruction • http_addheader
Properties	content: complex
Model	ANY element from ANY namespace
Source	<code><xsd:element name="addheader" type="http_addheader"/></code>

Element http / addparams

Namespace	No namespace
Diagram	
Type	http_addparams
Type hierarchy	• action_instruction

	<ul style="list-style-type: none"> • http_addparams
Properties	content: complex
Model	ANY element from ANY namespace
Source	<xsd:element name="addparams" type="http_addparams" />

Element event / fax

Namespace	No namespace						
Diagram	<pre> classDiagram fax "Type fax" --o action "Base Type action" action "*" --o "###any" </pre>						
Type	fax						
Type hierarchy	<ul style="list-style-type: none"> • action • fax 						
Properties	<table border="1"> <tr> <td>content:</td> <td>complex</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>unbounded</td> </tr> </table>	content:	complex	minOccurs:	0	maxOccurs:	unbounded
content:	complex						
minOccurs:	0						
maxOccurs:	unbounded						
Model	ANY element from ANY namespace						
Source	<xsd:element name="fax" type="fax" minOccurs="0" maxOccurs="unbounded" />						

Element event / letter

Namespace	No namespace						
Diagram	<pre> classDiagram letter "*" --o registered "Type xsd:boolean" letter "*" --o to "Type to" letter "*" --o text "Type notemptystring" letter "*" --o costscoveredby "Type costscoveredby" </pre> <p>This element contains information about the letter event.</p>						
Type	letter						
Properties	<table border="1"> <tr> <td>content:</td> <td>complex</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>unbounded</td> </tr> </table>	content:	complex	minOccurs:	0	maxOccurs:	unbounded
content:	complex						
minOccurs:	0						
maxOccurs:	unbounded						
Model	ALL(registered to text costscoveredby)						
Children	costscoveredby, registered, text, to						
Instance	<pre> <letter> <registered>{1,1}</registered> <to>{1,1}</to> <text>{1,1}</text> <costscoveredby>{1,1}</costscoveredby> </letter> </pre>						
Source	<xsd:element name="letter" type="letter" minOccurs="0" maxOccurs="unbounded" />						

Element letter / registered

Namespace	No namespace
Annotations	This tells if letter must be registered or not.
Diagram	<p>This tells if letter must be registered or not.</p> <p>Built-in primitive type. It defines the boolean values true and false.</p>
Type	xsd:boolean
Properties	content: simple
Source	<pre><xsd:element name="registered" type="xsd:boolean"> <xsd:annotation> <xsd:documentation xml:lang="en">This tells if letter must be registered or not.</ xsd:documentation> </xsd:annotation> </xsd:element></pre>

Element letter / to


Namespace	No namespace
Diagram	<p>This element contains information about recipient.</p>
Type	to
Properties	content: complex
Model	ALL(name{0,1} department{0,1} nameperson{0,1} street postcode country additionaladdressinfo{0,1})
Children	additionaladdressinfo, country, department, name, nameperson, postcode, street
Instance	<pre><to> <name>{0,1}</name> <department>{0,1}</department> <nameperson>{0,1}</nameperson> <street>{1,1}</street> <postcode>{1,1}</postcode> <country>{1,1}</country> <additionaladdressinfo>{0,1}</additionaladdressinfo> </to></pre>
Source	<pre><xsd:element name="to" type="to" /></pre>

Element to / name


Namespace	No namespace
Diagram	

Type	notemptystring
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	minLength 1
Source	<code><xsd:element name="name" type="notemptystring" minOccurs="0" maxOccurs="1"/></code>


Element to / department

Namespace	No namespace
Diagram	
Type	notemptystring
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	minLength 1
Source	<code><xsd:element name="department" type="notemptystring" minOccurs="0" maxOccurs="1"/></code>


Element to / nameperson

Namespace	No namespace
Diagram	
Type	notemptystring
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	minLength 1
Source	<code><xsd:element name="nameperson" type="notemptystring" minOccurs="0" maxOccurs="1"/></code>

Element to / street

Namespace	No namespace
Diagram	
Type	notemptystring
Properties	content: simple
Facets	minLength 1
Source	<code><xsd:element name="street" type="notemptystring"/></code>

Element to / postcode

Namespace	No namespace
Diagram	
Type	notemptystring
Properties	content: simple
Facets	minLength 1

Source	<code><xsd:element name="postcode" type="notemptystring" /></code>
--------	--

Element to / country

Namespace	No namespace		
Diagram			
Type	countryCode		
Properties	content: simple		
Facets	enumeration	AF	Afghanistan
	enumeration	AX	Åland Islands
	enumeration	AL	Albania
	enumeration	DZ	Algeria
	enumeration	AS	American Samoa
	enumeration	AD	Andorra
	enumeration	AO	Angola
	enumeration	AI	Anguilla
	enumeration	AQ	Antarctica
	enumeration	AG	Antigua and Barbuda
	enumeration	AR	Argentina
	enumeration	AM	Armenia
	enumeration	AW	Aruba
	enumeration	AU	Australia
	enumeration	AT	Austria
	enumeration	AZ	Azerbaijan
	enumeration	BS	Bahamas
	enumeration	BH	Bahrain
	enumeration	BD	Bangladesh
	enumeration	BB	Barbados
	enumeration	BY	Belarus
	enumeration	BE	Belgium
	enumeration	BZ	Belize
	enumeration	BJ	Benin
	enumeration	BM	Bermuda
	enumeration	BT	Bhutan
	enumeration	BO	Bolivia, Plurinational State of
	enumeration	BQ	Bonaire, Sint Eustatius and Saba
	enumeration	BA	Bosnia and Herzegovina
	enumeration	BW	Botswana
	enumeration	BV	Bouvet Island
	enumeration	BR	Brazil
	enumeration	IO	British Indian Ocean Territory
	enumeration	BN	Brunei Darussalam
	enumeration	BG	Bulgaria
	enumeration	BF	Burkina Faso
	enumeration	BI	Burundi
	enumeration	KH	Cambodia
	enumeration	CM	Cameroon
	enumeration	CA	Canada

enumeration	CV	Cape Verde
enumeration	KY	Cayman Islands
enumeration	CF	Central African Republic
enumeration	TD	Chad
enumeration	CL	Chile
enumeration	CN	China
enumeration	CX	Christmas Island
enumeration	CC	Cocos (Keeling) Islands
enumeration	CO	Colombia
enumeration	KM	Comoros
enumeration	CG	Congo
enumeration	CD	Congo, the Democratic Republic of the
enumeration	CK	Cook Islands
enumeration	CR	Costa Rica
enumeration	CI	Côte d'Ivoire
enumeration	HR	Croatia
enumeration	CU	Cuba
enumeration	CW	Curaçao
enumeration	CY	Cyprus
enumeration	CZ	Czech Republic
enumeration	DK	Denmark
enumeration	DJ	Djibouti
enumeration	DM	Dominica
enumeration	DO	Dominican Republic
enumeration	EC	Ecuador
enumeration	EG	Egypt
enumeration	SV	El Salvador
enumeration	GQ	Equatorial Guinea
enumeration	ER	Eritrea
enumeration	EE	Estonia
enumeration	ET	Ethiopia
enumeration	FK	Falkland Islands (Malvinas)
enumeration	FO	Faroe Islands
enumeration	FJ	Fiji
enumeration	FI	Finland
enumeration	FR	France
enumeration	GF	French Guiana
enumeration	PF	French Polynesia
enumeration	TF	French Southern Territories
enumeration	GA	Gabon
enumeration	GM	Gambia
enumeration	GE	Georgia
enumeration	DE	Germany
enumeration	GH	Ghana
enumeration	GI	Gibraltar
enumeration	GR	Greece
enumeration	GL	Greenland
enumeration	GD	Grenada
enumeration	GP	Guadeloupe


enumeration	GU	Guam
enumeration	GT	Guatemala
enumeration	GG	Guernsey
enumeration	GN	Guinea
enumeration	GW	Guinea-Bissau
enumeration	GY	Guyana
enumeration	HT	Haiti
enumeration	HM	Heard Island and McDonald Islands
enumeration	VA	Holy See (Vatican City State)
enumeration	HN	Honduras
enumeration	HK	Hong Kong
enumeration	HU	Hungary
enumeration	IS	Iceland
enumeration	IN	India
enumeration	ID	Indonesia
enumeration	IR	Iran, Islamic Republic of
enumeration	IQ	Iraq
enumeration	IE	Ireland
enumeration	IM	Isle of Man
enumeration	IL	Israel
enumeration	IT	Italy
enumeration	JM	Jamaica
enumeration	JP	Japan
enumeration	JE	Jersey
enumeration	JO	Jordan
enumeration	KZ	Kazakhstan
enumeration	KE	Kenya
enumeration	KI	Kiribati
enumeration	KP	Korea, Democratic People's Republic of
enumeration	KR	Korea, Republic of
enumeration	KW	Kuwait
enumeration	KG	Kyrgyzstan
enumeration	LA	Lao People's Democratic Republic
enumeration	LV	Latvia
enumeration	LB	Lebanon
enumeration	LS	Lesotho
enumeration	LR	Liberia
enumeration	LY	Libyan Arab Jamahiriya
enumeration	LI	Liechtenstein
enumeration	LT	Lithuania
enumeration	LU	Luxembourg
enumeration	MO	Macao
enumeration	MK	Macedonia, the former Yugoslav Republic of
enumeration	MG	Madagascar
enumeration	MW	Malawi
enumeration	MY	Malaysia
enumeration	MV	Maldives
enumeration	ML	Mali
enumeration	MT	Malta

enumeration	MH	Marshall Islands
enumeration	MQ	Martinique
enumeration	MR	Mauritania
enumeration	MU	Mauritius
enumeration	YT	Mayotte
enumeration	MX	Mexico
enumeration	FM	Micronesia, Federated States of
enumeration	MD	Moldova, Republic of
enumeration	MC	Monaco
enumeration	MN	Mongolia
enumeration	ME	Montenegro
enumeration	MS	Montserrat
enumeration	MA	Morocco
enumeration	MZ	Mozambique
enumeration	MM	Myanmar
enumeration	NA	Namibia
enumeration	NR	Nauru
enumeration	NP	Nepal
enumeration	NL	Netherlands
enumeration	AN	Netherlands Antilles
enumeration	NC	New Caledonia
enumeration	NZ	New Zealand
enumeration	NI	Nicaragua
enumeration	NE	Niger
enumeration	NG	Nigeria
enumeration	NU	Niue
enumeration	NF	Norfolk Island
enumeration	MP	Northern Mariana Islands
enumeration	NO	Norway
enumeration	OM	Oman
enumeration	PK	Pakistan
enumeration	PW	Palau
enumeration	PS	Palestinian Territory, Occupied
enumeration	PA	Panama
enumeration	PG	Papua New Guinea
enumeration	PY	Paraguay
enumeration	PE	Peru
enumeration	PH	Philippines
enumeration	PN	Pitcairn
enumeration	PL	Poland
enumeration	PT	Portugal
enumeration	PR	Puerto Rico
enumeration	QA	Qatar
enumeration	RE	Réunion
enumeration	RO	Romania
enumeration	RU	Russian Federation
enumeration	RW	Rwanda
enumeration	BL	Saint Barthélemy
enumeration	SH	Saint Helena, Ascension and Tristan da Cunha


enumeration	KN	Saint Kitts and Nevis
enumeration	LC	Saint Lucia
enumeration	MF	Saint Martin (French part)
enumeration	PM	Saint Pierre and Miquelon
enumeration	VC	Saint Vincent and the Grenadines
enumeration	WS	Samoa
enumeration	SM	San Marino
enumeration	ST	Sao Tome and Principe
enumeration	SA	Saudi Arabia
enumeration	SN	Senegal
enumeration	RS	Serbia
enumeration	SC	Seychelles
enumeration	SL	Sierra Leone
enumeration	SG	Singapore
enumeration	SX	Sint Maarten (Dutch part)
enumeration	SK	Slovakia
enumeration	SI	Slovenia
enumeration	SB	Solomon Islands
enumeration	SO	Somalia
enumeration	ZA	South Africa
enumeration	GS	South Georgia and the South Sandwich Islands
enumeration	SS	South Sudan
enumeration	ES	Spain
enumeration	LK	Sri Lanka
enumeration	SD	Sudan
enumeration	SR	Suriname
enumeration	SJ	Svalbard and Jan Mayen
enumeration	SZ	Swaziland
enumeration	SE	Sweden
enumeration	CH	Switzerland
enumeration	SY	Syrian Arab Republic
enumeration	TW	Taiwan, Province of China
enumeration	TJ	Tajikistan
enumeration	TZ	Tanzania, United Republic of
enumeration	TH	Thailand
enumeration	TL	Timor-Leste
enumeration	TG	Togo
enumeration	TK	Tokelau
enumeration	TO	Tonga
enumeration	TT	Trinidad and Tobago
enumeration	TN	Tunisia
enumeration	TR	Turkey
enumeration	TM	Turkmenistan
enumeration	TC	Turks and Caicos Islands
enumeration	TV	Tuvalu
enumeration	UG	Uganda
enumeration	UA	Ukraine
enumeration	AE	United Arab Emirates
enumeration	GB	United Kingdom

	enumeration	US	United States
	enumeration	UM	United States Minor Outlying Islands
	enumeration	UY	Uruguay
	enumeration	UZ	Uzbekistan
	enumeration	VU	Vanuatu
	enumeration	VE	Venezuela, Bolivarian Republic of
	enumeration	VN	Viet Nam
	enumeration	VG	Virgin Islands, British
	enumeration	VI	Virgin Islands, U.S.
	enumeration	WF	Wallis and Futuna
	enumeration	WW	WorldWide
	enumeration	EH	Western Sahara
	enumeration	YE	Yemen
	enumeration	ZM	Zambia
	enumeration	ZW	Zimbabwe
Source	<xsd:element name="country" type="cc:countryCode"/>		

Element to / additionaladdressinfo

Namespace	No namespace						
Diagram							
Type	notemptystring						
Properties	<table> <tr> <td>content:</td> <td>simple</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	<table> <tr> <td>minLength</td> <td>1</td> </tr> </table>	minLength	1				
minLength	1						
Source	<xsd:element name="additionaladdressinfo" type="notemptystring" minOccurs="0" maxOccurs="1"/>						

Element letter / text

Namespace	No namespace		
Annotations	This contains the content/text of letter.		
Diagram			
Type	notemptystring		
Properties	<table> <tr> <td>content:</td> <td>simple</td> </tr> </table>	content:	simple
content:	simple		
Facets	<table> <tr> <td>minLength</td> <td>1</td> </tr> </table>	minLength	1
minLength	1		
Source	<pre> <xsd:element name="text" type="notemptystring"> <xsd:annotation> <xsd:documentation xml:lang="en">This contains the content/text of letter.</xsd:documentation> </xsd:annotation> </xsd:element> </pre>		

Element letter / costscoveredby

Namespace	No namespace
-----------	--------------

Diagram	
Type	costscoveredby
Properties	content: complex
Model	ALL(contractpartnerid ourcontractpartnerid maxcostscovered{0,1})
Children	contractpartnerid, maxcostscovered, ourcontractpartnerid
Instance	<pre><costscoveredby> <contractpartnerid>{1,1}</contractpartnerid> <ourcontractpartnerid>{1,1}</ourcontractpartnerid> <maxcostscovered>{0,1}</maxcostscovered> </costscoveredby></pre>
Source	<code><xsd:element name="costscoveredby" type="costscoveredby"/></code>

Element costscoveredby / contractpartnerid

Namespace	No namespace
Diagram	
Type	notemptystring
Properties	content: simple
Facets	minLength 1
Source	<code><xsd:element name="contractpartnerid" type="notemptystring"/></code>

Element costscoveredby / ourcontractpartnerid

Namespace	No namespace
Diagram	
Type	notemptystring
Properties	content: simple
Facets	minLength 1
Source	<code><xsd:element name="ourcontractpartnerid" type="notemptystring"/></code>

Element costscoveredby / maxcostscovered

Namespace	No namespace				
Annotations	This contains the max amount that will be covered.				
Diagram					
Type	notemptystring				
Properties	<table border="1"> <tr> <td>content:</td> <td>simple</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> </table>	content:	simple	minOccurs:	0
content:	simple				
minOccurs:	0				

	maxOccurs:	1
Facets	minLength	1
Source	<pre><xsd:element name="maxcostscovered" type="notemptystring" minOccurs="0" maxOccurs="1"> <xsd:annotation> <xsd:documentation xml:lang="en">This contains the max amount that will be covered.</ xsd:documentation> </xsd:annotation> </xsd:element></pre>	

Element event / nothing

Namespace	No namespace						
Diagram							
Type	nothing						
Properties	<table border="1"> <tr> <td>content:</td> <td>simple</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	length 0						
Source	<pre><xsd:element name="nothing" type="nothing" minOccurs="0" maxOccurs="1"/></pre>						

Element actions / onprocessstart

Namespace	No namespace						
Diagram							
Type	event						
Properties	<table border="1"> <tr> <td>content:</td> <td>complex</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	complex	minOccurs:	0	maxOccurs:	1
content:	complex						
minOccurs:	0						
maxOccurs:	1						
Model	mailto*, http*, fax*, letter*, nothing{0,1}						
Children	fax, http, letter, mailto, nothing						
Instance	<pre><onprocessstart> <mailto>{0,unbounded}</mailto> <http>{0,unbounded}</http> <fax>{0,unbounded}</fax> <letter>{0,unbounded}</letter> <nothing>{0,1}</nothing> </onprocessstart></pre>						
Source	<pre><xsd:element name="onprocessstart" type="event" maxOccurs="1" minOccurs="0"/></pre>						

Element actions / onprocessend

Namespace	No namespace
-----------	--------------

Diagram	<p>This element contains information about possible events and actions.</p>						
Type	event						
Properties	<table border="1"> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>1</td></tr> </table>	content:	complex	minOccurs:	0	maxOccurs:	1
content:	complex						
minOccurs:	0						
maxOccurs:	1						
Model	mailto* , http* , fax* , letter* , nothing{0,1}						
Children	fax, http, letter, mailto, nothing						
Instance	<pre><onprocessend> <mailto>{0,unbounded}</mailto> <http>{0,unbounded}</http> <fax>{0,unbounded}</fax> <letter>{0,unbounded}</letter> <nothing>{0,1}</nothing> </onprocessend></pre>						
Source	<code><xsd:element name="onprocessend" type="event" maxOccurs="1" minOccurs="0"/></code>						

Element actions / onfullsuccess

Namespace	No namespace						
Diagram	<p>This element contains information about possible events and actions.</p>						
Type	event						
Properties	<table border="1"> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>1</td></tr> </table>	content:	complex	minOccurs:	0	maxOccurs:	1
content:	complex						
minOccurs:	0						
maxOccurs:	1						
Model	mailto* , http* , fax* , letter* , nothing{0,1}						
Children	fax, http, letter, mailto, nothing						
Instance	<pre><onfullsuccess> <mailto>{0,unbounded}</mailto> <http>{0,unbounded}</http> <fax>{0,unbounded}</fax></pre>						

	<pre><letter>{0,unbounded}</letter> <nothing>{0,1}</nothing> </onfullsuccess></pre>
Source	<code><xsd:element name="onfullsuccess" type="event" maxOccurs="1" minOccurs="0" /></code>

Element actions / onerror

Namespace	No namespace						
Diagram	<p>This element contains information about possible events and actions.</p>						
Type	event						
Properties	<table border="1"> <tr> <td>content:</td> <td>complex</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	complex	minOccurs:	0	maxOccurs:	1
content:	complex						
minOccurs:	0						
maxOccurs:	1						
Model	mailto*, http*, fax*, letter*, nothing{0,1}						
Children	fax, http, letter, mailto, nothing						
Instance	<pre><onerror> <mailto>{0,unbounded}</mailto> <http>{0,unbounded}</http> <fax>{0,unbounded}</fax> <letter>{0,unbounded}</letter> <nothing>{0,1}</nothing> </onerror></pre>						
Source	<code><xsd:element name="onerror" type="event" maxOccurs="1" minOccurs="0" /></code>						

Element feed / bundle

Namespace	No namespace
-----------	--------------

Diagram	
Type	bundle
Properties	<p>content: complex</p> <p>minOccurs: 0</p> <p>maxOccurs: unbounded</p>
Model	ALL(displayname{0,1} name{0,1} version{0,1} display_artistname{0,1} ids items{0,1} contributors{0,1} information{0,1} license_basis{0,1} license_specifics{0,1} reporting{0,1} tags{0,1} files{0,1} purchase{0,1})
Children	contributors, display_artistname, displayname, files, ids, information, items, license_basis, license_specifics, name, purchase, reporting, tags, version
Instance	<pre><bundle> <displayname>{0,1}</displayname> <name>{0,1}</name> <version>{0,1}</version> <display_artistname>{0,1}</display_artistname> <ids>{1,1}</ids> <items>{0,1}</items> <contributors>{0,1}</contributors> <information>{0,1}</information> <license_basis>{0,1}</license_basis> <license_specifics>{0,1}</license_specifics> <reporting>{0,1}</reporting> <tags>{0,1}</tags> <files>{0,1}</files> <purchase>{0,1}</purchase> </bundle></pre>
Source	<pre><xsd:element name="bundle" type="bundle" maxOccurs="unbounded" minOccurs="0" /></pre>

Element bundle / displayname

Namespace	No namespace
Diagram	<pre> graph LR displayname[displayname] --- type1[notemptystring] style displayname fill:#e0f2e0 style type1 fill:#d9e1f2 </pre>
Type	notemptystring
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	minLength 1
Source	<code><xsd:element name="displayname" type="notemptystring" maxOccurs="1" minOccurs="0" /></code>

Element bundle / name

Namespace	No namespace
Diagram	<pre> graph LR name[name] --- type2[notemptystring] style name fill:#e0f2e0 style type2 fill:#d9e1f2 </pre>
Type	notemptystring
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	minLength 1
Source	<code><xsd:element name="name" type="notemptystring" maxOccurs="1" minOccurs="0" /></code>

Element bundle / version

Namespace	No namespace
Diagram	<pre> graph LR version[version] --- type3[xsd:string] style version fill:#e0f2e0 style type3 fill:#d9e1f2 type3 -- "Built-in primitive type. The string datatype represents character strings in XML." -- </pre>
Type	xsd:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<code><xsd:element name="version" type="xsd:string" maxOccurs="1" minOccurs="0" /></code>

Element bundle / display_artistname

Namespace	No namespace
Diagram	<pre> graph LR display_artistname[display_artistname] --- type4[notemptystring] style display_artistname fill:#e0f2e0 style type4 fill:#d9e1f2 </pre>
Type	notemptystring
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	minLength 1
Source	<code><xsd:element name="display_artistname" type="notemptystring" maxOccurs="1" minOccurs="0" /></code>

Element bundle / ids

Namespace	No namespace
-----------	--------------

Diagram	<p>This Element is a container for all IDs which are available for the associated element.</p>
Type	ids
Properties	content: complex
Model	ALL(grid{0,1} upc{0,1} isrc{0,1} iswc{0,1} contentauth{0,1} labelordernum{0,1} amzn{0,1} isbn{0,1} finetunes{0,1} licensor{0,1} licensee{0,1} gvl{0,1} amg{0,1})
Children	amg, amzn, contentauth, finetunes, grid, gvl, isbn, isrc, iswc, labelordernum, licensee, licensor, upc
Instance	<pre><ids> <grid>{0,1}</grid> <upc>{0,1}</upc> <isrc>{0,1}</isrc> <iswc>{0,1}</iswc> <contentauth>{0,1}</contentauth> <labelordernum>{0,1}</labelordernum> <amzn>{0,1}</amzn> <isbn>{0,1}</isbn> <finetunes>{0,1}</finetunes> <licensor>{0,1}</licensor> <licensee>{0,1}</licensee> <gvl>{0,1}</gvl> <amg>{0,1}</amg> </ids></pre>
Source	<code><xsd:element name="ids" type="ids" /></code>

Element ids / grid

Namespace	No namespace
Diagram	
Type	grid

Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	minLength 18
Source	<code><xsd:element name="grid" type="grid" maxOccurs="1" minOccurs="0" /></code>

Element `ids / upc`

Namespace	No namespace
Diagram	
Type	upc
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	pattern (\d{10,13})
Source	<code><xsd:element name="upc" type="upc" maxOccurs="1" minOccurs="0" /></code>

Element `ids / isrc`

Namespace	No namespace
Diagram	
Type	isrc
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	minLength 1 pattern ([a-zA-Z]{2}(\-)?[0-9a-zA-Z]{3}(\-)?\d{2}(\-)?\d{5})
Source	<code><xsd:element name="isrc" type="isrc" maxOccurs="1" minOccurs="0" /></code>

Element `ids / iswc`


Namespace	No namespace
Diagram	
Type	iswc
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	minLength 1
Source	<code><xsd:element name="iswc" type="iswc" maxOccurs="1" minOccurs="0" /></code>

Element `ids / contentauth`


Namespace	No namespace
Diagram	

Type	contentauth
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	minLength 1
Source	<code><xsd:element name="contentauth" type="contentauth" maxOccurs="1" minOccurs="0" /></code>

Element ids / labelordernum

Namespace	No namespace
Diagram	
Type	notemptystring
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	minLength 1
Source	<code><xsd:element name="labelordernum" type="notemptystring" maxOccurs="1" minOccurs="0" /></code>

Element ids / amzn


Namespace	No namespace
Diagram	
Type	amzn
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	minExclusive 0
Source	<code><xsd:element name="amzn" type="amzn" maxOccurs="1" minOccurs="0" /></code>

Element ids / isbn


Namespace	No namespace
Diagram	
Type	isbn
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	pattern $(\d{1}(-)?\d{5}(-)?\d{3}(-)?\d{1} \d{1}(-)?\d{3}(-)?\d{5}(-)?\d{1} \d{1} \d{1}(-)?\d{2} \d{1}(-)?\d{6}(-)?\d{1} \d{3}(-)?\d{1}(-)?\d{6}(-)?\d{2}(-)?\d{1})$
Source	<code><xsd:element name="isbn" type="isbn" maxOccurs="1" minOccurs="0" /></code>

Element ids / finetunes


Namespace	No namespace
-----------	--------------

Diagram									
Type	finetunes								
Properties	<table> <tr> <td>content:</td> <td>simple</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1		
content:	simple								
minOccurs:	0								
maxOccurs:	1								
Facets	<table> <tr> <td>totalDigits</td> <td>13</td> </tr> <tr> <td>maxExclusive</td> <td>2000000000000</td> </tr> <tr> <td>minExclusive</td> <td>1000000000000</td> </tr> <tr> <td>pattern</td> <td>([-+]?[0-9]+) & ([0-9]{13})</td> </tr> </table>	totalDigits	13	maxExclusive	2000000000000	minExclusive	1000000000000	pattern	([-+]?[0-9]+) & ([0-9]{13})
totalDigits	13								
maxExclusive	2000000000000								
minExclusive	1000000000000								
pattern	([-+]?[0-9]+) & ([0-9]{13})								
Source	<code><xsd:element name="finetunes" type="finetunes" maxOccurs="1" minOccurs="0" /></code>								


Element ids / licensor

Namespace	No namespace						
Diagram							
Type	notemptystring						
Properties	<table> <tr> <td>content:</td> <td>simple</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	<table> <tr> <td>minLength</td> <td>1</td> </tr> </table>	minLength	1				
minLength	1						
Source	<code><xsd:element name="licensor" type="notemptystring" maxOccurs="1" minOccurs="0" /></code>						

Element ids / licensee


Namespace	No namespace						
Diagram							
Type	notemptystring						
Properties	<table> <tr> <td>content:</td> <td>simple</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	<table> <tr> <td>minLength</td> <td>1</td> </tr> </table>	minLength	1				
minLength	1						
Source	<code><xsd:element name="licensee" type="notemptystring" maxOccurs="1" minOccurs="0" /></code>						

Element ids / gvl

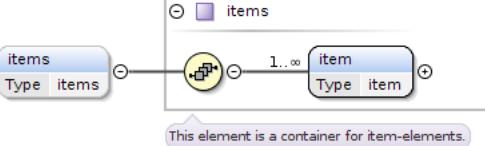
Namespace	No namespace						
Diagram							
Type	gvl						
Properties	<table> <tr> <td>content:</td> <td>simple</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	<table> <tr> <td>minLength</td> <td>8</td> </tr> <tr> <td>pattern</td> <td>LC \d{5}</td> </tr> </table>	minLength	8	pattern	LC \d{5}		
minLength	8						
pattern	LC \d{5}						

Source	<code><xsd:element name="gvl" type="gvl" maxOccurs="1" minOccurs="0" /></code>
--------	--

Element **ids** / **amg**

Namespace	No namespace						
Diagram							
Type	amg						
Properties	<table> <tr> <td>content:</td> <td>simple</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	minLength 1						
Source	<code><xsd:element name="amg" type="amg" maxOccurs="1" minOccurs="0" /></code>						

Element **bundle** / **items**

Namespace	No namespace						
Diagram	 This element is a container for item-elements.						
Type	items						
Properties	<table> <tr> <td>content:</td> <td>complex</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	complex	minOccurs:	0	maxOccurs:	1
content:	complex						
minOccurs:	0						
maxOccurs:	1						
Model	item+						
Children	item						
Instance	<code><items> <item>{1,unbounded}</item> </items></code>						
Source	<code><xsd:element name="items" type="items" maxOccurs="1" minOccurs="0" /></code>						

Element **items** / **item**

Namespace	No namespace
-----------	--------------

Diagram	<p>This element contains information about a item just like a track. The type describes what the item is e.g. audio,...</p>
Type	item
Properties	<p>content: complex</p> <p>minOccurs: 1</p> <p>maxOccurs: unbounded</p>
Model	ALL(displayname{0,1} name{0,1} version{0,1} type{0,1} display_artistname{0,1} ids{0,1} contributors information license_basis license_specifics tags{0,1} fingerprint{0,1} reporting{0,1} files{0,1})
Children	contributors, display_artistname, displayname, files, fingerprint, ids, information, license_basis, license_specifics, name, reporting, tags, type, version
Instance	<pre><item> <displayname>{0,1}</displayname> <name>{0,1}</name> <version>{0,1}</version> <type>{0,1}</type> <display_artistname>{0,1}</display_artistname> <ids>{0,1}</ids> <contributors>{1,1}</contributors> <information>{1,1}</information> <license_basis>{1,1}</license_basis> <license_specifics>{1,1}</license_specifics> <tags>{0,1}</tags> <fingerprint>{0,1}</fingerprint> <reporting>{0,1}</reporting> <files>{0,1}</files> </item></pre>
Source	<code><xsd:element name="item" type="item" maxOccurs="unbounded" minOccurs="1" /></code>

Element item / displayname

Namespace	No namespace
Diagram	<pre> graph LR A[displayname] --- B{notemptystring} style A fill:#e0f2e0,stroke:#3399cc,color:#3399cc style B fill:#f0f0ff,stroke:#3399cc,color:#3399cc </pre>
Type	notemptystring
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	minLength 1
Source	<code><xsd:element name="displayname" type="notemptystring" maxOccurs="1" minOccurs="0" /></code>

Element item / name

Namespace	No namespace
Diagram	<pre> graph LR A[name] --- B{notemptystring} style A fill:#e0f2e0,stroke:#3399cc,color:#3399cc style B fill:#f0f0ff,stroke:#3399cc,color:#3399cc </pre>
Type	notemptystring
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	minLength 1
Source	<code><xsd:element name="name" type="notemptystring" maxOccurs="1" minOccurs="0" /></code>

Element item / version


Namespace	No namespace
Diagram	<pre> graph LR A[version] --- B{xsd:string} style A fill:#e0f2e0,stroke:#3399cc,color:#3399cc style B fill:#f0f0ff,stroke:#3399cc,color:#3399cc </pre> <p>Built-in primitive type. The string datatype represents character strings in XML.</p>
Type	xsd:string
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<code><xsd:element name="version" type="xsd:string" maxOccurs="1" minOccurs="0" /></code>

Element item / type

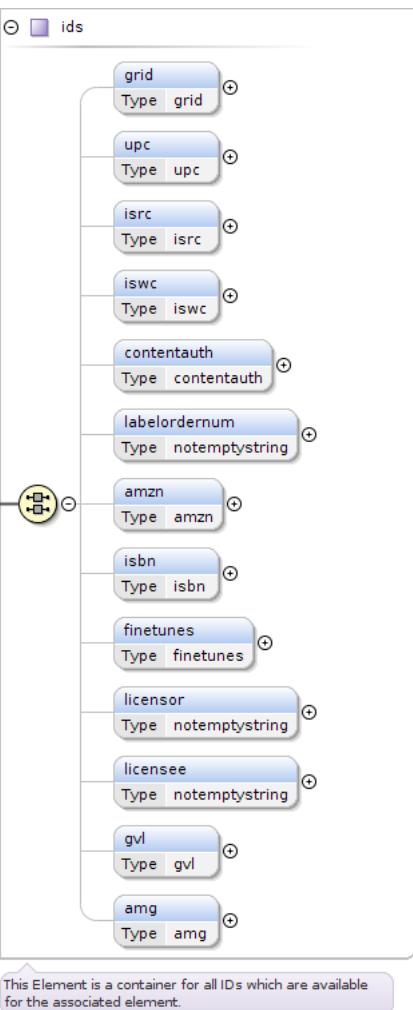
Namespace	No namespace
Diagram	<pre> graph LR A[type] --- B{notemptystring} style A fill:#e0f2e0,stroke:#3399cc,color:#3399cc style B fill:#f0f0ff,stroke:#3399cc,color:#3399cc </pre>
Type	notemptystring
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	minLength 1
Source	<code><xsd:element name="type" type="notemptystring" maxOccurs="1" minOccurs="0" /></code>

Element item / display_artistname

Namespace	No namespace
-----------	--------------

Diagram							
Type	notemptystring						
Properties	<table border="1"> <tr> <td>content:</td> <td>simple</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	<table border="1"> <tr> <td>minLength</td> <td>1</td> </tr> </table>	minLength	1				
minLength	1						
Source	<xsd:element name="display_artistname" type="notemptystring" maxOccurs="1" minOccurs="0" />						

Element item / ids

Namespace	No namespace						
Diagram	 <p>This Element is a container for all IDs which are available for the associated element.</p>						
Type	ids						
Properties	<table border="1"> <tr> <td>content:</td> <td>complex</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	complex	minOccurs:	0	maxOccurs:	1
content:	complex						
minOccurs:	0						
maxOccurs:	1						
Model	ALL(grid{0,1} upc{0,1} isrc{0,1} iswc{0,1} contentauth{0,1} labelordernum{0,1} amzn{0,1} isbn{0,1} finetunes{0,1} licensor{0,1} licensee{0,1} gvl{0,1} amg{0,1})						
Children	amg, amzn, contentauth, finetunes, grid, gvl, isbn, isrc, iswc, labelordernum, licensee, licensor, upc						
Instance	<pre> <ids> <grid>{0,1}</grid> <upc>{0,1}</upc> <isrc>{0,1}</isrc> <iswc>{0,1}</iswc> </pre>						

	<pre> <contentauth>{0,1}</contentauth> <labelordernum>{0,1}</labelordernum> <amzn>{0,1}</amzn> <isbn>{0,1}</isbn> <finetunes>{0,1}</finetunes> <licensor>{0,1}</licensor> <licensee>{0,1}</licensee> <gvl>{0,1}</gvl> <amg>{0,1}</amg> </ids> </pre>
Source	<xsd:element name="ids" type="ids" maxOccurs="1" minOccurs="0" />

Element item / contributors

Namespace	No namespace
Diagram	<p>This element contains a list of contributor.</p>
Type	contributors
Properties	content: complex
Model	contributor*
Children	contributor
Instance	<pre> <contributors> <contributor num="">{0,unbounded}</contributor> </contributors> </pre>
Source	<xsd:element name="contributors" type="contributors"/>

Element contributors / contributor

Namespace	No namespace
Diagram	<p>This element contains information of one contributor. A contributor can be a label, performer, texter, editor,...</p>
Type	contributor
Properties	content: complex minOccurs: 0 maxOccurs: unbounded
Model	ALL(name type year{0,1} ids www{0,1})
Children	ids, name, type, www, year
Instance	<pre> <contributor num=""> <name>{1,1}</name> </pre>

	<pre><type>{1,1}</type> <year>{0,1}</year> <ids>{1,1}</ids> <www>{0,1}</www> </contributor></pre>										
Attributes	<table border="1"> <thead> <tr> <th>QName</th><th>Type</th><th>Fixed</th><th>Default</th><th>Use</th></tr> </thead> <tbody> <tr> <td>num</td><td>xsd:integer</td><td></td><td></td><td>optional</td></tr> </tbody> </table>	QName	Type	Fixed	Default	Use	num	xsd:integer			optional
QName	Type	Fixed	Default	Use							
num	xsd:integer			optional							
Source	<code><xsd:element name="contributor" type="contributor" maxOccurs="unbounded" minOccurs="0" /></code>										

Element contributor / name


Namespace	No namespace
Diagram	<pre> classDiagram class name { <<notemptystring>> } class notemptystring name "o" -- "notemptystring" </pre>
Type	notemptystring
Properties	content: simple
Facets	minLength 1
Source	<code><xsd:element name="name" type="notemptystring"/></code>

Element contributor / type

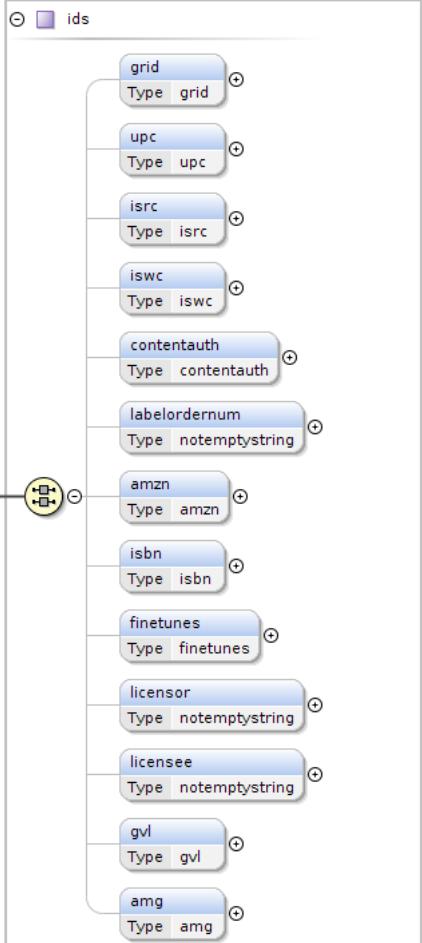
Namespace	No namespace
Diagram	<pre> classDiagram class type { <<contributorType>> } class contributorType type "o" -- "contributorType" </pre>
Type	contributorType
Properties	content: simple
Facets	enumeration label enumeration performer enumeration texter enumeration editor enumeration conductor enumeration orchestra enumeration ensemble enumeration choir enumeration accompanist enumeration soloist enumeration display_artist enumeration singer enumeration composer enumeration mixer enumeration remixer enumeration producer enumeration author enumeration arranger enumeration featuring enumeration with enumeration DJ enumeration versus enumeration meets enumeration presents enumeration compilator

	enumeration narrator
	enumeration copyright
	enumeration production
	enumeration publisher
	enumeration clearinghouse
Source	<xsd:element name="type" type="contributorType" />

Element contributor / year

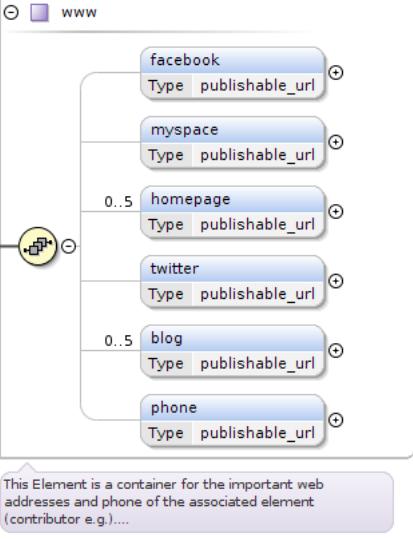
Namespace	No namespace
Diagram	
Type	year
Properties	<p>content: simple</p> <p>minOccurs: 0</p> <p>maxOccurs: 1</p>
Facets	totalDigits 4
Source	<xsd:element name="year" type="year" maxOccurs="1" minOccurs="0" />

Element contributor / ids

Namespace	No namespace
Diagram	 <p>This Element is a container for all IDs which are available for the associated element.</p>

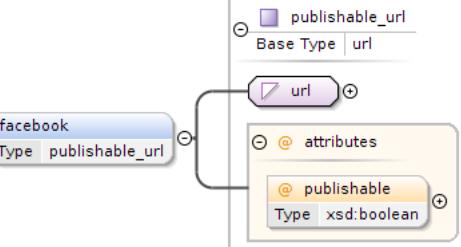
Type	ids
Properties	content: complex
Model	ALL(grid{0,1} upc{0,1} isrc{0,1} iswc{0,1} contentauth{0,1} labelordernum{0,1} amzn{0,1} isbn{0,1} finetunes{0,1} licensor{0,1} licensee{0,1} gvl{0,1} amg{0,1})
Children	amg, amzn, contentauth, finetunes, grid, gvl, isbn, isrc, iswc, labelordernum, licensee, licensor, upc
Instance	<pre><ids> <grid>{0,1}</grid> <upc>{0,1}</upc> <isrc>{0,1}</isrc> <iswc>{0,1}</iswc> <contentauth>{0,1}</contentauth> <labelordernum>{0,1}</labelordernum> <amzn>{0,1}</amzn> <isbn>{0,1}</isbn> <finetunes>{0,1}</finetunes> <licensor>{0,1}</licensor> <licensee>{0,1}</licensee> <gvl>{0,1}</gvl> <amg>{0,1}</amg> </ids></pre>
Source	<code><xsd:element name="ids" type="ids" /></code>

Element contributor / www

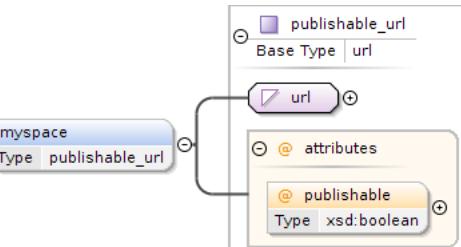
Namespace	No namespace						
Diagram	 <p>This Element is a container for the important web addresses and phone of the associated element (contributor e.g.)....</p>						
Type	www						
Properties	<table border="1"> <tr> <td>content:</td> <td>complex</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	complex	minOccurs:	0	maxOccurs:	1
content:	complex						
minOccurs:	0						
maxOccurs:	1						
Model	facebook{0,1} , myspace{0,1} , homepage{0,5} , twitter{0,1} , blog{0,5} , phone{0,1}						
Children	blog, facebook, homepage, myspace, phone, twitter						
Instance	<pre><www> <facebook publishable="">{0,1}</facebook> <myspace publishable="">{0,1}</myspace> <homepage publishable="">{0,5}</homepage> <twitter publishable="">{0,1}</twitter> <blog publishable="">{0,5}</blog> <phone publishable="">{0,1}</phone> </www></pre>						
Source	<code><xsd:element name="www" type="www" maxOccurs="1" minOccurs="0" /></code>						

Element www / facebook

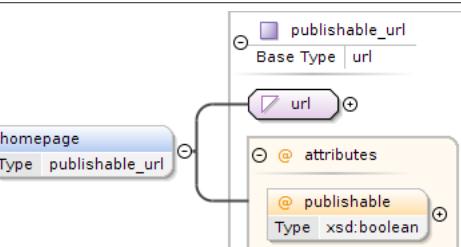
Namespace	No namespace
-----------	--------------

Diagram											
Type	publishable_url										
Type hierarchy	<ul style="list-style-type: none"> xsd:anyURI url publishable_url 										
Properties	<table> <tr> <td>content:</td> <td>complex</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	complex	minOccurs:	0	maxOccurs:	1				
content:	complex										
minOccurs:	0										
maxOccurs:	1										
Attributes	<table> <thead> <tr> <th>QName</th> <th>Type</th> <th>Fixed</th> <th>Default</th> <th>Use</th> </tr> </thead> <tbody> <tr> <td>publishable</td> <td>xsd:boolean</td> <td></td> <td></td> <td>optional</td> </tr> </tbody> </table>	QName	Type	Fixed	Default	Use	publishable	xsd:boolean			optional
QName	Type	Fixed	Default	Use							
publishable	xsd:boolean			optional							
Source	<code><xsd:element name="facebook" type="publishable_url" maxOccurs="1" minOccurs="0" /></code>										

Element www / myspace

Namespace	No namespace										
Diagram											
Type	publishable_url										
Type hierarchy	<ul style="list-style-type: none"> xsd:anyURI url publishable_url 										
Properties	<table> <tr> <td>content:</td> <td>complex</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	complex	minOccurs:	0	maxOccurs:	1				
content:	complex										
minOccurs:	0										
maxOccurs:	1										
Attributes	<table> <thead> <tr> <th>QName</th> <th>Type</th> <th>Fixed</th> <th>Default</th> <th>Use</th> </tr> </thead> <tbody> <tr> <td>publishable</td> <td>xsd:boolean</td> <td></td> <td></td> <td>optional</td> </tr> </tbody> </table>	QName	Type	Fixed	Default	Use	publishable	xsd:boolean			optional
QName	Type	Fixed	Default	Use							
publishable	xsd:boolean			optional							
Source	<code><xsd:element name="myspace" type="publishable_url" maxOccurs="1" minOccurs="0" /></code>										

Element www / homepage

Namespace	No namespace
Diagram	

Type	publishable_url														
Type hierarchy	<ul style="list-style-type: none"> xsd:anyURI url publishable_url 														
Properties	content: complex minOccurs: 0 maxOccurs: 5														
Attributes	<table border="1"> <thead> <tr> <th>QName</th> <th>Type</th> <th>Fixed</th> <th>Default</th> <th>Use</th> </tr> </thead> <tbody> <tr> <td>publishable</td> <td>xsd:boolean</td> <td></td> <td></td> <td>optional</td> </tr> </tbody> </table>					QName	Type	Fixed	Default	Use	publishable	xsd:boolean			optional
QName	Type	Fixed	Default	Use											
publishable	xsd:boolean			optional											
Source	<xsd:element name="homepage" type="publishable_url" maxOccurs="5" minOccurs="0" />														

Element www / twitter

Namespace	No namespace														
Diagram	<pre> classDiagram class twitter { <<Type publishable_url>> } class publishable_url { <<Base Type url>> attribute publishable <<Type xsd:boolean>> } twitter "1" --> "1" publishable_url </pre>														
Type	publishable_url														
Type hierarchy	<ul style="list-style-type: none"> xsd:anyURI url publishable_url 														
Properties	content: complex minOccurs: 0 maxOccurs: 1														
Attributes	<table border="1"> <thead> <tr> <th>QName</th> <th>Type</th> <th>Fixed</th> <th>Default</th> <th>Use</th> </tr> </thead> <tbody> <tr> <td>publishable</td> <td>xsd:boolean</td> <td></td> <td></td> <td>optional</td> </tr> </tbody> </table>					QName	Type	Fixed	Default	Use	publishable	xsd:boolean			optional
QName	Type	Fixed	Default	Use											
publishable	xsd:boolean			optional											
Source	<xsd:element name="twitter" type="publishable_url" maxOccurs="1" minOccurs="0" />														

Element www / blog

Namespace	No namespace				
Diagram	<pre> classDiagram class blog { <<Type publishable_url>> } class publishable_url { <<Base Type url>> attribute publishable <<Type xsd:boolean>> } blog "1" --> "1" publishable_url </pre>				
Type	publishable_url				
Type hierarchy	<ul style="list-style-type: none"> xsd:anyURI url publishable_url 				
Properties	content: complex				

	minOccurs:	0			
	maxOccurs:	5			
Attributes	QName	Type	Fixed	Default	Use
	publishable	xsd:boolean			optional

Source `<xsd:element name="blog" type="publishable_url" maxOccurs="5" minOccurs="0" />`

Element www / phone

Namespace	No namespace										
Diagram	<pre> classDiagram class phone { <<publishable_url>> } class url { <<url>> @ publishable { <<xsd:boolean>> } } phone < -- url </pre>										
Type	publishable_url										
Type hierarchy	<ul style="list-style-type: none"> • xsd:anyURI • url • publishable_url 										
Properties	<table border="1"> <tr> <td>content:</td> <td>complex</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	complex	minOccurs:	0	maxOccurs:	1				
content:	complex										
minOccurs:	0										
maxOccurs:	1										
Attributes	<table border="1"> <tr> <td>QName</td> <td>Type</td> <td>Fixed</td> <td>Default</td> <td>Use</td> </tr> <tr> <td>publishable</td> <td>xsd:boolean</td> <td></td> <td></td> <td>optional</td> </tr> </table>	QName	Type	Fixed	Default	Use	publishable	xsd:boolean			optional
QName	Type	Fixed	Default	Use							
publishable	xsd:boolean			optional							
Source	<code><xsd:element name="phone" type="publishable_url" maxOccurs="1" minOccurs="0" /></code>										

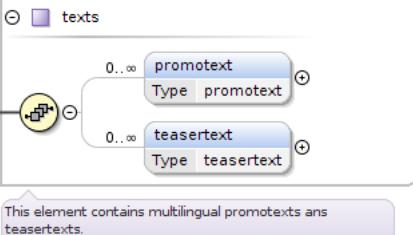
Element item / information

Namespace	No namespace
-----------	--------------

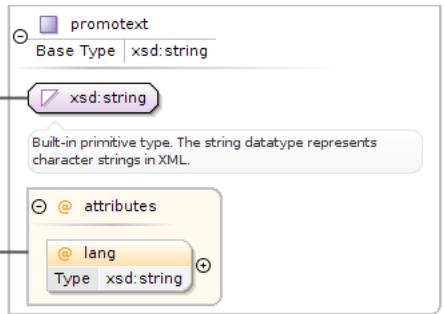
Diagram	<pre> classDiagram class information { texts physical_release_datetime digital_release_datetime playlength num setnum suggested_prelistening_offset origin_country main_language compositiontype recordingtype related } information < -- information </pre>
Type	information
Properties	content: complex
Model	ALL(texts{0,1} physical_release_datetime digital_release_datetime playlength{0,1} num{0,1} setnum{0,1} suggested_prelistening_offset{0,1} origin_country{0,1} main_language{0,1} compositiontype{0,1} recordingtype{0,1} related{0,1})
Children	compositiontype, digital_release_datetime, main_language, num, origin_country, physical_release_datetime, playlength, recordingtype, related, setnum, suggested_prelistening_offset, texts
Instance	<pre> <information> <texts>{0,1}</texts> <physical_release_datetime>{1,1}</physical_release_datetime> <digital_release_datetime>{1,1}</digital_release_datetime> <playlength>{0,1}</playlength> <num>{0,1}</num> <setnum>{0,1}</setnum> <suggested_prelistening_offset>{0,1}</suggested_prelistening_offset> <origin_country>{0,1}</origin_country> <main_language>{0,1}</main_language> <compositiontype>{0,1}</compositiontype> <recordingtype>{0,1}</recordingtype> <related>{0,1}</related> </information> </pre>
Source	<xsd:element name="information" type="information"/>

Element information / texts

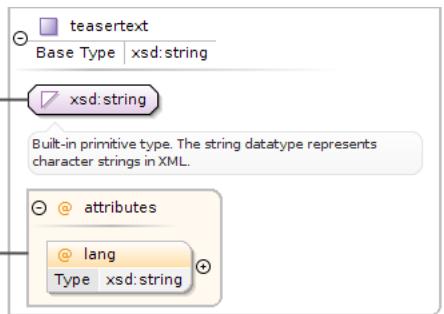
Namespace	No namespace
-----------	--------------

Diagram							
Type	texts						
Properties	<table border="1"> <tr> <td>content:</td> <td>complex</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	complex	minOccurs:	0	maxOccurs:	1
content:	complex						
minOccurs:	0						
maxOccurs:	1						
Model	promotext*, teasertext*						
Children	promotext, teasertext						
Instance	<pre><texts> <promotext lang="">{0,unbounded}</promotext> <teasertext lang="">{0,unbounded}</teasertext> </texts></pre>						
Source	<code><xsd:element name="texts" type="texts" maxOccurs="1" minOccurs="0" /></code>						

Element texts / promotext

Namespace	No namespace										
Diagram											
Type	promotext										
Properties	<table border="1"> <tr> <td>content:</td> <td>complex</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>unbounded</td> </tr> </table>	content:	complex	minOccurs:	0	maxOccurs:	unbounded				
content:	complex										
minOccurs:	0										
maxOccurs:	unbounded										
Attributes	<table border="1"> <thead> <tr> <th>QName</th> <th>Type</th> <th>Fixed</th> <th>Default</th> <th>Use</th> </tr> </thead> <tbody> <tr> <td>lang</td> <td>xsd:string</td> <td></td> <td></td> <td>optional</td> </tr> </tbody> </table>	QName	Type	Fixed	Default	Use	lang	xsd:string			optional
QName	Type	Fixed	Default	Use							
lang	xsd:string			optional							
Source	<code><xsd:element name="promotext" type="promotext" maxOccurs="unbounded" minOccurs="0" /></code>										

Element texts / teasertext

Namespace	No namespace
Diagram	
Type	teasertext

Properties	content:	complex			
	minOccurs:	0			
	maxOccurs:	unbounded			
Attributes	QName	Type	Fixed	Default	Use
	lang	xsd:string			optional
Source	<xsd:element name="teaserText" type="teaserText" maxOccurs="unbounded" minOccurs="0" />				

Element information / physical_release_datetime

Namespace	No namespace
Diagram	
Type	datetimeGMT
Properties	content: simple
Facets	pattern \d{4}-\d{2}-\d{2} \d{2}: \d{2}:\d{2} GMT+\d{2}:\d{2}
Source	<xsd:element name="physical_release_datetime" type="datetimeGMT" />

Element information / digital_release_datetime

Namespace	No namespace
Diagram	
Type	datetimeGMT
Properties	content: simple
Facets	pattern \d{4}-\d{2}-\d{2} \d{2}: \d{2}:\d{2} GMT+\d{2}:\d{2}
Source	<xsd:element name="digital_release_datetime" type="datetimeGMT" />

Element information / playlength

Namespace	No namespace
Diagram	<p>Built-in derived type. The integer datatype is derived from decimal by fixing the value of fractionDigits to be 0. This...</p>
Type	xsd:integer
Properties	content: simple
	minOccurs: 0
	maxOccurs: 1
Source	<xsd:element name="playlength" type="xsd:integer" maxOccurs="1" minOccurs="0" />

Element information / num

Namespace	No namespace
Diagram	<p>Built-in derived type. The integer datatype is derived from decimal by fixing the value of fractionDigits to be 0. This...</p>
Type	xsd:integer
Properties	content: simple
	minOccurs: 0

	maxOccurs:	1
Source	<xsd:element name="num" type="xsd:integer" maxOccurs="1" minOccurs="0" />	

Element information / setnum

Namespace	No namespace						
Diagram							
Type	xsd:integer						
Properties	<table border="1"> <tr> <td>content:</td> <td>simple</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Source	<xsd:element name="setnum" type="xsd:integer" maxOccurs="1" minOccurs="0" />						

Element information / suggested_prelistening_offset

Namespace	No namespace						
Diagram							
Type	xsd:integer						
Properties	<table border="1"> <tr> <td>content:</td> <td>simple</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Source	<xsd:element name="suggested_prelistening_offset" type="xsd:integer" maxOccurs="1" minOccurs="0" />						

Element information / origin_country

Namespace	No namespace																																										
Diagram																																											
Type	countryCode																																										
Properties	<table border="1"> <tr> <td>content:</td> <td>simple</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1																																				
content:	simple																																										
minOccurs:	0																																										
maxOccurs:	1																																										
Facets	<table border="1"> <tr> <td>enumeration</td> <td>AF</td> <td>Afghanistan</td> </tr> <tr> <td>enumeration</td> <td>AX</td> <td>Åland Islands</td> </tr> <tr> <td>enumeration</td> <td>AL</td> <td>Albania</td> </tr> <tr> <td>enumeration</td> <td>DZ</td> <td>Algeria</td> </tr> <tr> <td>enumeration</td> <td>AS</td> <td>American Samoa</td> </tr> <tr> <td>enumeration</td> <td>AD</td> <td>Andorra</td> </tr> <tr> <td>enumeration</td> <td>AO</td> <td>Angola</td> </tr> <tr> <td>enumeration</td> <td>AI</td> <td>Anguilla</td> </tr> <tr> <td>enumeration</td> <td>AQ</td> <td>Antarctica</td> </tr> <tr> <td>enumeration</td> <td>AG</td> <td>Antigua and Barbuda</td> </tr> <tr> <td>enumeration</td> <td>AR</td> <td>Argentina</td> </tr> <tr> <td>enumeration</td> <td>AM</td> <td>Armenia</td> </tr> <tr> <td>enumeration</td> <td>AW</td> <td>Aruba</td> </tr> <tr> <td>enumeration</td> <td>AU</td> <td>Australia</td> </tr> </table>	enumeration	AF	Afghanistan	enumeration	AX	Åland Islands	enumeration	AL	Albania	enumeration	DZ	Algeria	enumeration	AS	American Samoa	enumeration	AD	Andorra	enumeration	AO	Angola	enumeration	AI	Anguilla	enumeration	AQ	Antarctica	enumeration	AG	Antigua and Barbuda	enumeration	AR	Argentina	enumeration	AM	Armenia	enumeration	AW	Aruba	enumeration	AU	Australia
enumeration	AF	Afghanistan																																									
enumeration	AX	Åland Islands																																									
enumeration	AL	Albania																																									
enumeration	DZ	Algeria																																									
enumeration	AS	American Samoa																																									
enumeration	AD	Andorra																																									
enumeration	AO	Angola																																									
enumeration	AI	Anguilla																																									
enumeration	AQ	Antarctica																																									
enumeration	AG	Antigua and Barbuda																																									
enumeration	AR	Argentina																																									
enumeration	AM	Armenia																																									
enumeration	AW	Aruba																																									
enumeration	AU	Australia																																									

enumeration	AT	Austria
enumeration	AZ	Azerbaijan
enumeration	BS	Bahamas
enumeration	BH	Bahrain
enumeration	BD	Bangladesh
enumeration	BB	Barbados
enumeration	BY	Belarus
enumeration	BE	Belgium
enumeration	BZ	Belize
enumeration	BJ	Benin
enumeration	BM	Bermuda
enumeration	BT	Bhutan
enumeration	BO	Bolivia, Plurinational State of
enumeration	BQ	Bonaire, Sint Eustatius and Saba
enumeration	BA	Bosnia and Herzegovina
enumeration	BW	Botswana
enumeration	BV	Bouvet Island
enumeration	BR	Brazil
enumeration	IO	British Indian Ocean Territory
enumeration	BN	Brunei Darussalam
enumeration	BG	Bulgaria
enumeration	BF	Burkina Faso
enumeration	BI	Burundi
enumeration	KH	Cambodia
enumeration	CM	Cameroon
enumeration	CA	Canada
enumeration	CV	Cape Verde
enumeration	KY	Cayman Islands
enumeration	CF	Central African Republic
enumeration	TD	Chad
enumeration	CL	Chile
enumeration	CN	China
enumeration	CX	Christmas Island
enumeration	CC	Cocos (Keeling) Islands
enumeration	CO	Colombia
enumeration	KM	Comoros
enumeration	CG	Congo
enumeration	CD	Congo, the Democratic Republic of the
enumeration	CK	Cook Islands
enumeration	CR	Costa Rica
enumeration	CI	Côte d'Ivoire
enumeration	HR	Croatia
enumeration	CU	Cuba
enumeration	CW	Curaçao
enumeration	CY	Cyprus
enumeration	CZ	Czech Republic
enumeration	DK	Denmark
enumeration	DJ	Djibouti
enumeration	DM	Dominica

enumeration	DO	Dominican Republic
enumeration	EC	Ecuador
enumeration	EG	Egypt
enumeration	SV	El Salvador
enumeration	GQ	Equatorial Guinea
enumeration	ER	Eritrea
enumeration	EE	Estonia
enumeration	ET	Ethiopia
enumeration	FK	Falkland Islands (Malvinas)
enumeration	FO	Faroe Islands
enumeration	FJ	Fiji
enumeration	FI	Finland
enumeration	FR	France
enumeration	GF	French Guiana
enumeration	PF	French Polynesia
enumeration	TF	French Southern Territories
enumeration	GA	Gabon
enumeration	GM	Gambia
enumeration	GE	Georgia
enumeration	DE	Germany
enumeration	GH	Ghana
enumeration	GI	Gibraltar
enumeration	GR	Greece
enumeration	GL	Greenland
enumeration	GD	Grenada
enumeration	GP	Guadeloupe
enumeration	GU	Guam
enumeration	GT	Guatemala
enumeration	GG	Guernsey
enumeration	GN	Guinea
enumeration	GW	Guinea-Bissau
enumeration	GY	Guyana
enumeration	HT	Haiti
enumeration	HM	Heard Island and McDonald Islands
enumeration	VA	Holy See (Vatican City State)
enumeration	HN	Honduras
enumeration	HK	Hong Kong
enumeration	HU	Hungary
enumeration	IS	Iceland
enumeration	IN	India
enumeration	ID	Indonesia
enumeration	IR	Iran, Islamic Republic of
enumeration	IQ	Iraq
enumeration	IE	Ireland
enumeration	IM	Isle of Man
enumeration	IL	Israel
enumeration	IT	Italy
enumeration	JM	Jamaica
enumeration	JP	Japan

enumeration	JE	Jersey
enumeration	JO	Jordan
enumeration	KZ	Kazakhstan
enumeration	KE	Kenya
enumeration	KI	Kiribati
enumeration	KP	Korea, Democratic People's Republic of
enumeration	KR	Korea, Republic of
enumeration	KW	Kuwait
enumeration	KG	Kyrgyzstan
enumeration	LA	Lao People's Democratic Republic
enumeration	LV	Latvia
enumeration	LB	Lebanon
enumeration	LS	Lesotho
enumeration	LR	Liberia
enumeration	LY	Libyan Arab Jamahiriya
enumeration	LI	Liechtenstein
enumeration	LT	Lithuania
enumeration	LU	Luxembourg
enumeration	MO	Macao
enumeration	MK	Macedonia, the former Yugoslav Republic of
enumeration	MG	Madagascar
enumeration	MW	Malawi
enumeration	MY	Malaysia
enumeration	MV	Maldives
enumeration	ML	Mali
enumeration	MT	Malta
enumeration	MH	Marshall Islands
enumeration	MQ	Martinique
enumeration	MR	Mauritania
enumeration	MU	Mauritius
enumeration	YT	Mayotte
enumeration	MX	Mexico
enumeration	FM	Micronesia, Federated States of
enumeration	MD	Moldova, Republic of
enumeration	MC	Monaco
enumeration	MN	Mongolia
enumeration	ME	Montenegro
enumeration	MS	Montserrat
enumeration	MA	Morocco
enumeration	MZ	Mozambique
enumeration	MM	Myanmar
enumeration	NA	Namibia
enumeration	NR	Nauru
enumeration	NP	Nepal
enumeration	NL	Netherlands
enumeration	AN	Netherlands Antilles
enumeration	NC	New Caledonia
enumeration	NZ	New Zealand
enumeration	NI	Nicaragua

enumeration	NE	Niger
enumeration	NG	Nigeria
enumeration	NU	Niue
enumeration	NF	Norfolk Island
enumeration	MP	Northern Mariana Islands
enumeration	NO	Norway
enumeration	OM	Oman
enumeration	PK	Pakistan
enumeration	PW	Palau
enumeration	PS	Palestinian Territory, Occupied
enumeration	PA	Panama
enumeration	PG	Papua New Guinea
enumeration	PY	Paraguay
enumeration	PE	Peru
enumeration	PH	Philippines
enumeration	PN	Pitcairn
enumeration	PL	Poland
enumeration	PT	Portugal
enumeration	PR	Puerto Rico
enumeration	QA	Qatar
enumeration	RE	Réunion
enumeration	RO	Romania
enumeration	RU	Russian Federation
enumeration	RW	Rwanda
enumeration	BL	Saint Barthélemy
enumeration	SH	Saint Helena, Ascension and Tristan da Cunha
enumeration	KN	Saint Kitts and Nevis
enumeration	LC	Saint Lucia
enumeration	MF	Saint Martin (French part)
enumeration	PM	Saint Pierre and Miquelon
enumeration	VC	Saint Vincent and the Grenadines
enumeration	WS	Samoa
enumeration	SM	San Marino
enumeration	ST	Sao Tome and Principe
enumeration	SA	Saudi Arabia
enumeration	SN	Senegal
enumeration	RS	Serbia
enumeration	SC	Seychelles
enumeration	SL	Sierra Leone
enumeration	SG	Singapore
enumeration	SX	Sint Maarten (Dutch part)
enumeration	SK	Slovakia
enumeration	SI	Slovenia
enumeration	SB	Solomon Islands
enumeration	SO	Somalia
enumeration	ZA	South Africa
enumeration	GS	South Georgia and the South Sandwich Islands
enumeration	SS	South Sudan
enumeration	ES	Spain

enumeration	LK	Sri Lanka
enumeration	SD	Sudan
enumeration	SR	Suriname
enumeration	SJ	Svalbard and Jan Mayen
enumeration	SZ	Swaziland
enumeration	SE	Sweden
enumeration	CH	Switzerland
enumeration	SY	Syrian Arab Republic
enumeration	TW	Taiwan, Province of China
enumeration	TJ	Tajikistan
enumeration	TZ	Tanzania, United Republic of
enumeration	TH	Thailand
enumeration	TL	Timor-Leste
enumeration	TG	Togo
enumeration	TK	Tokelau
enumeration	TO	Tonga
enumeration	TT	Trinidad and Tobago
enumeration	TN	Tunisia
enumeration	TR	Turkey
enumeration	TM	Turkmenistan
enumeration	TC	Turks and Caicos Islands
enumeration	TV	Tuvalu
enumeration	UG	Uganda
enumeration	UA	Ukraine
enumeration	AE	United Arab Emirates
enumeration	GB	United Kingdom
enumeration	US	United States
enumeration	UM	United States Minor Outlying Islands
enumeration	UY	Uruguay
enumeration	UZ	Uzbekistan
enumeration	VU	Vanuatu
enumeration	VE	Venezuela, Bolivarian Republic of
enumeration	VN	Viet Nam
enumeration	VG	Virgin Islands, British
enumeration	VI	Virgin Islands, U.S.
enumeration	WF	Wallis and Futuna
enumeration	WW	WorldWide
enumeration	EH	Western Sahara
enumeration	YE	Yemen
enumeration	ZM	Zambia
enumeration	ZW	Zimbabwe
Source	<xsd:element name="origin_country" type="cc:countryCode" maxOccurs="1" minOccurs="0" />	

Element information / main_language

Namespace	No namespace
Diagram	<p>This element includes a list of ISO 639-1 language codes. See: List_of_ISO_639-1_codes">http://en.wikipedia.org/wikia>List_of_ISO_639-1_codes</p>
Type	language


Properties	content:	simple	
	minOccurs:	0	
	maxOccurs:	1	
Facets	enumeration	aa	Afar
	enumeration	ab	Abkhaz
	enumeration	ae	Avestan
	enumeration	af	Afrikaans
	enumeration	ak	Akan
	enumeration	am	Amharic
	enumeration	an	Aragonese
	enumeration	ar	Arabic
	enumeration	as	Assamese
	enumeration	av	Avaric
	enumeration	ay	Aymara
	enumeration	az	Azerbaijani
	enumeration	ba	Bashkir
	enumeration	be	Belarusian
	enumeration	bg	Bulgarian
	enumeration	bh	Bihari
	enumeration	bi	Bislama
	enumeration	bm	Bambara
	enumeration	bn	Bengali
	enumeration	bo	Tibetan Standard, Tibetan, Central
	enumeration	br	Breton
	enumeration	bs	Bosnian
	enumeration	ca	Catalan
	enumeration	ce	Chechen
	enumeration	ch	Chamorro
	enumeration	co	Corsican
	enumeration	cr	Cree
	enumeration	cs	Czech
	enumeration	cu	Old Church Slavonic, Church Slavic, Church Slavonic, Old Bulgarian, Old Slavonic
	enumeration	cv	Chuvash
	enumeration	cy	Welsh
	enumeration	da	Danish
	enumeration	de	German
	enumeration	dv	Divehi, Dhivehi, Maldivian
	enumeration	dz	Dzongkha
	enumeration	ee	Ewe
	enumeration	el	Greek, Modern
	enumeration	en	English
	enumeration	eo	Esperanto
	enumeration	es	Spanish, Castilian
	enumeration	et	Estonian
	enumeration	eu	Basque
	enumeration	fa	Persian
	enumeration	ff	Fula, Fulah, Pulaar, Pular
	enumeration	fi	Finnish

enumeration	fj	Fijian
enumeration	fo	Faroese
enumeration	fr	French
enumeration	fy	Western Frisian
enumeration	ga	Irish
enumeration	gd	Scottish Gaelic, Gaelic
enumeration	gl	Galician
enumeration	gn	Guaraní
enumeration	gu	Gujarati
enumeration	gv	Manx
enumeration	ha	Hausa
enumeration	he	Hebrew (modern)
enumeration	hi	Hindi
enumeration	ho	Hiri Motu
enumeration	hr	Croatian
enumeration	ht	Haitian, Haitian Creole
enumeration	hu	Hungarian
enumeration	hy	Armenian
enumeration	hz	Herero
enumeration	ia	Interlingua
enumeration	id	Indonesian
enumeration	ie	Interlingue
enumeration	ig	Igbo
enumeration	ii	Nuosu
enumeration	ik	Inupiaq
enumeration	io	Ido
enumeration	is	Icelandic
enumeration	it	Italian
enumeration	iu	Inuktitut
enumeration	ja	Japanese
enumeration	jv	Javanese
enumeration	ka	Georgian
enumeration	kg	Kongo
enumeration	ki	Kikuyu, Gikuyu
enumeration	kj	Kwanyama, Kuanyama
enumeration	kk	Kazakh
enumeration	kl	Kalaallisut, Greenlandic
enumeration	km	Khmer
enumeration	kn	Kannada
enumeration	ko	Korean
enumeration	kr	Kanuri
enumeration	ks	Kashmiri
enumeration	ku	Kurdish
enumeration	kv	Komi
enumeration	kw	Cornish
enumeration	ky	Kyrgyz
enumeration	la	Latin
enumeration	lb	Luxembourgish, Letzeburgesch
enumeration	lg	Ganda

enumeration	li	Limburgish, Limburgan, Limburger
enumeration	ln	Lingala
enumeration	lo	Lao
enumeration	lt	Lithuanian
enumeration	lu	Luba-Katanga
enumeration	lv	Latvian
enumeration	mg	Malagasy
enumeration	mh	Marshallese
enumeration	mi	M#ori
enumeration	mk	Macedonian
enumeration	ml	Malayalam
enumeration	mn	Mongolian
enumeration	mr	Marathi (Mar##h#)
enumeration	ms	Malay
enumeration	mt	Maltese
enumeration	my	Burmese
enumeration	na	Nauru
enumeration	nb	Norwegian Bokmål
enumeration	nd	North Ndebele
enumeration	ne	Nepali
enumeration	ng	Ndonga
enumeration	nl	Dutch
enumeration	nn	Norwegian Nynorsk
enumeration	no	Norwegian
enumeration	nr	South Ndebele
enumeration	nv	Navajo, Navaho
enumeration	ny	Chichewa, Chewa, Nyanja
enumeration	oc	Occitan
enumeration	oj	Ojibwe, Ojibwa
enumeration	om	Oromo
enumeration	or	Oriya
enumeration	os	Ossetian, Ossetic
enumeration	pa	Punjabi, Panjabi
enumeration	pi	P#li
enumeration	pl	Polish
enumeration	ps	Pashto, Pushto
enumeration	pt	Portuguese
enumeration	qu	Quechua
enumeration	rm	Romansh
enumeration	rn	Kirundi
enumeration	ro	Romanian, Moldavian, Moldovan
enumeration	ru	Russian
enumeration	rw	Kinyarwanda
enumeration	sa	Sanskrit (Sa#sk#ta)
enumeration	sc	Sardinian
enumeration	sd	Sindhi
enumeration	se	Northern Sami
enumeration	sg	Sango
enumeration	si	Sinhala, Sinhalese


enumeration	sk	Slovak
enumeration	sl	Slovene
enumeration	sm	Samoan
enumeration	sn	Shona
enumeration	so	Somali
enumeration	sq	Albanian
enumeration	sr	Serbian
enumeration	ss	Swati
enumeration	st	Southern Sotho
enumeration	su	Sundanese
enumeration	sv	Swedish
enumeration	sw	Swahili
enumeration	ta	Tamil
enumeration	te	Telugu
enumeration	tg	Tajik
enumeration	th	Thai
enumeration	ti	Tigrinya
enumeration	tk	Turkmen
enumeration	tl	Tagalog
enumeration	tn	Tswana
enumeration	to	Tonga (Tonga Islands)
enumeration	tr	Turkish
enumeration	ts	Tsonga
enumeration	tt	Tatar
enumeration	tw	Twi
enumeration	ty	Tahitian
enumeration	ug	Uighur, Uyghur
enumeration	uk	Ukrainian
enumeration	ur	Urdu
enumeration	uz	Uzbek
enumeration	ve	Venda
enumeration	vi	Vietnamese
enumeration	vo	Volapük
enumeration	wa	Walloon
enumeration	wo	Wolof
enumeration	xh	Xhosa
enumeration	yi	Yiddish
enumeration	yo	Yoruba
enumeration	za	Zhuang, Chuang
enumeration	zh	Chinese
enumeration	zu	Zulu
Source	<xsd:element name="main_language" type="l:language" maxOccurs="1" minOccurs="0" />	

Element information / compositiontype

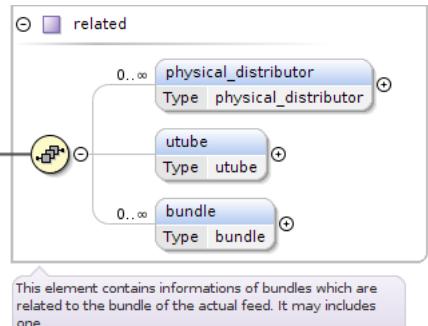
Namespace	No namespace
Diagram	
Type	compositionType
Properties	content: simple

	minOccurs:	0
	maxOccurs:	1
Facets	enumeration	undefined
	enumeration	original
	enumeration	public domain
	enumeration	cover
	enumeration	tribute
Source	<xsd:element name="compositiontype" type="compositionType" maxOccurs="1" minOccurs="0" />	

Element information / recordingtype

Namespace	No namespace												
Diagram													
Type	recordingType												
Properties	<table border="1"> <tr> <td>content:</td> <td>simple</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1						
content:	simple												
minOccurs:	0												
maxOccurs:	1												
Facets	<table border="1"> <tr> <td>enumeration</td> <td>undefined</td> </tr> <tr> <td>enumeration</td> <td>original</td> </tr> <tr> <td>enumeration</td> <td>public domain</td> </tr> <tr> <td>enumeration</td> <td>rerecorded</td> </tr> <tr> <td>enumeration</td> <td>remastered</td> </tr> <tr> <td>enumeration</td> <td>soundalike</td> </tr> </table>	enumeration	undefined	enumeration	original	enumeration	public domain	enumeration	rerecorded	enumeration	remastered	enumeration	soundalike
enumeration	undefined												
enumeration	original												
enumeration	public domain												
enumeration	rerecorded												
enumeration	remastered												
enumeration	soundalike												
Source	<xsd:element name="recordingtype" type="recordingType" maxOccurs="1" minOccurs="0" />												

Element information / related

Namespace	No namespace						
Diagram	 <p>This element contains informations of bundles which are related to the bundle of the actual feed. It may includes one...</p>						
Type	related						
Properties	<table border="1"> <tr> <td>content:</td> <td>complex</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	complex	minOccurs:	0	maxOccurs:	1
content:	complex						
minOccurs:	0						
maxOccurs:	1						
Model	physical_distributor*, utube{0,1}, bundle*						
Children	bundle, physical_distributor, utube						
Instance	<pre><related> <physical_distributor publishable="">{0,unbounded}</physical_distributor> <utube>{0,1}</utube> <bundle>{0,unbounded}</bundle> </related></pre>						
Source	<xsd:element name="related" type="related" maxOccurs="1" minOccurs="0" />						

Element related / physical_distributor

Namespace	No namespace										
Diagram	<pre> classDiagram class physical_distributor { <<physical_distributor>> <<Type physical_distributor>> <<notemptystring>> <<@ attributes>> <<@ publishable>> <<Type xsd:boolean>> } </pre>										
Type	physical_distributor										
Type hierarchy	<ul style="list-style-type: none"> xsd:string • notemptystring • physical_distributor 										
Properties	<table border="1"> <tr> <td>content:</td> <td>complex</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>unbounded</td> </tr> </table>	content:	complex	minOccurs:	0	maxOccurs:	unbounded				
content:	complex										
minOccurs:	0										
maxOccurs:	unbounded										
Attributes	<table border="1"> <thead> <tr> <th>QName</th> <th>Type</th> <th>Fixed</th> <th>Default</th> <th>Use</th> </tr> </thead> <tbody> <tr> <td>publishable</td> <td>xsd:boolean</td> <td></td> <td></td> <td>optional</td> </tr> </tbody> </table>	QName	Type	Fixed	Default	Use	publishable	xsd:boolean			optional
QName	Type	Fixed	Default	Use							
publishable	xsd:boolean			optional							
Source	<pre><xsd:element name="physical_distributor" type="physical_distributor" maxOccurs="unbounded" minOccurs="0" /></pre>										

Element related / utube


Namespace	No namespace						
Diagram	<pre> classDiagram class utube { <<utube>> <<Type utube>> <<url>> <<Type notemptystring>> <<channel>> <<Type notemptystring>> } </pre> <p>Contains optional information about youtube url und channel.</p>						
Type	utube						
Properties	<table border="1"> <tr> <td>content:</td> <td>complex</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	complex	minOccurs:	0	maxOccurs:	1
content:	complex						
minOccurs:	0						
maxOccurs:	1						
Model	ALL(url{0,1} channel{0,1})						
Children	channel, url						
Instance	<pre><utube> <url>{0,1}</url> <channel>{0,1}</channel> </utube></pre>						
Source	<pre><xsd:element name="utube" type="utube" maxOccurs="1" minOccurs="0" /></pre>						

Element utube / url

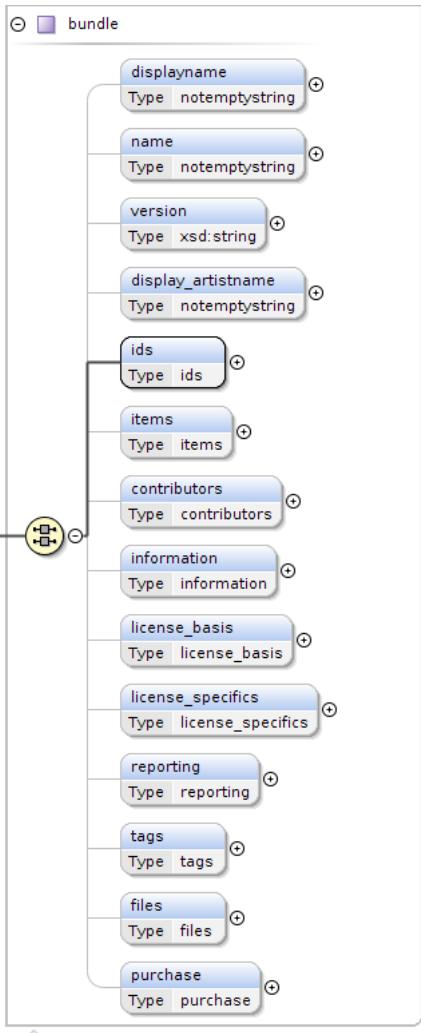
Namespace	No namespace
Diagram	<pre> classDiagram class url { <<url>> <<Type notemptystring>> } </pre>
Type	notemptystring
Properties	content: simple

	minOccurs:	0
	maxOccurs:	1
Facets	minLength	1
Source	<xsd:element name="url" type="notemptystring" maxOccurs="1" minOccurs="0" />	

Element utube / channel

Namespace	No namespace						
Diagram							
Type	notemptystring						
Properties	<table border="1"> <tr> <td>content:</td> <td>simple</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	minLength 1						
Source	<xsd:element name="channel" type="notemptystring" maxOccurs="1" minOccurs="0" />						

Element related / bundle

Namespace	No namespace
Diagram	 <p>On bundle level, there are information on how to handle a collection of "items". This is mainly an album/ep/single. A...</p>

Type	bundle
Properties	<p>content: complex</p> <p>minOccurs: 0</p> <p>maxOccurs: unbounded</p>
Model	ALL(displayname{0,1} name{0,1} version{0,1} display_artistname{0,1} ids items{0,1} contributors{0,1} information{0,1} license_basis{0,1} license_specifics{0,1} reporting{0,1} tags{0,1} files{0,1} purchase{0,1})
Children	contributors, display_artistname, displayname, files, ids, information, items, license_basis, license_specifics, name, purchase, reporting, tags, version
Instance	<pre><bundle> <displayname>{0,1}</displayname> <name>{0,1}</name> <version>{0,1}</version> <display_artistname>{0,1}</display_artistname> <ids>{1,1}</ids> <items>{0,1}</items> <contributors>{0,1}</contributors> <information>{0,1}</information> <license_basis>{0,1}</license_basis> <license_specifics>{0,1}</license_specifics> <reporting>{0,1}</reporting> <tags>{0,1}</tags> <files>{0,1}</files> <purchase>{0,1}</purchase> </bundle></pre>
Source	<code><xsd:element name="bundle" type="bundle" maxOccurs="unbounded" minOccurs="0" /></code>

Element bundle / contributors

Namespace	No namespace
Diagram	<pre> classDiagram class contributors { <<Type contributors>> } class contributor { <<Type contributor>> } contributors "0..*" --> "0..*" contributor note over contributors: This element contains a list of contributor. </pre>
Type	contributors
Properties	<p>content: complex</p> <p>minOccurs: 0</p> <p>maxOccurs: 1</p>
Model	contributor*
Children	contributor
Instance	<pre><contributors> <contributor num=" ">{0,unbounded}</contributor> </contributors></pre>
Source	<code><xsd:element name="contributors" type="contributors" maxOccurs="1" minOccurs="0" /></code>

Element bundle / information

Namespace	No namespace
-----------	--------------

Diagram	<pre> classDiagram class information { texts physical_release_datetime digital_release_datetime playlength num setnum suggested_prelistening_offset origin_country main_language compositiontype recordingtype related } information < -- information </pre> <p>This element contains important data for an item/file. Multilingual promotexts and teasertexts, dates of physical and...</p>						
Type	information						
Properties	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 2px;">content:</td><td style="padding: 2px;">complex</td></tr> <tr> <td style="padding: 2px;">minOccurs:</td><td style="padding: 2px;">0</td></tr> <tr> <td style="padding: 2px;">maxOccurs:</td><td style="padding: 2px;">1</td></tr> </table>	content:	complex	minOccurs:	0	maxOccurs:	1
content:	complex						
minOccurs:	0						
maxOccurs:	1						
Model	ALL(texts{0,1} physical_release_datetime digital_release_datetime playlength{0,1} num{0,1} setnum{0,1} suggested_prelistening_offset{0,1} origin_country{0,1} main_language{0,1} compositiontype{0,1} recordingtype{0,1} related{0,1})						
Children	compositiontype, digital_release_datetime, main_language, num, origin_country, physical_release_datetime, playlength, recordingtype, related, setnum, suggested_prelistening_offset, texts						
Instance	<pre> <information> <texts>{0,1}</texts> <physical_release_datetime>{1,1}</physical_release_datetime> <digital_release_datetime>{1,1}</digital_release_datetime> <playlength>{0,1}</playlength> <num>{0,1}</num> <setnum>{0,1}</setnum> <suggested_prelistening_offset>{0,1}</suggested_prelistening_offset> <origin_country>{0,1}</origin_country> <main_language>{0,1}</main_language> <compositiontype>{0,1}</compositiontype> <recordingtype>{0,1}</recordingtype> <related>{0,1}</related> </information> </pre>						
Source	<xsd:element name="information" type="information" maxOccurs="1" minOccurs="0"/>						

Element bundle / license_basis

Namespace	No namespace
-----------	--------------

Diagram	<pre> classDiagram class license_basis { territorial timeframe pricing download_allowed streaming_allowed channels } license_basis < -- license_basis </pre> <p>This element includes the basic rules and information under which this bundle is provided. If "download_allowed" is...</p>						
Type	license_basis						
Properties	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 2px;">content:</td><td style="padding: 2px;">complex</td></tr> <tr> <td style="padding: 2px;">minOccurs:</td><td style="padding: 2px;">0</td></tr> <tr> <td style="padding: 2px;">maxOccurs:</td><td style="padding: 2px;">1</td></tr> </table>	content:	complex	minOccurs:	0	maxOccurs:	1
content:	complex						
minOccurs:	0						
maxOccurs:	1						
Model	ALL(territorial{0,1} timeframe pricing{0,1} download_allowed{0,1} streaming_allowed channels{0,1})						
Children	channels, download_allowed, pricing, streaming_allowed, territorial, timeframe						
Instance	<pre> <license_basis> <territorial>{0,1}</territorial> <timeframe>{1,1}</timeframe> <pricing>{0,1}</pricing> <download_allowed>{0,1}</download_allowed> <streaming_allowed>{1,1}</streaming_allowed> <channels>{0,1}</channels> </license_basis> </pre>						
Source	<xsd:element name="license_basis" type="license_basis" maxOccurs="1" minOccurs="0"/>						

Element license_basis / territorial

Namespace	No namespace						
Diagram	<pre> classDiagram class territorial { territory } territorial < -- territorial </pre> <p>This Element is a container for territories. There should be a entry for all territories (ISO 3166-1 country code) with...</p>						
Type	territorial						
Properties	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 2px;">content:</td><td style="padding: 2px;">complex</td></tr> <tr> <td style="padding: 2px;">minOccurs:</td><td style="padding: 2px;">0</td></tr> <tr> <td style="padding: 2px;">maxOccurs:</td><td style="padding: 2px;">1</td></tr> </table>	content:	complex	minOccurs:	0	maxOccurs:	1
content:	complex						
minOccurs:	0						
maxOccurs:	1						
Model	territory*						
Children	territory						
Instance	<pre> <territorial> <territory type="">{0,unbounded}</territory> </territorial> </pre>						
Source	<xsd:element name="territorial" type="territorial" maxOccurs="1" minOccurs="0"/>						

Element territorial / territory

Namespace	No namespace
-----------	--------------

Diagram											
Type	territory										
Type hierarchy	<ul style="list-style-type: none"> xsd:string <ul style="list-style-type: none"> countryCode territory 										
Properties	<table border="1"> <tr> <td>content:</td> <td>complex</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>unbounded</td> </tr> </table>	content:	complex	minOccurs:	0	maxOccurs:	unbounded				
content:	complex										
minOccurs:	0										
maxOccurs:	unbounded										
Attributes	<table border="1"> <thead> <tr> <th>QName</th> <th>Type</th> <th>Fixed</th> <th>Default</th> <th>Use</th> </tr> </thead> <tbody> <tr> <td>type</td> <td>allowance</td> <td></td> <td></td> <td>optional</td> </tr> </tbody> </table>	QName	Type	Fixed	Default	Use	type	allowance			optional
QName	Type	Fixed	Default	Use							
type	allowance			optional							
Source	<code><xsd:element name="territory" type="territory" maxOccurs="unbounded" minOccurs="0" /></code>										

Element license_basis / timeframe


Namespace	No namespace						
Diagram							
Type	timeframe						
Properties	<table border="1"> <tr> <td>content:</td> <td>complex</td> </tr> <tr> <td>minOccurs:</td> <td>1</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	complex	minOccurs:	1	maxOccurs:	1
content:	complex						
minOccurs:	1						
maxOccurs:	1						
Model	from , to						
Children	from, to						
Instance	<pre><timeframe> <from>{1,1}</from> <to>{1,1}</to> </timeframe></pre>						
Source	<code><xsd:element name="timeframe" type="timeframe" maxOccurs="1" minOccurs="1" /></code>						

Element timeframe / from

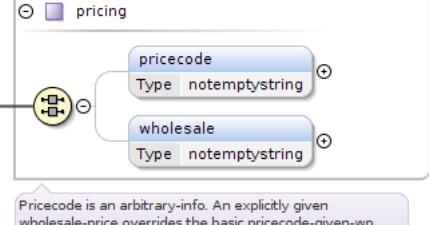
Namespace	No namespace
Diagram	
Type	datetimeGMT
Properties	content: simple

Facets	pattern	$\text{\d\{4\}-\d\{2\}-\d\{2\} \d\{2\}:}$ $\d\{2\}:\d\{2\} \text{ GMT}\+\d\{2\}:$ $\d\{2\}$
Source		<xsd:element name="from" type="datetimeGMT"/>

Element timeframe / to

Namespace	No namespace
Diagram	
Type	datetimeGMT
Properties	content: simple
Facets	pattern $\text{\d\{4\}-\d\{2\}-\d\{2\} \d\{2\}:}$ $\d\{2\}:\d\{2\} \text{ GMT}\+\d\{2\}:$ $\d\{2\}$
Source	<xsd:element name="to" type="datetimeGMT"/>

Element license_basis / pricing


Namespace	No namespace
Diagram	 <p>Pricecode is an arbitrary-info. An explicitly given wholesale-price overrides the basic pricecode-given-wp. Most...</p>
Type	pricing
Properties	content: complex minOccurs: 0 maxOccurs: 1
Model	ALL(pricecode{0,1} wholesale{0,1})
Children	pricecode, wholesale
Instance	<pricing> <pricecode>{0,1}</pricecode> <wholesale>{0,1}</wholesale> </pricing>
Source	<xsd:element name="pricing" type="pricing" maxOccurs="1" minOccurs="0"/>

Element pricing / pricecode

Namespace	No namespace
Diagram	
Type	notemptystring
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	minLength 1
Source	<xsd:element name="pricecode" type="notemptystring" maxOccurs="1" minOccurs="0"/>

Element pricing / wholesale


Namespace	No namespace
-----------	--------------

Diagram	
Type	notemptystring
Properties	<p>content: simple</p> <p>minOccurs: 0</p> <p>maxOccurs: 1</p>
Facets	<p>minLength 1</p>
Source	<code><xsd:element name="wholesale" type="notemptystring" maxOccurs="1" minOccurs="0" /></code>

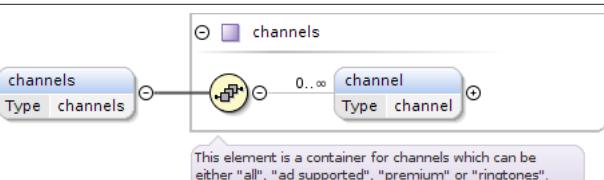
Element license_basis / download_allowed

Namespace	No namespace
Diagram	
Type	xsd:boolean
Properties	<p>content: simple</p> <p>minOccurs: 0</p> <p>maxOccurs: 1</p>
Source	<code><xsd:element name="download_allowed" type="xsd:boolean" maxOccurs="1" minOccurs="0" /></code>

Element license_basis / streaming_allowed

Namespace	No namespace
Diagram	
Type	xsd:boolean
Properties	<p>content: simple</p> <p>minOccurs: 1</p> <p>maxOccurs: 1</p>
Source	<code><xsd:element name="streaming_allowed" type="xsd:boolean" maxOccurs="1" minOccurs="1" /></code>

Element license_basis / channels

Namespace	No namespace
Diagram	
Type	channels
Properties	<p>content: complex</p> <p>minOccurs: 0</p> <p>maxOccurs: 1</p>
Model	channel*
Children	channel
Instance	<code><channels> <channel download_allowed="" streaming_allowed="" type="">{0,unbounded}</channel></code>

	</channels>
Source	<xsd:element name="channels" type="channels" maxOccurs="1" minOccurs="0" />

Element channels / channel

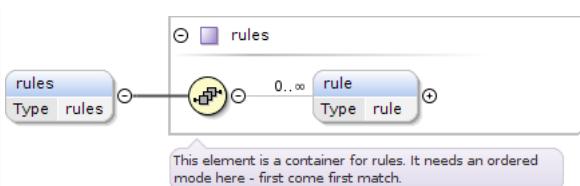
Namespace	No namespace																				
Diagram																					
Type	channel																				
Properties	<table> <tr> <td>content:</td> <td>complex</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>unbounded</td> </tr> </table>	content:	complex	minOccurs:	0	maxOccurs:	unbounded														
content:	complex																				
minOccurs:	0																				
maxOccurs:	unbounded																				
Attributes	<table> <thead> <tr> <th>QName</th> <th>Type</th> <th>Fixed</th> <th>Default</th> <th>Use</th> </tr> </thead> <tbody> <tr> <td>download_allowed</td> <td>xsd:boolean</td> <td></td> <td></td> <td>optional</td> </tr> <tr> <td>streaming_allowed</td> <td>xsd:boolean</td> <td></td> <td></td> <td>optional</td> </tr> <tr> <td>type</td> <td>allowance</td> <td></td> <td></td> <td>required</td> </tr> </tbody> </table>	QName	Type	Fixed	Default	Use	download_allowed	xsd:boolean			optional	streaming_allowed	xsd:boolean			optional	type	allowance			required
QName	Type	Fixed	Default	Use																	
download_allowed	xsd:boolean			optional																	
streaming_allowed	xsd:boolean			optional																	
type	allowance			required																	
Source	<xsd:element name="channel" type="channel" maxOccurs="unbounded" minOccurs="0" />																				

Element bundle / license_specifics

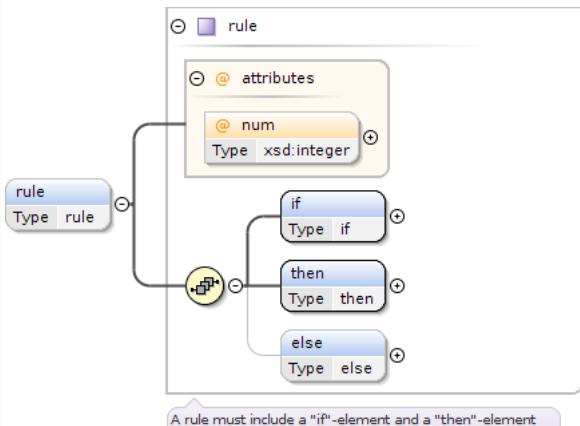
Namespace	No namespace						
Diagram							
Type	license_specifics						
Properties	<table> <tr> <td>content:</td> <td>complex</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	complex	minOccurs:	0	maxOccurs:	1
content:	complex						
minOccurs:	0						
maxOccurs:	1						
Model	ALL(rules{0,1})						
Children	rules						
Instance	<license_specifics><rules>{0,1}</rules></license_specifics>						
Source	<xsd:element name="license_specifics" type="license_specifics" maxOccurs="1" minOccurs="0" />						

Element license_specifics / rules

Namespace	No namespace
-----------	--------------

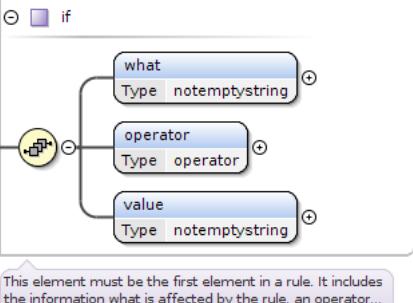
Diagram	
Type	rules
Properties	<p>content: complex</p> <p>minOccurs: 0</p> <p>maxOccurs: 1</p>
Model	rule*
Children	rule
Instance	<pre><rules> <rule num="">{0,unbounded}</rule> </rules></pre>
Source	<code><xsd:element name="rules" type="rules" maxOccurs="1" minOccurs="0" /></code>

Element rules / rule

Namespace	No namespace										
Diagram											
Type	rule										
Properties	<p>content: complex</p> <p>minOccurs: 0</p> <p>maxOccurs: unbounded</p>										
Model	if , then , else{0,1}										
Children	else, if, then										
Instance	<pre><rule num=""> <if>{1,1}</if> <then>{1,1}</then> <else>{0,1}</else> </rule></pre>										
Attributes	<table border="1"> <thead> <tr> <th>QName</th> <th>Type</th> <th>Fixed</th> <th>Default</th> <th>Use</th> </tr> </thead> <tbody> <tr> <td>num</td> <td>xsd:integer</td> <td></td> <td></td> <td>optional</td> </tr> </tbody> </table>	QName	Type	Fixed	Default	Use	num	xsd:integer			optional
QName	Type	Fixed	Default	Use							
num	xsd:integer			optional							
Source	<code><xsd:element name="rule" type="rule" maxOccurs="unbounded" minOccurs="0" /></code>										

Element rule / if


Namespace	No namespace
-----------	--------------

Diagram	
Type	if
Properties	content: complex
Model	what , operator , value
Children	operator, value, what
Instance	<pre><if> <what>{1,1}</what> <operator>{1,1}</operator> <value>{1,1}</value> </if></pre>
Source	<code><xsd:element name="if" type="if"/></code>


Element if / what

Namespace	No namespace
Diagram	
Type	notemptystring
Properties	content: simple
Facets	minLength 1
Source	<code><xsd:element name="what" type="notemptystring"/></code>

Element if / operator

Namespace	No namespace
Diagram	
Type	operator
Properties	content: simple
Facets	enumeration equals enumeration before enumeration after enumeration contains enumeration containedin
Source	<code><xsd:element name="operator" type="operator"/></code>

Element if / value

Namespace	No namespace
Diagram	
Type	notemptystring
Properties	content: simple
Facets	minLength 1

Source	<code><xsd:element name="value" type="notemptystring" /></code>
--------	---

Element rule / then

Namespace	No namespace
Diagram	<pre> classDiagram class then { <<then>> <<Type then>> } class proclaim { <<proclaim>> <<Type proclaim>> } class echo { <<echo>> <<Type notemptystring>> } class break { <<break>> } then "0..oo" -- "*" proclaim then "*" -- "*" echo then "*" -- "*" break </pre>
Type	then
Properties	content: complex
Model	proclaim*, echo{0,1} , break{0,1}
Children	break, echo, proclaim
Instance	<pre> <then> <proclaim>{0,unbounded}</proclaim> <echo>{0,1}</echo> <break>{0,1}</break> </then> </pre>
Source	<code><xsd:element name="then" type="then" /></code>

Element then / proclaim


Namespace	No namespace
Diagram	<pre> classDiagram class proclaim { <<proclaim>> <<Type proclaim>> } class what { <<what>> <<Type notemptystring>> } class for { <<for>> <<Type notemptystring>> } proclaim "*" -- "*" what proclaim "*" -- "*" for </pre>
Type	proclaim
Properties	<p>content: complex</p> <p>minOccurs: 0</p> <p>maxOccurs: unbounded</p>
Model	what , for
Children	for, what
Instance	<pre> <proclaim> <what>{1,1}</what> <for>{1,1}</for> </proclaim> </pre>
Source	<code><xsd:element name="proclaim" type="proclaim" maxOccurs="unbounded" minOccurs="0" /></code>

Element proclaim / what


Namespace	No namespace
Diagram	<pre> classDiagram class what { <<what>> <<Type notemptystring>> } class notemptystring { <<notemptystring>> } what "*" -- "1" notemptystring </pre>
Type	notemptystring
Properties	content: simple
Facets	minLength 1

Source	<code><xsd:element name="what" type="notemptystring" /></code>
--------	--

Element proclaim / for

Namespace	No namespace
Diagram	
Type	notemptystring
Properties	content: simple
Facets	minLength 1
Source	<code><xsd:element name="for" type="notemptystring" /></code>

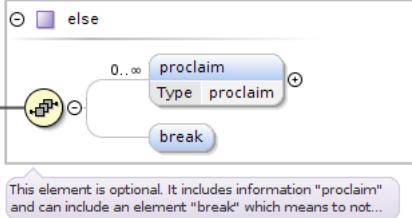
Element then / echo

Namespace	No namespace
Diagram	
Type	notemptystring
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	minLength 1
Source	<code><xsd:element name="echo" type="notemptystring" maxOccurs="1" minOccurs="0" /></code>

Element then / break

Namespace	No namespace
Diagram	
Properties	minOccurs: 0 maxOccurs: 1
Source	<code><xsd:element name="break" maxOccurs="1" minOccurs="0" /></code>

Element rule / else

Namespace	No namespace
Diagram	 <p>This element is optional. It includes information "proclaim" and can include an element "break" which means to not...</p>
Type	else
Properties	content: complex minOccurs: 0 maxOccurs: 1
Model	proclaim*, break{0,1}
Children	break, proclaim
Instance	<code><else> <proclaim>{0,unbounded}</proclaim> <break>{0,1}</break> </else></code>
Source	<code><xsd:element name="else" type="else" maxOccurs="1" minOccurs="0" /></code>

Element else / proclaim

Namespace	No namespace						
Diagram	<pre> classDiagram class proclaim { <> --> <> } note over <> --> <> { This element includes the information what is affected and the corresponding value. } </pre>						
Type	proclaim						
Properties	<table border="1"> <tr> <td>content:</td> <td>complex</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>unbounded</td> </tr> </table>	content:	complex	minOccurs:	0	maxOccurs:	unbounded
content:	complex						
minOccurs:	0						
maxOccurs:	unbounded						
Model	what , for						
Children	for, what						
Instance	<proclaim> <what>{1,1}</what> <for>{1,1}</for> </proclaim>						
Source	<xsd:element name="proclaim" type="proclaim" maxOccurs="unbounded" minOccurs="0"/>						

Element else / break

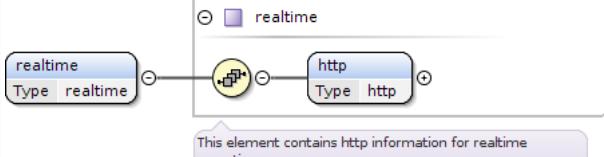
Namespace	No namespace				
Diagram	<pre> classDiagram class break { <> --> <> } </pre>				
Properties	<table border="1"> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	minOccurs:	0	maxOccurs:	1
minOccurs:	0				
maxOccurs:	1				
Source	<xsd:element name="break" maxOccurs="1" minOccurs="0"/>				

Element bundle / reporting

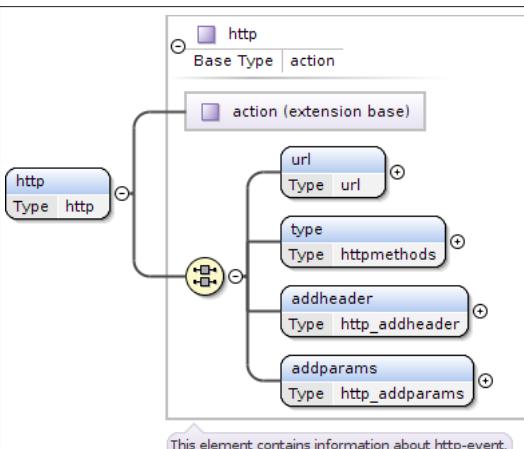
Namespace	No namespace						
Diagram	<pre> classDiagram class reporting { <> --> <> } note over <> --> <> { This element contains information about reporting. } </pre>						
Type	reporting						
Properties	<table border="1"> <tr> <td>content:</td> <td>complex</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	complex	minOccurs:	0	maxOccurs:	1
content:	complex						
minOccurs:	0						
maxOccurs:	1						
Model	ALL(realtime postponed)						
Children	postponed, realtime						
Instance	<reporting> <realtime>{1,1}</realtime> <postponed>{1,1}</postponed> </reporting>						
Source	<xsd:element name="reporting" type="reporting" maxOccurs="1" minOccurs="0"/>						

Element reporting / realtime

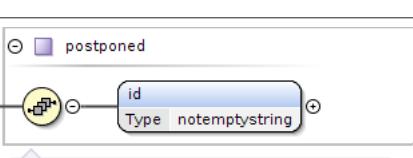
Namespace	No namespace
-----------	--------------

Diagram	
Type	realtime
Properties	content: complex
Model	http
Children	http
Instance	<realtime> <http>{1,1}</http> </realtime>
Source	<xsd:element name="realtime" type="realtime"/>

Element realtime / http

Namespace	No namespace
Diagram	
Type	http
Type hierarchy	<ul style="list-style-type: none"> • action • http
Properties	content: complex
Model	ALL(url type addheader addparams)
Children	addheader, addparams, type, url
Instance	<http> <url>{1,1}</url> <type>{1,1}</type> <addheader>{1,1}</addheader> <addparams>{1,1}</addparams> </http>
Source	<xsd:element name="http" type="http"/>

Element reporting / postponed

Namespace	No namespace
Diagram	
Type	postponed

Properties	content: complex
Model	id
Children	id
Instance	<postponed> <id>{1,1}</id> </postponed>
Source	<xsd:element name="postponed" type="postponed" />

Element postponed / id

Namespace	No namespace
Diagram	
Type	notemptystring
Properties	content: simple
Facets	minLength 1
Source	<xsd:element name="id" type="notemptystring" />

Element bundle / tags

Namespace	No namespace
Diagram	
Type	tags
Properties	content: complex minOccurs: 0 maxOccurs: 1
Model	ALL(genres{0,1} bundle_only{0,1} explicit_lyrics{0,1} recommended_age_from{0,1} live{0,1} acoustic{0,1} instrumental{0,1} abridged{0,1})
Children	abridged, acoustic, bundle_only, explicit_lyrics, genres, instrumental, live, recommended_age_from
Instance	<tags> <genres>{0,1}</genres> <bundle_only>{0,1}</bundle_only> <explicit_lyrics>{0,1}</explicit_lyrics> <recommended_age_from>{0,1}</recommended_age_from> <live>{0,1}</live> <acoustic>{0,1}</acoustic> <instrumental>{0,1}</instrumental> <abridged>{0,1}</abridged> </tags>

Source	<code><xsd:element name="tags" type="tags" maxOccurs="1" minOccurs="0"/></code>
--------	---

Element tags / genres

Namespace	No namespace
Diagram	<p>This element contains a list of genres.</p>
Type	genres
Properties	<p>content: complex</p> <p>minOccurs: 0</p> <p>maxOccurs: 1</p>
Model	genre*
Children	genre
Instance	<code><genres> <genre>{0,unbounded}</genre> </genres></code>
Source	<code><xsd:element name="genres" type="tags" maxOccurs="1" minOccurs="0"/></code>

Element genres / genre

Namespace	No namespace
Diagram	<p>This element includes a list of openSDX-genres.</p>
Type	genre
Properties	<p>content: simple</p> <p>minOccurs: 0</p> <p>maxOccurs: unbounded</p>
Facets	<p>enumeration Rock</p> <p>enumeration Beat</p> <p>enumeration Blues Rock</p> <p>enumeration Rock'n'Roll</p> <p>enumeration Art Rock</p> <p>enumeration Classic Rock</p> <p>enumeration Deutschrock</p> <p>enumeration Emo</p> <p>enumeration Experimental Rock</p> <p>enumeration Glam Rock</p> <p>enumeration Hard Rock</p> <p>enumeration Krautrock</p> <p>enumeration Progressive Rock</p> <p>enumeration Psychedelic Rock</p> <p>enumeration Psychobilly Rock</p> <p>enumeration Rockabilly</p> <p>enumeration Soft Rock</p> <p>enumeration Southern Rock</p> <p>enumeration Surf Rock</p> <p>enumeration Alternative</p> <p>enumeration Crossover</p>

enumeration	Dark Wave
enumeration	Garage Rock
enumeration	Goth / Industrial
enumeration	Grunge
enumeration	Hardcore
enumeration	Indie Rock
enumeration	New Wave
enumeration	Punk
enumeration	Funpunk
enumeration	Black Metal
enumeration	Death Metal
enumeration	Heavy Metal
enumeration	Power Metal
enumeration	Thrash / Speed Metal
enumeration	Doom Metal
enumeration	Grind Core
enumeration	Pop
enumeration	Britpop
enumeration	Dance Pop
enumeration	Deutschpop
enumeration	Disco
enumeration	Easy Listening
enumeration	Electropop
enumeration	Euro Dance
enumeration	Euro Pop
enumeration	French Pop
enumeration	Indie Pop
enumeration	Italo Pop
enumeration	J-Pop
enumeration	K-Pop
enumeration	Neue Deutsche Welle
enumeration	New Age
enumeration	Pop Rock
enumeration	Power Pop
enumeration	Schlager
enumeration	Singer / Songwriter
enumeration	Synthpop
enumeration	Teen Pop
enumeration	Country
enumeration	Alternative Country
enumeration	Bluegrass
enumeration	Contemporary Folk
enumeration	Country Gospel
enumeration	Honky-Tonk
enumeration	Jewish / Yiddish Music
enumeration	Nashville Sound
enumeration	Outlaw / Progressive Country
enumeration	Texas Country

enumeration	Traditional Country
enumeration	Western Swing
enumeration	Folk
enumeration	Americana
enumeration	Folk Rock
enumeration	Irish Folk
enumeration	German Folk / Volksmusik
enumeration	Jazz
enumeration	Acid Jazz
enumeration	Avantgarde
enumeration	Bebop
enumeration	Big Band
enumeration	Classic Jazz
enumeration	Cool Jazz
enumeration	Dixieland music
enumeration	Free jazz
enumeration	Hard Bop
enumeration	Jazz Fusion
enumeration	New Orleans Jazz
enumeration	Nu-Jazz
enumeration	Smooth Jazz
enumeration	Swing
enumeration	Vocal Jazz
enumeration	Hip Hop
enumeration	Alternative Hip Hop
enumeration	Crunk
enumeration	Dirty South
enumeration	G-Funk
enumeration	Gangsta Rap
enumeration	Golden Era
enumeration	Grime
enumeration	Hyphy
enumeration	Instrumental Hip Hop
enumeration	Miami Bass
enumeration	New School
enumeration	Old School
enumeration	Turntablism
enumeration	US Eastcoast
enumeration	US Midwest
enumeration	US Southern
enumeration	US Westcoast
enumeration	Blues
enumeration	Boogie-Woogie
enumeration	Electric Blues Guitar
enumeration	Modern Blues
enumeration	Regional Blues
enumeration	Traditional Blues
enumeration	Soul
enumeration	Motown Sound

enumeration	Neo Soul
enumeration	Philly Sound
enumeration	Funk
enumeration	R&B
enumeration	Contemporary R&B
enumeration	Doo-wop
enumeration	Electronic
enumeration	Ambient
enumeration	Chill Out
enumeration	Lounge
enumeration	Downbeat
enumeration	Electronica
enumeration	Indie Disco
enumeration	Industrial / EBM
enumeration	Techno
enumeration	Dance
enumeration	Electro
enumeration	Glitch hop
enumeration	House
enumeration	Acid House
enumeration	Deep House
enumeration	Disco House
enumeration	Electro House
enumeration	Fidget House
enumeration	Hard House
enumeration	Progressive House
enumeration	Soulful House
enumeration	Tech House
enumeration	Tribal
enumeration	Vocal House
enumeration	Big Beat
enumeration	Breakbeat
enumeration	Drum 'n' Bass
enumeration	Dubstep
enumeration	Garage / UK Funky
enumeration	IDM
enumeration	Trip-Hop
enumeration	Trance
enumeration	Goa Trance
enumeration	Hard Trance
enumeration	Psychedelic Trance
enumeration	Gabba
enumeration	Jumpstyle / Hardstyle
enumeration	Classic
enumeration	Ancient music
enumeration	Medieval music
enumeration	Renaissance
enumeration	Baroque
enumeration	Classical period

enumeration	Romantic
enumeration	Neoromanticism
enumeration	Neoclassicism
enumeration	New Music / Contemporary Music
enumeration	Modern, 20th / 21st Century
enumeration	Postmodern Music
enumeration	Music and other Media / Arts
enumeration	Music and Word
enumeration	12-Tone Composition
enumeration	Anthem
enumeration	Ballet
enumeration	Cantata
enumeration	Chamber Music
enumeration	Choral
enumeration	Crossover / Popular Classicism
enumeration	Electronic Music / Computer Music
enumeration	Madrigal
enumeration	March
enumeration	Minimal Music
enumeration	Motet
enumeration	Musical
enumeration	Opera Arias
enumeration	Opera Baroque
enumeration	Opera Classical
enumeration	Opera Renaissance
enumeration	Opera Romantic
enumeration	Operetta
enumeration	Oratorio
enumeration	Passion
enumeration	Requiem
enumeration	Serialism
enumeration	Sonata
enumeration	Suite
enumeration	Symphonic Music / Orchestral Music
enumeration	Symphony
enumeration	Waltz
enumeration	Brass Ensemble
enumeration	Concerto / Solo Instrument with Orchestra
enumeration	Mixed Ensemble (Strings / Wind)
enumeration	Mixed Wind Ensemble (Woodwind / Brass)
enumeration	Several Solo Instruments
enumeration	Solo Instrument
enumeration	String Ensemble

enumeration	String Orchestra
enumeration	String Quartet
enumeration	String Trio
enumeration	Woodwind Ensemble
enumeration	A cappella
enumeration	Vocal Ensemble
enumeration	Vocal Music
enumeration	Choir
enumeration	Boy's Choir
enumeration	Children's Choir
enumeration	Choir with Orchestra
enumeration	Women's Choir
enumeration	Men's Choir
enumeration	Mixed Choir
enumeration	Soprano
enumeration	Mezzosoprano
enumeration	Alto
enumeration	Tenor
enumeration	Baritone
enumeration	Bass
enumeration	Accordion
enumeration	Ancient Instruments
enumeration	Bassoon
enumeration	Cembalo
enumeration	Clarinet
enumeration	Double Bass
enumeration	Flute
enumeration	Guitar
enumeration	Harp
enumeration	Harpsichord
enumeration	Horn
enumeration	Lute
enumeration	Mandolin
enumeration	Oboe
enumeration	Organ
enumeration	Percussion (Vibraphone etc.)
enumeration	Piano
enumeration	Recorder / English Flute
enumeration	Saxophone
enumeration	Trombone
enumeration	Trumpet
enumeration	Tuba
enumeration	Viola
enumeration	Violin
enumeration	Violoncello
enumeration	Miscellaneous Lead Instrument
enumeration	Reggae
enumeration	Contemporary Reggae

enumeration	Dancehall
enumeration	Dub
enumeration	Lover's Rock
enumeration	Reggaeton
enumeration	Roots
enumeration	Ska
enumeration	World
enumeration	African Music
enumeration	Afro Beat
enumeration	Afro Pop
enumeration	Asian Music
enumeration	Austropop
enumeration	Calypso
enumeration	Caribbean Music
enumeration	Celtic Music
enumeration	Chanson
enumeration	Coupé Decalé
enumeration	Enka
enumeration	European Music
enumeration	Ghazal
enumeration	Griot
enumeration	Gypsy
enumeration	Highlife
enumeration	Judaica Music / Yiddish / Klezmer
enumeration	Kuduro
enumeration	Kwaito
enumeration	Makossa
enumeration	Marching Band
enumeration	Mento
enumeration	Middle Eastern Music
enumeration	Nordic / Scandinavia
enumeration	North American Music
enumeration	South American Music
enumeration	Parang
enumeration	Polka
enumeration	Rai
enumeration	Soca
enumeration	Soukous
enumeration	Zouk
enumeration	Zulu
enumeration	Russion Chansons
enumeration	Dini
enumeration	Halk
enumeration	Sanat
enumeration	Dangdut
enumeration	Indonesian Religious
enumeration	Axé
enumeration	Baile Funk

enumeration	Brazilian
enumeration	Choro
enumeration	Forró
enumeration	Frevo
enumeration	MPB
enumeration	Pagode
enumeration	Sertanejo
enumeration	Chinese Alt
enumeration	Chinese Classical
enumeration	Chinese Flute
enumeration	Chinese Hip-Hop
enumeration	Chinese Opera
enumeration	Chinese Orchestral
enumeration	Chinese Regional Folk
enumeration	Chinese Rock
enumeration	Chinese Strings
enumeration	C-Pop
enumeration	Cantopop/HK Pop
enumeration	Kayokyoku
enumeration	Korean Classical
enumeration	Korean Folk-Pop
enumeration	Korean Hip-Hop
enumeration	Korean Indie
enumeration	Korean Rock
enumeration	Korean Trad Instrumental
enumeration	Korean Trad Song
enumeration	Korean Trad Theater
enumeration	Trot
enumeration	Original Pilipino Music
enumeration	Pinoy Pop
enumeration	Indo Pop
enumeration	Tai-Pop
enumeration	Taiwanese Folk
enumeration	Thai Pop
enumeration	Tibetan Native Music
enumeration	Indian - Tamil
enumeration	Indian - Telugu
enumeration	Indian - Regional Indian
enumeration	Indian - Indian Pop
enumeration	Indian - Devotional & Spiritual
enumeration	Indian - Sufi and Ghazals
enumeration	Indian - Indian Classical
enumeration	Latin
enumeration	Bachata
enumeration	Banda
enumeration	Bhangra
enumeration	Bolero
enumeration	Bossa Nova

enumeration	Corridos
enumeration	Cumbia
enumeration	Fado
enumeration	Flamenco
enumeration	Grupero
enumeration	Mambo
enumeration	Mariachi
enumeration	Merengue
enumeration	Norteno
enumeration	Ranchero
enumeration	Rock En Espanol
enumeration	Salsa
enumeration	Samba
enumeration	Son Cubana
enumeration	Sonidero
enumeration	Tango
enumeration	Tejano
enumeration	Religious
enumeration	Christian Rock
enumeration	Christian Hip Hop
enumeration	Christian Pop
enumeration	Chants
enumeration	Gospel
enumeration	Gregorian Music
enumeration	Hymn
enumeration	Mass
enumeration	Spiritual
enumeration	Worship
enumeration	Miscellaneous
enumeration	Anime / Video Game Soundtracks
enumeration	Bollywood
enumeration	Instrumental
enumeration	Vocal
enumeration	Acoustic
enumeration	Unplugged
enumeration	Live
enumeration	Traditional
enumeration	Karaoke
enumeration	Movie Scores
enumeration	Movie Soundtracks
enumeration	Sound Effects
enumeration	Soundtrack
enumeration	TV Soundtrack
enumeration	Wedding Music
enumeration	Holiday
enumeration	Chanukah
enumeration	Christmas
enumeration	Christmas: Children's

enumeration	Christmas: Classic
enumeration	Christmas: Classical
enumeration	Christmas: Jazz
enumeration	Christmas: Modern
enumeration	Christmas: Pop
enumeration	Christmas: R&B
enumeration	Christmas: Religious
enumeration	Christmas: Rock
enumeration	Easter
enumeration	Halloween
enumeration	Holiday: Other
enumeration	Thanksgiving
enumeration	Mashup
enumeration	Unclassifiable
enumeration	Word
enumeration	Business & Career
enumeration	Abstracts & Dossiers
enumeration	Accounting
enumeration	Business & Investing
enumeration	Communication
enumeration	Computers & Internet
enumeration	Economics
enumeration	Finance
enumeration	Management & Leadership
enumeration	Marketing & Sales
enumeration	Politics
enumeration	Self-Help
enumeration	Self-Organization
enumeration	Skills
enumeration	Small Business & Entrepeneurship
enumeration	Children's Audiobooks
enumeration	Popular Characters
enumeration	Animal Stories
enumeration	Children's Book Classics
enumeration	Children's Detective Stories
enumeration	Fairy Tales
enumeration	Fantasy & Spook
enumeration	Knowledge for Children
enumeration	Pirates, Knights & Historical
enumeration	Poems & Song
enumeration	Comedy & Humour
enumeration	Comedy & Cabaret
enumeration	Humoristic Novel
enumeration	Crime
enumeration	Detective Stories
enumeration	Detective Stories „Noir“
enumeration	Classic Detective Stories

enumeration	Scandinavian Detective Stories
enumeration	Temporary Detective Stories
enumeration	Education & Knowledge
enumeration	Art & Culture
enumeration	Biography & Memento
enumeration	Foreign Language
enumeration	History
enumeration	Philosophy
enumeration	Politics & Current Affairs
enumeration	Science & Technology
enumeration	Health, Mind & Body
enumeration	Autogenous Training
enumeration	Creativity
enumeration	Esoteric
enumeration	Fitness
enumeration	Health
enumeration	Lifestyle
enumeration	Love & Erotic
enumeration	Meditation / Yoga
enumeration	Memory Training
enumeration	Mental Training
enumeration	Motivation
enumeration	Philosophy
enumeration	Positive Thinking & Attitude
enumeration	Psychology
enumeration	Spirituality & Religion
enumeration	Sports
enumeration	Wellness & Beauty
enumeration	Science Fiction & Fantasy
enumeration	Ancient World
enumeration	Fantasy-Romance
enumeration	Historical Thriller
enumeration	Horror Classics
enumeration	Medieval Times & Early Modern Era
enumeration	Thriller
enumeration	Mystery & Conspiracy
enumeration	Psychological Thriller
enumeration	Espionage, Politics & Justice
enumeration	Vatican & Secret Societies
enumeration	Science & Medicine
enumeration	Literature
enumeration	Novels
enumeration	Erotica
enumeration	Romance

enumeration	Contemporary Literature
enumeration	Contemporary German Literature
enumeration	Entertainment
enumeration	Youth
enumeration	Youth Detective Stories
enumeration	Fantasy
enumeration	For Girls
enumeration	Knowledge for Teenagers
enumeration	Mystery
enumeration	Youth Classics
enumeration	Youth Today
enumeration	Language
enumeration	Albanian
enumeration	Arabic
enumeration	Bengali
enumeration	Bosnian
enumeration	Bulgarian
enumeration	Cantonese / Yue
enumeration	Croatian
enumeration	Czech
enumeration	Danish
enumeration	Dutch
enumeration	English
enumeration	Finnish
enumeration	French
enumeration	German
enumeration	Greek
enumeration	Hebrew
enumeration	Hindi / Urdu
enumeration	Hungarian
enumeration	Italian
enumeration	Japanese
enumeration	Korean
enumeration	Macedonian
enumeration	Mandarin
enumeration	Norwegian
enumeration	Patois
enumeration	Portuguese
enumeration	Russian
enumeration	Serbian
enumeration	Spanish
enumeration	Swedish
enumeration	Tamil
enumeration	Turkish
enumeration	Vietnamese
enumeration	Afrikaans
enumeration	Film
enumeration	Action

enumeration	3D
enumeration	Adventure
enumeration	Animation
enumeration	Author's Film
enumeration	Biography
enumeration	Cartoon
enumeration	Children
enumeration	Comedy
enumeration	Crime & Gangster
enumeration	Disaster
enumeration	Documentary
enumeration	Drama
enumeration	Epic / Historical
enumeration	Erotic
enumeration	Expressionism
enumeration	Family
enumeration	Fantasy
enumeration	Film-Noir
enumeration	GLBT
enumeration	Horror
enumeration	Independent Film
enumeration	Martial-Arts / Eastern
enumeration	Monumental
enumeration	Musical / Dance
enumeration	Music
enumeration	Mystery
enumeration	Reality-TV
enumeration	Romantic
enumeration	Science Fiction
enumeration	Silent Movie
enumeration	Sport
enumeration	Thriller
enumeration	TV-Series
enumeration	Tragicomedy
enumeration	War / Anti-War
enumeration	Western
enumeration	Youth
enumeration	Time
enumeration	Middle Ages
enumeration	20's
enumeration	30's
enumeration	40's
enumeration	50's
enumeration	60's
enumeration	70'
enumeration	80's
enumeration	90's
enumeration	2000's
enumeration	2010's

enumeration	2020's
enumeration	Adult
enumeration	Children
enumeration	Age: up to 6 years
enumeration	Age: 6 years +
enumeration	Age: 8 years +
enumeration	Kids & Family
enumeration	Lullabies
enumeration	Sing-Along
enumeration	Stories
enumeration	Country
enumeration	United Arab Emirates (AE)
enumeration	Afghanistan (AF)
enumeration	Antigua and Barbuda (AG)
enumeration	Anguilla (AI)
enumeration	Albania (AL)
enumeration	Armenia (AM)
enumeration	Angola (AO)
enumeration	Antarctica (AQ)
enumeration	Argentina (AR)
enumeration	American Samoa (AS)
enumeration	Austria (AT)
enumeration	Australia (AU)
enumeration	Aruba (AW)
enumeration	Åland Islands (AX)
enumeration	Azerbaijan (AZ)
enumeration	Bosnia and Herzegovina (BA)
enumeration	Barbados (BB)
enumeration	Bangladesh (BD)
enumeration	Belgium (BE)
enumeration	Burkina Faso (BF)
enumeration	Bulgaria (BG)
enumeration	Bahrain (BH)
enumeration	Burundi (BI)
enumeration	Benin (BJ)
enumeration	Saint Barthélemy (BL)
enumeration	Bermuda (BM)
enumeration	Brunei Darussalam (BN)
enumeration	Bolivia Plurinational State of (BO)
enumeration	Bonaire Saint Eustatius and Saba (BQ)
enumeration	Brazil (BR)
enumeration	Bahamas (BS)
enumeration	Bhutan (BT)
enumeration	Bouvet Island (BV)
enumeration	Botswana (BW)
enumeration	Belarus (BY)
enumeration	Belize (BZ)

enumeration	Canada (CA)
enumeration	Cocos (Keeling) Islands (CC)
enumeration	Congo the Democratic Republic of the (CD)
enumeration	Central African Republic (CF)
enumeration	Congo (CG)
enumeration	Switzerland (CH)
enumeration	Côte d'Ivoire (CI)
enumeration	Cook Islands (CK)
enumeration	Chile (CL)
enumeration	Cameroon (CM)
enumeration	China (CN)
enumeration	Colombia (CO)
enumeration	Costa Rica (CR)
enumeration	Cuba (CU)
enumeration	Cape Verde (CV)
enumeration	Curaçao (CW)
enumeration	Christmas Island (CX)
enumeration	Cyprus (CY)
enumeration	Czech Republic (CZ)
enumeration	Germany (DE)
enumeration	Djibouti (DJ)
enumeration	Denmark (DK)
enumeration	Dominica (DM)
enumeration	Dominican Republic (DO)
enumeration	Algeria (DZ)
enumeration	Ecuador (EC)
enumeration	Estonia (EE)
enumeration	Egypt (EG)
enumeration	Western Sahara (EH)
enumeration	Eritrea (ER)
enumeration	Spain (ES)
enumeration	Ethiopia (ET)
enumeration	Finland (FI)
enumeration	Fiji (FJ)
enumeration	Falkland Islands (Malvinas) (FK)
enumeration	Micronesia Federated States of (FM)
enumeration	Faroe Islands (FO)
enumeration	France (FR)
enumeration	Gabon (GA)
enumeration	United Kingdom (GB)
enumeration	Grenada (GD)
enumeration	Georgia (GE)
enumeration	French Guiana (GF)
enumeration	Guernsey (GG)
enumeration	Ghana (GH)
enumeration	Gibraltar (GI)

enumeration	Greenland (GL)
enumeration	Gambia (GM)
enumeration	Guinea (GN)
enumeration	Guadeloupe (GP)
enumeration	Equatorial Guinea (GQ)
enumeration	Greece (GR)
enumeration	South Georgia and the South Sandwich Islands (GS)
enumeration	Guatemala (GT)
enumeration	Guam (GU)
enumeration	Guinea-Bissau (GW)
enumeration	Guyana (GY)
enumeration	Hong Kong (HK)
enumeration	Heard Island and McDonald Islands (HM)
enumeration	Honduras (HN)
enumeration	Croatia (HR)
enumeration	Haiti (HT)
enumeration	Hungary (HU)
enumeration	Indonesia (ID)
enumeration	Ireland (IE)
enumeration	Israel (IL)
enumeration	Isle of Man (IM)
enumeration	India (IN)
enumeration	British Indian Ocean Territory (IO)
enumeration	Iraq (IQ)
enumeration	Iran Islamic Republic of (IR)
enumeration	Iceland (IS)
enumeration	Italy (IT)
enumeration	Jersey (JE)
enumeration	Jamaica (JM)
enumeration	Jordan (JO)
enumeration	Japan (JP)
enumeration	Kenya (KE)
enumeration	Kyrgyzstan (KG)
enumeration	Cambodia (KH)
enumeration	Kiribati (KI)
enumeration	Comoros (KM)
enumeration	Saint Kitts and Nevis (KN)
enumeration	Korea Democratic People's Republic of (KP)
enumeration	Korea Republic of (KR)
enumeration	Kuwait (KW)
enumeration	Cayman Islands (KY)
enumeration	Kazakhstan (KZ)
enumeration	Lao People's Democratic Republic (LA)
enumeration	Lebanon (LB)

enumeration	Saint Lucia (LC)
enumeration	Liechtenstein (LI)
enumeration	Sri Lanka (LK)
enumeration	Liberia (LR)
enumeration	Lesotho (LS)
enumeration	Lithuania (LT)
enumeration	Luxembourg (LU)
enumeration	Latvia (LV)
enumeration	Libyan Arab Jamahiriya (LY)
enumeration	Morocco (MA)
enumeration	Monaco (MC)
enumeration	Moldova Republic of (MD)
enumeration	Montenegro (ME)
enumeration	Saint Martin (French part) (MF)
enumeration	Madagascar (MG)
enumeration	Marshall Islands (MH)
enumeration	Macedonia the former Yugoslav Republic of (MK)
enumeration	Mali (ML)
enumeration	Myanmar (MM)
enumeration	Mongolia (MN)
enumeration	Macao (MO)
enumeration	Northern Mariana Islands (MP)
enumeration	Martinique (MQ)
enumeration	Mauritania (MR)
enumeration	Montserrat (MS)
enumeration	Malta (MT)
enumeration	Mauritius (MU)
enumeration	Maldives (MV)
enumeration	Malawi (MW)
enumeration	Mexico (MX)
enumeration	Malaysia (MY)
enumeration	Mozambique (MZ)
enumeration	Namibia (NA)
enumeration	New Caledonia (NC)
enumeration	Niger (NE)
enumeration	Norfolk Island (NF)
enumeration	Nigeria (NG)
enumeration	Nicaragua (NI)
enumeration	Netherlands (NL)
enumeration	Norway (NO)
enumeration	Nepal (NP)
enumeration	Nauru (NR)
enumeration	Niue (NU)
enumeration	New Zealand (NZ)
enumeration	Oman (OM)
enumeration	Panama (PA)

enumeration	Peru (PE)
enumeration	French Polynesia (PF)
enumeration	Papua New Guinea (PG)
enumeration	Philippines (PH)
enumeration	Pakistan (PK)
enumeration	Poland (PL)
enumeration	Saint Pierre and Miquelon (PM)
enumeration	Pitcairn (PN)
enumeration	Puerto Rico (PR)
enumeration	Palestinian Territory Occupied (PS)
enumeration	Portugal (PT)
enumeration	Palau (PW)
enumeration	Paraguay (PY)
enumeration	Qatar (QA)
enumeration	Réunion (RE)
enumeration	Romania (RO)
enumeration	Serbia (RS)
enumeration	Russian Federation (RU)
enumeration	Rwanda (RW)
enumeration	Saudi Arabia (SA)
enumeration	Solomon Islands (SB)
enumeration	Seychelles (SC)
enumeration	Sudan (SD)
enumeration	Sweden (SE)
enumeration	Singapore (SG)
enumeration	Saint Helena Ascension and Tristan da Cunha (SH)
enumeration	Slovenia (SI)
enumeration	Svalbard and Jan Mayen (SJ)
enumeration	Slovakia (SK)
enumeration	Sierra Leone (SL)
enumeration	San Marino (SM)
enumeration	Senegal (SN)
enumeration	Somalia (SO)
enumeration	Suriname (SR)
enumeration	South Sudan (SS)
enumeration	Sao Tome and Principe (ST)
enumeration	El Salvador (SV)
enumeration	Sint Maarten (Dutch part) (SX)
enumeration	Syrian Arab Republic (SY)
enumeration	Swaziland (SZ)
enumeration	Turks and Caicos Islands (TC)
enumeration	Chad (TD)
enumeration	French Southern Territories (TF)
enumeration	Togo (TG)

enumeration	Thailand (TH)
enumeration	Tajikistan (TJ)
enumeration	Tokelau (TK)
enumeration	Timor-Leste (TL)
enumeration	Turkmenistan (TM)
enumeration	Tunisia (TN)
enumeration	Tonga (TO)
enumeration	Turkey (TR)
enumeration	Trinidad and Tobago (TT)
enumeration	Tuvalu (TV)
enumeration	Taiwan Province of China (TW)
enumeration	Tanzania United Republic of (TZ)
enumeration	Ukraine (UA)
enumeration	Uganda (UG)
enumeration	United States Minor Outlying Islands (UM)
enumeration	United States (US)
enumeration	Uruguay (UY)
enumeration	Uzbekistan (UZ)
enumeration	Holy See (Vatican City State) (VA)
enumeration	Saint Vincent and the Grenadines (VC)
enumeration	Venezuela Bolivarian Republic of (VE)
enumeration	Virgin Islands British (VG)
enumeration	Virgin Islands U.S. (VI)
enumeration	Viet Nam (VN)
enumeration	Vanuatu (VU)
enumeration	Wallis and Futuna (WF)
enumeration	Samoa (WS)
enumeration	Yemen (YE)
enumeration	Mayotte (YT)
enumeration	South Africa (ZA)
enumeration	Zambia (ZM)
enumeration	Zimbabwe (ZW)
enumeration	Axé
enumeration	Baile Funk
enumeration	Brazilian
enumeration	Choro
enumeration	Forró
enumeration	Frevo
enumeration	MPB
enumeration	Pagode
enumeration	Sertanejo
enumeration	Chinese Alt
enumeration	Chinese Classical
enumeration	Chinese Flute

enumeration	Chinese Hip-Hop
enumeration	Chinese Opera
enumeration	Chinese Orchestral
enumeration	Chinese Regional Folk
enumeration	Chinese Rock
enumeration	Chinese Strings
enumeration	C-Pop
enumeration	Cantopop/HK Pop
enumeration	Kayokyoku
enumeration	Korean Classical
enumeration	Korean Folk-Pop
enumeration	Korean Hip-Hop
enumeration	Korean Indie
enumeration	Korean Rock
enumeration	Korean Trad Instrumental
enumeration	Korean Trad Song
enumeration	Korean Trad Theater
enumeration	Trot
enumeration	Original Pilipino Music
enumeration	Pinoy Pop
enumeration	Indo Pop
enumeration	Tai-Pop
enumeration	Taiwanese Folk
enumeration	Thai Pop
enumeration	Tibetan Native Music
Source	<xsd:element name="genre" type="g:genre" maxOccurs="unbounded" minOccurs="0" />

Element tags / bundle_only

Namespace	No namespace
Diagram	
Type	xsd:boolean
Properties	content: simple minOccurs: 0 maxOccurs: 1
Source	<xsd:element name="bundle_only" type="xsd:boolean" maxOccurs="1" minOccurs="0" />

Element tags / explicit_lyrics

Namespace	No namespace
Diagram	
Type	explicitLyrics
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	enumeration true enumeration false

	enumeration	cleaned
Source	<xsd:element name="explicit_lyrics" type="explicitLyrics" maxOccurs="1" minOccurs="0" />	

Element tags / recommended_age_from

Namespace	No namespace						
Diagram	<p>The diagram shows a box labeled "recommended_age_from" with a sub-box "Type xsd:integer". A line connects them with a small circle at the end.</p> <p>Built-in derived type. The integer datatype is derived from decimal by fixing the value of fractionDigits to be 0. This...</p>						
Type	xsd:integer						
Properties	<table border="1"> <tr> <td>content:</td> <td>simple</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Source	<xsd:element name="recommended_age_from" type="xsd:integer" maxOccurs="1" minOccurs="0" />						

Element tags / live

Namespace	No namespace						
Diagram	<p>The diagram shows a box labeled "live" with a sub-box "Type xsd:boolean". A line connects them with a small circle at the end.</p> <p>Built-in primitive type. It defines the boolean values true and false.</p>						
Type	xsd:boolean						
Properties	<table border="1"> <tr> <td>content:</td> <td>simple</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Source	<xsd:element name="live" type="xsd:boolean" maxOccurs="1" minOccurs="0" />						

Element tags / accoustic

Namespace	No namespace						
Diagram	<p>The diagram shows a box labeled "accoustic" with a sub-box "Type xsd:boolean". A line connects them with a small circle at the end.</p> <p>Built-in primitive type. It defines the boolean values true and false.</p>						
Type	xsd:boolean						
Properties	<table border="1"> <tr> <td>content:</td> <td>simple</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Source	<xsd:element name="accoustic" type="xsd:boolean" maxOccurs="1" minOccurs="0" />						

Element tags / instrumental

Namespace	No namespace						
Diagram	<p>The diagram shows a box labeled "instrumental" with a sub-box "Type xsd:boolean". A line connects them with a small circle at the end.</p> <p>Built-in primitive type. It defines the boolean values true and false.</p>						
Type	xsd:boolean						
Properties	<table border="1"> <tr> <td>content:</td> <td>simple</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Source	<xsd:element name="instrumental" type="xsd:boolean" maxOccurs="1" minOccurs="0" />						

Element tags / abridged

Namespace	No namespace						
Diagram	<p>The diagram shows a blue rounded rectangle labeled "abridged" with a small "Type" label below it. An arrow points from this box to another blue rounded rectangle labeled "xsd:boolean" with a small "Type" label below it. A callout bubble next to the arrow contains the text: "Built-in primitive type. It defines the boolean values true and false."</p>						
Type	xsd:boolean						
Properties	<table border="1"> <tr> <td>content:</td> <td>simple</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Source	<code><xsd:element name="abridged" type="xsd:boolean" maxOccurs="1" minOccurs="0" /></code>						

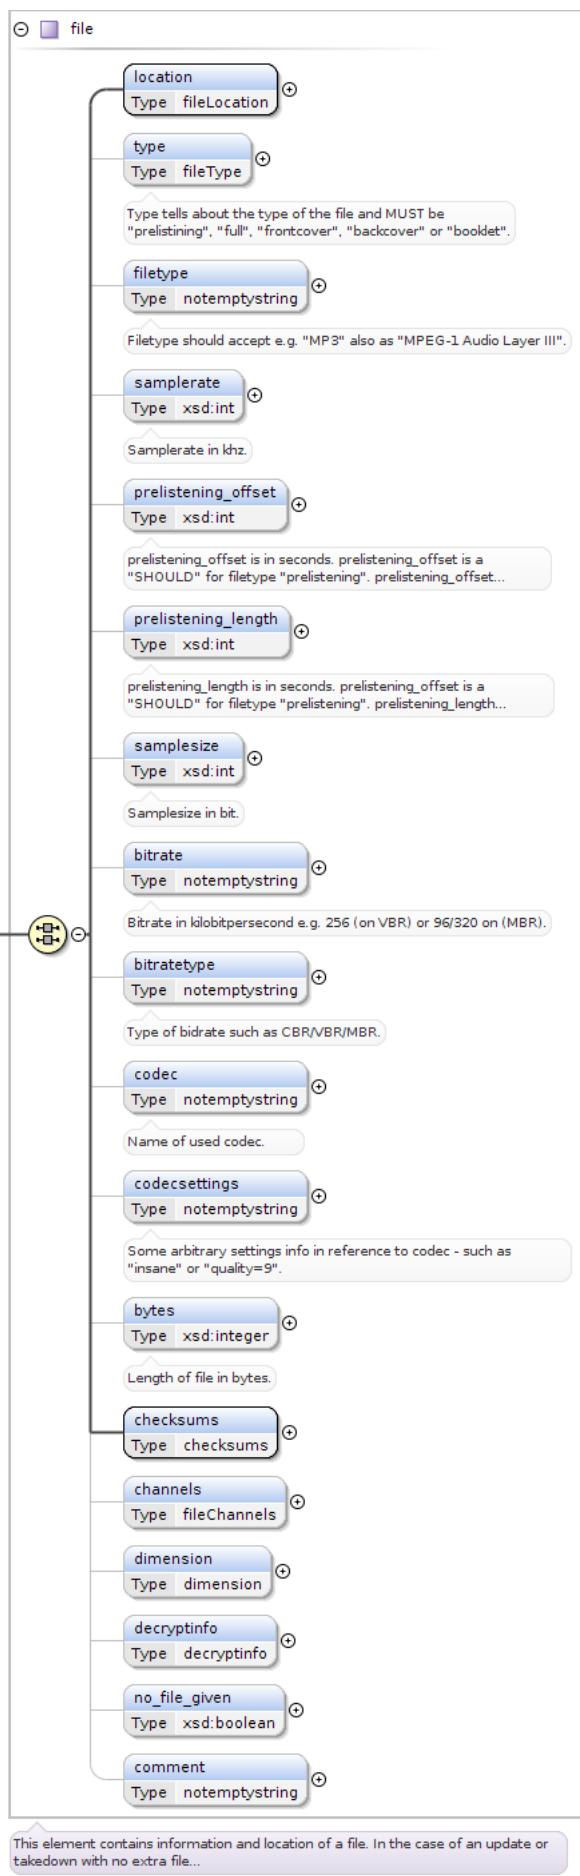
Element bundle / files

Namespace	No namespace						
Diagram	<p>The diagram shows a blue rounded rectangle labeled "files" with a small "Type" label below it. An arrow points from this box to a yellow circle containing a plus sign, which is connected to a blue rounded rectangle labeled "file" with a small "Type" label below it. A callout bubble next to the arrow contains the text: "This element contains a list of files."</p>						
Type	files						
Properties	<table border="1"> <tr> <td>content:</td> <td>complex</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	complex	minOccurs:	0	maxOccurs:	1
content:	complex						
minOccurs:	0						
maxOccurs:	1						
Model	file*						
Children	file						
Instance	<code><files> <file>{0,unbounded}</file> </files></code>						
Source	<code><xsd:element name="files" type="files" maxOccurs="1" minOccurs="0" /></code>						

Element files / file

Namespace	No namespace
-----------	--------------

Diagram



Type	file
Properties	<p>content: complex</p> <p>minOccurs: 0</p> <p>maxOccurs: unbounded</p>
Model	ALL(location type{0,1} filetype{0,1} samplerate{0,1} prelistening_offset{0,1} prelistening_length{0,1} samplesize{0,1} bitrate{0,1} bitratetype{0,1} codec{0,1} codecsettings{0,1} bytes{0,1} checksums channels{0,1} dimension{0,1} decryptinfo{0,1} no_file_given{0,1} comment{0,1})
Children	bitrate, bitratetype, bytes, channels, checksums, codec, codecsettings, comment, decryptinfo, dimension, filetype, location, no_file_given, prelistening_length, prelistening_offset, samplerate, samplesize, type
Instance	<pre><file> <location>{1,1}</location> <type>{0,1}</type> <filetype>{0,1}</filetype> <samplerate>{0,1}</samplerate> <prelistening_offset>{0,1}</prelistening_offset> <prelistening_length>{0,1}</prelistening_length> <samplesize>{0,1}</samplesize> <bitrate>{0,1}</bitrate> <bitratetype>{0,1}</bitratetype> <codec>{0,1}</codec> <codecsettings>{0,1}</codecsettings> <bytes>{0,1}</bytes> <checksums>{1,1}</checksums> <channels>{0,1}</channels> <dimension>{0,1}</dimension> <decryptinfo>{0,1}</decryptinfo> <no_file_given>{0,1}</no_file_given> <comment>{0,1}</comment> </file></pre>
Source	<code><xsd:element name="file" type="file" maxOccurs="unbounded" minOccurs="0" /></code>

Element file / location

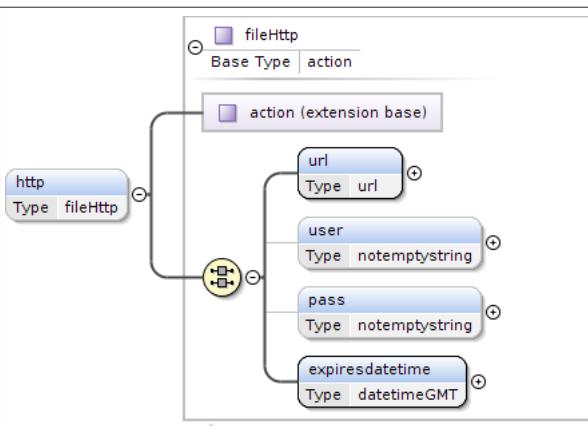
Namespace	No namespace
Diagram	
Type	fileLocation
Properties	content: complex
Model	ALL(origin_file{0,1} http{0,1} ftp{0,1} path{0,1})
Children	ftp, http, origin_file, path
Instance	<pre><location> <origin_file>{0,1}</origin_file> <http>{0,1}</http> <ftp>{0,1}</ftp> <path>{0,1}</path> </location></pre>
Source	<code><xsd:element name="location" type="fileLocation" /></code>

Element fileLocation / origin_file


Namespace	No namespace
Diagram	

Type	notemptystring
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	minLength 1
Source	<code><xsd:element name="origin_file" type="notemptystring" maxOccurs="1" minOccurs="0" /></code>

Element fileLocation / http


Namespace	No namespace
Diagram	 <p>This element contains information about http access to file.</p> <pre> classDiagram fileHttp < -- action action < -- extensionBase extensionBase < -- url extensionBase < -- user extensionBase < -- pass extensionBase < -- expiresdatetime </pre>
Type	fileHttp
Type hierarchy	<ul style="list-style-type: none"> action fileHttp
Properties	content: complex minOccurs: 0 maxOccurs: 1
Model	ALL(url user{0,1} pass{0,1} expiresdatetime)
Children	expiresdatetime, pass, url, user
Instance	<pre> <http> <url>{1,1}</url> <user>{0,1}</user> <pass>{0,1}</pass> <expiresdatetime>{1,1}</expiresdatetime> </http> </pre>
Source	<code><xsd:element name="http" type="fileHttp" maxOccurs="1" minOccurs="0" /></code>

Element fileHttp / url


Namespace	No namespace
Diagram	
Type	url
Properties	content: simple
Facets	minLength 1 pattern (http://...*\....*) (https://...*\....*)
Source	<code><xsd:element name="url" type="url" /></code>

Element fileHttp / user


Namespace	No namespace
-----------	--------------

Diagram							
Type	notemptystring						
Properties	<table> <tr> <td>content:</td> <td>simple</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	<table> <tr> <td>minLength</td> <td>1</td> </tr> </table>	minLength	1				
minLength	1						
Source	<xsd:element name="user" type="notemptystring" maxOccurs="1" minOccurs="0" />						

Element fileHttp / pass

Namespace	No namespace						
Diagram							
Type	notemptystring						
Properties	<table> <tr> <td>content:</td> <td>simple</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	<table> <tr> <td>minLength</td> <td>1</td> </tr> </table>	minLength	1				
minLength	1						
Source	<xsd:element name="pass" type="notemptystring" maxOccurs="1" minOccurs="0" />						

Element fileHttp / expiresdatetime

Namespace	No namespace		
Diagram			
Type	datetimeGMT		
Properties	<table> <tr> <td>content:</td> <td>simple</td> </tr> </table>	content:	simple
content:	simple		
Facets	<table> <tr> <td>pattern</td> <td>\d{4}-\d{2}-\d{2} \d{2}: \d{2}:\d{2} GMT+\d{2}: \d{2}</td> </tr> </table>	pattern	\d{4}-\d{2}-\d{2} \d{2}: \d{2}:\d{2} GMT+\d{2}: \d{2}
pattern	\d{4}-\d{2}-\d{2} \d{2}: \d{2}:\d{2} GMT+\d{2}: \d{2}		
Source	<xsd:element name="expiresdatetime" type="datetimeGMT" />		

Element fileLocation / ftp

Namespace	No namespace
-----------	--------------

Diagram	<pre> classDiagram fileFtp < -- action ftp < -- fileFtp action < -- server action < -- port action < -- path action < -- user action < -- pass action < -- expiresdatetime note over fileFtp: This element contains information about ftp access to file just like server, port, path to file and credentials (user /...) </pre>						
Type	fileFtp						
Type hierarchy	<ul style="list-style-type: none"> • action • fileFtp 						
Properties	<table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>1</td></tr> </table>	content:	complex	minOccurs:	0	maxOccurs:	1
content:	complex						
minOccurs:	0						
maxOccurs:	1						
Model	ALL(server port path user{0,1} pass{0,1} expiresdatetime)						
Children	expiresdatetime, pass, path, port, server, user						
Instance	<pre> <ftp> <server>{1,1}</server> <port>{1,1}</port> <path>{1,1}</path> <user>{0,1}</user> <pass>{0,1}</pass> <expiresdatetime>{1,1}</expiresdatetime> </ftp> </pre>						
Source	<code><xsd:element name="ftp" type="fileFtp" maxOccurs="1" minOccurs="0" /></code>						

Element fileFtp / server


Namespace	No namespace
Diagram	<pre> classDiagram server < -- notemptystring </pre>
Type	notemptystring
Properties	content: simple
Facets	minLength 1
Source	<code><xsd:element name="server" type="notemptystring" /></code>

Element fileFtp / port


Namespace	No namespace
Diagram	<pre> classDiagram port < -- xsd:int note over port: Built-in derived type. The int datatype is derived from long by setting the value of maxInclusive to be 2147483647 and... </pre>
Type	xsd:int

Properties	content: simple
Source	<xsd:element name="port" type="xsd:int"/>


Element fileFtp / path

Namespace	No namespace
Diagram	
Type	notemptystring
Properties	content: simple
Facets	minLength 1
Source	<xsd:element name="path" type="notemptystring"/>


Element fileFtp / user

Namespace	No namespace
Diagram	
Type	notemptystring
Properties	content: simple
	minOccurs: 0
	maxOccurs: 1
Facets	minLength 1
Source	<xsd:element name="user" type="notemptystring" maxOccurs="1" minOccurs="0"/>

Element fileFtp / pass


Namespace	No namespace
Diagram	
Type	notemptystring
Properties	content: simple
	minOccurs: 0
	maxOccurs: 1
Facets	minLength 1
Source	<xsd:element name="pass" type="notemptystring" maxOccurs="1" minOccurs="0"/>

Element fileFtp / expiresdatetime

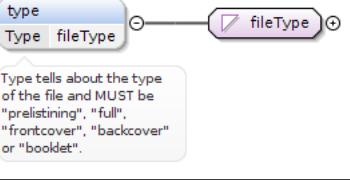
Namespace	No namespace
Diagram	
Type	datetimeGMT
Properties	content: simple
Facets	pattern \d{4}-\d{2}-\d{2} \d{2}: \d{2}:\d{2} \d{2}:
Source	<xsd:element name="expiresdatetime" type="datetimeGMT"/>

Element fileLocation / path

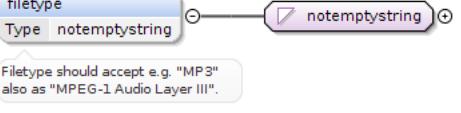
Namespace	No namespace
-----------	--------------

Diagram	
Type	notemptystring
Properties	<p>content: simple</p> <p>minOccurs: 0</p> <p>maxOccurs: 1</p>
Facets	<p>minLength 1</p>
Source	<pre><xsd:element name="path" type="notemptystring" maxOccurs="1" minOccurs="0" /></pre>

Element file / type

Namespace	No namespace
Annotations	Type tells about the type of the file and MUST be "prelistining", "full", "frontcover", "backcover" or "booklet".
Diagram	 <p>Type tells about the type of the file and MUST be "prelistining", "full", "frontcover", "backcover" or "booklet".</p>
Type	fileType
Properties	<p>content: simple</p> <p>minOccurs: 0</p> <p>maxOccurs: 1</p>
Facets	<p>enumeration full</p> <p>enumeration prelistening</p> <p>enumeration frontcover</p> <p>enumeration backcover</p> <p>enumeration booklet</p> <p>enumeration stillframe</p>
Source	<pre><xsd:element name="type" type="fileType" maxOccurs="1" minOccurs="0" > <xsd:annotation> <xsd:documentation xml:lang="en">Type tells about the type of the file and MUST be "prelistining", "full", "frontcover", "backcover" or "booklet".</xsd:documentation> </xsd:annotation> </xsd:element></pre>

Element file / filetype

Namespace	No namespace
Annotations	Filetype should accept e.g. "MP3" also as "MPEG-1 Audio Layer III".
Diagram	 <p>Filetype should accept e.g. "MP3" also as "MPEG-1 Audio Layer III".</p>
Type	notemptystring
Properties	<p>content: simple</p> <p>minOccurs: 0</p> <p>maxOccurs: 1</p>
Facets	<p>minLength 1</p>
Source	<pre><xsd:element name="filetype" type="notemptystring" maxOccurs="1" minOccurs="0" > <xsd:annotation> <xsd:documentation xml:lang="en">Filetype should accept e.g. "MP3" also as "MPEG-1 Audio Layer III".</xsd:documentation> </xsd:annotation> </xsd:element></pre>

</xsd:element>

Element file / samplerate

Namespace	No namespace						
Annotations	Samplerate in khz.						
Diagram							
Type	xsd:int						
Properties	<table border="1"> <tr> <td>content:</td> <td>simple</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Source	<pre><xsd:element name="samplerate" type="xsd:int" maxOccurs="1" minOccurs="0"> <xsd:annotation> <xsd:documentation xml:lang="en">Samplerate in khz.</xsd:documentation> </xsd:annotation> </xsd:element></pre>						

Element file / prelistening_offset

Namespace	No namespace				
Annotations	prelistening_offset is in seconds. prelistening_offset is a "SHOULD" for filetype "prelistening". prelistening_offset is a MUST NOT for any other filetype.				
Diagram					
Type	xsd:int				
Properties	<table border="1"> <tr> <td>content:</td> <td>simple</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> </table>	content:	simple	minOccurs:	0
content:	simple				
minOccurs:	0				
Source	<pre><xsd:element minOccurs="0" name="prelistening_offset" type="xsd:int"> <xsd:annotation> <xsd:documentation xml:lang="en">prelistening_offset is in seconds. prelistening_offset is a "SHOULD" for filetype "prelistening". prelistening_offset is a MUST NOT for any other filetype.</xsd:documentation> </xsd:annotation> </xsd:element></pre>				

Element file / prelistening_length

Namespace	No namespace				
Annotations	prelistening_length is in seconds. prelistening_offset is a "SHOULD" for filetype "prelistening". prelistening_length is a MUST NOT for any other filetype.				
Diagram					
Type	xsd:int				
Properties	<table border="1"> <tr> <td>content:</td> <td>simple</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> </table>	content:	simple	minOccurs:	0
content:	simple				
minOccurs:	0				
Source	<pre><xsd:element minOccurs="0" name="prelistening_length" type="xsd:int"> <xsd:annotation> <xsd:documentation xml:lang="en">prelistening_length is in seconds. prelistening_offset is a "SHOULD" for filetype "prelistening". prelistening_length is a MUST NOT for any other filetype.</xsd:documentation></pre>				

```
</xsd:annotation>
</xsd:element>
```

Element file / samplesize

Namespace	No namespace						
Annotations	Samplesize in bit.						
Diagram	<p>A UML class diagram showing a class named "samplesize" with a compartment labeled "Type xsd:int". A directed association line connects "samplesize" to another class represented by a purple rounded rectangle labeled "xsd:int". A callout box next to the association line contains the text: "Built-in derived type. The int datatype is derived from long by setting the value of maxInclusive to be 2147483647 and..."</p>						
Type	xsd:int						
Properties	<table border="1"> <tr> <td>content:</td> <td>simple</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Source	<pre><xsd:element name="samplesize" type="xsd:int" maxOccurs="1" minOccurs="0"> <xsd:annotation> <xsd:documentation xml:lang="en">Samplesize in bit.</xsd:documentation> </xsd:annotation> </xsd:element></pre>						

Element file / bitrate

Namespace	No namespace						
Annotations	Bitrate in kilobitpersecond e.g. 256 (on VBR) or 96/320 on (MBR).						
Diagram	<p>A UML class diagram showing a class named "bitrate" with a compartment labeled "Type notemptystring". A directed association line connects "bitrate" to another class represented by a purple rounded rectangle labeled "notemptystring". A callout box next to the association line contains the text: "Bitrate in kilobitpersecond e.g. 256 (on VBR) or 96/320 on (MBR)."</p>						
Type	notemptystring						
Properties	<table border="1"> <tr> <td>content:</td> <td>simple</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	<table border="1"> <tr> <td>minLength</td> <td>1</td> </tr> </table>	minLength	1				
minLength	1						
Source	<pre><xsd:element name="bitrate" type="notemptystring" maxOccurs="1" minOccurs="0"> <xsd:annotation> <xsd:documentation xml:lang="en">Bitrate in kilobitpersecond e.g. 256 (on VBR) or 96/320 on (MBR).</xsd:documentation> </xsd:annotation> </xsd:element></pre>						

Element file / bitratetype

Namespace	No namespace						
Annotations	Type of bidrate such as CBR/VBR/MBR.						
Diagram	<p>A UML class diagram showing a class named "bitratetype" with a compartment labeled "Type notemptystring". A directed association line connects "bitratetype" to another class represented by a purple rounded rectangle labeled "notemptystring". A callout box next to the association line contains the text: "Type of bidrate such as CBR/VBR/MBR."</p>						
Type	notemptystring						
Properties	<table border="1"> <tr> <td>content:</td> <td>simple</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	<table border="1"> <tr> <td>minLength</td> <td>1</td> </tr> </table>	minLength	1				
minLength	1						
Source	<pre><xsd:element name="bitratetype" type="notemptystring" maxOccurs="1" minOccurs="0"> <xsd:annotation></pre>						

```
<xsd:documentation xml:lang="en">Type of bitrate such as CBR/VBR/MBR.</xsd:documentation>
</xsd:annotation>
</xsd:element>
```

Element file / codec

Namespace	No namespace						
Annotations	Name of used codec.						
Diagram							
Type	notemptystring						
Properties	<table border="1"> <tr> <td>content:</td> <td>simple</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	<table border="1"> <tr> <td>minLength</td> <td>1</td> </tr> </table>	minLength	1				
minLength	1						
Source	<pre><xsd:element name="codec" type="notemptystring" maxOccurs="1" minOccurs="0"> <xsd:annotation> <xsd:documentation xml:lang="en">Name of used codec.</xsd:documentation> </xsd:annotation> </xsd:element></pre>						

Element file / codecsettings

Namespace	No namespace						
Annotations	Some arbitrary settings info in reference to codec - such as "insane" or "quality=9".						
Diagram							
Type	notemptystring						
Properties	<table border="1"> <tr> <td>content:</td> <td>simple</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	<table border="1"> <tr> <td>minLength</td> <td>1</td> </tr> </table>	minLength	1				
minLength	1						
Source	<pre><xsd:element name="codecsettings" type="notemptystring" maxOccurs="1" minOccurs="0"> <xsd:annotation> <xsd:documentation xml:lang="en">Some arbitrary settings info in reference to codec - such as "insane" or "quality=9".</xsd:documentation> </xsd:annotation> </xsd:element></pre>						

Element file / bytes

Namespace	No namespace						
Annotations	Length of file in bytes.						
Diagram							
Type	xsd:integer						
Properties	<table border="1"> <tr> <td>content:</td> <td>simple</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Source	<pre><xsd:element name="bytes" type="xsd:integer" maxOccurs="1" minOccurs="0"> <xsd:annotation></pre>						

```
<xsd:documentation xml:lang="en">Length of file in bytes.</xsd:documentation>
</xsd:annotation>
</xsd:element>
```

Element file / checksums

Namespace	No namespace
Diagram	<pre> classDiagram class checksums { md5 sha1 sha256 } checksums < --> md5 checksums < --> sha1 checksums < --> sha256 note over checksums: This element contains checksums for the file. </pre>
Type	checksums
Properties	content: complex
Model	ALL(md5{0,1} sha1{0,1} sha256{0,1})
Children	md5, sha1, sha256
Instance	<pre> <checksums> <md5>{0,1}</md5> <sha1>{0,1}</sha1> <sha256>{0,1}</sha256> </checksums> </pre>
Source	<code><xsd:element name="checksums" type="checksums" /></code>

Element checksums / md5


Namespace	No namespace						
Diagram	<pre> classDiagram class md5 { Type md5 } </pre>						
Type	md5						
Type hierarchy	<ul style="list-style-type: none"> • xsd:string • notemptystring • md5 						
Properties	<table border="1"> <tr> <td>content:</td> <td>simple</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	<table border="1"> <tr> <td>minLength</td> <td>8</td> </tr> <tr> <td>pattern</td> <td>(([A-F0-9]{2}:){15}[A-F0-9]{2}) ([a-f0-9]{32})</td> </tr> </table>	minLength	8	pattern	(([A-F0-9]{2}:){15}[A-F0-9]{2}) ([a-f0-9]{32})		
minLength	8						
pattern	(([A-F0-9]{2}:){15}[A-F0-9]{2}) ([a-f0-9]{32})						
Source	<code><xsd:element name="md5" type="md5" maxOccurs="1" minOccurs="0" /></code>						

Element checksums / sha1


Namespace	No namespace
Diagram	<pre> classDiagram class sha1 { Type sha1 } </pre>
Type	sha1
Type hierarchy	<ul style="list-style-type: none"> • xsd:string • notemptystring • sha1

Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	minLength 8 pattern $(([A-F0-9]\{2\}:\){19}[A-F0-9]\{2\}) ([a-f0-9]\{40\})$
Source	<xsd:element name="sha1" type="sha1" maxOccurs="1" minOccurs="0" />

Element checksums / sha256

Namespace	No namespace
Diagram	
Type	sha256
Type hierarchy	<ul style="list-style-type: none"> xsd:string notemptystring sha256
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	minLength 8 pattern $([A-F0-9]\{2\}:\){31}[A-F0-9]\{2\}$
Source	<xsd:element name="sha256" type="sha256" maxOccurs="1" minOccurs="0" />

Element file / channels


Namespace	No namespace
Diagram	
Type	fileChannels
Properties	content: simple minOccurs: 0 maxOccurs: 1
Facets	<ul style="list-style-type: none"> enumeration mono enumeration stereo enumeration joint-stereo enumeration 5.1
Source	<xsd:element name="channels" type="fileChannels" maxOccurs="1" minOccurs="0" />

Element file / dimension


Namespace	No namespace
Diagram	<p>This element contains entries for the dimension (width and height) of the file.</p>

Type	dimension
Properties	content: complex minOccurs: 0 maxOccurs: 1
Model	width , height
Children	height, width
Instance	<pre><dimension> <width>{1,1}</width> <height>{1,1}</height> </dimension></pre>
Source	<code><xsd:element name="dimension" type="dimension" maxOccurs="1" minOccurs="0"/></code>

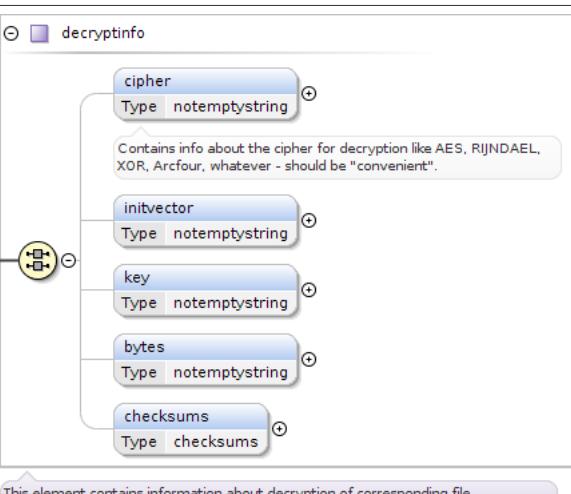
Element dimension / width

Namespace	No namespace
Diagram	
Type	xsd:integer
Properties	content: simple
Source	<code><xsd:element name="width" type="xsd:integer"/></code>

Element dimension / height

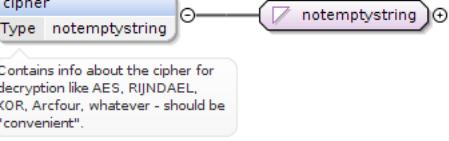
Namespace	No namespace
Diagram	
Type	xsd:integer
Properties	content: simple
Source	<code><xsd:element name="height" type="xsd:integer"/></code>

Element file / decryptinfo


Namespace	No namespace
Diagram	
Type	decryptinfo
Properties	content: complex

	minOccurs:	0
	maxOccurs:	1
Model	ALL(cipher{0,1} initvector{0,1} key{0,1} bytes{0,1} checksums{0,1})	
Children	bytes, checksums, cipher, initvector, key	
Instance	<pre><decryptinfo> <cipher>{0,1}</cipher> <initvector>{0,1}</initvector> <key>{0,1}</key> <bytes>{0,1}</bytes> <checksums>{0,1}</checksums> </decryptinfo></pre>	
Source	<xsd:element name="decryptinfo" type="decryptinfo" maxOccurs="1" minOccurs="0"/>	


Element decryptinfo / cipher

Namespace	No namespace						
Annotations	Contains info about the cipher for decryption like AES, RIJNDAEL, XOR, Arcfour, whatever - should be "convenient".						
Diagram							
Type	notemptystring						
Properties	<table border="1"> <tr> <td>content:</td> <td>simple</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	minLength 1						
Source	<pre><xsd:element name="cipher" type="notemptystring" minOccurs="0" maxOccurs="1"> <xsd:annotation> <xsd:documentation xml:lang="en">Contains info about the cipher for decryption like AES, RIJNDAEL, XOR, Arcfour, whatever - should be "convenient".</xsd:documentation> </xsd:annotation> </xsd:element></pre>						

Element decryptinfo / initvector

Namespace	No namespace						
Diagram							
Type	notemptystring						
Properties	<table border="1"> <tr> <td>content:</td> <td>simple</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	minLength 1						
Source	<xsd:element name="initvector" type="notemptystring" minOccurs="0" maxOccurs="1"/>						

Element decryptinfo / key

Namespace	No namespace				
Diagram					
Type	notemptystring				
Properties	<table border="1"> <tr> <td>content:</td> <td>simple</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> </table>	content:	simple	minOccurs:	0
content:	simple				
minOccurs:	0				

	maxOccurs:	1
Facets	minLength	1
Source	<xsd:element name="key" type="notemptystring" minOccurs="0" maxOccurs="1"/>	

Element decryptinfo / bytes

Namespace	No namespace						
Diagram	<pre> graph LR bytes[bytes] --> notemptystring notemptystring[/notemptystring/] style bytes fill:#e0f2e0 style notemptystring fill:#f0e6ff </pre>						
Type	notemptystring						
Properties	<table border="1"> <tr> <td>content:</td> <td>simple</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	minLength 1						
Source	<xsd:element name="bytes" type="notemptystring" minOccurs="0" maxOccurs="1"/>						

Element decryptinfo / checksums


Namespace	No namespace						
Diagram	<pre> graph TD checksums1["checksums
Type checksums"] --- md51["md5
Type md5"] checksums1 --- sha11["sha1
Type sha1"] checksums1 --- sha2561["sha256
Type sha256"] style checksums1 fill:#e0f2e0 style md51 fill:#f0e6ff style sha11 fill:#f0e6ff style sha2561 fill:#f0e6ff </pre> <p>This element contains checksums for the file.</p>						
Type	checksums						
Properties	<table border="1"> <tr> <td>content:</td> <td>complex</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	complex	minOccurs:	0	maxOccurs:	1
content:	complex						
minOccurs:	0						
maxOccurs:	1						
Model	ALL(md5{0,1} sha1{0,1} sha256{0,1})						
Children	md5, sha1, sha256						
Instance	<pre> <checksums> <md5>{0,1}</md5> <sha1>{0,1}</sha1> <sha256>{0,1}</sha256> </checksums> </pre>						
Source	<xsd:element name="checksums" type="checksums" minOccurs="0" maxOccurs="1"/>						

Element file / no_file_given

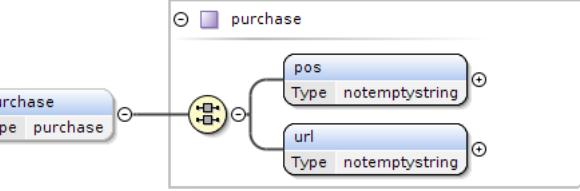
Namespace	No namespace						
Diagram	<pre> graph LR no_file_given["no_file_given
Type xsd:boolean"] --> xsd:boolean xsdboolean[/xsd:boolean/] style no_file_given fill:#e0f2e0 style xsdboolean fill:#f0e6ff </pre> <p>Built-in primitive type. It defines the boolean values true and false.</p>						
Type	xsd:boolean						
Properties	<table border="1"> <tr> <td>content:</td> <td>simple</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						

Source	<code><xsd:element name="no_file_given" type="xsd:boolean" maxOccurs="1" minOccurs="0"/></code>
--------	---


Element file / comment

Namespace	No namespace
Diagram	
Type	notemptystring
Properties	content: simple minOccurs: 0
Facets	minLength 1
Source	<code><xsd:element name="comment" minOccurs="0" type="notemptystring"/></code>


Element bundle / purchase

Namespace	No namespace
Diagram	 <p>This element contains information about purchase. Mostly when this feeds recipient is a POS.</p>
Type	purchase
Properties	content: complex minOccurs: 0 maxOccurs: 1
Model	ALL(pos url)
Children	pos, url
Instance	<code><purchase> <pos>{1,1}</pos> <url>{1,1}</url> </purchase></code>
Source	<code><xsd:element name="purchase" type="purchase" maxOccurs="1" minOccurs="0"/></code>

Element purchase / pos

Namespace	No namespace
Diagram	
Type	notemptystring
Properties	content: simple
Facets	minLength 1
Source	<code><xsd:element name="pos" type="notemptystring"/></code>

Element purchase / url

Namespace	No namespace
Diagram	
Type	notemptystring

Properties	content: simple
Facets	minLength 1
Source	<xsd:element name="url" type="notemptystring" />

Element item / license_basis

Namespace	No namespace
Diagram	<pre> classDiagram class license_basis_item { territorial timeframe pricing download_allowed streaming_allowed channels as_on_bundle } license_basis_item < -- license_basis </pre>
Type	license_basis_item
Properties	content: complex
Model	ALL(territorial{0,1} timeframe{0,1} pricing{0,1} download_allowed{0,1} streaming_allowed{0,1} channels{0,1} as_on_bundle{0,1})
Children	as_on_bundle, channels, download_allowed, pricing, streaming_allowed, territorial, timeframe
Instance	<license_basis> <territorial>{0,1}</territorial> <timeframe>{0,1}</timeframe> <pricing>{0,1}</pricing> <download_allowed>{0,1}</download_allowed> <streaming_allowed>{0,1}</streaming_allowed> <channels>{0,1}</channels> <as_on_bundle>{0,1}</as_on_bundle> </license_basis>
Source	<xsd:element name="license_basis" type="license_basis_item" />

Element license_basis_item / territorial

Namespace	No namespace
Diagram	<pre> classDiagram class territorial { <<Territory>> } territorial "0..*" --> territory </pre>
Type	territorial
Properties	content: complex minOccurs: 0 maxOccurs: 1
Model	territory*

Children	territory
Instance	<pre><territorial> <territory type="">{0,unbounded}</territory> </territorial></pre>
Source	<pre><xsd:element name="territorial" type="territorial" maxOccurs="1" minOccurs="0" /></pre>

Element license_basis_item / timeframe

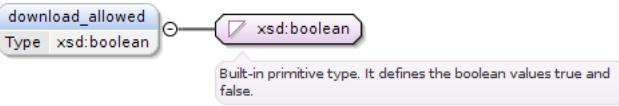
Namespace	No namespace						
Diagram							
Type	timeframe						
Properties	<table border="1"> <tr> <td>content:</td> <td>complex</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	complex	minOccurs:	0	maxOccurs:	1
content:	complex						
minOccurs:	0						
maxOccurs:	1						
Model	from , to						
Children	from, to						
Instance	<pre><timeframe> <from>{1,1}</from> <to>{1,1}</to> </timeframe></pre>						
Source	<pre><xsd:element name="timeframe" type="timeframe" maxOccurs="1" minOccurs="0" /></pre>						

Element license_basis_item / pricing

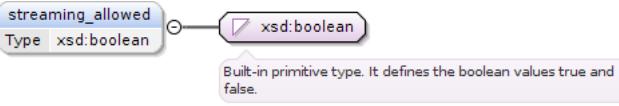
Namespace	No namespace						
Diagram							
Type	pricing						
Properties	<table border="1"> <tr> <td>content:</td> <td>complex</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	complex	minOccurs:	0	maxOccurs:	1
content:	complex						
minOccurs:	0						
maxOccurs:	1						
Model	ALL(pricecode{0,1} wholesale{0,1})						
Children	pricecode, wholesale						
Instance	<pre><pricing> <pricecode>{0,1}</pricecode> <wholesale>{0,1}</wholesale> </pricing></pre>						
Source	<pre><xsd:element name="pricing" type="pricing" maxOccurs="1" minOccurs="0" /></pre>						

Element license_basis_item / download_allowed

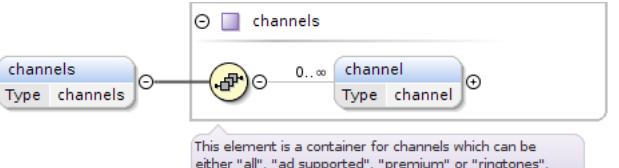
Namespace	No namespace
-----------	--------------

Diagram	
Type	xsd:boolean
Properties	<p>content: simple</p> <p>minOccurs: 0</p> <p>maxOccurs: 1</p>
Source	<code><xsd:element name="download_allowed" type="xsd:boolean" maxOccurs="1" minOccurs="0" /></code>

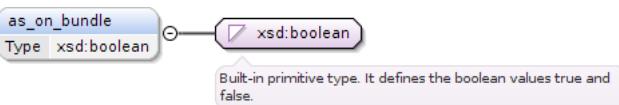
Element license_basis_item / streaming_allowed

Namespace	No namespace
Diagram	
Type	xsd:boolean
Properties	<p>content: simple</p> <p>minOccurs: 0</p> <p>maxOccurs: 1</p>
Source	<code><xsd:element name="streaming_allowed" type="xsd:boolean" maxOccurs="1" minOccurs="0" /></code>

Element license_basis_item / channels

Namespace	No namespace
Diagram	
Type	channels
Properties	<p>content: complex</p> <p>minOccurs: 0</p> <p>maxOccurs: 1</p>
Model	channel*
Children	channel
Instance	<code><channels> <channel download_allowed="" streaming_allowed="" type="">{0,unbounded}</channel> </channels></code>
Source	<code><xsd:element name="channels" type="channels" maxOccurs="1" minOccurs="0" /></code>

Element license_basis_item / as_on_bundle

Namespace	No namespace
Diagram	
Type	xsd:boolean
Properties	<p>content: simple</p> <p>minOccurs: 0</p>

	maxOccurs:	1
Source	<xsd:element name="as_on_bundle" type="xsd:boolean" maxOccurs="1" minOccurs="0"/>	

Element item / license_specifics

Namespace	No namespace
Diagram	<pre> classDiagram class license_specifics { <<license_specifics>> <<rules>> <<as_on_bundle>> } class license_specifics_item { <<license_specifics_item>> <<rules>> <<as_on_bundle>> } license_specifics "1..2" -- "1" license_specifics_item license_specifics_item "*" -- "0..1" rules license_specifics_item "*" -- "0..1" as_on_bundle </pre> <p>This element includes specific rules which should be applied.</p>
Type	license_specifics_item
Properties	content: complex
Model	rules{0,1} as_on_bundle{0,1}
Children	as_on_bundle, rules
Instance	<license_specifics> <rules>{0,1}</rules> <as_on_bundle>{0,1}</as_on_bundle> </license_specifics>
Source	<xsd:element name="license_specifics" type="license_specifics_item"/>

Element license_specifics_item / rules

Namespace	No namespace						
Diagram	<pre> classDiagram class rules { <<rules>> <<rule>> } class rule { <<rule>> } rules "*" -- "0..>" rule </pre> <p>This element is a container for rules. It needs an ordered mode here - first come first match.</p>						
Type	rules						
Properties	<table border="1"> <tr> <td>content:</td> <td>complex</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	complex	minOccurs:	0	maxOccurs:	1
content:	complex						
minOccurs:	0						
maxOccurs:	1						
Model	rule*						
Children	rule						
Instance	<rules> <rule num="">{0,unbounded}</rule> </rules>						
Source	<xsd:element name="rules" type="rules" maxOccurs="1" minOccurs="0"/>						

Element license_specifics_item / as_on_bundle

Namespace	No namespace						
Diagram	<pre> classDiagram class as_on_bundle { <<as_on_bundle>> <<xsd:boolean>> } as_on_bundle "*" -- "1" xsd:boolean </pre> <p>Built-in primitive type. It defines the boolean values true and false.</p>						
Type	xsd:boolean						
Properties	<table border="1"> <tr> <td>content:</td> <td>simple</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						

Source

```
<xsd:element name="as_on_bundle" type="xsd:boolean" maxOccurs="1" minOccurs="0"/>
```

Element item / tags

Namespace	No namespace						
Diagram							
Type	tags						
Properties	<table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>1</td></tr> </table>	content:	complex	minOccurs:	0	maxOccurs:	1
content:	complex						
minOccurs:	0						
maxOccurs:	1						
Model	ALL(genres{0,1} bundle_only{0,1} explicit_lyrics{0,1} recommended_age_from{0,1} live{0,1} acoustic{0,1} instrumental{0,1} abridged{0,1})						
Children	abridged, acoustic, bundle_only, explicit_lyrics, genres, instrumental, live, recommended_age_from						
Instance	<pre><tags> <genres>{0,1}</genres> <bundle_only>{0,1}</bundle_only> <explicit_lyrics>{0,1}</explicit_lyrics> <recommended_age_from>{0,1}</recommended_age_from> <live>{0,1}</live> <acoustic>{0,1}</acoustic> <instrumental>{0,1}</instrumental> <abridged>{0,1}</abridged> </tags></pre>						
Source	<pre><xsd:element name="tags" type="tags" maxOccurs="1" minOccurs="0"/></pre>						

Element item / fingerprint

Namespace	No namespace						
Diagram							
Type	fingerprint						
Properties	<table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>1</td></tr> </table>	content:	complex	minOccurs:	0	maxOccurs:	1
content:	complex						
minOccurs:	0						
maxOccurs:	1						

Model	echoprint{0,1}
Children	echoprint
Instance	<fingerprint> <echoprint>{0,1}</echoprint> </fingerprint>
Source	<xsd:element name="fingerprint" type="fingerprint" maxOccurs="1" minOccurs="0"/>

Element **fingerprint** / **echoprint**

Namespace	No namespace						
Diagram	<p>The diagram shows the 'echoprint' element (Type xsd:string) connected to the 'xsd:string' primitive type. A callout bubble states: 'Built-in primitive type. The string datatype represents character strings in XML.'</p>						
Type	xsd:string						
Properties	<table border="1"> <tr> <td>content:</td> <td>simple</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Source	<xsd:element name="echoprint" type="xsd:string" maxOccurs="1" minOccurs="0"/>						

Element **item** / **reporting**

Namespace	No namespace						
Diagram	<p>The diagram shows the 'reporting' element (Type reporting) containing two child elements: 'realtime' and 'postponed'. A callout bubble states: 'This element contains information about reporting.'</p>						
Type	reporting						
Properties	<table border="1"> <tr> <td>content:</td> <td>complex</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>1</td> </tr> </table>	content:	complex	minOccurs:	0	maxOccurs:	1
content:	complex						
minOccurs:	0						
maxOccurs:	1						
Model	ALL(realtime postponed)						
Children	postponed, realtime						
Instance	<reporting> <realtime>{1,1}</realtime> <postponed>{1,1}</postponed> </reporting>						
Source	<xsd:element name="reporting" type="reporting" maxOccurs="1" minOccurs="0"/>						

Element **item** / **files**

Namespace	No namespace				
Diagram	<p>The diagram shows the 'files' element (Type files) containing multiple 'file' elements. A callout bubble states: 'This element contains a list of files.'</p>				
Type	files				
Properties	<table border="1"> <tr> <td>content:</td> <td>complex</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> </table>	content:	complex	minOccurs:	0
content:	complex				
minOccurs:	0				

	maxOccurs:	1
Model	file*	
Children	file	
Instance	<files> <file>{0,unbounded}</file> </files>	
Source	<xsd:element name="files" type="files" maxOccurs="1" minOccurs="0" />	

Element feed / item

Namespace	No namespace						
Diagram	<pre> classDiagram class item { displayname "notemptystring" name "notemptystring" version "xsd:string" type "notemptystring" display_artistname "notemptystring" ids "ids" contributors "contributors" information "information" license_basis "license_basis_item" license_specifics "license_specifics_item" tags "tags" fingerprint "fingerprint" reporting "reporting" files "files" } item <--> item </pre> <p>This element contains information about a item just like a track. The type describes what the item is e.g. audio,...</p>						
Type	item						
Properties	<table border="1"> <tr> <td>content:</td> <td>complex</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> <tr> <td>maxOccurs:</td> <td>unbounded</td> </tr> </table>	content:	complex	minOccurs:	0	maxOccurs:	unbounded
content:	complex						
minOccurs:	0						
maxOccurs:	unbounded						
Model	ALL(displayname{0,1} name{0,1} version{0,1} type{0,1} display_artistname{0,1} ids{0,1} contributors information license_basis license_specifics tags{0,1} fingerprint{0,1} reporting{0,1} files{0,1})						
Children	contributors, display_artistname, displayname, files, fingerprint, ids, information, license_basis, license_specifics, name, reporting, tags, type, version						
Instance	<pre> <item> <displayname>{0,1}</displayname> <name>{0,1}</name> <version>{0,1}</version> <type>{0,1}</type> </pre>						

	<pre><display_artistname>{0,1}</display_artistname> <ids>{0,1}</ids> <contributors>{1,1}</contributors> <information>{1,1}</information> <license_basis>{1,1}</license_basis> <license_specifics>{1,1}</license_specifics> <tags>{0,1}</tags> <fingerprint>{0,1}</fingerprint> <reporting>{0,1}</reporting> <files>{0,1}</files> </item></pre>
Source	<pre><xsd:element name="item" type="item" maxOccurs="unbounded" minOccurs="0" /></pre>

Complex Type(s)

Complex Type feedinfo

Namespace	No namespace
Annotations	<p>On feedinfo-level there are the global information needed or at least valuable for ingesting / identifying the content sent. It is defined, when the feed was created, when it shall be come effective, who created the feed and who is the receiver of the feed. Also the sender (which can diverge from the creator) is to be stated. The licensor is also to be stated (which in turn can also diverge from the creator and/or the sender). There can be "actions" defined on the receiving-party's side which should be "done" when initially receiving this feed, or starting to process the feed for ingestion or finishing the feeds processing. Additionally when everything could be interpreted correctly (in the sense of the receiving party), a "full-success-action" could be issued; likewise if "some error" occurred while processing the feed, an "onerror-action" could be issued. Those actions are initially defined to be email-notifications or http-calls; we also included some action to have a "registered letter" and/or "fax" to be sent; wether this is accepted/handled by the receiving party is to be dealt with contractually (we included a field for stating how much the sending party will cover the fee max.).</p>
Diagram	<pre> classDiagram class feedinfo { onlytest Type xsd:boolean feedid Type notemptystring creationdatetime Type datetimeGMT effectivedatetime Type datetimeGMT creator Type creator receiver Type receiver sender Type sender licensor Type licensor licensee Type licensee actions Type actions } </pre>
Used by	Element feed/feedinfo
Model	ALL(onlytest feedid creationdatetime effectivedatetime creator{0,1} receiver sender licensor licensee actions{0,1})
Children	actions, creationdatetime, creator, effectivedatetime, feedid, licensee, licensor, onlytest, receiver, sender
Source	<pre><xsd:complexType name="feedinfo"> <xsd:annotation> <xsd:documentation xml:lang="en">On feedinfo-level there are the global information needed or at least valuable for ingesting / identifying the content sent. It is defined, when the feed was created, when it shall be come effective, who created the feed and who is the receiver of the feed.</pre>

Also the sender (which can diverge from the creator) is to be stated. The licensor is also to be stated (which in turn can also diverge from the creator and/or the sender). There can be "actions" defined on the receiving-party's side which should be "done" when initially receiving this feed, or starting to process the feed for ingestion or finishing the feeds processing. Additionally when everything could be interpreted correctly (in the sense of the receiving party), a "full-success-action" could be issued; likewise if "some error" occurred while processing the feed, an "onerror-action" could be issued. Those actions are initially defined to be email-notifications or http-calls; we also included some action to have a "registered letter" and/or "fax" to be sent; whether this is accepted/handled by the receiving party is to be dealt with contractually (we included a field for stating how much the sending party will cover the fee max.).</xsd:documentation>

```

</xsd:annotation>
<xsd:all>
  <xsd:element name="onlytest" type="xsd:boolean"/>
  <xsd:element name="feedid" type="notemptystring"/>
  <xsd:element name="creationdatetime" type="datetimeGMT"/>
  <xsd:element name="effectivedatetime" type="datetimeGMT"/>
  <xsd:element name="creator" type="creator" maxOccurs="1" minOccurs="0"/>
  <xsd:element name="receiver" type="receiver"/>
  <xsd:element name="sender" type="sender"/>
  <xsd:element name="licensor" type="licensor"/>
  <xsd:element name="licensee" type="licensee"/>
  <xsd:element name="actions" type="actions" maxOccurs="1" minOccurs="0"/>
</xsd:all>
</xsd:complexType>

```

Complex Type creator

Namespace	No namespace
Annotations	This element contains information about the creator of that feed.
Diagram	<pre> classDiagram class creator { email userid keyid } creator --> email : Content should be an email-address of the *user* on the sending side. creator --> userid : This should be an unique id of the *user* on the sending side. creator --> keyid </pre>
Used by	Element feedinfo/creator
Model	ALL(email userid{0,1} keyid{0,1})
Children	email, keyid, userid
Source	<pre> <xsd:complexType name="creator"> <xsd:annotation> <xsd:documentation xml:lang="en">This element contains information about the creator of that feed.</xsd:documentation> </xsd:annotation> <xsd:all> <xsd:element name="email" type="email"> <xsd:annotation> <xsd:documentation xml:lang="en">Content should be an email-address of the *user* on the sending side.</xsd:documentation> </xsd:annotation> </xsd:element> <xsd:element name="userid" type="userid" maxOccurs="1" minOccurs="0"> <xsd:annotation> <xsd:documentation xml:lang="en">This should be an unique id of the *user* on the sending side.</xsd:documentation> </xsd:annotation> </xsd:element> <xsd:element name="keyid" type="notemptystring" maxOccurs="1" minOccurs="0"/> </xsd:all> </xsd:complexType> </pre>

Complex Type receiver

Namespace	No namespace
Annotations	This element contains information about the receiver of that feed.

Diagram	
Used by	Element feedinfo/receiver
Model	ALL(type servername serveripv4 serveripv6{0,1} authtype username{0,1} crypto{0,1} keyid{0,1})
Children	authtype, crypto, keyid, serveripv4, serveripv6, servername, type, username
Source	<pre><xsd:complexType name="receiver"> <xsd:annotation> <xsd:documentation xml:lang="en">This element contains information about the receiver of that feed.</xsd:documentation> </xsd:annotation> <xsd:all> <xsd:element name="type" type="receivertypes"/> <xsd:element name="servername" type="iporhostname"/> <xsd:element name="serveripv4" type="ipv4"/> <xsd:element name="serveripv6" type="ipv6" maxOccurs="1" minOccurs="0"/> <xsd:element name="authtype" type="authtype"/> <xsd:element name="username" type="notemptystring" maxOccurs="1" minOccurs="0"/> <xsd:element name="crypto" type="crypto" maxOccurs="1" minOccurs="0"/> <xsd:element name="keyid" type="notemptystring" maxOccurs="1" minOccurs="0"/> </xsd:all> </xsd:complexType></pre>

Complex Type crypto

Namespace	No namespace
Annotations	This element contains crypto information for secure and authenticated transfer.
Diagram	
Used by	Element receiver/crypto
Model	ALL(relatedemail{0,1} usedkeyid{0,1} usedpubkey{0,1})
Children	relatedemail, usedkeyid, usedpubkey
Source	<pre><xsd:complexType name="crypto"> <xsd:annotation> <xsd:documentation xml:lang="en">This element contains crypto information for secure and authenticated transfer.</xsd:documentation> </xsd:annotation> <xsd:all> <xsd:element name="relatedemail" type="email" maxOccurs="1" minOccurs="0"/> <xsd:element name="usedkeyid" type="keyid" maxOccurs="1" minOccurs="0"/> <xsd:element name="usedpubkey" type="xsd:base64Binary" maxOccurs="1" minOccurs="0"/> </xsd:all> </xsd:complexType></pre>

Complex Type sender

Namespace	No namespace
Annotations	This element contains information about the sender of that feed.
Diagram	<pre> classDiagram class sender { <<This element contains information about the sender of that feed.>> } contractpartnerid "1.." ourcontractpartnerid "1.." email "1.." keyid "1.." sender --> contractpartnerid sender --> ourcontractpartnerid sender --> email sender --> keyid </pre>
Used by	Element feedinfo/sender
Model	ALL(contractpartnerid ourcontractpartnerid email{0,1} keyid{0,1})
Children	contractpartnerid, email, keyid, ourcontractpartnerid
Source	<pre> <xsd:complexType name="sender"> <xsd:annotation> <xsd:documentation xml:lang="en">This element contains information about the sender of that feed.</xsd:documentation> </xsd:annotation> <xsd:all> <xsd:element name="contractpartnerid" type="notemptystring"/> <xsd:element name="ourcontractpartnerid" type="notemptystring"/> <xsd:element name="email" type="email" maxOccurs="1" minOccurs="0"/> <xsd:element name="keyid" type="notemptystring" maxOccurs="1" minOccurs="0"/> </xsd:all> </xsd:complexType> </pre>

Complex Type licensor

Namespace	No namespace
Annotations	This element contains information about the licensor of that feed.
Diagram	<pre> classDiagram class licensor { <<This element contains information about the licensor of that feed.>> } contractpartnerid "1.." ourcontractpartnerid "1.." email "1.." keyid "1.." licensor --> contractpartnerid licensor --> ourcontractpartnerid licensor --> email licensor --> keyid </pre>
Used by	Element feedinfo/licensor
Model	ALL(contractpartnerid ourcontractpartnerid email{0,1} keyid{0,1})
Children	contractpartnerid, email, keyid, ourcontractpartnerid
Source	<pre> <xsd:complexType name="licensor"> <xsd:annotation> <xsd:documentation xml:lang="en">This element contains information about the licensor of that feed.</xsd:documentation> </xsd:annotation> <xsd:all> <xsd:element name="contractpartnerid" type="notemptystring"/> <xsd:element name="ourcontractpartnerid" type="notemptystring"/> <xsd:element name="email" type="email" maxOccurs="1" minOccurs="0"/> <xsd:element name="keyid" type="notemptystring" maxOccurs="1" minOccurs="0"/> </xsd:all> </xsd:complexType> </pre>

Complex Type licensee

Namespace	No namespace
Annotations	This element contains information about the licensee of that feed.

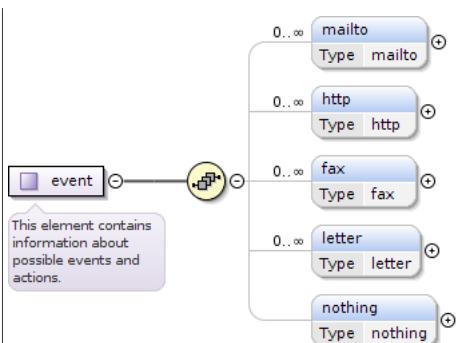
Diagram	
Used by	Element feedinfo/licensee
Model	ALL(contractpartnerid ourcontractpartnerid email{0,1} keyid{0,1})
Children	contractpartnerid, email, keyid, ourcontractpartnerid
Source	<pre><xsd:complexType name="licensee"> <xsd:annotation> <xsd:documentation xml:lang="en">This element contains information about the licensee of that feed.</xsd:documentation> </xsd:annotation> <xsd:all> <xsd:element name="contractpartnerid" type="notemptystring"/> <xsd:element name="ourcontractpartnerid" type="notemptystring"/> <xsd:element name="email" type="email" maxOccurs="1" minOccurs="0"/> <xsd:element name="keyid" type="notemptystring" maxOccurs="1" minOccurs="0"/> </xsd:all> </xsd:complexType></pre>

Complex Type actions

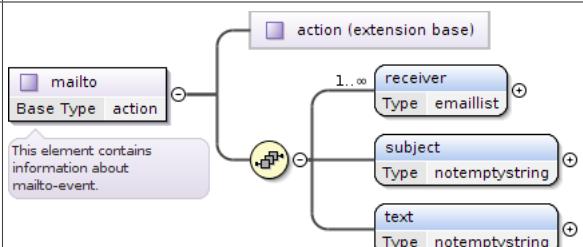
Namespace	No namespace
Annotations	This element contains information about possible actions with the feed.
Diagram	
Used by	Element feedinfo/actions
Model	ALL(oninitialreceive{0,1} onprocessstart{0,1} onprocessend{0,1} onfullsuccess{0,1} onerror{0,1})
Children	onerror, onfullsuccess, oninitialreceive, onprocessend, onprocessstart
Source	<pre><xsd:complexType name="actions"> <xsd:annotation> <xsd:documentation xml:lang="en">This element contains information about possible actions with the feed.</xsd:documentation> </xsd:annotation> <xsd:all> <xsd:element name="oninitialreceive" type="event" maxOccurs="1" minOccurs="0"/> <xsd:element name="onprocessstart" type="event" maxOccurs="1" minOccurs="0"/> <xsd:element name="onprocessend" type="event" maxOccurs="1" minOccurs="0"/> <xsd:element name="onfullsuccess" type="event" maxOccurs="1" minOccurs="0"/> <xsd:element name="onerror" type="event" maxOccurs="1" minOccurs="0"/> </xsd:all> </xsd:complexType></pre>

Complex Type event

Namespace	No namespace
Annotations	This element contains information about possible events and actions.

Diagram	
Used by	Elements actions/onerror, actions/onfullsuccess, actions/oninitialreceive, actions/onprocessend, actions/onprocessstart Complex Types onerror, onfullsuccess, oninitialreceive, onprocessend, onprocessstart
Model	mailto*, http*, fax*, letter*, nothing{0,1}
Children	fax, http, letter, mailto, nothing
Source	<pre><xsd:complexType name="event"> <xsd:annotation> <xsd:documentation xml:lang="en">This element contains information about possible events and actions.</xsd:documentation> </xsd:annotation> <xsd:sequence> <xsd:element name="mailto" type="mailto" minOccurs="0" maxOccurs="unbounded"/> <xsd:element name="http" type="http" minOccurs="0" maxOccurs="unbounded"/> <xsd:element name="fax" type="fax" minOccurs="0" maxOccurs="unbounded"/> <xsd:element name="letter" type="letter" minOccurs="0" maxOccurs="unbounded"/> <xsd:element name="nothing" type="nothing" minOccurs="0" maxOccurs="1"/> </xsd:sequence> </xsd:complexType></pre>

Complex Type mailto

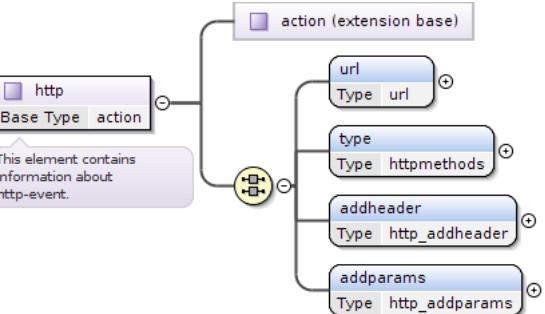
Namespace	No namespace
Annotations	This element contains information about mailto-event.
Diagram	
Type	extension of action
Type hierarchy	<ul style="list-style-type: none"> action mailto
Used by	Element event/mailto
Model	receiver+, subject, text
Children	receiver, subject, text
Source	<pre><xsd:complexType name="mailto"> <xsd:annotation> <xsd:documentation xml:lang="en">This element contains information about mailto-event.</xsd:documentation> </xsd:annotation> <xsd:complexContent> <xsd:extension base="action"> <xsd:sequence> <xsd:element name="receiver" type="emaillist" minOccurs="1" maxOccurs="unbounded"/> <xsd:element name="subject" type="notemptystring"/> <xsd:element name="text" type="notemptystring"/> </xsd:sequence> </xsd:extension> </xsd:complexContent> </xsd:complexType></pre>

</xsd:complexType>

Complex Type action

Namespace	No namespace
Diagram	
Used by	Complex Types fax, fileFtp, fileHttp, http, mailto
Source	<xsd:complexType name="action"/>

Complex Type http

Namespace	No namespace
Annotations	This element contains information about http-event.
Diagram	
Type	extension of action
Type hierarchy	<ul style="list-style-type: none"> • action • http
Used by	Elements event/http, realtime/http
Model	ALL(url type addheader addparams)
Children	addheader, addparams, type, url
Source	<pre><xsd:complexType name="http"> <xsd:annotation> <xsd:documentation xml:lang="en">This element contains information about http-event.</ xsd:documentation> </xsd:annotation> <xsd:complexContent> <xsd:extension base="action"> <xsd:all> <xsd:element name="url" type="url"/> <xsd:element name="type" type="httpmethods"/> <xsd:element name="addheader" type="http_addheader"/> <xsd:element name="addparams" type="http_addparams"/> </xsd:all> </xsd:extension> </xsd:complexContent> </xsd:complexType></pre>

Complex Type http_addheader


Namespace	No namespace
Diagram	
Type	extension of action_instruction
Type hierarchy	<ul style="list-style-type: none"> • action_instruction • http_addheader
Used by	Element http/addheader

Model	ANY element from ANY namespace
Source	<pre><xsd:complexType name="http_addheader"> <xsd:complexContent mixed="false"> <xsd:extension base="action_instruction"> <xsd:sequence> <xsd:any processContents="lax" maxOccurs="unbounded" /> </xsd:sequence> </xsd:extension> </xsd:complexContent> </xsd:complexType></pre>


Complex Type action_instruction

Namespace	No namespace
Diagram	
Used by	Complex Types http_addheader, http_addparams
Source	<pre><xsd:complexType name="action_instruction"></pre>

Complex Type http_addparams

Namespace	No namespace
Diagram	
Type	extension of action_instruction
Type hierarchy	<ul style="list-style-type: none"> • action_instruction • http_addparams
Used by	Element http/addparams
Model	ANY element from ANY namespace
Source	<pre><xsd:complexType name="http_addparams"> <xsd:complexContent> <xsd:extension base="action_instruction"> <xsd:sequence> <xsd:any processContents="lax" maxOccurs="unbounded" /> </xsd:sequence> </xsd:extension> </xsd:complexContent> </xsd:complexType></pre>

Complex Type fax

Namespace	No namespace
Diagram	
Type	extension of action
Type hierarchy	<ul style="list-style-type: none"> • action • fax
Used by	Element event/fax
Model	ANY element from ANY namespace
Source	<pre><xsd:complexType name="fax"> <xsd:complexContent> <xsd:extension base="action"> <xsd:sequence> <xsd:any processContents="lax" maxOccurs="unbounded" /> </xsd:sequence> </xsd:extension> </xsd:complexContent> </xsd:complexType></pre>

</xsd:complexType>

Complex Type letter

Namespace	No namespace
Annotations	This element contains information about the letter event.
Diagram	<pre> classDiagram class letter { <<This element contains information about the letter event.>> } class registered { <<Type xsd:boolean<< This tells if letter must be registered or not. >>> } class to { <<Type to<< >>> } class text { <<Type notemptystring<< This contains the content/text of letter. >>> } class costscoveredby { <<Type costscoveredby<< >>> } letter "3" --> registered letter "3" --> to letter "3" --> text letter "3" --> costscoveredby </pre>
Used by	Element event/letter
Model	ALL(registered to text costscoveredby)
Children	costscoveredby, registered, text, to
Source	<pre> <xsd:complexType name="letter"> <xsd:annotation> <xsd:documentation xml:lang="en">This element contains information about the letter event.</ xsd:documentation> </xsd:annotation> <xsd:all> <xsd:element name="registered" type="xsd:boolean"> <xsd:annotation> <xsd:documentation xml:lang="en">This tells if letter must be registered or not.</ xsd:documentation> </xsd:annotation> </xsd:element> <xsd:element name="to" type="to"/> <xsd:element name="text" type="notemptystring"> <xsd:annotation> <xsd:documentation xml:lang="en">This contains the content/text of letter.</ xsd:documentation> </xsd:annotation> </xsd:element> <xsd:element name="costscoveredby" type="costscoveredby"/> </xsd:all> </xsd:complexType> </pre>

Complex Type to

Namespace	No namespace
Annotations	This element contains information about recipient.
Diagram	<pre> classDiagram class to { <<This element contains information about recipient.>> } class name { <<Type notemptystring<< >>> } class department { <<Type notemptystring<< >>> } class nameperson { <<Type notemptystring<< >>> } class street { <<Type notemptystring<< >>> } class postcode { <<Type notemptystring<< >>> } class country { <<Type cc:countryCode<< >>> } class additionaladdressinfo { <<Type notemptystring<< >>> } to "3" --> name to "3" --> department to "3" --> nameperson to "3" --> street to "3" --> postcode to "3" --> country to "3" --> additionaladdressinfo </pre>

Used by	Element letter/to
Model	ALL(name{0,1} department{0,1} nameperson{0,1} street postcode country additionaladdressinfo{0,1})
Children	additionaladdressinfo, country, department, name, nameperson, postcode, street
Source	<pre> <xsd:complexType name="to"> <xsd:annotation> <xsd:documentation xml:lang="en">This element contains information about recipient.</xsd:documentation> </xsd:annotation> <xsd:all> <xsd:element name="name" type="notemptystring" minOccurs="0" maxOccurs="1"/> <xsd:element name="department" type="notemptystring" minOccurs="0" maxOccurs="1"/> <xsd:element name="nameperson" type="notemptystring" minOccurs="0" maxOccurs="1"/> <xsd:element name="street" type="notemptystring"/> <xsd:element name="postcode" type="notemptystring"/> <xsd:element name="country" type="cc:countryCode"/> <xsd:element name="additionaladdressinfo" type="notemptystring" minOccurs="0" maxOccurs="1"/> </xsd:all> </xsd:complexType></pre>

Complex Type costscoveredby

Namespace	No namespace
Annotations	This element contains information about who covered the costs of event.
Diagram	<pre> classDiagram class costscoveredby { +contractpartnerid : notemptystring +ourcontractpartnerid : notemptystring +maxcostscovered : notemptystring } note over costscoveredby: This element contains information about who covered the costs of event. note over maxcostscovered: This contains the max amount that will be covered. </pre>
Used by	Element letter/costscoveredby
Model	ALL(contractpartnerid ourcontractpartnerid maxcostscovered{0,1})
Children	contractpartnerid, maxcostscovered, ourcontractpartnerid
Source	<pre> <xsd:complexType name="costscoveredby"> <xsd:annotation> <xsd:documentation xml:lang="en">This element contains information about who covered the costs of event.</xsd:documentation> </xsd:annotation> <xsd:all> <xsd:element name="contractpartnerid" type="notemptystring"/> <xsd:element name="ourcontractpartnerid" type="notemptystring"/> <xsd:element name="maxcostscovered" type="notemptystring" minOccurs="0" maxOccurs="1"> <xsd:annotation> <xsd:documentation xml:lang="en">This contains the max amount that will be covered.</xsd:documentation> </xsd:annotation> </xsd:element> </xsd:all> </xsd:complexType></pre>

Complex Type bundle

Namespace	No namespace
Annotations	<p>On bundle level, there are information on how to handle a collection of "items". This is mainly an album/ep/single. A bundle is identified by one unique identifier, but more unique identifiers could and should be transmitted as well (see below "ids"). Most notably on the bundle-level is the "bundle name" which is basically the conjunction of the "name"- and the "version"-field. Also to have this easy at hand, there should be the desired "display_artistname"-string be present on this level. Of course, the receiver of the feed can still calculate the "correct" display_artistname by evaluating the contributors (see below) for this.</p>

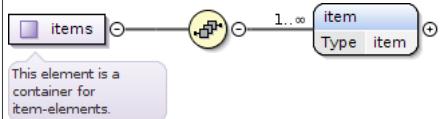
Diagram	<pre> classDiagram class bundle { displayname name version display_artistname ids items contributors information license_basis license_specifics reporting tags files purchase } </pre>
Used by	Elements feed/bundle, related/bundle
Model	ALL(displayname{0,1} name{0,1} version{0,1} display_artistname{0,1} ids items{0,1} contributors{0,1} information{0,1} license_basis{0,1} license_specifics{0,1} reporting{0,1} tags{0,1} files{0,1} purchase{0,1})
Children	contributors, display_artistname, displayname, files, ids, information, items, license_basis, license_specifics, name, purchase, reporting, tags, version
Source	<pre> <xsd:complexType name="bundle"> <xsd:annotation> <xsd:documentation xml:lang="en">On bundle level, there are information on how to handle a collection of "items". This is mainly an album/ep/single. A bundle is identified by one unique identifier, but more unique identifiers could and should be transmitted as well (see below "ids"). Most notably on the bundle-level is the "bundle name" which is basically the conjunction of the "name"- and the "version"-field. Also to have this easy at hand, there should be the desired "display_artistname"-string be present on this level. Of course, the receiver of the feed can still calculate the "correct" display_artistname by evaluating the contributors (see below) for this.</xsd:documentation> </xsd:annotation> <xsd:all> <xsd:element name="displayname" type="notemptystring" maxOccurs="1" minOccurs="0"/> <xsd:element name="name" type="notemptystring" maxOccurs="1" minOccurs="0"/> <xsd:element name="version" type="xsd:string" maxOccurs="1" minOccurs="0"/> <xsd:element name="display_artistname" type="notemptystring" maxOccurs="1" minOccurs="0"/> <xsd:element name="ids" type="ids"/> <xsd:element name="items" type="items" maxOccurs="1" minOccurs="0"/> <xsd:element name="contributors" type="contributors" maxOccurs="1" minOccurs="0"/> <xsd:element name="information" type="information" maxOccurs="1" minOccurs="0"/> <xsd:element name="license_basis" type="license_basis" maxOccurs="1" minOccurs="0"/> <xsd:element name="license_specifics" type="license_specifics" maxOccurs="1" minOccurs="0"/> <xsd:element name="reporting" type="reporting" maxOccurs="1" minOccurs="0"/> <xsd:element name="tags" type="tags" maxOccurs="1" minOccurs="0"/> <xsd:element name="files" type="files" maxOccurs="1" minOccurs="0"/> <xsd:element name="purchase" type="purchase" maxOccurs="1" minOccurs="0"/> </xsd:all> </xsd:complexType> </pre>

Complex Type ids

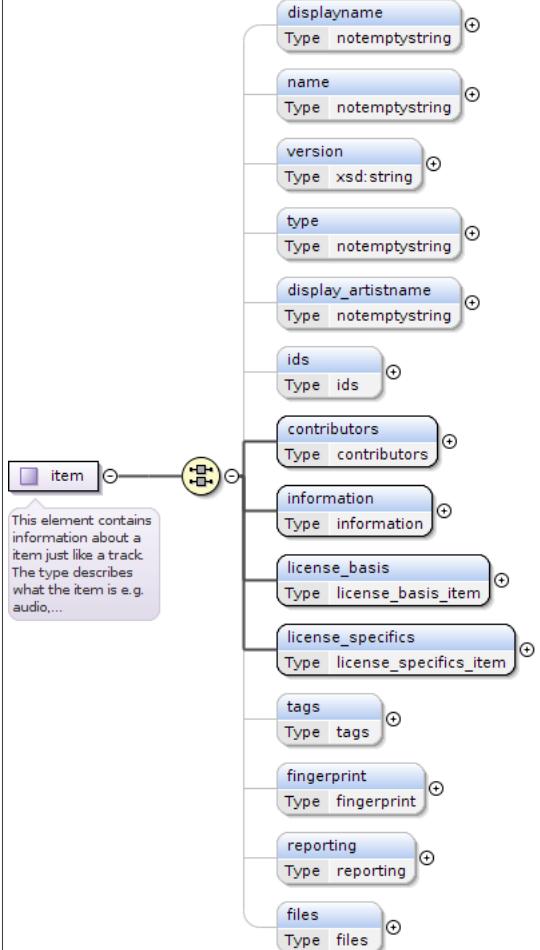
Namespace	No namespace
Annotations	This Element is a container for all IDs which are available for the associated element.
Diagram	<pre> graph LR ids[ids] --- grid[grid Type grid] ids --- upc[upc Type upc] ids --- isrc[isrc Type isrc] ids --- iswc[iswc Type iswc] ids --- contentauth[contentauth Type contentauth] ids --- labelordernum[labelordernum Type notemptystring] ids --- amzn[amzn Type amzn] ids --- isbn[isbn Type isbn] ids --- finetunes[finetunes Type finetunes] ids --- licensor[licensor Type notemptystring] ids --- licensee[licensee Type notemptystring] ids --- gvl[gvl Type gvl] ids --- amg[amg Type amg] </pre> <p>This Element is a container for all IDs which are available for the associated element.</p>
Used by	Elements bundle/ids, contributor/ids, item/ids
Model	ALL(grid{0,1} upc{0,1} isrc{0,1} iswc{0,1} contentauth{0,1} labelordernum{0,1} amzn{0,1} isbn{0,1} finetunes{0,1} licensor{0,1} licensee{0,1} gvl{0,1} amg{0,1})
Children	amg, amzn, contentauth, finetunes, grid, gvl, isbn, isrc, iswc, labelordernum, licensee, licensor, upc
Source	<pre> <xsd:complexType name="ids"> <xsd:annotation> <xsd:documentation xml:lang="en">This Element is a container for all IDs which are available for the associated element.</xsd:documentation> </xsd:annotation> <xsd:all> <xsd:element name="grid" type="grid" maxOccurs="1" minOccurs="0"/> <xsd:element name="upc" type="upc" maxOccurs="1" minOccurs="0"/> <xsd:element name="isrc" type="isrc" maxOccurs="1" minOccurs="0"/> <xsd:element name="iswc" type="iswc" maxOccurs="1" minOccurs="0"/> <xsd:element name="contentauth" type="contentauth" maxOccurs="1" minOccurs="0"/> <xsd:element name="labelordernum" type="notemptystring" maxOccurs="1" minOccurs="0"/> <xsd:element name="amzn" type="amzn" maxOccurs="1" minOccurs="0"/> <xsd:element name="isbn" type="isbn" maxOccurs="1" minOccurs="0"/> <xsd:element name="finetunes" type="finetunes" maxOccurs="1" minOccurs="0"/> <xsd:element name="licensor" type="notemptystring" maxOccurs="1" minOccurs="0"/> <xsd:element name="licensee" type="notemptystring" maxOccurs="1" minOccurs="0"/> <xsd:element name="gvl" type="gvl" maxOccurs="1" minOccurs="0"/> <xsd:element name="amg" type="amg" maxOccurs="1" minOccurs="0"/> </xsd:all> </xsd:complexType> </pre>

Complex Type items

Namespace	No namespace
Annotations	This element is a container for item-elements.

Diagram	
Used by	Element bundle/items
Model	item+
Children	item
Source	<pre><xsd:complexType name="items"> <xsd:annotation> <xsd:documentation xml:lang="en">This element is a container for item-elements.</xsd:documentation> </xsd:annotation> <xsd:sequence> <xsd:element name="item" type="item" maxOccurs="unbounded" minOccurs="1" /> </xsd:sequence> </xsd:complexType></pre>

Complex Type item

Namespace	No namespace
Annotations	<p>This element contains information about a item just like a track. The type describes what the item is e.g. audio, video, android-app et cetera. The entry "version" is important if different versions of the bundle exist. The licens_basic and license_specifics contains information and rules about pricing, allowed and disallowed territories, channels an so on. The child "files" hold information for the associated files for this item.</p>
Diagram	
Used by	Elements feed/item, items/item
Model	ALL(displayname{0,1} name{0,1} version{0,1} type{0,1} display_artistname{0,1} ids{0,1} contributors information license_basis license_specifics tags{0,1} fingerprint{0,1} reporting{0,1} files{0,1})

Children	contributors, display_artistname, displayname, files, fingerprint, ids, information, license_basis, license_specifics, name, reporting, tags, type, version
Source	<pre> <xsd:complexType name="item"> <xsd:annotation> <xsd:documentation xml:lang="en">This element contains information about a item just like a track. The type describes what the item is e.g. audio, video, android-app et cetera. The entry "version" is important if different versions of the bundle exist. The licens_basic and license_specifics contains information and rules about pricing, allowed and disallowed territories, channels an so on. The child "files" hold information for the associated files for this item.</xsd:documentation> </xsd:annotation> <xsd:all> <xsd:element name="displayname" type="notemptystring" maxOccurs="1" minOccurs="0"/> <xsd:element name="name" type="notemptystring" maxOccurs="1" minOccurs="0"/> <xsd:element name="version" type="xsd:string" maxOccurs="1" minOccurs="0"/> <xsd:element name="type" type="notemptystring" maxOccurs="1" minOccurs="0"/> <xsd:element name="display_artistname" type="notemptystring" maxOccurs="1" minOccurs="0"/> <xsd:element name="ids" type="ids" maxOccurs="1" minOccurs="0"/> <xsd:element name="contributors" type="contributors"/> <xsd:element name="information" type="information"/> <xsd:element name="license_basis" type="license_basis_item"/> <xsd:element name="license_specifics" type="license_specifics_item"/> <xsd:element name="tags" type="tags" maxOccurs="1" minOccurs="0"/> <xsd:element name="fingerprint" type="fingerprint" maxOccurs="1" minOccurs="0"/> <xsd:element name="reporting" type="reporting" maxOccurs="1" minOccurs="0"/> <xsd:element name="files" type="files" maxOccurs="1" minOccurs="0"/> </xsd:all> </xsd:complexType></pre>

Complex Type contributors

Namespace	No namespace
Annotations	This element contains a list of contributor.
Diagram	<pre> classDiagram class contributors class contributor { <<Type contributor>> } contributors "0..∞" --> contributor contributor "0..∞" --> contributor "Type" </pre> <p>This element contains a list of contributor.</p>
Used by	Elements bundle/contributors, item/contributors
Model	contributor*
Children	contributor
Source	<pre> <xsd:complexType name="contributors"> <xsd:annotation> <xsd:documentation xml:lang="en">This element contains a list of contributor.</xsd:documentation> </xsd:annotation> <xsd:sequence> <xsd:element name="contributor" type="contributor" maxOccurs="unbounded" minOccurs="0"/> </xsd:sequence> </xsd:complexType></pre>

Complex Type contributor

Namespace	No namespace
Annotations	<p>This element contains information of one contributor.</p> <p>A contributor can be a label, performer, texter, editor, conductor, artist, singer, composer, mixer, remixer, producer, author, arranger, featuring-Artist, with-Artist, DJ, versus-Artist, meets-Artist, presents-Artist, narrator, compilator, copyright, production or clearinghouse.</p> <p>A year should be provided in case the type equals copyright or production.</p>

Diagram											
Used by	Element contributors/contributor										
Model	ALL(name type year{0,1} ids www{0,1})										
Children	ids, name, type, www, year										
Attributes	<table border="1"> <thead> <tr> <th>QName</th><th>Type</th><th>Fixed</th><th>Default</th><th>Use</th></tr> </thead> <tbody> <tr> <td>num</td><td>xsd:integer</td><td></td><td></td><td>optional</td></tr> </tbody> </table>	QName	Type	Fixed	Default	Use	num	xsd:integer			optional
QName	Type	Fixed	Default	Use							
num	xsd:integer			optional							
Source	<pre><xsd:complexType name="contributor"> <xsd:annotation> <xsd:documentation xml:lang="en">This element contains information of one contributor. A contributor can be a label, performer, texter, editor, conductor, artist, singer, composer, mixer, remixer, producer, author, arranger, featuring-Artist, with-Artist, DJ, versus-Artist, meets-Artist, presents-Artist, narrator, compilator, copyright, production or clearinghouse. A year should be provided in case the type equals copyright or production.</xsd:documentation> </xsd:annotation> <xsd:all> <xsd:element name="name" type="notemptystring"/> <xsd:element name="type" type="contributorType"/> <xsd:element name="year" type="year" maxOccurs="1" minOccurs="0"/> <xsd:element name="ids" type="ids"/> <xsd:element name="www" type="www" maxOccurs="1" minOccurs="0"/> </xsd:all> <xsd:attribute name="num" type="xsd:integer"/> </xsd:complexType></pre>										

Complex Type www

Namespace	No namespace
Annotations	This Element is a container for the important web addresses and phone of the associated element (contributor e.g.). Phone should be in international format. Every single information-entry cold be tagged "publishable" which would then mean whether customers of receiver are also allowed to be given this information. If publishable is not given, then this is granted.
Diagram	
Used by	Element contributor/www
Model	facebook{0,1} , myspace{0,1} , homepage{0,5} , twitter{0,1} , blog{0,5} , phone{0,1}

Children	blog, facebook, homepage, myspace, phone, twitter
Source	<pre> <xsd:complexType name="www"> <xsd:annotation> <xsd:documentation xml:lang="en">This Element is a container for the important web addresses and phone of the associated element (contributor e.g.). Phone should be in international format. Every single information-entry cold be tagged "publishable" which would then mean whether customers of receiver are also allowed to be given this information. If publishable is not given, then this is granted.</xsd:documentation> </xsd:annotation> <xsd:sequence> <xsd:element name="facebook" type="publishable_url" maxOccurs="1" minOccurs="0"/> <xsd:element name="myspace" type="publishable_url" maxOccurs="1" minOccurs="0"/> <xsd:element name="homepage" type="publishable_url" maxOccurs="5" minOccurs="0"/> <xsd:element name="twitter" type="publishable_url" maxOccurs="1" minOccurs="0"/> <xsd:element name="blog" type="publishable_url" maxOccurs="5" minOccurs="0"/> <xsd:element name="phone" type="publishable_url" maxOccurs="1" minOccurs="0"/> </xsd:sequence> </xsd:complexType></pre>

Complex Type publishable_url

Namespace	No namespace										
Diagram	<pre> classDiagram class publishable_url { <<Base Type url>> } class url { <<@ attributes>> } publishable_url < -- url url < -- @publishable : xsd:boolean </pre>										
Type	extension of url										
Type hierarchy	<ul style="list-style-type: none"> xsd:anyURI url publishable_url 										
Used by	Elements www/blog, www/facebook, www/homepage, www/myspace, www/phone, www/twitter										
Attributes	<table border="1"> <thead> <tr> <th>QName</th> <th>Type</th> <th>Fixed</th> <th>Default</th> <th>Use</th> </tr> </thead> <tbody> <tr> <td>publishable</td> <td>xsd:boolean</td> <td></td> <td></td> <td>optional</td> </tr> </tbody> </table>	QName	Type	Fixed	Default	Use	publishable	xsd:boolean			optional
QName	Type	Fixed	Default	Use							
publishable	xsd:boolean			optional							
Source	<pre> <xsd:complexType name="publishable_url"> <xsd:simpleContent> <xsd:extension base="url"> <xsd:attribute name="publishable" type="xsd:boolean"/> </xsd:extension> </xsd:simpleContent> </xsd:complexType></pre>										

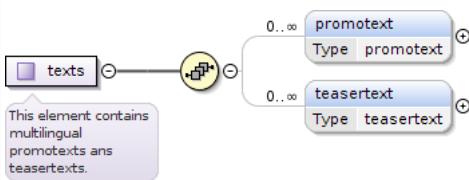
Complex Type information

Namespace	No namespace
Annotations	<p>This element contains important data for an item/file. Multilingual promotexts ans teasertexts, dates of physical and digital release, playlength of file, position of the file in relation to other file of bundle, number of set (e.g. 2 for cd 2), the suggested prelistining offset if the file not starts e.g. with significant content, origin country and main language of file and information about related bundles.</p>

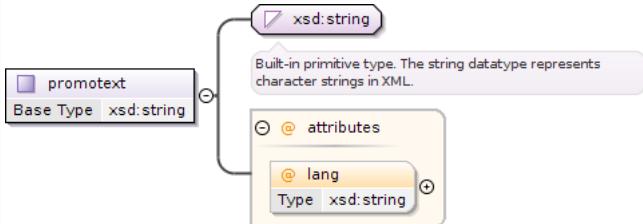
Diagram	<pre> classDiagram class information { texts physical_release_datetime digital_release_datetime playlength num setnum suggested_prelistening_offset origin_country main_language compositiontype recordingtype related } texts < -- physical_release_datetime texts < -- digital_release_datetime texts < -- playlength texts < -- num texts < -- setnum texts < -- suggested_prelistening_offset texts < -- origin_country texts < -- main_language texts < -- compositiontype texts < -- recordingtype texts < -- related </pre> <p>This element contains important data for an item/file. Multilingual promotexts ans teasertexts, dates of physical and digital release, playlength of file, position of the file in relation to other file of bundle, number of set (e.g. 2 for cd 2), the suggested prelistining offset if the file not starts e.g. with significant content, origin country and main language of file and information about related bundles.</p>
Used by	Elements bundle/information, item/information
Model	ALL(texts{0,1} physical_release_datetime digital_release_datetime playlength{0,1} num{0,1} setnum{0,1} suggested_prelistening_offset{0,1} origin_country{0,1} main_language{0,1} compositiontype{0,1} recordingtype{0,1} related{0,1})
Children	compositiontype, digital_release_datetime, main_language, num, origin_country, physical_release_datetime, playlength, recordingtype, related, setnum, suggested_prelistening_offset, texts
Source	<pre> <xsd:complexType name="information"> <xsd:annotation> <xsd:documentation xml:lang="en">This element contains important data for an item/file. Multilingual promotexts ans teasertexts, dates of physical and digital release, playlength of file, position of the file in relation to other file of bundle, number of set (e.g. 2 for cd 2), the suggested prelistining offset if the file not starts e.g. with significant content, origin country and main language of file and information about related bundles.</xsd:documentation> </xsd:annotation> <xsd:all> <xsd:element name="texts" type="texts" maxOccurs="1" minOccurs="0"/> <xsd:element name="physical_release_datetime" type="datetimeGMT"/> <xsd:element name="digital_release_datetime" type="datetimeGMT"/> <xsd:element name="playlength" type="xsd:integer" maxOccurs="1" minOccurs="0"/> <xsd:element name="num" type="xsd:integer" maxOccurs="1" minOccurs="0"/> <xsd:element name="setnum" type="xsd:integer" maxOccurs="1" minOccurs="0"/> <xsd:element name="suggested_prelistening_offset" type="xsd:integer" maxOccurs="1" minOccurs="0"/> <xsd:element name="origin_country" type="cc:countryCode" maxOccurs="1" minOccurs="0"/> <xsd:element name="main_language" type="l:language" maxOccurs="1" minOccurs="0"/> <xsd:element name="compositiontype" type="compositionType" maxOccurs="1" minOccurs="0"/> <xsd:element name="recordingtype" type="recordingType" maxOccurs="1" minOccurs="0"/> <xsd:element name="related" type="related" maxOccurs="1" minOccurs="0"/> </xsd:all> </xsd:complexType> </pre>

Complex Type texts

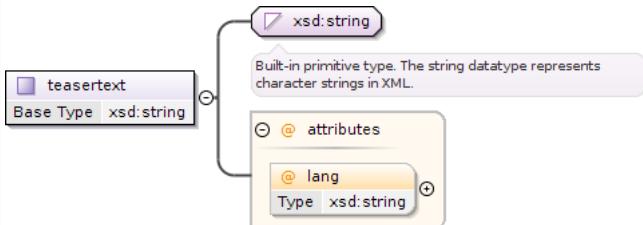
Namespace	No namespace
Annotations	This element contains multilingual promotexts ans teasertexts.

Diagram	
Used by	Element information/texts
Model	promotext*, teasertext*
Children	promotext, teasertext
Source	<pre><xsd:complexType name="texts"> <xsd:annotation> <xsd:documentation xml:lang="en">This element contains multilingual promotexts and teasertexts.</xsd:documentation> </xsd:annotation> <xsd:sequence> <xsd:element name="promotext" type="promotext" maxOccurs="unbounded" minOccurs="0" /> <xsd:element name="teasertext" type="teasertext" maxOccurs="unbounded" minOccurs="0" /> </xsd:sequence> </xsd:complexType></pre>

Complex Type promotext

Namespace	No namespace										
Diagram											
Type	extension of xsd:string										
Used by	Element texts/promotext										
Attributes	<table border="1"> <thead> <tr> <th>QName</th> <th>Type</th> <th>Fixed</th> <th>Default</th> <th>Use</th> </tr> </thead> <tbody> <tr> <td>lang</td> <td>xsd:string</td> <td></td> <td></td> <td>optional</td> </tr> </tbody> </table>	QName	Type	Fixed	Default	Use	lang	xsd:string			optional
QName	Type	Fixed	Default	Use							
lang	xsd:string			optional							
Source	<pre><xsd:complexType name="promotext"> <xsd:simpleContent> <xsd:extension base="xsd:string"> <xsd:attribute name="lang" type="xsd:string" /> </xsd:extension> </xsd:simpleContent> </xsd:complexType></pre>										

Complex Type teasertext

Namespace	No namespace										
Diagram											
Type	extension of xsd:string										
Used by	Element texts/teasertext										
Attributes	<table border="1"> <thead> <tr> <th>QName</th> <th>Type</th> <th>Fixed</th> <th>Default</th> <th>Use</th> </tr> </thead> <tbody> <tr> <td>lang</td> <td>xsd:string</td> <td></td> <td></td> <td>optional</td> </tr> </tbody> </table>	QName	Type	Fixed	Default	Use	lang	xsd:string			optional
QName	Type	Fixed	Default	Use							
lang	xsd:string			optional							
Source	<pre><xsd:complexType name="teasertext"></pre>										

```

<xsd:simpleContent>
  <xsd:extension base="xsd:string">
    <xsd:attribute name="lang" type="xsd:string" />
  </xsd:extension>
</xsd:simpleContent>
</xsd:complexType>

```

Complex Type related

Namespace	No namespace
Annotations	This element contains informations of bundles which are related to the bundle of the actual feed. It may includes one or more physical distributors and one element "utube" which could include information about channel and url at youtube.
Diagram	<p>This element contains informations of bundles which are related to the bundle of the actual feed. It may includes one or more physical distributors and one element "utube" which could include information about channel and url at youtube.</p>
Used by	Element information/related
Model	physical_distributor*, utube{0,1}, bundle*
Children	bundle, physical_distributor, utube
Source	<pre> <xsd:complexType name="related"> <xsd:annotation> <xsd:documentation xml:lang="en">This element contains informations of bundles which are related to the bundle of the actual feed. It may includes one or more physical distributors and one element "utube" which could include information about channel and url at youtube.</xsd:documentation> </xsd:annotation> <xsd:sequence> <xsd:element name="physical_distributor" type="physical_distributor" maxOccurs="unbounded" minOccurs="0"/> <xsd:element name="utube" type="utube" maxOccurs="1" minOccurs="0"/> <xsd:element name="bundle" type="bundle" maxOccurs="unbounded" minOccurs="0"/> </xsd:sequence> </xsd:complexType> </pre>

Complex Type physical_distributor

Namespace	No namespace										
Diagram											
Type	extension of notemptystring										
Type hierarchy	<ul style="list-style-type: none"> xsd:string notemptystring physical_distributor 										
Used by	Element related/physical_distributor										
Attributes	<table border="1"> <thead> <tr> <th>QName</th> <th>Type</th> <th>Fixed</th> <th>Default</th> <th>Use</th> </tr> </thead> <tbody> <tr> <td>publishable</td> <td>xsd:boolean</td> <td></td> <td></td> <td>optional</td> </tr> </tbody> </table>	QName	Type	Fixed	Default	Use	publishable	xsd:boolean			optional
QName	Type	Fixed	Default	Use							
publishable	xsd:boolean			optional							
Source	<pre> <xsd:complexType name="physical_distributor"> <xsd:simpleContent> <xsd:extension base="notemptystring"> <xsd:attribute name="publishable" type="xsd:boolean" /> </xsd:extension> </xsd:simpleContent> </xsd:complexType> </pre>										

Complex Type utube

Namespace	No namespace
Annotations	Contains optional information about youtube url und channel.
Diagram	<pre> graph LR utube[utube] --> url[url
Type: notemptystring] utube --> channel[channel
Type: notemptystring] url --> url channel --> channel </pre>
Used by	Element related/utube
Model	ALL(url{0,1} channel{0,1})
Children	channel, url
Source	<pre> <xsd:complexType name="utube"> <xsd:annotation> <xsd:documentation xml:lang="en">Contains optional information about youtube url und channel.</xsd:documentation> </xsd:annotation> <xsd:all> <xsd:element name="url" type="notemptystring" maxOccurs="1" minOccurs="0"/> <xsd:element name="channel" type="notemptystring" maxOccurs="1" minOccurs="0"/> </xsd:all> </xsd:complexType> </pre>

Complex Type license_basis

Namespace	No namespace
Annotations	This element includes the basic rules and information under which this bundle is provided. If "download_allowed" is given it will be evaluated, if it's not included, basic download is allowed per default. The element "streaming_allowed" tells if streaming is allowed or not.
Diagram	<pre> graph LR license_basis[license_basis] --> territorial[territorial
Type: territorial] license_basis --> timeframe[timeframe
Type: timeframe] license_basis --> pricing(pricing
Type: pricing) license_basis --> download_allowed[download_allowed
Type: xsd:boolean] license_basis --> streaming_allowed[streaming_allowed
Type: xsd:boolean] territorial --> territorial timeframe --> timeframe pricing --> pricing download_allowed --> download_allowed streaming_allowed --> streaming_allowed </pre>
Used by	Element bundle/license_basis
Model	ALL(territorial{0,1} timeframe pricing{0,1} download_allowed{0,1} streaming_allowed channels{0,1})
Children	channels, download_allowed, pricing, streaming_allowed, territorial, timeframe
Source	<pre> <xsd:complexType name="license_basis"> <xsd:annotation> <xsd:documentation xml:lang="en">This element includes the basic rules and information under which this bundle is provided. If "download_allowed" is given it will be evaluated, if it's not included, basic download is allowed per default. The element "streaming_allowed" tells if streaming is allowed or not.</xsd:documentation> </xsd:annotation> <xsd:all> <xsd:element name="territorial" type="territorial" maxOccurs="1" minOccurs="0"/> <xsd:element name="timeframe" type="timeframe" maxOccurs="1" minOccurs="1"/> <xsd:element name="pricing" type="pricing" maxOccurs="1" minOccurs="0"/> <xsd:element name="download_allowed" type="xsd:boolean" maxOccurs="1" minOccurs="0"/> <xsd:element name="streaming_allowed" type="xsd:boolean" maxOccurs="1" minOccurs="1"/> <xsd:element name="channels" type="channels" maxOccurs="1" minOccurs="0"/> </xsd:all> </xsd:complexType> </pre>

Complex Type territorial

Namespace	No namespace
Annotations	This Element is a container for territories. There should be a entry for all territories (ISO 3166-1 country code) with a attribute if distribution is allowed or not. "WW" means "World Wide" and is a wildcard for all territories.
Diagram	<pre> classDiagram class territorial { <<This Element is a container for territories. There should be a entry for all territories (ISO 3166-1 country code) with a attribute if distribution is allowed or not. 'WW' means 'World Wide' and is a wildcard for all territories.>> } class territory { <<This Element is a container for territories. There should be a entry for all territories (ISO 3166-1 country code) with a attribute if distribution is allowed or not. 'WW' means 'World Wide' and is a wildcard for all territories.>> } territorial "0..∞" *-- "1" territory </pre>
Used by	Elements license_basis/territorial, license_basis_item/territorial
Model	territory*
Children	territory
Source	<pre> <xsd:complexType name="territorial"> <xsd:annotation> <xsd:documentation xml:lang="en">This Element is a container for territories. There should be a entry for all territories (ISO 3166-1 country code) with a attribute if distribution is allowed or not. "WW" means "World Wide" and is a wildcard for all territories.</xsd:documentation> </xsd:annotation> <xsd:sequence> <xsd:element name="territory" type="territory" maxOccurs="unbounded" minOccurs="0" /> </xsd:sequence> </xsd:complexType> </pre>

Complex Type territory

Namespace	No namespace										
Annotations	A territory includes one country code an the required attribute "type". Type can be "allow" or "disallow" and tells about the allowance of corresponding territory.										
Diagram	<pre> classDiagram class territory { <<A territory includes one country code an the required attribute 'type'. Type can be 'allow' or 'disallow' and tells...>> } class cc:countryCode { <<This element includes a list of ISO 3166-1 country codes.>> } territory "1" *-- "1" cc:countryCode </pre>										
Type	extension of countryCode										
Type hierarchy	<ul style="list-style-type: none"> xsd:string <ul style="list-style-type: none"> countryCode territory 										
Used by	Element territorial/territory										
Attributes	<table border="1"> <thead> <tr> <th>QName</th> <th>Type</th> <th>Fixed</th> <th>Default</th> <th>Use</th> </tr> </thead> <tbody> <tr> <td>type</td> <td>allowance</td> <td></td> <td></td> <td>optional</td> </tr> </tbody> </table>	QName	Type	Fixed	Default	Use	type	allowance			optional
QName	Type	Fixed	Default	Use							
type	allowance			optional							
Source	<pre> <xsd:complexType name="territory"> <xsd:annotation> <xsd:documentation xml:lang="en">A territory includes one country code an the required attribute "type". Type can be "allow" or "disallow" and tells about the allowance of corresponding territory.</xsd:documentation> </xsd:annotation> <xsd:simpleContent> <xsd:extension base="cc:countryCode"> <xsd:attribute name="type" type="allowance" use="optional" /> </xsd:extension> </xsd:simpleContent> </xsd:complexType> </pre>										

Complex Type timeframe

Namespace	No namespace
-----------	--------------

Annotations	Timeframe contains the most-recent-release-date from which on receiver may use this and the cancellation-date.
Diagram	<pre> classDiagram class timeframe { <<Timeframe contains the most-recent-release-date from which on receiver may use this and the cancellation-date.>> } timeframe "1" -- "2" from : Type datetimeGMT timeframe "1" -- "2" to : Type datetimeGMT </pre>
Used by	Elements license_basis/timeframe, license_basis_item/timeframe
Model	from , to
Children	from, to
Source	<pre> <xsd:complexType name="timeframe"> <xsd:annotation> <xsd:documentation xml:lang="en">Timeframe contains the most-recent-release-date from which on receiver may use this and the cancellation-date.</xsd:documentation> </xsd:annotation> <xsd:sequence> <xsd:element name="from" type="datetimeGMT" /> <xsd:element name="to" type="datetimeGMT" /> </xsd:sequence> </xsd:complexType> </pre>

Complex Type pricing

Namespace	No namespace
Annotations	Pricecode is an arbitrary-info. An explicitly given wholesale-price overrides the basic pricecode-given-wp. Most probably either one of pricecode OR wholesaleprice should be given.
Diagram	<pre> classDiagram class pricing { <<Pricecode is an arbitrary-info. An explicitly given wholesale-price overrides the basic pricecode-given-wp. Most...>> } pricing "1" -- "2" pricecode : Type notemptystring pricing "1" -- "2" wholesale : Type notemptystring </pre>
Used by	Elements license_basis/pricing, license_basis_item/pricing
Model	ALL(pricecode{0,1} wholesale{0,1})
Children	pricecode, wholesale
Source	<pre> <xsd:complexType name="pricing"> <xsd:annotation> <xsd:documentation xml:lang="en">Pricecode is an arbitrary-info. An explicitly given wholesale-price overrides the basic pricecode-given-wp. Most probably either one of pricecode OR wholesaleprice should be given.</xsd:documentation> </xsd:annotation> <xsd:all> <xsd:element name="pricecode" type="notemptystring" maxOccurs="1" minOccurs="0" /> <xsd:element name="wholesale" type="notemptystring" maxOccurs="1" minOccurs="0" /> </xsd:all> </xsd:complexType> </pre>

Complex Type channels

Namespace	No namespace
Annotations	This element is a container for channels which can be either "all", "ad supported", "premium" or "ringtones".
Diagram	<pre> classDiagram class channels { <<This element is a container for channels which can be either "all", "ad supported", "premium" or "ringtones".>> } channels "1" -- "0..oo" channel : Type channel </pre>
Used by	Elements license_basis/channels, license_basis_item/channels

Model	channel*
Children	channel
Source	<pre><xsd:complexType name="channels"> <xsd:annotation> <xsd:documentation xml:lang="en">This element is a container for channels which can be either "all", "ad supported", "premium" or "ringtones".</xsd:documentation> </xsd:annotation> <xsd:sequence> <xsd:element name="channel" type="channel" maxOccurs="unbounded" minOccurs="0"/> </xsd:sequence> </xsd:complexType></pre>

Complex Type channel

Namespace	No namespace																				
Annotations	A channels can be either "all", "ad supported", "premium" or "ringtones". The required attribute "type" regards to the allowance in reference to the channel. Type can be "allow" or "disallow".																				
Diagram																					
Type	extension of xsd:string																				
Used by	Element channels/channel																				
Attributes	<table border="1"> <thead> <tr> <th>QName</th> <th>Type</th> <th>Fixed</th> <th>Default</th> <th>Use</th> </tr> </thead> <tbody> <tr> <td>download_allowed</td> <td>xsd:boolean</td> <td></td> <td></td> <td>optional</td> </tr> <tr> <td>streaming_allowed</td> <td>xsd:boolean</td> <td></td> <td></td> <td>optional</td> </tr> <tr> <td>type</td> <td>allowance</td> <td></td> <td></td> <td>required</td> </tr> </tbody> </table>	QName	Type	Fixed	Default	Use	download_allowed	xsd:boolean			optional	streaming_allowed	xsd:boolean			optional	type	allowance			required
QName	Type	Fixed	Default	Use																	
download_allowed	xsd:boolean			optional																	
streaming_allowed	xsd:boolean			optional																	
type	allowance			required																	
Source	<pre><xsd:complexType name="channel"> <xsd:annotation> <xsd:documentation xml:lang="en">A channels can be either "all", "ad supported", "premium" or "ringtones". The required attribute "type" regards to the allowance in reference to the channel. Type can be "allow" or "disallow".</xsd:documentation> </xsd:annotation> <xsd:simpleContent> <xsd:extension base="xsd:string"> <xsd:attribute name="type" type="allowance" use="required"/> <xsd:attribute name="download_allowed" type="xsd:boolean" use="optional"/> <xsd:attribute name="streaming_allowed" type="xsd:boolean" use="optional"/> </xsd:extension> </xsd:simpleContent> </xsd:complexType></pre>																				

Complex Type license_specifics

Namespace	No namespace
Annotations	This element includes specific rules which should be applied.
Diagram	
Used by	Element bundle/license_specifics
Model	ALL(rules{0,1})
Children	rules

Source	<pre><xsd:complexType name="license_specifics"> <xsd:annotation> <xsd:documentation xml:lang="en">This element includes specific rules which should be applied.</xsd:documentation> </xsd:annotation> <xsd:all> <xsd:element name="rules" type="rules" maxOccurs="1" minOccurs="0"/> </xsd:all> </xsd:complexType></pre>
--------	--

Complex Type rules

Namespace	No namespace
Annotations	This element is a container for rules. It needs an ordered mode here - first come first match.
Diagram	
Used by	Elements license_specifics/rules, license_specifics_item/rules
Model	rule*
Children	rule
Source	<pre><xsd:complexType name="rules"> <xsd:annotation> <xsd:documentation xml:lang="en">This element is a container for rules. It needs an ordered mode here - first come first match.</xsd:documentation> </xsd:annotation> <xsd:sequence> <xsd:element name="rule" type="rule" maxOccurs="unbounded" minOccurs="0"/> </xsd:sequence> </xsd:complexType></pre>

Complex Type rule

Namespace	No namespace										
Annotations	A rule must include a "if"-element and a "then"-element to shape a legal instruction. It can also include a "else"-element.										
Diagram											
Used by	Element rules/rule										
Model	if , then , else{0,1}										
Children	else, if, then										
Attributes	<table border="1"> <thead> <tr> <th>QName</th> <th>Type</th> <th>Fixed</th> <th>Default</th> <th>Use</th> </tr> </thead> <tbody> <tr> <td>num</td> <td>xsd:integer</td> <td></td> <td></td> <td>optional</td> </tr> </tbody> </table>	QName	Type	Fixed	Default	Use	num	xsd:integer			optional
QName	Type	Fixed	Default	Use							
num	xsd:integer			optional							
Source	<pre><xsd:complexType name="rule"> <xsd:annotation> <xsd:documentation xml:lang="en">A rule must include a "if"-element and a "then"-element to shape a legal instruction. It can also include a "else"-element.</xsd:documentation> </xsd:annotation> <xsd:sequence> <xsd:element name="if" type="if"/> <xsd:element name="then" type="then"/> <xsd:element name="else" type="else" maxOccurs="1" minOccurs="0"/> </xsd:sequence> </xsd:complexType></pre>										

```
</xsd:sequence>
<xsd:attribute name="num" type="xsd:integer" />
</xsd:complexType>
```

Complex Type if

Namespace	No namespace
Annotations	This element must be the first element in a rule. It includes the information what is affected by the rule, an operator like "equals", "before", "after", "contains" or "containedin" and a value which will be compared.
Diagram	<pre> graph LR If[if] --> What[what Type notemptystring] If --> Operator[operator Type operator] If --> Value[value Type notemptystring] </pre> <p>This element must be the first element in a rule. It includes the information what is affected by the rule, an operator like "equals", "before", "after", "contains" or "containedin" and a value which will be compared.</p>
Used by	Element rule/if
Model	what , operator , value
Children	operator, value, what
Source	<pre> <xsd:complexType name="if"> <xsd:annotation> <xsd:documentation xml:lang="en">This element must be the first element in a rule. It includes the information what is affected by the rule, an operator like "equals", "before", "after", "contains" or "containedin" and a value which will be compared.</xsd:documentation> </xsd:annotation> <xsd:sequence> <xsd:element name="what" type="notemptystring"/> <xsd:element name="operator" type="operator"/> <xsd:element name="value" type="notemptystring"/> </xsd:sequence> </xsd:complexType> </pre>

Complex Type then

Namespace	No namespace
Annotations	This element must be the second in a rule and includes information "echo" for debugging output and can include an element "break" which means to not process any more rules. It also could include information "proclaim".
Diagram	<pre> graph LR Then[then] --> Proclaim[proclaim Type proclaim] Then --> Echo[echo Type notemptystring] Then --> Break[break] </pre> <p>This element must be the second in a rule and includes information "echo" for debugging output and can include an element "break" which means to not process any more rules. It also could include information "proclaim".</p>
Used by	Element rule/then
Model	proclaim*, echo{0,1} , break{0,1}
Children	break, echo, proclaim
Source	<pre> <xsd:complexType name="then"> <xsd:annotation> <xsd:documentation xml:lang="en">This element must be the second in a rule and includes information "echo" for debugging output and can include an element "break" which means to not process any more rules. It also could include information "proclaim".</xsd:documentation> </xsd:annotation> <xsd:sequence> <xsd:element name="proclaim" type="proclaim" maxOccurs="unbounded" minOccurs="0"/> <xsd:element name="echo" type="notemptystring" maxOccurs="1" minOccurs="0"/> <xsd:element name="break" maxOccurs="1" minOccurs="0"/> </xsd:sequence> </xsd:complexType> </pre>

Complex Type proclaim

Namespace	No namespace
Annotations	This element includes the information what is affected and the corresponding value.
Diagram	<pre> classDiagram class proclaim { what "Type notemptystring" for "Type notemptystring" } note over proclaim: This element includes the information what is affected and the corresponding value. </pre>
Used by	Elements else/proclaim, then/proclaim
Model	what , for
Children	for, what
Source	<pre> <xsd:complexType name="proclaim"> <xsd:annotation> <xsd:documentation xml:lang="en">This element includes the information what is affected and the corresponding value.</xsd:documentation> </xsd:annotation> <xsd:sequence> <xsd:element name="what" type="notemptystring"/> <xsd:element name="for" type="notemptystring"/> </xsd:sequence> </xsd:complexType> </pre>

Complex Type else

Namespace	No namespace
Annotations	This element is optional. It includes information "proclaim" and can include an element "break" which means to not process any more rules.
Diagram	<pre> classDiagram class else { 0..> proclaim "Type proclaim" break } note over else: This element is optional. It includes information "proclaim" and can include an element "break" which means to not... </pre>
Used by	Element rule/else
Model	proclaim*, break{0,1}
Children	break, proclaim
Source	<pre> <xsd:complexType name="else"> <xsd:annotation> <xsd:documentation xml:lang="en">This element is optional. It includes information "proclaim" and can include an element "break" which means to not process any more rules.</xsd:documentation> </xsd:annotation> <xsd:sequence> <xsd:element name="proclaim" type="proclaim" maxOccurs="unbounded" minOccurs="0"/> <xsd:element name="break" maxOccurs="1" minOccurs="0"/> </xsd:sequence> </xsd:complexType> </pre>

Complex Type reporting

Namespace	No namespace
Annotations	This element contains information about reporting.
Diagram	<pre> classDiagram class reporting { realtime "Type realtime" postponed "Type postponed" } note over reporting: This element contains information about reporting. </pre>

Used by	Elements	bundle/reporting, item/reporting
Model	ALL(realtime postponed)	
Children	postponed, realtime	
Source	<pre><xsd:complexType name="reporting"> <xsd:annotation> <xsd:documentation xml:lang="en">This element contains information about reporting.</xsd:documentation> </xsd:annotation> <xsd:all> <xsd:element name="realtime" type="realtime"/> <xsd:element name="postponed" type="postponed"/> </xsd:all> </xsd:complexType></pre>	

Complex Type realtime

Namespace	No namespace	
Annotations	This element contains http information for realtime reporting.	
Diagram	<pre> sequenceDiagram participant Realtime as realtime participant HTTP as http Realtime->>HTTP: activate Realtime activate HTTP deactivate Realtime deactivate HTTP </pre>	
Used by	Element	reporting/realtime
Model	http	
Children	http	
Source	<pre><xsd:complexType name="realtime"> <xsd:annotation> <xsd:documentation xml:lang="en">This element contains http information for realtime reporting.</xsd:documentation> </xsd:annotation> <xsd:sequence> <xsd:element name="http" type="http"/> </xsd:sequence> </xsd:complexType></pre>	

Complex Type postponed

Namespace	No namespace	
Annotations	This element contains some info on reporting when doing the "usual" time-gap-reporting. Id is a ID of a reporting or similar.	
Diagram	<pre> sequenceDiagram participant Postponed as postponed participant ID as id Postponed->>ID: activate Postponed activate ID deactivate Postponed deactivate ID </pre>	
Used by	Element	reporting/postponed
Model	id	
Children	id	
Source	<pre><xsd:complexType name="postponed"> <xsd:annotation> <xsd:documentation xml:lang="en">This element contains some info on reporting when doing the "usual" time-gap-reporting. Id is a ID of a reporting or similar.</xsd:documentation> </xsd:annotation> <xsd:sequence> <xsd:element name="id" type="notemptystring"/> </xsd:sequence> </xsd:complexType></pre>	

Complex Type tags

Namespace	No namespace	
Annotations	This element contains information about genres and more.	


Diagram	<pre> classDiagram class tags { genres bundle_only explicit_lyrics recommended_age_from live acoustic instrumental abridged } note over tags: This element contains information about genres and more. </pre>
Used by	Elements bundle/tags, item/tags
Model	ALL(genres{0,1} bundle_only{0,1} explicit_lyrics{0,1} recommended_age_from{0,1} live{0,1} acoustic{0,1} instrumental{0,1} abridged{0,1})
Children	abridged, acoustic, bundle_only, explicit_lyrics, genres, instrumental, live, recommended_age_from
Source	<pre> <xsd:complexType name="tags"> <xsd:annotation> <xsd:documentation xml:lang="en">This element contains information about genres and more.</xsd:documentation> </xsd:annotation> <xsd:all> <xsd:element name="genres" type="genres" maxOccurs="1" minOccurs="0"/> <xsd:element name="bundle_only" type="xsd:boolean" maxOccurs="1" minOccurs="0"/> <xsd:element name="explicit_lyrics" type="explicitLyrics" maxOccurs="1" minOccurs="0"/> <xsd:element name="recommended_age_from" type="xsd:integer" maxOccurs="1" minOccurs="0"/> <xsd:element name="live" type="xsd:boolean" maxOccurs="1" minOccurs="0"/> <xsd:element name="acoustic" type="xsd:boolean" maxOccurs="1" minOccurs="0"/> <xsd:element name="instrumental" type="xsd:boolean" maxOccurs="1" minOccurs="0"/> <xsd:element name="abridged" type="xsd:boolean" maxOccurs="1" minOccurs="0"/> </xsd:all> </xsd:complexType> </pre>

Complex Type genres

Namespace	No namespace
Annotations	This element contains a list of genres.
Diagram	<pre> classDiagram class genres { <<This element contains a list of genres.>> "0..oo" --> genre : Type g:genre } note over genres: This element contains a list of genres. </pre>
Used by	Element tags/genres
Model	genre*
Children	genre
Source	<pre> <xsd:complexType name="genres"> <xsd:annotation> <xsd:documentation xml:lang="en">This element contains a list of genres.</xsd:documentation> </xsd:annotation> <xsd:sequence> <xsd:element name="genre" type="g:genre" maxOccurs="unbounded" minOccurs="0"/> </xsd:sequence> </xsd:complexType> </pre>

Complex Type files

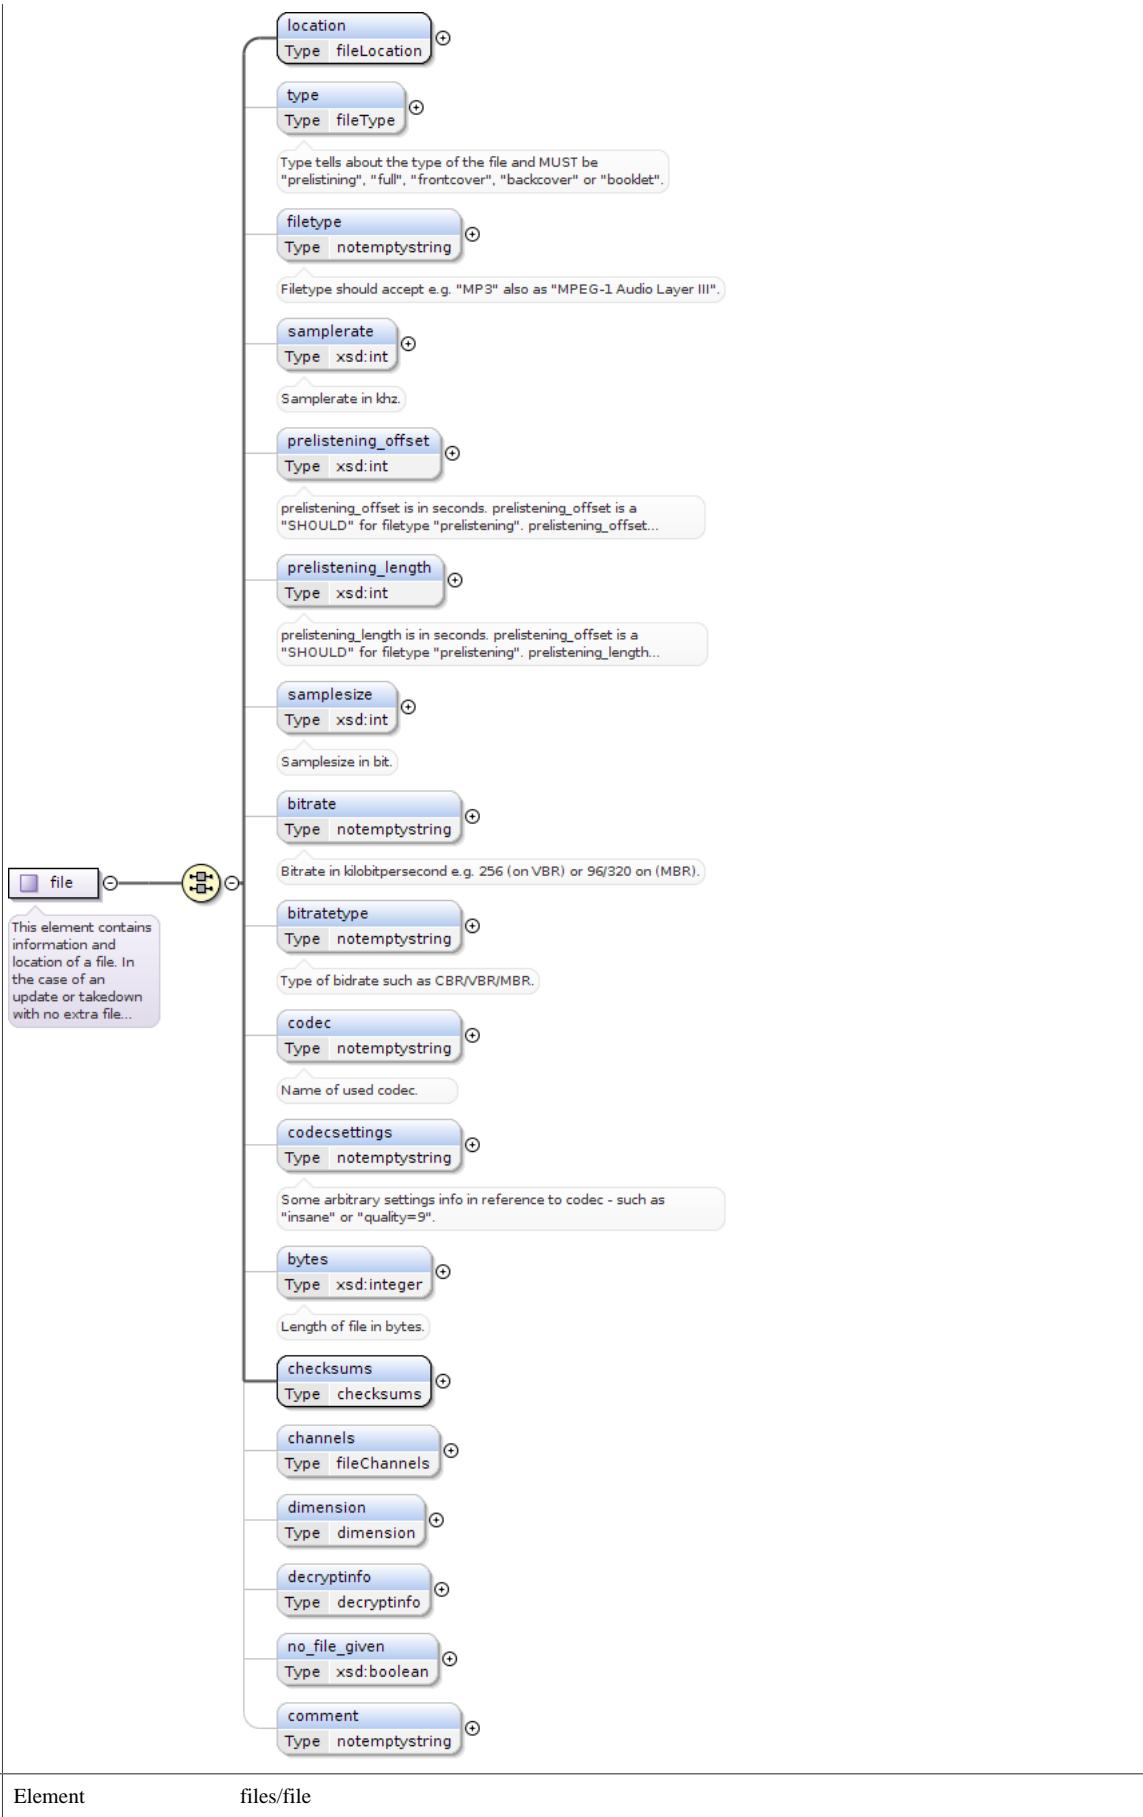
Namespace	No namespace
Annotations	This element contains a list of files.

Diagram	 This element contains a list of files.
Used by	Elements bundle/files, item/files
Model	file*
Children	file
Source	<pre><xsd:complexType name="files"> <xsd:annotation> <xsd:documentation xml:lang="en">This element contains a list of files.</xsd:documentation> </xsd:annotation> <xsd:sequence> <xsd:element name="file" type="file" maxOccurs="unbounded" minOccurs="0" /> </xsd:sequence> </xsd:complexType></pre>

Complex Type file

Namespace	No namespace
Annotations	This element contains information and location of a file. In the case of an update or takedown with no extra file given, set "no_file_given" to "true"

Diagram



Used by

Element files/file

Model	ALL(location type{0,1} filetype{0,1} samplerate{0,1} prelistening_offset{0,1} prelistening_length{0,1} samplesize{0,1} bitrate{0,1} bitratatype{0,1} codec{0,1} codecsettings{0,1} bytes{0,1} checksums channels{0,1} dimension{0,1} decryptinfo{0,1} no_file_given{0,1} comment{0,1})
Children	bitrate, bitratatype, bytes, channels, checksums, codec, codecsettings, comment, decryptinfo, dimension, filetype, location, no_file_given, prelistening_length, prelistening_offset, samplerate, samplesize, type
Source	<pre> <xsd:complexType name="file"> <xsd:annotation> <xsd:documentation xml:lang="en">This element contains information and location of a file. In the case of an update or takedown with no extra file given, set "no_file_given" to "true" </xsd:documentation> <xsd:annotation> <xsd:all> <xsd:element name="location" type="fileLocation"/> <xsd:element name="type" type="fileType" maxOccurs="1" minOccurs="0"> <xsd:annotation> <xsd:documentation xml:lang="en">Type tells about the type of the file and MUST be "prelistining", "full", "frontcover", "backcover" or "booklet". </xsd:documentation> </xsd:annotation> </xsd:element> <xsd:element name="filetype" type="notemptystring" maxOccurs="1" minOccurs="0"> <xsd:annotation> <xsd:documentation xml:lang="en">Filetype should accept e.g. "MP3" also as "MPEG-1 Audio Layer III". </xsd:documentation> </xsd:annotation> </xsd:element> <xsd:element name="samplerate" type="xsd:int" maxOccurs="1" minOccurs="0"> <xsd:annotation> <xsd:documentation xml:lang="en">Samplerate in khz. </xsd:documentation> </xsd:annotation> </xsd:element> <xsd:element minOccurs="0" name="prelistening_offset" type="xsd:int"> <xsd:annotation> <xsd:documentation xml:lang="en">prelistening_offset is in seconds. prelistening_offset is a "SHOULD" for filetype "prelistening". prelistening_offset is a MUST NOT for any other filetype. </xsd:documentation> </xsd:annotation> </xsd:element> <xsd:element minOccurs="0" name="prelistening_length" type="xsd:int"> <xsd:annotation> <xsd:documentation xml:lang="en">prelistening_length is in seconds. prelistening_offset is a "SHOULD" for filetype "prelistening". prelistening_length is a MUST NOT for any other filetype. </xsd:documentation> </xsd:annotation> </xsd:element> <xsd:element name="samplesize" type="xsd:int" maxOccurs="1" minOccurs="0"> <xsd:annotation> <xsd:documentation xml:lang="en">Samplesize in bit. </xsd:documentation> </xsd:annotation> </xsd:element> <xsd:element name="bitrate" type="notemptystring" maxOccurs="1" minOccurs="0"> <xsd:annotation> <xsd:documentation xml:lang="en">Bitrate in kilobitpersecond e.g. 256 (on VBR) or 96/320 on (MBR). </xsd:documentation> </xsd:annotation> </xsd:element> <xsd:element name="bitratatype" type="notemptystring" maxOccurs="1" minOccurs="0"> <xsd:annotation> <xsd:documentation xml:lang="en">Type of bitrate such as CBR/VBR/MBR. </xsd:documentation> </xsd:annotation> </xsd:element> <xsd:element name="codec" type="notemptystring" maxOccurs="1" minOccurs="0"> <xsd:annotation> <xsd:documentation xml:lang="en">Name of used codec. </xsd:documentation> </xsd:annotation> </xsd:element> <xsd:element name="codecsettings" type="notemptystring" maxOccurs="1" minOccurs="0"> <xsd:annotation> <xsd:documentation xml:lang="en">Some arbitrary settings info in reference to codec - such as "insane" or "quality=9". </xsd:documentation> </xsd:annotation> </xsd:element> <xsd:element name="bytes" type="xsd:integer" maxOccurs="1" minOccurs="0"> <xsd:annotation> <xsd:documentation xml:lang="en">Length of file in bytes. </xsd:documentation> </xsd:annotation> </xsd:element> <xsd:element name="checksums" type="checksums"/> <xsd:element name="channels" type="fileChannels" maxOccurs="1" minOccurs="0"/> <xsd:element name="dimension" type="dimension" maxOccurs="1" minOccurs="0"/> <xsd:element name="decryptinfo" type="decryptinfo" maxOccurs="1" minOccurs="0"/> <xsd:element name="no_file_given" type="xsd:boolean" maxOccurs="1" minOccurs="0"/> </pre>

```
<xsd:element name="comment" minOccurs="0" type="notemptystring" />
</xsd:all>
</xsd:complexType>
```

Complex Type fileLocation

Namespace	No namespace
Annotations	This element contains the path to the corresponding file. File can be accessible via path, http or ftp.
Diagram	<pre> classDiagram class fileLocation class origin_file { <<origin_file>> <<Type notemptystring>> } class http { <<http>> <<Type fileHttp>> } class ftp { <<ftp>> <<Type fileFtp>> } class path { <<path>> <<Type notemptystring>> } fileLocation < -- origin_file fileLocation < -- http fileLocation < -- ftp fileLocation < -- path </pre> <p>This element contains the path to the corresponding file. File can be accessible via path, http or ftp.</p>
Used by	Element file/location
Model	ALL(origin_file{0,1} http{0,1} ftp{0,1} path{0,1})
Children	ftp, http, origin_file, path
Source	<pre> <xsd:complexType name="fileLocation"> <xsd:annotation> <xsd:documentation xml:lang="en">This element contains the path to the corresponding file. File can be accessible via path, http or ftp.</xsd:documentation> </xsd:annotation> <xsd:all> <xsd:element name="origin_file" type="notemptystring" maxOccurs="1" minOccurs="0"/> <xsd:element name="http" type="fileHttp" maxOccurs="1" minOccurs="0"/> <xsd:element name="ftp" type="fileFtp" maxOccurs="1" minOccurs="0"/> <xsd:element name="path" type="notemptystring" maxOccurs="1" minOccurs="0"/> </xsd:all> </xsd:complexType> </pre>

Complex Type fileHttp

Namespace	No namespace
Annotations	This element contains information about http access to file.
Diagram	<pre> classDiagram class fileHttp class action { <<action>> <<Base Type action>> } fileHttp < -- action </pre> <p>This element contains information about http access to file.</p>
Type	extension of action
Type hierarchy	<ul style="list-style-type: none"> • action • fileHttp
Used by	Element fileLocation/http
Model	ALL(url user{0,1} pass{0,1} expiresdatetime)
Children	expiresdatetime, pass, url, user
Source	<pre> <xsd:complexType name="fileHttp"> <xsd:annotation> <xsd:documentation xml:lang="en">This element contains information about http access to file.</xsd:documentation> </xsd:annotation> <xsd:complexContent> </pre>

```

<xsd:extension base="action">
  <xsd:all>
    <xsd:element name="url" type="url"/>
    <xsd:element name="user" type="notemptystring" maxOccurs="1" minOccurs="0"/>
    <xsd:element name="pass" type="notemptystring" maxOccurs="1" minOccurs="0"/>
    <xsd:element name="expiresdatetime" type="datetimeGMT"/>
  </xsd:all>
</xsd:extension>
</xsd:complexContent>
</xsd:complexType>

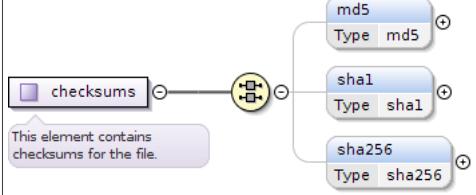
```

Complex Type fileFtp

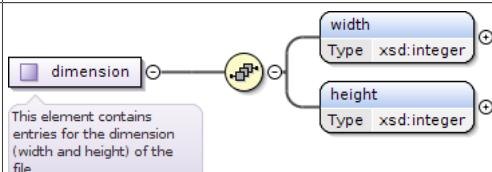
Namespace	No namespace
Annotations	This element contains information about ftp access to file just like server, port, path to file and credentials (user / password). The expiredate tells until when this file is definitely available to be called.
Diagram	<pre> classDiagram class action { <<action (extension base)>> } class fileFtp { <<fileFtp Base Type action This element contains information about ftp access to file just like server, port, path to file and credentials (user / ... >> } action < -- fileFtp fileFtp < --> server fileFtp < --> port fileFtp < --> path fileFtp < --> user fileFtp < --> pass fileFtp < --> expiresdatetime </pre>
Type	extension of action
Type hierarchy	<ul style="list-style-type: none"> • action • fileFtp
Used by	Element fileLocation/ftp
Model	ALL(server port path user{0,1} pass{0,1} expiresdatetime)
Children	expiresdatetime, pass, path, port, server, user
Source	<pre> <xsd:complexType name="fileFtp"> <xsd:annotation> <xsd:documentation xml:lang="en">This element contains information about ftp access to file just like server, port, path to file and credentials (user / password). The expiredate tells until when this file is definitely available to be called.</xsd:documentation> </xsd:annotation> <xsd:complexContent> <xsd:extension base="action"> <xsd:all> <xsd:element name="server" type="notemptystring"/> <xsd:element name="port" type="xsd:int"/> <xsd:element name="path" type="notemptystring"/> <xsd:element name="user" type="notemptystring" maxOccurs="1" minOccurs="0"/> <xsd:element name="pass" type="notemptystring" maxOccurs="1" minOccurs="0"/> <xsd:element name="expiresdatetime" type="datetimeGMT"/> </xsd:all> </xsd:extension> </xsd:complexContent> </xsd:complexType> </pre>

Complex Type checksums

Namespace	No namespace
Annotations	This element contains checksums for the file.

Diagram	
Used by	Elements decryptinfo/checksums, file/checksums
Model	ALL(md5{0,1} sha1{0,1} sha256{0,1})
Children	md5, sha1, sha256
Source	<pre><xsd:complexType name="checksums"> <xsd:annotation> <xsd:documentation xml:lang="en">This element contains checksums for the file.</xsd:documentation> </xsd:annotation> <xsd:all> <xsd:element name="md5" type="md5" maxOccurs="1" minOccurs="0"/> <xsd:element name="sha1" type="shal" maxOccurs="1" minOccurs="0"/> <xsd:element name="sha256" type="sha256" maxOccurs="1" minOccurs="0"/> </xsd:all> </xsd:complexType></pre>

Complex Type dimension

Namespace	No namespace
Annotations	This element contains entries for the dimension (width and height) of the file.
Diagram	
Used by	Element file/dimension
Model	width , height
Children	height, width
Source	<pre><xsd:complexType name="dimension"> <xsd:annotation> <xsd:documentation xml:lang="en">This element contains entries for the dimension (width and height) of the file.</xsd:documentation> </xsd:annotation> <xsd:sequence> <xsd:element name="width" type="xsd:integer"/> <xsd:element name="height" type="xsd:integer"/> </xsd:sequence> </xsd:complexType></pre>

Complex Type decryptinfo

Namespace	No namespace
Annotations	This element contains information about decryption of corresponding file.

Diagram	
Used by	Element file/decryptinfo
Model	ALL(cipher{0,1} initvector{0,1} key{0,1} bytes{0,1} checksums{0,1})
Children	bytes, checksums, cipher, initvector, key
Source	<pre><xsd:complexType name="decryptinfo"> <xsd:annotation> <xsd:documentation xml:lang="en">This element contains information about decryption of corresponding file.</xsd:documentation> </xsd:annotation> <xsd:all> <xsd:element name="cipher" type="notemptystring" minOccurs="0" maxOccurs="1"> <xsd:annotation> <xsd:documentation xml:lang="en">Contains info about the cipher for decryption like AES, RIJNDAEL, XOR, Arcfour, whatever - should be "convenient".</xsd:documentation> </xsd:annotation> </xsd:element> <xsd:element name="initvector" type="notemptystring" minOccurs="0" maxOccurs="1"/> <xsd:element name="key" type="notemptystring" minOccurs="0" maxOccurs="1"/> <xsd:element name="bytes" type="notemptystring" minOccurs="0" maxOccurs="1"/> <xsd:element name="checksums" type="checksums" minOccurs="0" maxOccurs="1"/> </xsd:all> </xsd:complexType></pre>

Complex Type purchase

Namespace	No namespace
Annotations	This element contains information about purchase. Mostly when this feeds recipient is a POS.
Diagram	
Used by	Element bundle/purchase
Model	ALL(pos url)
Children	pos, url
Source	<pre><xsd:complexType name="purchase"> <xsd:annotation> <xsd:documentation xml:lang="en">This element contains information about purchase. Mostly when this feeds recipient is a POS.</xsd:documentation> </xsd:annotation> <xsd:all> <xsd:element name="pos" type="notemptystring"/> <xsd:element name="url" type="notemptystring"/> </xsd:all> </xsd:complexType></pre>

Complex Type license_basis_item

Namespace	No namespace
Annotations	This element includes the basic rules and information under which this bundle is provided. If "download_allowed" is given it will be evaluated, if it's not included, basic download is allowed.


	The optional element "streaming_allowed" tells if streaming is allowed or not
Diagram	<pre> classDiagram class license_basis_item { territorial timeframe pricing download_allowed streaming_allowed channels as_on_bundle } </pre> <p>This element includes the basic rules and information under which this bundle is provided. If "download_allowed" is... </p>
Used by	Element item/license_basis
Model	ALL(territorial{0,1} timeframe{0,1} pricing{0,1} download_allowed{0,1} streaming_allowed{0,1} channels{0,1} as_on_bundle{0,1})
Children	as_on_bundle, channels, download_allowed, pricing, streaming_allowed, territorial, timeframe
Source	<pre> <xsd:complexType name="license_basis_item"> <xsd:annotation> <xsd:documentation xml:lang="en">This element includes the basic rules and information under which this bundle is provided. If "download_allowed" is given it will be evaluated, if it's not included, basic download is allowed. The optional element "streaming_allowed" tells if streaming is allowed or not</xsd:documentation> </xsd:annotation> <xsd:all> <xsd:element name="territorial" type="territorial" maxOccurs="1" minOccurs="0"/> <xsd:element name="timeframe" type="timeframe" maxOccurs="1" minOccurs="0"/> <xsd:element name="pricing" type="pricing" maxOccurs="1" minOccurs="0"/> <xsd:element name="download_allowed" type="xsd:boolean" maxOccurs="1" minOccurs="0"/> <xsd:element name="streaming_allowed" type="xsd:boolean" maxOccurs="1" minOccurs="0"/> <xsd:element name="channels" type="channels" maxOccurs="1" minOccurs="0"/> <xsd:element name="as_on_bundle" type="xsd:boolean" maxOccurs="1" minOccurs="0"/> </xsd:all> </xsd:complexType> </pre>

Complex Type license_specifics_item

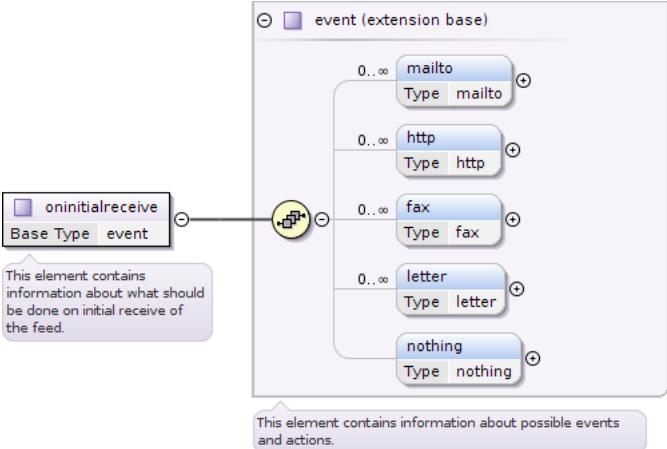
Namespace	No namespace
Annotations	This element includes specific rules which should be applied.
Diagram	<pre> classDiagram class license_specifics_item { rules as_on_bundle } </pre> <p>This element includes specific rules which should be applied.</p>
Used by	Element item/license_specifics
Model	rules{0,1} as_on_bundle{0,1}
Children	as_on_bundle, rules
Source	<pre> <xsd:complexType name="license_specifics_item"> <xsd:annotation> <xsd:documentation xml:lang="en">This element includes specific rules which should be applied.</xsd:documentation> </xsd:annotation> <xsd:choice minOccurs="1" maxOccurs="2"> <xsd:element name="rules" type="rules" maxOccurs="1" minOccurs="0"/> <xsd:element name="as_on_bundle" type="xsd:boolean" maxOccurs="1" minOccurs="0"/> </xsd:choice> </xsd:complexType> </pre>

Complex Type fingerprint

Namespace	No namespace
-----------	--------------

Annotations	This element includes an element "echoprint" (http://echoprint.me https://github.com/echonest/echoprint-codegen).
Diagram	
Used by	Element item/fingerprint
Model	echoprint{0,1}
Children	echoprint
Source	<pre><xsd:complexType name="fingerprint"> <xsd:annotation> <xsd:documentation xml:lang="en">This element includes an element "echoprint" (http://echoprint.me https://github.com/echonest/echoprint-codegen).</xsd:documentation> </xsd:annotation> <xsd:sequence> <xsd:element name="echoprint" type="xsd:string" maxOccurs="1" minOccurs="0"/> </xsd:sequence> </xsd:complexType></pre>

Complex Type oninitialreceive

Namespace	No namespace
Annotations	This element contains information about what should be done on initial receive of the feed.
Diagram	
Type	extension of event
Type hierarchy	<ul style="list-style-type: none"> • event • oninitialreceive
Model	mailto*, http*, fax*, letter*, nothing{0,1}
Children	fax, http, letter, mailto, nothing
Source	<pre><xsd:complexType name="oninitialreceive"> <xsd:annotation> <xsd:documentation xml:lang="en">This element contains information about what should be done on initial receive of the feed.</xsd:documentation> </xsd:annotation> <xsd:complexContent> <xsd:extension base="event" /> </xsd:complexContent> </xsd:complexType></pre>

Complex Type onprocessstart

Namespace	No namespace
Annotations	This element contains information about what should be done on the start of processing the feed.

Diagram	<pre> classDiagram event --> onprocessstart : "Base Type" event < -- onprocessstart onprocessstart < -- mailto onprocessstart < -- http onprocessstart < -- fax onprocessstart < -- letter onprocessstart < -- nothing </pre> <p>This element contains information about what should be done on the start of processing the feed.</p> <p>This element contains information about possible events and actions.</p>
Type	extension of event
Type hierarchy	<ul style="list-style-type: none"> • event • onprocessstart
Model	mailto*, http*, fax*, letter*, nothing{0,1}
Children	fax, http, letter, mailto, nothing
Source	<pre> <xsd:complexType name="onprocessstart"> <xsd:annotation> <xsd:documentation xml:lang="en">This element contains information about what should be done on the start of processing the feed.</xsd:documentation> </xsd:annotation> <xsd:complexContent> <xsd:extension base="event" /> </xsd:complexContent> </xsd:complexType> </pre>

Complex Type onprocessend

Namespace	No namespace
Annotations	This element contains information about what should be done on the end of processing the feed.
Diagram	<pre> classDiagram event --> onprocessend : "Base Type" event < -- onprocessend onprocessend < -- mailto onprocessend < -- http onprocessend < -- fax onprocessend < -- letter onprocessend < -- nothing </pre> <p>This element contains information about what should be done on the end of processing the feed.</p> <p>This element contains information about possible events and actions.</p>
Type	extension of event
Type hierarchy	<ul style="list-style-type: none"> • event • onprocessend
Model	mailto*, http*, fax*, letter*, nothing{0,1}
Children	fax, http, letter, mailto, nothing
Source	<pre> <xsd:complexType name="onprocessend"> <xsd:annotation> <xsd:documentation xml:lang="en">This element contains information about what should be done on the end of processing the feed.</xsd:documentation> </xsd:annotation> </xsd:complexType> </pre>

```
<xsd:complexContent>
  <xsd:extension base="event" />
</xsd:complexContent>
</xsd:complexType>
```

Complex Type onfullsuccess

Namespace	No namespace
Annotations	This element contains information about what should be done on full success processing the feed.
Diagram	<p>The diagram illustrates the UML representation of the <code>onfullsuccess</code> complex type. It is defined as an extension of the <code>event</code> base type. The <code>onfullsuccess</code> type contains five child elements: <code>mailto</code>, <code>http</code>, <code>fax</code>, <code>letter</code>, and <code>nothing</code>. Each child element is associated with a multiplicity of <code>0..oo</code> and a specific type: <code>mailto</code> (Type <code>mailto</code>), <code>http</code> (Type <code>http</code>), <code>fax</code> (Type <code>fax</code>), <code>letter</code> (Type <code>letter</code>), and <code>nothing</code> (Type <code>nothing</code>). A callout box provides a detailed description of the element's purpose.</p>
Type	extension of event
Type hierarchy	<ul style="list-style-type: none"> • event • onfullsuccess
Model	<code>mailto*</code> , <code>http*</code> , <code>fax*</code> , <code>letter*</code> , <code>nothing{0,1}</code>
Children	fax, http, letter, mailto, nothing
Source	<pre><xsd:complexType name="onfullsuccess"> <xsd:annotation> <xsd:documentation xml:lang="en">This element contains information about what should be done on full success processing the feed.</xsd:documentation> </xsd:annotation> <xsd:complexContent> <xsd:extension base="event" /> </xsd:complexContent> </xsd:complexType></pre>

Complex Type onerror

Namespace	No namespace
Annotations	This element contains information about what should be done on error processing the feed.
Diagram	<p>The diagram illustrates the UML representation of the <code>onerror</code> complex type. It is defined as an extension of the <code>event</code> base type. The <code>onerror</code> type contains five child elements: <code>mailto</code>, <code>http</code>, <code>fax</code>, <code>letter</code>, and <code>nothing</code>. Each child element is associated with a multiplicity of <code>0..oo</code> and a specific type: <code>mailto</code> (Type <code>mailto</code>), <code>http</code> (Type <code>http</code>), <code>fax</code> (Type <code>fax</code>), <code>letter</code> (Type <code>letter</code>), and <code>nothing</code> (Type <code>nothing</code>). A callout box provides a detailed description of the element's purpose.</p>
Type	extension of event

Type hierarchy	<ul style="list-style-type: none"> event onerror
Model	mailto*, http*, fax*, letter*, nothing{0,1}
Children	fax, http, letter, mailto, nothing
Source	<pre><xsd:complexType name="onerror"> <xsd:annotation> <xsd:documentation xml:lang="en">This element contains information about what should be done on error processing the feed.</xsd:documentation> </xsd:annotation> <xsd:complexContent> <xsd:extension base="event" /> </xsd:complexContent> </xsd:complexType></pre>

Simple Type(s)

Simple Type notemptystring

Namespace	No namespace	
Diagram		
Type	restriction of xsd:string	
Facets	minLength 1	
Used by	Elements	bundle/display_artistname, bundle/displayname, bundle/name, contributor/name, costscoveredby/contractpartnerid, costscoveredby/maxcostscovered, costscoveredby/ourcontractpartnerid, creator/keyid, decryptinfo/bytes, decryptinfo/cipher, decryptinfo/initvector, decryptinfo/key, feedinfo/feedid, file/bitrate, file/bitratatype, file/codec, file/codecsettings, file/comment, file/filetype, fileFtp/pass, fileFtp/path, fileFtp/server, fileFtp/user, fileHttp/pass, fileHttp/user, fileLocation/origin_file, fileLocation/path, ids/labelordernum, ids/licensee, ids/licensor, if/value, if/what, item/display_artistname, item/displayname, item/name, item/type, letter/text, licensee/contractpartnerid, licensee/keyid, licensee/ourcontractpartnerid, licensor/contractpartnerid, licensor/keyid, licensor/ourcontractpartnerid, mailto/subject, mailto/text, postponed/id, pricing/pricecode, pricing/wholesale, proclaim/for, proclaim/what, purchase/pos, purchase/url, receiver/keyid, receiver/username, sender/contractpartnerid, sender/keyid, sender/ourcontractpartnerid, then/echo, to/additionaladdressinfo, to/department, to/name, to/nametyperson, to/postcode, to/street, utube/channel, utube/url
	Complex Type	physical_distributor
	Simple Types	md5, sha1, sha256
Source	<pre><xsd:simpleType name="notemptystring"> <xsd:restriction base="xsd:string"> <xsd:minLength value="1" /> </xsd:restriction> </xsd:simpleType></pre>	

Simple Type datetimeGMT

Namespace	No namespace	
Diagram		
Type	restriction of xsd:string	
Facets	pattern \d{4}-\d{2}-\d{2} \d{2}: \d{2}:\d{2} GMT\d{2}:\d{2}: \d{2}	
Used by	Elements feedinfo/creationdatetime, feedinfo/effectivedatetime, fileFtp/expiredatetime, fileHttp/expiredatetime, information/digital_release_datetime, information/physical_release_datetime, timeframe/from, timeframe/to	
Source	<pre><xsd:simpleType name="datetimeGMT"> <xsd:restriction base="xsd:string"> <xsd:pattern value="\d{4}-\d{2}-\d{2} \d{2}:\d{2}:\d{2} \d{2}:\d{2}:\d{2} GMT\d{2}:\d{2}:\d{2}" /> <!-- "2010-01-31 00:00:00 GMT+00:00" - should be altered to some NMOKENS or such ... --> </xsd:restriction> </xsd:simpleType></pre>	

Simple Type email

Namespace	No namespace
Diagram	
Type	restriction of xsd:string
Facets	pattern $(([a-zA-Z0-9_\\-\\.]+@[a-zA-Z0-9-]+(\\. [a-zA-Z0-9-]+)*(\\. [a-zA-Z]{2,3}))?$
Used by	Elements creator/email, crypto/relatedemail, licensee/email, licensor/email, sender/email
Source	<pre><xsd:simpleType name="email"> <xsd:restriction base="xsd:string"> <xsd:pattern value="(([a-zA-Z0-9_\\-\\.]+@[a-zA-Z0-9-]+(\\. [a-zA-Z0-9-]+)*(\\. [a-zA-Z]{2,3}))?" /> </xsd:restriction> </xsd:simpleType></pre>

Simple Type userid

Namespace	No namespace
Diagram	
Type	xsd:string
Used by	Element creator/userid
Source	<pre><xsd:simpleType name="userid"> <xsd:restriction base="xsd:string"/> </xsd:simpleType></pre>

Simple Type receivertypes

Namespace	No namespace
Diagram	
Type	restriction of xsd:string
Facets	enumeration ftp enumeration ftps enumeration sftp enumeration webdav enumeration openSDX fileserver
Used by	Element receiver/type
Source	<pre><xsd:simpleType name="receivertypes"> <xsd:restriction base="xsd:string"> <xsd:enumeration value="ftp"/> <xsd:enumeration value="ftps"/> <xsd:enumeration value="sftp"/> <xsd:enumeration value="webdav"/> <xsd:enumeration value="openSDX fileserver"/> </xsd:restriction> </xsd:simpleType></pre>

Simple Type iporhostname

Namespace	No namespace
Diagram	
Type	xsd:string

Used by	Element	receiver/servername
Source		<pre><xsd:simpleType name="iporhostname"> <xsd:restriction base="xsd:string"/> </xsd:simpleType></pre>

Simple Type ipv4

Namespace	No namespace
Diagram	<div style="border: 1px solid #ccc; padding: 5px; margin-top: 5px;"> Built-in primitive type. The string datatype represents character strings in XML. </div>
Type	restriction of xsd:string
Facets	<p>pattern</p> <pre>(25[0-5] 2[0-4][0-9] 1[0-9][0-9] [0-9]{1,2}) (\.(25[0-5] 2[0-4][0-9] 1[0-9][0-9] [0-9]{1,2})) {3}</pre>
Used by	Element receiver/serveripv4
Source	<pre><xsd:simpleType name="ipv4"> <xsd:restriction base="xsd:string"> <xsd:pattern value="(25[0-5] 2[0-4][0-9] 1[0-9][0-9] [0-9]{1,2})(\.(25[0-5] 2[0-4][0-9] 1[0-9] [0-9] [0-9]{1,2})){3}"> <xsd:annotation> <xsd:documentation xml:lang="en">Internet Protocol version 4 (IPv4) is the fourth revision in the development of the Internet Protocol (IP) and the first version of the protocol to be widely deployed. Valide ipv4-addresses includes four dotted separated blocks with digits between 0 and 255.</xsd:documentation> </xsd:annotation> </xsd:pattern> </xsd:restriction> </xsd:simpleType></pre>

Simple Type ipv6

Namespace	No namespace
Diagram	<div style="border: 1px solid #ccc; padding: 5px; margin-top: 5px;"> Built-in primitive type. The string datatype represents character strings in XML. </div>
Type	xsd:string
Used by	Element receiver/serveripv6
Source	<pre><xsd:simpleType name="ipv6"> <xsd:restriction base="xsd:string"> <!-- not pattern defined yet... --> </xsd:restriction> </xsd:simpleType></pre>

Simple Type authtype

Namespace	No namespace
Diagram	<div style="border: 1px solid #ccc; padding: 5px; margin-top: 5px;"> Built-in primitive type. The string datatype represents character strings in XML. </div>
Type	restriction of xsd:string
Facets	<p>enumeration login</p> <p>enumeration keyfile</p> <p>enumeration kerberos</p> <p>enumeration keyfile+login</p> <p>enumeration keyfile+username</p>
Used by	Element receiver/authtype
Source	<pre><xsd:simpleType name="authtype"></pre>

```

<xsd:restriction base="xsd:string">
  <xsd:enumeration value="login"/>
  <xsd:enumeration value="keyfile"/>
  <xsd:enumeration value="kerberos"/>
  <xsd:enumeration value="keyfile+login"/>
  <xsd:enumeration value="keyfile+username"/>
</xsd:restriction>
</xsd:simpleType>

```

Simple Type keyid

Namespace	No namespace
Diagram	<p>The diagram shows a purple rounded rectangle labeled "keyid" connected by a line with a hollow circle to another purple rounded rectangle labeled "xsd:string". A callout bubble below the line states: "Built-in primitive type. The string datatype represents character strings in XML."</p>
Type	xsd:string
Used by	Element crypto/usedkeyid
Source	<pre> <xsd:simpleType name="keyid"> <xsd:restriction base="xsd:string"> </xsd:restriction> </xsd:simpleType> </pre>

Simple Type emaillist

Namespace	No namespace
Diagram	<p>The diagram shows a purple rounded rectangle labeled "emaillist" connected by a line with a hollow circle to another purple rounded rectangle labeled "xsd:string". A callout bubble below the line states: "Built-in primitive type. The string datatype represents character strings in XML."</p>
Type	xsd:string
Used by	Element mailto/receiver
Source	<pre> <xsd:simpleType name="emaillist"> <xsd:restriction base="xsd:string"> <!-- make to NMTOKENS or such... --> </xsd:restriction> </xsd:simpleType> </pre>

Simple Type url

Namespace	No namespace				
Diagram	<p>The diagram shows a purple rounded rectangle labeled "url" connected by a line with a hollow circle to another purple rounded rectangle labeled "xsd:anyURI". A callout bubble below the line states: "Built-in primitive type. The anyURI datatype represents a Uniform Resource Identifier Reference (URI)."</p>				
Type	restriction of xsd:anyURI				
Facets	<table border="1"> <tr> <td>minLength</td> <td>1</td> </tr> <tr> <td>pattern</td> <td>(http://...*\....*) (https://...*\....*)</td> </tr> </table>	minLength	1	pattern	(http://...*\....*) (https://...*\....*)
minLength	1				
pattern	(http://...*\....*) (https://...*\....*)				
Used by	<table border="1"> <tr> <td>Elements</td> <td>fileHttp/url, http/url</td> </tr> <tr> <td>Complex Type</td> <td>publishable_url</td> </tr> </table>	Elements	fileHttp/url, http/url	Complex Type	publishable_url
Elements	fileHttp/url, http/url				
Complex Type	publishable_url				
Source	<pre> <xsd:simpleType name="url"> <xsd:restriction base="xsd:anyURI"> <xsd:minLength value="1"/> <xsd:pattern value="http://...*\....*"/> <xsd:pattern value="https://...*\....*"/> </xsd:restriction> </xsd:simpleType> </pre>				

Simple Type httpmethods

Namespace	No namespace
Diagram	<p>The diagram shows a purple rounded rectangle labeled "httpmethods" connected by a line with a hollow circle to another purple rounded rectangle labeled "xsd:string". A callout bubble below the line states: "Built-in primitive type. The string datatype represents character strings in XML."</p>

Type	restriction of xsd:string	
Facets	enumeration	GET
	enumeration	POST
	enumeration	HEAD
Used by	Element	http/type
Source	<pre><xsd:simpleType name="httpmethods"> <xsd:restriction base="xsd:string"> <xsd:enumeration value="GET"/> <xsd:enumeration value="POST"/> <xsd:enumeration value="HEAD"/> </xsd:restriction> </xsd:simpleType></pre>	

Simple Type nothing

Namespace	No namespace	
Diagram	<div style="border: 1px solid #ccc; padding: 5px; margin-top: 5px;"> Built-in primitive type. The string datatype represents character strings in XML. </div>	
Type	restriction of xsd:string	
Facets	length 0	
Used by	Element event/nothing	
Source	<pre><xsd:simpleType name="nothing"> <xsd:restriction base="xsd:string"> <xsd:length value="0"/> </xsd:restriction> </xsd:simpleType></pre>	

Simple Type grid

Namespace	No namespace	
Diagram	<div style="border: 1px solid #ccc; padding: 5px; margin-top: 5px;"> Built-in primitive type. The string datatype represents character strings in XML. </div>	
Type	restriction of xsd:string	
Facets	minLength 18	
Used by	Element ids/grid	
Source	<pre><xsd:simpleType name="grid"> <!-- examples: http://en.wikipedia.org/wiki/Global_Release_Identifier A12425GABC1234002M A1-2425G-ABC1234002-M GRid:A1-2425G-ABC1234002-M --> <xsd:restriction base="xsd:string"> <xsd:minLength value="18"/> </xsd:restriction> </xsd:simpleType></pre>	

Simple Type upc

Namespace	No namespace	
Diagram	<div style="border: 1px solid #ccc; padding: 5px; margin-top: 5px;"> Built-in primitive type. The string datatype represents character strings in XML. </div>	
Type	restriction of xsd:string	
Facets	pattern $(\text{\d}\{10,13\})$	
Used by	Element ids/upc	
Source	<pre><xsd:simpleType name="upc"> <xsd:restriction base="xsd:string"> <xsd:pattern value="(\d{10,13})"></pre>	

```

<xsd:annotation>
  <xsd:documentation xml:lang="en">The Universal Product Code (UPC) is a barcode symbology
  (i.e., a specific type of barcode), that is widely used in North America, and in countries
  including the UK, Australia, and New Zealand for tracking trade items in stores. Its most common
  form, the UPC-A, consists of 12 numerical digits, which are uniquely assigned to each trade item.
  Along with the related EAN barcode, the UPC is the only barcode allowed for scanning trade items at
  the point of sale, per GS1 standards.</xsd:documentation>
</xsd:annotation>
</xsd:pattern>
</xsd:restriction>
</xsd:simpleType>

```

Simple Type isrc

Namespace	No namespace				
Diagram	<p>Built-in primitive type. The string datatype represents character strings in XML.</p>				
Type	restriction of xsd:string				
Facets	<table> <tr> <td>minLength</td> <td>1</td> </tr> <tr> <td>pattern</td> <td>([a-zA-Z]{2}(-)?[0-9a-zA-Z]{3}(-)?\d{2}(-)?\d{5})</td> </tr> </table>	minLength	1	pattern	([a-zA-Z]{2}(-)?[0-9a-zA-Z]{3}(-)?\d{2}(-)?\d{5})
minLength	1				
pattern	([a-zA-Z]{2}(-)?[0-9a-zA-Z]{3}(-)?\d{2}(-)?\d{5})				
Used by	Element ids/isrc				
Source	<pre> <xsd:simpleType name="isrc"> <xsd:restriction base="xsd:string"> <xsd:pattern value="([a-zA-Z]{2}(-)?[0-9a-zA-Z]{3}(-)?\d{2}(-)?\d{5})"> <xsd:annotation> <xsd:documentation xml:lang="en">The International Standard Recording Code (ISRC), defined by ISO 3901, is an international standard code for uniquely identifying sound recordings and music video recordings.</xsd:documentation> </xsd:annotation> </xsd:pattern> <xsd:minLength value="1"/> </xsd:restriction> </xsd:simpleType> </pre>				

Simple Type iswc

Namespace	No namespace
Diagram	<p>Built-in primitive type. The string datatype represents character strings in XML.</p>
Type	restriction of xsd:string
Facets	minLength 1
Used by	Element ids/iswc
Source	<pre> <xsd:simpleType name="iswc"> <xsd:restriction base="xsd:string"> <xsd:minLength value="1"/> </xsd:restriction> </xsd:simpleType> </pre>

Simple Type contentauth

Namespace	No namespace
Diagram	<p>Built-in primitive type. The string datatype represents character strings in XML.</p>
Type	restriction of xsd:string
Facets	minLength 1
Used by	Element ids/contentauth
Source	<pre> <xsd:simpleType name="contentauth"> <xsd:restriction base="xsd:string"> </pre>

```

<xsd:minLength value="1" />
</xsd:restriction>
</xsd:simpleType>

```

Simple Type amzn

Namespace	No namespace
Diagram	<p>Built-in derived type. The integer datatype is derived from decimal by fixing the value of fractionDigits to be 0. This...</p>
Type	restriction of xsd:integer
Facets	minExclusive 0
Used by	Element ids/amzn
Source	<pre> <xsd:simpleType name="amzn"> <!-- example: http://de.wikipedia.org/wiki/Amazon_Standard_Identification_Number --> <xsd:restriction base="xsd:integer"> <xsd:minExclusive value="0" /> </xsd:restriction> </xsd:simpleType> </pre>

Simple Type isbn

Namespace	No namespace
Diagram	<p>Built-in primitive type. The string datatype represents character strings in XML.</p>
Type	restriction of xsd:string
Facets	pattern <pre>(\d{1}(\-)?\d{5}(\-)?\d{3}(\-)?\d{1} \d{1}(\-)?\d{3}(\-)?\d{5}(\-)?\d{1} \d{1} \d{1}(\-)?\d{2}(\-)?\d{6}(\-)?\d{1} \d{3}(\-)?\d{1}(\-)?\d{6}(\-)?\d{2}(\-)?\d{1})</pre>
Used by	Element ids/isbn
Source	<pre> <xsd:simpleType name="isbn"> <!-- 978-3-943061-03-1 ISBN-10: 3943061035 - ISBN-13: 9783943061031 --> <xsd:restriction base="xsd:string"> <xsd:pattern value="(\d{1}(\-)?\d{5}(\-)?\d{3}(\-)?\d{1} \d{1}(\-)?\d{3}(\-)?\d{5}(\-)?\d{1} \d{1}(\-)?\d{2}(\-)?\d{6}(\-)?\d{1} \d{3}(\-)?\d{1}(\-)?\d{6}(\-)?\d{2}(\-)?\d{1})"> <xsd:annotation> <xsd:documentation xml:lang="en">The International Standard Book Number (ISBN) is a unique numeric commercial book identifier based upon the 9-digit Standard Book Numbering (SBN) code.</xsd:documentation> </xsd:annotation> </xsd:pattern> </xsd:restriction> </xsd:simpleType> </pre>

Simple Type finetunes

Namespace	No namespace								
Diagram	<p>Built-in derived type. The long datatype is derived from integer by setting the value of maxInclusive to be...</p>								
Type	restriction of xsd:long								
Facets	<table border="1"> <tr> <td>totalDigits</td> <td>13</td> </tr> <tr> <td>maxExclusive</td> <td>2000000000000</td> </tr> <tr> <td>minExclusive</td> <td>1000000000000</td> </tr> <tr> <td>pattern</td> <td>([-+]?[0-9]+) & ([0-9]{13})</td> </tr> </table>	totalDigits	13	maxExclusive	2000000000000	minExclusive	1000000000000	pattern	([-+]?[0-9]+) & ([0-9]{13})
totalDigits	13								
maxExclusive	2000000000000								
minExclusive	1000000000000								
pattern	([-+]?[0-9]+) & ([0-9]{13})								

Used by	Element	ids/finetunes
Source		<pre><xsd:simpleType name="finetunes"> <xsd:restriction base="xsd:long"> <xsd:annotation> <xsd:documentation xml:lang="en">The 13 digits long identifier of a item at finetunes.</ xsd:documentation> </xsd:annotation> <xsd:totalDigits value="13"/> <xsd:minExclusive value="10000000000000"/> <xsd:maxExclusive value="20000000000000"/> <xsd:pattern value="[0-9]{13}" /> </xsd:restriction> </xsd:simpleType></pre>

Simple Type gvl

Namespace	No namespace				
Diagram	<p>Built-in primitive type. The string datatype represents character strings in XML.</p>				
Type	restriction of xsd:string				
Facets	<table> <tr> <td>minLength</td> <td>8</td> </tr> <tr> <td>pattern</td> <td>LC \d{5}</td> </tr> </table>	minLength	8	pattern	LC \d{5}
minLength	8				
pattern	LC \d{5}				
Used by	Element ids/gvl				
Source	<pre><xsd:simpleType name="gvl"> <xsd:restriction base="xsd:string"> <xsd:minLength value="8"/> <xsd:pattern value="LC \d{5}" /> </xsd:restriction> </xsd:simpleType></pre>				

Simple Type amg

Namespace	No namespace
Diagram	<p>Built-in primitive type. The string datatype represents character strings in XML.</p>
Type	restriction of xsd:string
Facets	minLength 1
Used by	Element ids/amg
Source	<pre><xsd:simpleType name="amg"> <xsd:restriction base="xsd:string"> <xsd:minLength value="1"/> </xsd:restriction> </xsd:simpleType></pre>

Simple Type contributorType

Namespace	No namespace												
Diagram	<p>Built-in primitive type. The string datatype represents character strings in XML.</p>												
Type	restriction of xsd:string												
Facets	<table> <tr> <td>enumeration</td> <td>label</td> </tr> <tr> <td>enumeration</td> <td>performer</td> </tr> <tr> <td>enumeration</td> <td>texter</td> </tr> <tr> <td>enumeration</td> <td>editor</td> </tr> <tr> <td>enumeration</td> <td>conductor</td> </tr> <tr> <td>enumeration</td> <td>orchestra</td> </tr> </table>	enumeration	label	enumeration	performer	enumeration	texter	enumeration	editor	enumeration	conductor	enumeration	orchestra
enumeration	label												
enumeration	performer												
enumeration	texter												
enumeration	editor												
enumeration	conductor												
enumeration	orchestra												

	enumeration	ensemble
	enumeration	choir
	enumeration	accompanist
	enumeration	soloist
	enumeration	display_artist
	enumeration	singer
	enumeration	composer
	enumeration	mixer
	enumeration	remixer
	enumeration	producer
	enumeration	author
	enumeration	arranger
	enumeration	featuring
	enumeration	with
	enumeration	DJ
	enumeration	versus
	enumeration	meets
	enumeration	presents
	enumeration	compilator
	enumeration	narrator
	enumeration	copyright
	enumeration	production
	enumeration	publisher
	enumeration	clearinghouse
Used by	Element	contributor/type
Source	<pre> <xsd:simpleType name="contributorType"> <xsd:restriction base="xsd:string"> <xsd:enumeration value="label"/> <xsd:enumeration value="performer"/> <xsd:enumeration value="texter"/> <xsd:enumeration value="editor"/> <xsd:enumeration value="conductor"/> <xsd:enumeration value="orchestra"/> <xsd:enumeration value="ensemble"/> <xsd:enumeration value="choir"/> <xsd:enumeration value="accompanist"/> <xsd:enumeration value="soloist"/> <xsd:enumeration value="display_artist"/> <xsd:enumeration value="singer"/> <xsd:enumeration value="composer"/> <xsd:enumeration value="mixer"/> <xsd:enumeration value="remixer"/> <xsd:enumeration value="producer"/> <xsd:enumeration value="author"/> <xsd:enumeration value="arranger"/> <xsd:enumeration value="featuring"/> <xsd:enumeration value="with"/> <xsd:enumeration value="DJ"/> <xsd:enumeration value="versus"/> <xsd:enumeration value="meets"/> <xsd:enumeration value="presents"/> <xsd:enumeration value="compilator"/> <xsd:enumeration value="narrator"/> <xsd:enumeration value="copyright"/> <xsd:enumeration value="production"/> <xsd:enumeration value="publisher"/> <xsd:enumeration value="clearinghouse"/> </xsd:restriction> </xsd:simpleType></pre>	

Simple Type year

Namespace	No namespace
-----------	--------------

Diagram	
Type	restriction of xsd:integer
Facets	totalDigits 4
Used by	Element contributor/year
Source	<pre><xsd:simpleType name="year"> <xsd:restriction base="xsd:integer"> <xsd:totalDigits value="4"/> </xsd:restriction> </xsd:simpleType></pre>

Simple Type compositionType


Namespace	No namespace
Diagram	
Type	restriction of xsd:string
Facets	enumeration undefined enumeration original enumeration public domain enumeration cover enumeration tribute
Used by	Element information/compositiontype
Source	<pre><xsd:simpleType name="compositionType"> <xsd:restriction base="xsd:string"> <xsd:enumeration value="undefined"/> <xsd:enumeration value="original"/> <xsd:enumeration value="public domain"/> <xsd:enumeration value="cover"/> <xsd:enumeration value="tribute"/> </xsd:restriction> </xsd:simpleType></pre>

Simple Type recordingType


Namespace	No namespace
Diagram	
Type	restriction of xsd:string
Facets	enumeration undefined enumeration original enumeration public domain enumeration rerecorded enumeration remastered enumeration soundalike
Used by	Element information/recordingtype
Source	<pre><xsd:simpleType name="recordingType"> <xsd:restriction base="xsd:string"> <xsd:enumeration value="undefined"/> <xsd:enumeration value="original"/> <xsd:enumeration value="public domain"/> <xsd:enumeration value="rerecorded"/> <xsd:enumeration value="remastered"/> </xsd:restriction> </xsd:simpleType></pre>

```
<xsd:enumeration value="soundalike" />
</xsd:restriction>
</xsd:simpleType>
```

Simple Type allowance

Namespace	No namespace				
Diagram	 <div style="border: 1px solid #ccc; padding: 5px; margin-top: 5px;"> Built-in primitive type. The string datatype represents character strings in XML. </div>				
Type	restriction of xsd:string				
Facets	<table> <tr> <td>enumeration</td> <td>allow</td> </tr> <tr> <td>enumeration</td> <td>disallow</td> </tr> </table>	enumeration	allow	enumeration	disallow
enumeration	allow				
enumeration	disallow				
Used by	Attributes channel/@type, territory/@type				
Source	<pre><xsd:simpleType name="allowance"> <xsd:restriction base="xsd:string"> <xsd:enumeration value="allow"/> <xsd:enumeration value="disallow"/> </xsd:restriction> </xsd:simpleType></pre>				

Simple Type operator

Namespace	No namespace										
Diagram	 <div style="border: 1px solid #ccc; padding: 5px; margin-top: 5px;"> Built-in primitive type. The string datatype represents character strings in XML. </div>										
Type	restriction of xsd:string										
Facets	<table> <tr> <td>enumeration</td> <td>equals</td> </tr> <tr> <td>enumeration</td> <td>before</td> </tr> <tr> <td>enumeration</td> <td>after</td> </tr> <tr> <td>enumeration</td> <td>contains</td> </tr> <tr> <td>enumeration</td> <td>containedin</td> </tr> </table>	enumeration	equals	enumeration	before	enumeration	after	enumeration	contains	enumeration	containedin
enumeration	equals										
enumeration	before										
enumeration	after										
enumeration	contains										
enumeration	containedin										
Used by	Element if/operator										
Source	<pre><xsd:simpleType name="operator"> <xsd:restriction base="xsd:string"> <xsd:enumeration value="equals"/> <xsd:enumeration value="before"/> <xsd:enumeration value="after"/> <xsd:enumeration value="contains"/> <xsd:enumeration value="containedin"/> </xsd:restriction> </xsd:simpleType></pre>										

Simple Type explicitLyrics

Namespace	No namespace						
Diagram	 <div style="border: 1px solid #ccc; padding: 5px; margin-top: 5px;"> Built-in primitive type. The string datatype represents character strings in XML. </div>						
Type	restriction of xsd:string						
Facets	<table> <tr> <td>enumeration</td> <td>true</td> </tr> <tr> <td>enumeration</td> <td>false</td> </tr> <tr> <td>enumeration</td> <td>cleaned</td> </tr> </table>	enumeration	true	enumeration	false	enumeration	cleaned
enumeration	true						
enumeration	false						
enumeration	cleaned						
Used by	Element tags/explicit_lyrics						

Source	<pre><xsd:simpleType name="explicitLyrics"> <xsd:restriction base="xsd:string"> <xsd:enumeration value="true"/> <xsd:enumeration value="false"/> <xsd:enumeration value="cleaned"/> </xsd:restriction> </xsd:simpleType></pre>
--------	--

Simple Type fileType

Namespace	No namespace												
Diagram													
Type	restriction of xsd:string												
Facets	<table> <tr> <td>enumeration</td> <td>full</td> </tr> <tr> <td>enumeration</td> <td>prelistening</td> </tr> <tr> <td>enumeration</td> <td>frontcover</td> </tr> <tr> <td>enumeration</td> <td>backcover</td> </tr> <tr> <td>enumeration</td> <td>booklet</td> </tr> <tr> <td>enumeration</td> <td>stillframe</td> </tr> </table>	enumeration	full	enumeration	prelistening	enumeration	frontcover	enumeration	backcover	enumeration	booklet	enumeration	stillframe
enumeration	full												
enumeration	prelistening												
enumeration	frontcover												
enumeration	backcover												
enumeration	booklet												
enumeration	stillframe												
Used by	Element file/type												
Source	<pre><xsd:simpleType name="fileType"> <xsd:restriction base="xsd:string"> <xsd:enumeration value="full"/> <xsd:enumeration value="prelistening"/> <xsd:enumeration value="frontcover"/> <xsd:enumeration value="backcover"/> <xsd:enumeration value="booklet"/> <xsd:enumeration value="stillframe"/> </xsd:restriction> </xsd:simpleType></pre>												

Simple Type md5

Namespace	No namespace				
Diagram					
Type	restriction of notemptystring				
Type hierarchy	<ul style="list-style-type: none"> xsd:string <ul style="list-style-type: none"> notemptystring md5 				
Facets	<table> <tr> <td>minLength</td> <td>8</td> </tr> <tr> <td>pattern</td> <td>(([A-F0-9]{2}:){15}[A-F0-9]{2}) ([a-f0-9]{32})</td> </tr> </table>	minLength	8	pattern	(([A-F0-9]{2}:){15}[A-F0-9]{2}) ([a-f0-9]{32})
minLength	8				
pattern	(([A-F0-9]{2}:){15}[A-F0-9]{2}) ([a-f0-9]{32})				
Used by	Element checksums/md5				
Source	<pre><xsd:simpleType name="md5"> <xsd:restriction base="notemptystring"> <xsd:minLength value="8"/> <xsd:pattern value="(([A-F0-9]{2}:){15}[A-F0-9]{2}) ([a-f0-9]{32})"/> </xsd:restriction> </xsd:simpleType></pre>				

Simple Type sha1

Namespace	No namespace
Diagram	

Type	restriction of notemptystring	
Type hierarchy	<ul style="list-style-type: none"> xsd:string <ul style="list-style-type: none"> notemptystring sha1 	
Facets	minLength	8
	pattern	(([A-F0-9]{2}:){19}[A-F0-9]{2}) ([a-f0-9]{40})
Used by	Element	checksums/sha1
Source	<pre><xsd:simpleType name="sha1"> <!-- example: E8:27:4E:86:68:9E:CC:67:F0:93:BC:AC:A6:E2:09:C1:C6:25:7D:7B 44 b2f5171e85760127d04390a7f549da3b669755 --> <xsd:restriction base="notemptystring"> <xsd:minLength value="8"/> <xsd:pattern value="([A-F0-9]{2}:){19}[A-F0-9]{2}" /> <xsd:pattern value="[a-f0-9]{40}" /> </xsd:restriction> </xsd:simpleType></pre>	

Simple Type sha256

Namespace	No namespace	
Diagram	<pre> graph LR sha256[sha256] --> restriction notemptystring[notemptystring] style sha256 fill:#e0e0ff,stroke:#808080 style notemptystring fill:#e0e0ff,stroke:#808080 </pre>	
Type	restriction of notemptystring	
Type hierarchy	<ul style="list-style-type: none"> xsd:string <ul style="list-style-type: none"> notemptystring sha256 	
Facets	minLength	8
	pattern	(([A-F0-9]{2}:){31}[A-F0-9]{2})
Used by	Element	checksums/sha256
Source	<pre><xsd:simpleType name="sha256"> <!-- example: 7E:DB:34:A2:E8:38:1C:FE:58:67:97:D0:4F:1A:37:0D:6C:CD:0D:87:62:00:75:FF:FA:71:47:80:DA:A4:8F:38 --> <xsd:restriction base="notemptystring"> <xsd:minLength value="8"/> <xsd:pattern value="([A-F0-9]{2}:){31}[A-F0-9]{2}" /> </xsd:restriction> </xsd:simpleType></pre>	

Simple Type fileChannels

Namespace	No namespace									
Diagram	<pre> graph LR fileChannels[fileChannels] --> restriction xsdString[xsd:string] style fileChannels fill:#e0e0ff,stroke:#808080 style xsdString fill:#e0e0ff,stroke:#808080 xsdString --> callout "Built-in primitive type. The string datatype represents character strings in XML." </pre>									
Type	restriction of xsd:string									
Facets	<table border="1"> <tr> <td>enumeration</td> <td>mono</td> </tr> <tr> <td>enumeration</td> <td>stereo</td> </tr> <tr> <td>enumeration</td> <td>joint-stereo</td> </tr> <tr> <td>enumeration</td> <td>5.1</td> </tr> </table>	enumeration	mono	enumeration	stereo	enumeration	joint-stereo	enumeration	5.1	
enumeration	mono									
enumeration	stereo									
enumeration	joint-stereo									
enumeration	5.1									
Used by	Element	file/channels								
Source	<pre><xsd:simpleType name="fileChannels"> <xsd:restriction base="xsd:string"> <xsd:enumeration value="mono"/> <xsd:enumeration value="stereo"/> <xsd:enumeration value="joint-stereo"/> </xsd:restriction> </xsd:simpleType></pre>									

	<pre><xsd:enumeration value="5.1"/> </xsd:restriction> </xsd:simpleType></pre>
--	--

Attribute(s)

Attribute **publishable_url** / @publishable

Namespace	No namespace
Type	xsd:boolean
Properties	content: simple
Used by	Complex Type publishable_url
Source	<pre><xsd:attribute name="publishable" type="xsd:boolean"/></pre>

Attribute **contributor** / @num

Namespace	No namespace
Type	xsd:integer
Properties	content: simple
Used by	Complex Type contributor
Source	<pre><xsd:attribute name="num" type="xsd:integer"/></pre>

Attribute **promotext** / @lang

Namespace	No namespace
Type	xsd:string
Properties	content: simple
Used by	Complex Type promotext
Source	<pre><xsd:attribute name="lang" type="xsd:string"/></pre>

Attribute **teaserText** / @lang

Namespace	No namespace
Type	xsd:string
Properties	content: simple
Used by	Complex Type teaserText
Source	<pre><xsd:attribute name="lang" type="xsd:string"/></pre>

Attribute **physical_distributor** / @publishable

Namespace	No namespace
Type	xsd:boolean
Properties	content: simple
Used by	Complex Type physical_distributor
Source	<pre><xsd:attribute name="publishable" type="xsd:boolean"/></pre>

Attribute **territory** / @type

Namespace	No namespace
Type	allowance

Properties	use:	optional
Facets	enumeration	allow
	enumeration	disallow
Used by	Complex Type	territory
Source	<xsd:attribute name="type" type="allowance" use="optional"/>	

Attribute channel / @type

Namespace	No namespace
Type	allowance
Properties	use: required
Facets	enumeration allow
	enumeration disallow
Used by	Complex Type channel
Source	<xsd:attribute name="type" type="allowance" use="required"/>

Attribute channel / @download_allowed

Namespace	No namespace
Type	xsd:boolean
Properties	use: optional
Used by	Complex Type channel
Source	<xsd:attribute name="download_allowed" type="xsd:boolean" use="optional"/>

Attribute channel / @streaming_allowed

Namespace	No namespace
Type	xsd:boolean
Properties	use: optional
Used by	Complex Type channel
Source	<xsd:attribute name="streaming_allowed" type="xsd:boolean" use="optional"/>

Attribute rule / @num

Namespace	No namespace
Type	xsd:integer
Properties	content: simple
Used by	Complex Type rule
Source	<xsd:attribute name="num" type="xsd:integer"/>

Namespace: "http://fnppl.org/opensdx/countrycodes"

Schema(s)

Imported schema openSDX_countryCodes.xsd

Namespace	http://fnppl.org/opensdx/countrycodes
Properties	attribute form default: unqualified
	element form default: unqualified

Simple Type(s)

Simple Type countryCode

Namespace	http://fnppl.org/opensdx/countrycodes																																																																																																																									
Annotations	This element includes a list of ISO 3166-1 country codes.																																																																																																																									
Diagram	<pre> classDiagram class countryCode class xsd.string countryCode "1..1" *-- "0..1" xsd.string </pre> <p>This element includes a list of ISO 3166-1 country codes.</p> <p>Built-in primitive type. The string datatype represents character strings in XML.</p>																																																																																																																									
Type	restriction of xsd:string																																																																																																																									
Facets	<table> <tr><td>enumeration</td><td>AF</td><td>Afghanistan</td></tr> <tr><td>enumeration</td><td>AX</td><td>Åland Islands</td></tr> <tr><td>enumeration</td><td>AL</td><td>Albania</td></tr> <tr><td>enumeration</td><td>DZ</td><td>Algeria</td></tr> <tr><td>enumeration</td><td>AS</td><td>American Samoa</td></tr> <tr><td>enumeration</td><td>AD</td><td>Andorra</td></tr> <tr><td>enumeration</td><td>AO</td><td>Angola</td></tr> <tr><td>enumeration</td><td>AI</td><td>Anguilla</td></tr> <tr><td>enumeration</td><td>AQ</td><td>Antarctica</td></tr> <tr><td>enumeration</td><td>AG</td><td>Antigua and Barbuda</td></tr> <tr><td>enumeration</td><td>AR</td><td>Argentina</td></tr> <tr><td>enumeration</td><td>AM</td><td>Armenia</td></tr> <tr><td>enumeration</td><td>AW</td><td>Aruba</td></tr> <tr><td>enumeration</td><td>AU</td><td>Australia</td></tr> <tr><td>enumeration</td><td>AT</td><td>Austria</td></tr> <tr><td>enumeration</td><td>AZ</td><td>Azerbaijan</td></tr> <tr><td>enumeration</td><td>BS</td><td>Bahamas</td></tr> <tr><td>enumeration</td><td>BH</td><td>Bahrain</td></tr> <tr><td>enumeration</td><td>BD</td><td>Bangladesh</td></tr> <tr><td>enumeration</td><td>BB</td><td>Barbados</td></tr> <tr><td>enumeration</td><td>BY</td><td>Belarus</td></tr> <tr><td>enumeration</td><td>BE</td><td>Belgium</td></tr> <tr><td>enumeration</td><td>BZ</td><td>Belize</td></tr> <tr><td>enumeration</td><td>BJ</td><td>Benin</td></tr> <tr><td>enumeration</td><td>BM</td><td>Bermuda</td></tr> <tr><td>enumeration</td><td>BT</td><td>Bhutan</td></tr> <tr><td>enumeration</td><td>BO</td><td>Bolivia, Plurinational State of</td></tr> <tr><td>enumeration</td><td>BQ</td><td>Bonaire, Sint Eustatius and Saba</td></tr> <tr><td>enumeration</td><td>BA</td><td>Bosnia and Herzegovina</td></tr> <tr><td>enumeration</td><td>BW</td><td>Botswana</td></tr> <tr><td>enumeration</td><td>BV</td><td>Bouvet Island</td></tr> <tr><td>enumeration</td><td>BR</td><td>Brazil</td></tr> <tr><td>enumeration</td><td>IO</td><td>British Indian Ocean Territory</td></tr> <tr><td>enumeration</td><td>BN</td><td>Brunei Darussalam</td></tr> <tr><td>enumeration</td><td>BG</td><td>Bulgaria</td></tr> <tr><td>enumeration</td><td>BF</td><td>Burkina Faso</td></tr> <tr><td>enumeration</td><td>BI</td><td>Burundi</td></tr> <tr><td>enumeration</td><td>KH</td><td>Cambodia</td></tr> <tr><td>enumeration</td><td>CM</td><td>Cameroon</td></tr> <tr><td>enumeration</td><td>CA</td><td>Canada</td></tr> </table>	enumeration	AF	Afghanistan	enumeration	AX	Åland Islands	enumeration	AL	Albania	enumeration	DZ	Algeria	enumeration	AS	American Samoa	enumeration	AD	Andorra	enumeration	AO	Angola	enumeration	AI	Anguilla	enumeration	AQ	Antarctica	enumeration	AG	Antigua and Barbuda	enumeration	AR	Argentina	enumeration	AM	Armenia	enumeration	AW	Aruba	enumeration	AU	Australia	enumeration	AT	Austria	enumeration	AZ	Azerbaijan	enumeration	BS	Bahamas	enumeration	BH	Bahrain	enumeration	BD	Bangladesh	enumeration	BB	Barbados	enumeration	BY	Belarus	enumeration	BE	Belgium	enumeration	BZ	Belize	enumeration	BJ	Benin	enumeration	BM	Bermuda	enumeration	BT	Bhutan	enumeration	BO	Bolivia, Plurinational State of	enumeration	BQ	Bonaire, Sint Eustatius and Saba	enumeration	BA	Bosnia and Herzegovina	enumeration	BW	Botswana	enumeration	BV	Bouvet Island	enumeration	BR	Brazil	enumeration	IO	British Indian Ocean Territory	enumeration	BN	Brunei Darussalam	enumeration	BG	Bulgaria	enumeration	BF	Burkina Faso	enumeration	BI	Burundi	enumeration	KH	Cambodia	enumeration	CM	Cameroon	enumeration	CA	Canada	
enumeration	AF	Afghanistan																																																																																																																								
enumeration	AX	Åland Islands																																																																																																																								
enumeration	AL	Albania																																																																																																																								
enumeration	DZ	Algeria																																																																																																																								
enumeration	AS	American Samoa																																																																																																																								
enumeration	AD	Andorra																																																																																																																								
enumeration	AO	Angola																																																																																																																								
enumeration	AI	Anguilla																																																																																																																								
enumeration	AQ	Antarctica																																																																																																																								
enumeration	AG	Antigua and Barbuda																																																																																																																								
enumeration	AR	Argentina																																																																																																																								
enumeration	AM	Armenia																																																																																																																								
enumeration	AW	Aruba																																																																																																																								
enumeration	AU	Australia																																																																																																																								
enumeration	AT	Austria																																																																																																																								
enumeration	AZ	Azerbaijan																																																																																																																								
enumeration	BS	Bahamas																																																																																																																								
enumeration	BH	Bahrain																																																																																																																								
enumeration	BD	Bangladesh																																																																																																																								
enumeration	BB	Barbados																																																																																																																								
enumeration	BY	Belarus																																																																																																																								
enumeration	BE	Belgium																																																																																																																								
enumeration	BZ	Belize																																																																																																																								
enumeration	BJ	Benin																																																																																																																								
enumeration	BM	Bermuda																																																																																																																								
enumeration	BT	Bhutan																																																																																																																								
enumeration	BO	Bolivia, Plurinational State of																																																																																																																								
enumeration	BQ	Bonaire, Sint Eustatius and Saba																																																																																																																								
enumeration	BA	Bosnia and Herzegovina																																																																																																																								
enumeration	BW	Botswana																																																																																																																								
enumeration	BV	Bouvet Island																																																																																																																								
enumeration	BR	Brazil																																																																																																																								
enumeration	IO	British Indian Ocean Territory																																																																																																																								
enumeration	BN	Brunei Darussalam																																																																																																																								
enumeration	BG	Bulgaria																																																																																																																								
enumeration	BF	Burkina Faso																																																																																																																								
enumeration	BI	Burundi																																																																																																																								
enumeration	KH	Cambodia																																																																																																																								
enumeration	CM	Cameroon																																																																																																																								
enumeration	CA	Canada																																																																																																																								

enumeration	CV	Cape Verde
enumeration	KY	Cayman Islands
enumeration	CF	Central African Republic
enumeration	TD	Chad
enumeration	CL	Chile
enumeration	CN	China
enumeration	CX	Christmas Island
enumeration	CC	Cocos (Keeling) Islands
enumeration	CO	Colombia
enumeration	KM	Comoros
enumeration	CG	Congo
enumeration	CD	Congo, the Democratic Republic of the
enumeration	CK	Cook Islands
enumeration	CR	Costa Rica
enumeration	CI	Côte d'Ivoire
enumeration	HR	Croatia
enumeration	CU	Cuba
enumeration	CW	Curaçao
enumeration	CY	Cyprus
enumeration	CZ	Czech Republic
enumeration	DK	Denmark
enumeration	DJ	Djibouti
enumeration	DM	Dominica
enumeration	DO	Dominican Republic
enumeration	EC	Ecuador
enumeration	EG	Egypt
enumeration	SV	El Salvador
enumeration	GQ	Equatorial Guinea
enumeration	ER	Eritrea
enumeration	EE	Estonia
enumeration	ET	Ethiopia
enumeration	FK	Falkland Islands (Malvinas)
enumeration	FO	Faroe Islands
enumeration	FJ	Fiji
enumeration	FI	Finland
enumeration	FR	France
enumeration	GF	French Guiana
enumeration	PF	French Polynesia
enumeration	TF	French Southern Territories
enumeration	GA	Gabon
enumeration	GM	Gambia
enumeration	GE	Georgia
enumeration	DE	Germany
enumeration	GH	Ghana
enumeration	GI	Gibraltar
enumeration	GR	Greece
enumeration	GL	Greenland
enumeration	GD	Grenada
enumeration	GP	Guadeloupe

enumeration	GU	Guam
enumeration	GT	Guatemala
enumeration	GG	Guernsey
enumeration	GN	Guinea
enumeration	GW	Guinea-Bissau
enumeration	GY	Guyana
enumeration	HT	Haiti
enumeration	HM	Heard Island and McDonald Islands
enumeration	VA	Holy See (Vatican City State)
enumeration	HN	Honduras
enumeration	HK	Hong Kong
enumeration	HU	Hungary
enumeration	IS	Iceland
enumeration	IN	India
enumeration	ID	Indonesia
enumeration	IR	Iran, Islamic Republic of
enumeration	IQ	Iraq
enumeration	IE	Ireland
enumeration	IM	Isle of Man
enumeration	IL	Israel
enumeration	IT	Italy
enumeration	JM	Jamaica
enumeration	JP	Japan
enumeration	JE	Jersey
enumeration	JO	Jordan
enumeration	KZ	Kazakhstan
enumeration	KE	Kenya
enumeration	KI	Kiribati
enumeration	KP	Korea, Democratic People's Republic of
enumeration	KR	Korea, Republic of
enumeration	KW	Kuwait
enumeration	KG	Kyrgyzstan
enumeration	LA	Lao People's Democratic Republic
enumeration	LV	Latvia
enumeration	LB	Lebanon
enumeration	LS	Lesotho
enumeration	LR	Liberia
enumeration	LY	Libyan Arab Jamahiriya
enumeration	LI	Liechtenstein
enumeration	LT	Lithuania
enumeration	LU	Luxembourg
enumeration	MO	Macao
enumeration	MK	Macedonia, the former Yugoslav Republic of
enumeration	MG	Madagascar
enumeration	MW	Malawi
enumeration	MY	Malaysia
enumeration	MV	Maldives
enumeration	ML	Mali
enumeration	MT	Malta

enumeration	MH	Marshall Islands
enumeration	MQ	Martinique
enumeration	MR	Mauritania
enumeration	MU	Mauritius
enumeration	YT	Mayotte
enumeration	MX	Mexico
enumeration	FM	Micronesia, Federated States of
enumeration	MD	Moldova, Republic of
enumeration	MC	Monaco
enumeration	MN	Mongolia
enumeration	ME	Montenegro
enumeration	MS	Montserrat
enumeration	MA	Morocco
enumeration	MZ	Mozambique
enumeration	MM	Myanmar
enumeration	NA	Namibia
enumeration	NR	Nauru
enumeration	NP	Nepal
enumeration	NL	Netherlands
enumeration	AN	Netherlands Antilles
enumeration	NC	New Caledonia
enumeration	NZ	New Zealand
enumeration	NI	Nicaragua
enumeration	NE	Niger
enumeration	NG	Nigeria
enumeration	NU	Niue
enumeration	NF	Norfolk Island
enumeration	MP	Northern Mariana Islands
enumeration	NO	Norway
enumeration	OM	Oman
enumeration	PK	Pakistan
enumeration	PW	Palau
enumeration	PS	Palestinian Territory, Occupied
enumeration	PA	Panama
enumeration	PG	Papua New Guinea
enumeration	PY	Paraguay
enumeration	PE	Peru
enumeration	PH	Philippines
enumeration	PN	Pitcairn
enumeration	PL	Poland
enumeration	PT	Portugal
enumeration	PR	Puerto Rico
enumeration	QA	Qatar
enumeration	RE	Réunion
enumeration	RO	Romania
enumeration	RU	Russian Federation
enumeration	RW	Rwanda
enumeration	BL	Saint Barthélemy
enumeration	SH	Saint Helena, Ascension and Tristan da Cunha

enumeration	KN	Saint Kitts and Nevis
enumeration	LC	Saint Lucia
enumeration	MF	Saint Martin (French part)
enumeration	PM	Saint Pierre and Miquelon
enumeration	VC	Saint Vincent and the Grenadines
enumeration	WS	Samoa
enumeration	SM	San Marino
enumeration	ST	Sao Tome and Principe
enumeration	SA	Saudi Arabia
enumeration	SN	Senegal
enumeration	RS	Serbia
enumeration	SC	Seychelles
enumeration	SL	Sierra Leone
enumeration	SG	Singapore
enumeration	SX	Sint Maarten (Dutch part)
enumeration	SK	Slovakia
enumeration	SI	Slovenia
enumeration	SB	Solomon Islands
enumeration	SO	Somalia
enumeration	ZA	South Africa
enumeration	GS	South Georgia and the South Sandwich Islands
enumeration	SS	South Sudan
enumeration	ES	Spain
enumeration	LK	Sri Lanka
enumeration	SD	Sudan
enumeration	SR	Suriname
enumeration	SJ	Svalbard and Jan Mayen
enumeration	SZ	Swaziland
enumeration	SE	Sweden
enumeration	CH	Switzerland
enumeration	SY	Syrian Arab Republic
enumeration	TW	Taiwan, Province of China
enumeration	TJ	Tajikistan
enumeration	TZ	Tanzania, United Republic of
enumeration	TH	Thailand
enumeration	TL	Timor-Leste
enumeration	TG	Togo
enumeration	TK	Tokelau
enumeration	TO	Tonga
enumeration	TT	Trinidad and Tobago
enumeration	TN	Tunisia
enumeration	TR	Turkey
enumeration	TM	Turkmenistan
enumeration	TC	Turks and Caicos Islands
enumeration	TV	Tuvalu
enumeration	UG	Uganda
enumeration	UA	Ukraine
enumeration	AE	United Arab Emirates
enumeration	GB	United Kingdom

	enumeration	US	United States
	enumeration	UM	United States Minor Outlying Islands
	enumeration	UY	Uruguay
	enumeration	UZ	Uzbekistan
	enumeration	VU	Vanuatu
	enumeration	VE	Venezuela, Bolivarian Republic of
	enumeration	VN	Viet Nam
	enumeration	VG	Virgin Islands, British
	enumeration	VI	Virgin Islands, U.S.
	enumeration	WF	Wallis and Futuna
	enumeration	WW	WorldWide
	enumeration	EH	Western Sahara
	enumeration	YE	Yemen
	enumeration	ZM	Zambia
	enumeration	ZW	Zimbabwe
Used by	Elements	information/origin_country, to/country	
	Complex Type	territory	
Source	<pre> <xsd:simpleType name="countryCode"> <xsd:annotation> <xsd:documentation xml:lang="en">This element includes a list of ISO 3166-1 country codes.</xsd:documentation> </xsd:annotation> <xsd:restriction base="xsd:string"> <xsd:enumeration value="AF"> <xsd:annotation> <xsd:documentation>Afghanistan</xsd:documentation> </xsd:annotation> </xsd:enumeration> <xsd:enumeration value="AX"> <xsd:annotation> <xsd:documentation>Åland Islands</xsd:documentation> </xsd:annotation> </xsd:enumeration> <xsd:enumeration value="AL"> <xsd:annotation> <xsd:documentation>Albania</xsd:documentation> </xsd:annotation> </xsd:enumeration> <xsd:enumeration value="DZ"> <xsd:annotation> <xsd:documentation>Algeria</xsd:documentation> </xsd:annotation> </xsd:enumeration> <xsd:enumeration value="AS"> <xsd:annotation> <xsd:documentation>American Samoa</xsd:documentation> </xsd:annotation> </xsd:enumeration> <xsd:enumeration value="AD"> <xsd:annotation> <xsd:documentation>Andorra</xsd:documentation> </xsd:annotation> </xsd:enumeration> <xsd:enumeration value="AO"> <xsd:annotation> <xsd:documentation>Angola</xsd:documentation> </xsd:annotation> </xsd:enumeration> <xsd:enumeration value="AI"> <xsd:annotation> <xsd:documentation>Anguilla</xsd:documentation> </xsd:annotation> </xsd:enumeration> <xsd:enumeration value="AQ"> <xsd:annotation> <xsd:documentation>Antarctica</xsd:documentation> </xsd:annotation> </xsd:enumeration> <xsd:enumeration value="AG"> <xsd:annotation></pre>		

```
<xsd:documentation>Antigua and Barbuda</xsd:documentation>
</xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="AR">
<xsd:annotation>
<xsd:documentation>Argentina</xsd:documentation>
</xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="AM">
<xsd:annotation>
<xsd:documentation>Armenia</xsd:documentation>
</xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="AW">
<xsd:annotation>
<xsd:documentation>Aruba</xsd:documentation>
</xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="AU">
<xsd:annotation>
<xsd:documentation>Australia</xsd:documentation>
</xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="AT">
<xsd:annotation>
<xsd:documentation>Austria</xsd:documentation>
</xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="AZ">
<xsd:annotation>
<xsd:documentation>Azerbaijan</xsd:documentation>
</xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="BS">
<xsd:annotation>
<xsd:documentation>Bahamas</xsd:documentation>
</xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="BH">
<xsd:annotation>
<xsd:documentation>Bahrain</xsd:documentation>
</xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="BD">
<xsd:annotation>
<xsd:documentation>Bangladesh</xsd:documentation>
</xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="BB">
<xsd:annotation>
<xsd:documentation>Barbados</xsd:documentation>
</xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="BY">
<xsd:annotation>
<xsd:documentation>Belarus</xsd:documentation>
</xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="BE">
<xsd:annotation>
<xsd:documentation>Belgium</xsd:documentation>
</xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="BZ">
<xsd:annotation>
<xsd:documentation>Belize</xsd:documentation>
</xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="BJ">
<xsd:annotation>
<xsd:documentation>Benin</xsd:documentation>
</xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="BM">
<xsd:annotation>
<xsd:documentation>Bermuda</xsd:documentation>
</xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="BT">
<xsd:annotation>
<xsd:documentation>Bhutan</xsd:documentation>
</xsd:annotation>
</xsd:enumeration>
```

```
<xsd:enumeration value="BO">
  <xsd:annotation>
    <xsd:documentation>Bolivia, Plurinational State of</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="BQ">
  <xsd:annotation>
    <xsd:documentation>Bonaire, Sint Eustatius and Saba</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="BA">
  <xsd:annotation>
    <xsd:documentation>Bosnia and Herzegovina</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="BW">
  <xsd:annotation>
    <xsd:documentation>Botswana</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="BV">
  <xsd:annotation>
    <xsd:documentation>Bouvet Island</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="BR">
  <xsd:annotation>
    <xsd:documentation>Brazil</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="IO">
  <xsd:annotation>
    <xsd:documentation>British Indian Ocean Territory</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="BN">
  <xsd:annotation>
    <xsd:documentation>Brunei Darussalam</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="BG">
  <xsd:annotation>
    <xsd:documentation>Bulgaria</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="BF">
  <xsd:annotation>
    <xsd:documentation>Burkina Faso</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="BI">
  <xsd:annotation>
    <xsd:documentation>Burundi</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="KH">
  <xsd:annotation>
    <xsd:documentation>Cambodia</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="CM">
  <xsd:annotation>
    <xsd:documentation>Cameroon</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="CA">
  <xsd:annotation>
    <xsd:documentation>Canada</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="CV">
  <xsd:annotation>
    <xsd:documentation>Cape Verde</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="KY">
  <xsd:annotation>
    <xsd:documentation>Cayman Islands</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="CF">
  <xsd:annotation>
    <xsd:documentation>Central African Republic</xsd:documentation>
```

```
</xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="TD">
  <xsd:annotation>
    <xsd:documentation>Chad</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="CL">
  <xsd:annotation>
    <xsd:documentation>Chile</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="CN">
  <xsd:annotation>
    <xsd:documentation>China</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="CX">
  <xsd:annotation>
    <xsd:documentation>Christmas Island</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="CC">
  <xsd:annotation>
    <xsd:documentation>Cocos (Keeling) Islands</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="CO">
  <xsd:annotation>
    <xsd:documentation>Colombia</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="KM">
  <xsd:annotation>
    <xsd:documentation>Comoros</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="CG">
  <xsd:annotation>
    <xsd:documentation>Congo</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="CD">
  <xsd:annotation>
    <xsd:documentation>Congo, the Democratic Republic of the</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="CK">
  <xsd:annotation>
    <xsd:documentation>Cook Islands</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="CR">
  <xsd:annotation>
    <xsd:documentation>Costa Rica</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="CI">
  <xsd:annotation>
    <xsd:documentation>Côte d'Ivoire</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="HR">
  <xsd:annotation>
    <xsd:documentation>Croatia</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="CU">
  <xsd:annotation>
    <xsd:documentation>Cuba</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="CW">
  <xsd:annotation>
    <xsd:documentation>Curaçao</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="CY">
  <xsd:annotation>
    <xsd:documentation>Cyprus</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="CZ">
```

```
<xsd:annotation>
  <xsd:documentation>Czech Republic</xsd:documentation>
</xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="DK">
  <xsd:annotation>
    <xsd:documentation>Denmark</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="DJ">
  <xsd:annotation>
    <xsd:documentation>Djibouti</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="DM">
  <xsd:annotation>
    <xsd:documentation>Dominica</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="DO">
  <xsd:annotation>
    <xsd:documentation>Dominican Republic</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="EC">
  <xsd:annotation>
    <xsd:documentation>Ecuador</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="EG">
  <xsd:annotation>
    <xsd:documentation>Egypt</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="SV">
  <xsd:annotation>
    <xsd:documentation>El Salvador</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="GQ">
  <xsd:annotation>
    <xsd:documentation>Equatorial Guinea</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="ER">
  <xsd:annotation>
    <xsd:documentation>Eritrea</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="EE">
  <xsd:annotation>
    <xsd:documentation>Estonia</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="ET">
  <xsd:annotation>
    <xsd:documentation>Ethiopia</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="FK">
  <xsd:annotation>
    <xsd:documentation>Falkland Islands (Malvinas)</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="FO">
  <xsd:annotation>
    <xsd:documentation>Faroe Islands</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="FJ">
  <xsd:annotation>
    <xsd:documentation>Fiji</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="FI">
  <xsd:annotation>
    <xsd:documentation>Finland</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="FR">
  <xsd:annotation>
    <xsd:documentation>France</xsd:documentation>
  </xsd:annotation>
```

```
</xsd:enumeration>
<xsd:enumeration value="GF">
  <xsd:annotation>
    <xsd:documentation>French Guiana</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="PF">
  <xsd:annotation>
    <xsd:documentation>French Polynesia</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="TF">
  <xsd:annotation>
    <xsd:documentation>French Southern Territories</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="GA">
  <xsd:annotation>
    <xsd:documentation>Gabon</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="GM">
  <xsd:annotation>
    <xsd:documentation>Gambia</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="GE">
  <xsd:annotation>
    <xsd:documentation>Georgia</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="DE">
  <xsd:annotation>
    <xsd:documentation>Germany</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="GH">
  <xsd:annotation>
    <xsd:documentation>Ghana</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="GI">
  <xsd:annotation>
    <xsd:documentation>Gibraltar</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="GR">
  <xsd:annotation>
    <xsd:documentation>Greece</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="GL">
  <xsd:annotation>
    <xsd:documentation>Greenland</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="GD">
  <xsd:annotation>
    <xsd:documentation>Grenada</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="GP">
  <xsd:annotation>
    <xsd:documentation>Guadeloupe</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="GU">
  <xsd:annotation>
    <xsd:documentation>Guam</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="GT">
  <xsd:annotation>
    <xsd:documentation>Guatemala</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="GG">
  <xsd:annotation>
    <xsd:documentation>Guernsey</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="GN">
  <xsd:annotation>
```

```
<xsd:documentation>Guinea</xsd:documentation>
</xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="GW">
  <xsd:annotation>
    <xsd:documentation>Guinea-Bissau</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="GY">
  <xsd:annotation>
    <xsd:documentation>Guyana</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="HT">
  <xsd:annotation>
    <xsd:documentation>Haiti</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="HM">
  <xsd:annotation>
    <xsd:documentation>Heard Island and McDonald Islands</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="VA">
  <xsd:annotation>
    <xsd:documentation>Holy See (Vatican City State)</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="HN">
  <xsd:annotation>
    <xsd:documentation>Honduras</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="HK">
  <xsd:annotation>
    <xsd:documentation>Hong Kong</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="HU">
  <xsd:annotation>
    <xsd:documentation>Hungary</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="IS">
  <xsd:annotation>
    <xsd:documentation>Iceland</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="IN">
  <xsd:annotation>
    <xsd:documentation>India</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="ID">
  <xsd:annotation>
    <xsd:documentation>Indonesia</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="IR">
  <xsd:annotation>
    <xsd:documentation>Iran, Islamic Republic of</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="IQ">
  <xsd:annotation>
    <xsd:documentation>Iraq</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="IE">
  <xsd:annotation>
    <xsd:documentation>Ireland</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="IM">
  <xsd:annotation>
    <xsd:documentation>Isle of Man</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="IL">
  <xsd:annotation>
    <xsd:documentation>Israel</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
```

```
<xsd:enumeration value="IT">
  <xsd:annotation>
    <xsd:documentation>Italy</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="JM">
  <xsd:annotation>
    <xsd:documentation>Jamaica</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="JP">
  <xsd:annotation>
    <xsd:documentation>Japan</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="JE">
  <xsd:annotation>
    <xsd:documentation>Jersey</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="JO">
  <xsd:annotation>
    <xsd:documentation>Jordan</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="KZ">
  <xsd:annotation>
    <xsd:documentation>Kazakhstan</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="KE">
  <xsd:annotation>
    <xsd:documentation>Kenya</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="KI">
  <xsd:annotation>
    <xsd:documentation>Kiribati</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="KP">
  <xsd:annotation>
    <xsd:documentation>Korea, Democratic People's Republic of</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="KR">
  <xsd:annotation>
    <xsd:documentation>Korea, Republic of</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="KW">
  <xsd:annotation>
    <xsd:documentation>Kuwait</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="KG">
  <xsd:annotation>
    <xsd:documentation>Kyrgyzstan</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="LA">
  <xsd:annotation>
    <xsd:documentation>Lao People's Democratic Republic</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="LV">
  <xsd:annotation>
    <xsd:documentation>Latvia</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="LB">
  <xsd:annotation>
    <xsd:documentation>Lebanon</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="LS">
  <xsd:annotation>
    <xsd:documentation>Lesotho</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="LR">
  <xsd:annotation>
    <xsd:documentation>Liberia</xsd:documentation>
  </xsd:annotation>
```

```
</xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="LY">
  <xsd:annotation>
    <xsd:documentation>Libyan Arab Jamahiriya</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="LI">
  <xsd:annotation>
    <xsd:documentation>Liechtenstein</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="LT">
  <xsd:annotation>
    <xsd:documentation>Lithuania</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="LU">
  <xsd:annotation>
    <xsd:documentation>Luxembourg</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="MO">
  <xsd:annotation>
    <xsd:documentation>Macao</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="MK">
  <xsd:annotation>
    <xsd:documentation>Macedonia, the former Yugoslav Republic of</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="MG">
  <xsd:annotation>
    <xsd:documentation>Madagascar</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="MW">
  <xsd:annotation>
    <xsd:documentation>Malawi</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="MY">
  <xsd:annotation>
    <xsd:documentation>Malaysia</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="MV">
  <xsd:annotation>
    <xsd:documentation>Maldives</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="ML">
  <xsd:annotation>
    <xsd:documentation>Mali</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="MT">
  <xsd:annotation>
    <xsd:documentation>Malta</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="MH">
  <xsd:annotation>
    <xsd:documentation>Marshall Islands</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="MQ">
  <xsd:annotation>
    <xsd:documentation>Martinique</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="MR">
  <xsd:annotation>
    <xsd:documentation>Mauritania</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="MU">
  <xsd:annotation>
    <xsd:documentation>Mauritius</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="YT">
```

```
<xsd:annotation>
  <xsd:documentation>Mayotte</xsd:documentation>
</xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="MX">
  <xsd:annotation>
    <xsd:documentation>Mexico</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="FM">
  <xsd:annotation>
    <xsd:documentation>Micronesia, Federated States of</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="MD">
  <xsd:annotation>
    <xsd:documentation>Moldova, Republic of</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="MC">
  <xsd:annotation>
    <xsd:documentation>Monaco</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="MN">
  <xsd:annotation>
    <xsd:documentation>Mongolia</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="ME">
  <xsd:annotation>
    <xsd:documentation>Montenegro</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="MS">
  <xsd:annotation>
    <xsd:documentation>Montserrat</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="MA">
  <xsd:annotation>
    <xsd:documentation>Morocco</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="MZ">
  <xsd:annotation>
    <xsd:documentation>Mozambique</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="MM">
  <xsd:annotation>
    <xsd:documentation>Myanmar</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="NA">
  <xsd:annotation>
    <xsd:documentation>Namibia</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="NR">
  <xsd:annotation>
    <xsd:documentation>Nauru</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="NP">
  <xsd:annotation>
    <xsd:documentation>Nepal</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="NL">
  <xsd:annotation>
    <xsd:documentation>Netherlands</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="AN">
  <xsd:annotation>
    <xsd:documentation>Netherlands Antilles</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="NC">
  <xsd:annotation>
    <xsd:documentation>New Caledonia</xsd:documentation>
  </xsd:annotation>
```

```
</xsd:enumeration>
<xsd:enumeration value="NZ">
  <xsd:annotation>
    <xsd:documentation>New Zealand</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="NI">
  <xsd:annotation>
    <xsd:documentation>Nicaragua</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="NE">
  <xsd:annotation>
    <xsd:documentation>Niger</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="NG">
  <xsd:annotation>
    <xsd:documentation>Nigeria</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="NU">
  <xsd:annotation>
    <xsd:documentation>Niue</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="NF">
  <xsd:annotation>
    <xsd:documentation>Norfolk Island</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="MP">
  <xsd:annotation>
    <xsd:documentation>Northern Mariana Islands</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="NO">
  <xsd:annotation>
    <xsd:documentation>Norway</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="OM">
  <xsd:annotation>
    <xsd:documentation>Oman</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="PK">
  <xsd:annotation>
    <xsd:documentation>Pakistan</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="PW">
  <xsd:annotation>
    <xsd:documentation>Palau</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="PS">
  <xsd:annotation>
    <xsd:documentation>Palestinian Territory, Occupied</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="PA">
  <xsd:annotation>
    <xsd:documentation>Panama</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="PG">
  <xsd:annotation>
    <xsd:documentation>Papua New Guinea</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="PY">
  <xsd:annotation>
    <xsd:documentation>Paraguay</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="PE">
  <xsd:annotation>
    <xsd:documentation>Peru</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="PH">
  <xsd:annotation>
```

```
<xsd:documentation>Philippines</xsd:documentation>
</xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="PN">
  <xsd:annotation>
    <xsd:documentation>Pitcairn</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="PL">
  <xsd:annotation>
    <xsd:documentation>Poland</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="PT">
  <xsd:annotation>
    <xsd:documentation>Portugal</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="PR">
  <xsd:annotation>
    <xsd:documentation>Puerto Rico</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="QA">
  <xsd:annotation>
    <xsd:documentation>Qatar</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="RE">
  <xsd:annotation>
    <xsd:documentation>Réunion</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="RO">
  <xsd:annotation>
    <xsd:documentation>Romania</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="RU">
  <xsd:annotation>
    <xsd:documentation>Russian Federation</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="RW">
  <xsd:annotation>
    <xsd:documentation>Rwanda</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="BL">
  <xsd:annotation>
    <xsd:documentation>Saint Barthélemy</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="SH">
  <xsd:annotation>
    <xsd:documentation>Saint Helena, Ascension and Tristan da Cunha</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="KN">
  <xsd:annotation>
    <xsd:documentation>Saint Kitts and Nevis</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="LC">
  <xsd:annotation>
    <xsd:documentation>Saint Lucia</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="MF">
  <xsd:annotation>
    <xsd:documentation>Saint Martin (French part)</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="PM">
  <xsd:annotation>
    <xsd:documentation>Saint Pierre and Miquelon</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="VC">
  <xsd:annotation>
    <xsd:documentation>Saint Vincent and the Grenadines</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
```

```
<xsd:enumeration value="WS">
  <xsd:annotation>
    <xsd:documentation>Samoa</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="SM">
  <xsd:annotation>
    <xsd:documentation>San Marino</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="ST">
  <xsd:annotation>
    <xsd:documentation>Sao Tome and Principe</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="SA">
  <xsd:annotation>
    <xsd:documentation>Saudi Arabia</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="SN">
  <xsd:annotation>
    <xsd:documentation>Senegal</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="RS">
  <xsd:annotation>
    <xsd:documentation>Serbia</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="SC">
  <xsd:annotation>
    <xsd:documentation>Seychelles</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="SL">
  <xsd:annotation>
    <xsd:documentation>Sierra Leone</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="SG">
  <xsd:annotation>
    <xsd:documentation>Singapore</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="SX">
  <xsd:annotation>
    <xsd:documentation>Sint Maarten (Dutch part)</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="SK">
  <xsd:annotation>
    <xsd:documentation>Slovakia</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="SI">
  <xsd:annotation>
    <xsd:documentation>Slovenia</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="SB">
  <xsd:annotation>
    <xsd:documentation>Solomon Islands</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="SO">
  <xsd:annotation>
    <xsd:documentation>Somalia</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="ZA">
  <xsd:annotation>
    <xsd:documentation>South Africa</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="GS">
  <xsd:annotation>
    <xsd:documentation>South Georgia and the South Sandwich Islands</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="SS">
  <xsd:annotation>
    <xsd:documentation>South Sudan</xsd:documentation>
```

```
</xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="ES">
  <xsd:annotation>
    <xsd:documentation>Spain</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="LK">
  <xsd:annotation>
    <xsd:documentation>Sri Lanka</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="SD">
  <xsd:annotation>
    <xsd:documentation>Sudan</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="SR">
  <xsd:annotation>
    <xsd:documentation>Suriname</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="SJ">
  <xsd:annotation>
    <xsd:documentation>Svalbard and Jan Mayen</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="SZ">
  <xsd:annotation>
    <xsd:documentation>Swaziland</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="SE">
  <xsd:annotation>
    <xsd:documentation>Sweden</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="CH">
  <xsd:annotation>
    <xsd:documentation>Switzerland</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="SY">
  <xsd:annotation>
    <xsd:documentation>Syrian Arab Republic</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="TW">
  <xsd:annotation>
    <xsd:documentation>Taiwan, Province of China</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="TJ">
  <xsd:annotation>
    <xsd:documentation>Tajikistan</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="TZ">
  <xsd:annotation>
    <xsd:documentation>Tanzania, United Republic of</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="TH">
  <xsd:annotation>
    <xsd:documentation>Thailand</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="TL">
  <xsd:annotation>
    <xsd:documentation>Timor-Leste</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="TG">
  <xsd:annotation>
    <xsd:documentation>Togo</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="TK">
  <xsd:annotation>
    <xsd:documentation>Tokelau</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="TO">
```

```
<xsd:annotation>
  <xsd:documentation>Tonga</xsd:documentation>
</xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="TT">
  <xsd:annotation>
    <xsd:documentation>Trinidad and Tobago</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="TN">
  <xsd:annotation>
    <xsd:documentation>Tunisia</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="TR">
  <xsd:annotation>
    <xsd:documentation>Turkey</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="TM">
  <xsd:annotation>
    <xsd:documentation>Turkmenistan</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="TC">
  <xsd:annotation>
    <xsd:documentation>Turks and Caicos Islands</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="TV">
  <xsd:annotation>
    <xsd:documentation>Tuvalu</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="UG">
  <xsd:annotation>
    <xsd:documentation>Uganda</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="UA">
  <xsd:annotation>
    <xsd:documentation>Ukraine</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="AE">
  <xsd:annotation>
    <xsd:documentation>United Arab Emirates</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="GB">
  <xsd:annotation>
    <xsd:documentation>United Kingdom</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="US">
  <xsd:annotation>
    <xsd:documentation>United States</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="UM">
  <xsd:annotation>
    <xsd:documentation>United States Minor Outlying Islands</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="UY">
  <xsd:annotation>
    <xsd:documentation>Uruguay</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="UZ">
  <xsd:annotation>
    <xsd:documentation>Uzbekistan</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="VU">
  <xsd:annotation>
    <xsd:documentation>Vanuatu</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="VE">
  <xsd:annotation>
    <xsd:documentation>Venezuela, Bolivarian Republic of</xsd:documentation>
  </xsd:annotation>
```

```

</xsd:enumeration>
<xsd:enumeration value="VN">
  <xsd:annotation>
    <xsd:documentation>Viet Nam</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="VG">
  <xsd:annotation>
    <xsd:documentation>Virgin Islands, British</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="VI">
  <xsd:annotation>
    <xsd:documentation>Virgin Islands, U.S.</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="WF">
  <xsd:annotation>
    <xsd:documentation>Wallis and Futuna</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="WW">
  <xsd:annotation>
    <xsd:documentation>WorldWide</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="EH">
  <xsd:annotation>
    <xsd:documentation>Western Sahara</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="YE">
  <xsd:annotation>
    <xsd:documentation>Yemen</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="ZM">
  <xsd:annotation>
    <xsd:documentation>Zambia</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="ZW">
  <xsd:annotation>
    <xsd:documentation>Zimbabwe</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
</xsd:restriction>
</xsd:simpleType>

```

Namespace: "http://fnppl.org/opensdx/genres"

Schema(s)

Imported schema openSDX_genres.xsd

Namespace	http://fnppl.org/opensdx/genres
Properties	attribute form default: unqualified element form default: unqualified

Simple Type(s)

Simple Type genre

Namespace	http://fnppl.org/opensdx/genres				
Annotations	This element includes a list of openSDX-genres.				
Diagram	<p>The diagram shows a class named 'genre' with a multiplicity of 0..* at its end. A directed association line connects 'genre' to the class 'xsd:string'. A callout bubble below 'genre' states: 'This element includes a list of openSDX-genres.' A callout bubble above 'xsd:string' states: 'Built-in primitive type. The string datatype represents character strings in XML.'</p>				
Type	restriction of xsd:string				
Facets	<table border="1"> <tr> <td>enumeration</td> <td>Rock</td> </tr> <tr> <td>enumeration</td> <td>Beat</td> </tr> </table>	enumeration	Rock	enumeration	Beat
enumeration	Rock				
enumeration	Beat				

enumeration	Blues Rock
enumeration	Rock'n'Roll
enumeration	Art Rock
enumeration	Classic Rock
enumeration	Deutschrock
enumeration	Emo
enumeration	Experimental Rock
enumeration	Glam Rock
enumeration	Hard Rock
enumeration	Krautrock
enumeration	Progressive Rock
enumeration	Psychedelic Rock
enumeration	Psychobilly Rock
enumeration	Rockabilly
enumeration	Soft Rock
enumeration	Southern Rock
enumeration	Surf Rock
enumeration	Alternative
enumeration	Crossover
enumeration	Dark Wave
enumeration	Garage Rock
enumeration	Goth / Industrial
enumeration	Grunge
enumeration	Hardcore
enumeration	Indie Rock
enumeration	New Wave
enumeration	Punk
enumeration	Funpunk
enumeration	Black Metal
enumeration	Death Metal
enumeration	Heavy Metal
enumeration	Power Metal
enumeration	Thrash / Speed Metal
enumeration	Doom Metal
enumeration	Grind Core
enumeration	Pop
enumeration	Britpop
enumeration	Dance Pop
enumeration	Deutschpop
enumeration	Disco
enumeration	Easy Listening
enumeration	Electropop
enumeration	Euro Dance
enumeration	Euro Pop
enumeration	French Pop
enumeration	Indie Pop
enumeration	Italo Pop
enumeration	J-Pop
enumeration	K-Pop

enumeration	Neue Deutsche Welle
enumeration	New Age
enumeration	Pop Rock
enumeration	Power Pop
enumeration	Schlager
enumeration	Singer / Songwriter
enumeration	Synthpop
enumeration	Teen Pop
enumeration	Country
enumeration	Alternative Country
enumeration	Bluegrass
enumeration	Contemporary Folk
enumeration	Country Gospel
enumeration	Honky-Tonk
enumeration	Jewish / Yiddish Music
enumeration	Nashville Sound
enumeration	Outlaw / Progressive Country
enumeration	Texas Country
enumeration	Traditional Country
enumeration	Western Swing
enumeration	Folk
enumeration	Americana
enumeration	Folk Rock
enumeration	Irish Folk
enumeration	German Folk / Volksmusik
enumeration	Jazz
enumeration	Acid Jazz
enumeration	Avantgarde
enumeration	Bebop
enumeration	Big Band
enumeration	Classic Jazz
enumeration	Cool Jazz
enumeration	Dixieland music
enumeration	Free jazz
enumeration	Hard Bop
enumeration	Jazz Fusion
enumeration	New Orleans Jazz
enumeration	Nu-Jazz
enumeration	Smooth Jazz
enumeration	Swing
enumeration	Vocal Jazz
enumeration	Hip Hop
enumeration	Alternative Hip Hop
enumeration	Crunk
enumeration	Dirty South
enumeration	G-Funk
enumeration	Gangsta Rap
enumeration	Golden Era

enumeration	Grime
enumeration	Hyphy
enumeration	Instrumental Hip Hop
enumeration	Miami Bass
enumeration	New School
enumeration	Old School
enumeration	Turntablism
enumeration	US Eastcoast
enumeration	US Midwest
enumeration	US Southern
enumeration	US Westcoast
enumeration	Blues
enumeration	Boogie-Woogie
enumeration	Electric Blues Guitar
enumeration	Modern Blues
enumeration	Regional Blues
enumeration	Traditional Blues
enumeration	Soul
enumeration	Motown Sound
enumeration	Neo Soul
enumeration	Philly Sound
enumeration	Funk
enumeration	R&B
enumeration	Contemporary R&B
enumeration	Doo-wop
enumeration	Electronic
enumeration	Ambient
enumeration	Chill Out
enumeration	Lounge
enumeration	Downbeat
enumeration	Electronica
enumeration	Indie Disco
enumeration	Industrial / EBM
enumeration	Techno
enumeration	Dance
enumeration	Electro
enumeration	Glitch hop
enumeration	House
enumeration	Acid House
enumeration	Deep House
enumeration	Disco House
enumeration	Electro House
enumeration	Fidget House
enumeration	Hard House
enumeration	Progressive House
enumeration	Soulful House
enumeration	Tech House
enumeration	Tribal
enumeration	Vocal House

enumeration	Big Beat
enumeration	Breakbeat
enumeration	Drum'n'Bass
enumeration	Dubstep
enumeration	Garage / UK Funky
enumeration	IDM
enumeration	Trip-Hop
enumeration	Trance
enumeration	Goa Trance
enumeration	Hard Trance
enumeration	Psychedelic Trance
enumeration	Gabba
enumeration	Jumpstyle / Hardstyle
enumeration	Classic
enumeration	Ancient music
enumeration	Medieval music
enumeration	Renaissance
enumeration	Baroque
enumeration	Classical period
enumeration	Romantic
enumeration	Neoromanticism
enumeration	Neoclassicism
enumeration	New Music / Contemporary Music
enumeration	Modern, 20th / 21st Century
enumeration	Postmodern Music
enumeration	Music and other Media / Arts
enumeration	Music and Word
enumeration	12-Tone Composition
enumeration	Anthem
enumeration	Ballet
enumeration	Cantata
enumeration	Chamber Music
enumeration	Choral
enumeration	Crossover / Popular Classicism
enumeration	Electronic Music / Computer Music
enumeration	Madrigal
enumeration	March
enumeration	Minimal Music
enumeration	Motet
enumeration	Musical
enumeration	Opera Arias
enumeration	Opera Baroque
enumeration	Opera Classical
enumeration	Opera Renaissance
enumeration	Opera Romantic
enumeration	Operetta

enumeration	Oratorio
enumeration	Passion
enumeration	Requiem
enumeration	Serialism
enumeration	Sonata
enumeration	Suite
enumeration	Symphonic Music / Orchestral Music
enumeration	Symphony
enumeration	Waltz
enumeration	Brass Ensemble
enumeration	Concerto / Solo Instrument with Orchestra
enumeration	Mixed Ensemble (Strings / Wind)
enumeration	Mixed Wind Ensemble (Woodwind / Brass)
enumeration	Several Solo Instruments
enumeration	Solo Instrument
enumeration	String Ensemble
enumeration	String Orchestra
enumeration	String Quartet
enumeration	String Trio
enumeration	Woodwind Ensemble
enumeration	A cappella
enumeration	Vocal Ensemble
enumeration	Vocal Music
enumeration	Choir
enumeration	Boy's Choir
enumeration	Children's Choir
enumeration	Choir with Orchestra
enumeration	Women's Choir
enumeration	Men's Choir
enumeration	Mixed Choir
enumeration	Soprano
enumeration	Mezzosoprano
enumeration	Alto
enumeration	Tenor
enumeration	Baritone
enumeration	Bass
enumeration	Accordion
enumeration	Ancient Instruments
enumeration	Bassoon
enumeration	Cembalo
enumeration	Clarinet
enumeration	Double Bass
enumeration	Flute
enumeration	Guitar
enumeration	Harp
enumeration	Harpsichord

enumeration	Horn
enumeration	Lute
enumeration	Mandolin
enumeration	Oboe
enumeration	Organ
enumeration	Percussion (Vibraphone etc.)
enumeration	Piano
enumeration	Recorder / English Flute
enumeration	Saxophone
enumeration	Trombone
enumeration	Trumpet
enumeration	Tuba
enumeration	Viola
enumeration	Violin
enumeration	Violoncello
enumeration	Miscellaneous Lead Instrument
enumeration	Reggae
enumeration	Contemporary Reggae
enumeration	Dancehall
enumeration	Dub
enumeration	Lover's Rock
enumeration	Reggaeton
enumeration	Roots
enumeration	Ska
enumeration	World
enumeration	African Music
enumeration	Afro Beat
enumeration	Afro Pop
enumeration	Asian Music
enumeration	Austropop
enumeration	Calypso
enumeration	Caribbean Music
enumeration	Celtic Music
enumeration	Chanson
enumeration	Coupé Decalé
enumeration	Enka
enumeration	European Music
enumeration	Ghazal
enumeration	Griot
enumeration	Gypsy
enumeration	Highlife
enumeration	Judaica Music / Yiddish / Klezmer
enumeration	Kuduro
enumeration	Kwaito
enumeration	Makossa
enumeration	Marching Band
enumeration	Mento

enumeration	Middle Eastern Music
enumeration	Nordic / Scandinavia
enumeration	North American Music
enumeration	South American Music
enumeration	Parang
enumeration	Polka
enumeration	Rai
enumeration	Soca
enumeration	Soukous
enumeration	Zouk
enumeration	Zulu
enumeration	Russion Chansons
enumeration	Dini
enumeration	Halk
enumeration	Sanat
enumeration	Dangdut
enumeration	Indonesian Religious
enumeration	Axé
enumeration	Baile Funk
enumeration	Brazilian
enumeration	Choro
enumeration	Forró
enumeration	Frevo
enumeration	MPB
enumeration	Pagode
enumeration	Sertanejo
enumeration	Chinese Alt
enumeration	Chinese Classical
enumeration	Chinese Flute
enumeration	Chinese Hip-Hop
enumeration	Chinese Opera
enumeration	Chinese Orchestral
enumeration	Chinese Regional Folk
enumeration	Chinese Rock
enumeration	Chinese Strings
enumeration	C-Pop
enumeration	Cantopop/HK Pop
enumeration	Kayokyoku
enumeration	Korean Classical
enumeration	Korean Folk-Pop
enumeration	Korean Hip-Hop
enumeration	Korean Indie
enumeration	Korean Rock
enumeration	Korean Trad Instrumental
enumeration	Korean Trad Song
enumeration	Korean Trad Theater
enumeration	Trot
enumeration	Original Pilipino Music
enumeration	Pinoy Pop

enumeration	Indo Pop
enumeration	Tai-Pop
enumeration	Taiwanese Folk
enumeration	Thai Pop
enumeration	Tibetan Native Music
enumeration	Indian - Tamil
enumeration	Indian - Telugu
enumeration	Indian - Regional Indian
enumeration	Indian - Indian Pop
enumeration	Indian - Devotional & Spiritual
enumeration	Indian - Sufi and Ghazals
enumeration	Indian - Indian Classical
enumeration	Latin
enumeration	Bachata
enumeration	Banda
enumeration	Bhangra
enumeration	Bolero
enumeration	Bossa Nova
enumeration	Corridos
enumeration	Cumbia
enumeration	Fado
enumeration	Flamenco
enumeration	Grupero
enumeration	Mambo
enumeration	Mariachi
enumeration	Merengue
enumeration	Norteno
enumeration	Ranchero
enumeration	Rock En Espanol
enumeration	Salsa
enumeration	Samba
enumeration	Son Cubana
enumeration	Sonidero
enumeration	Tango
enumeration	Tejano
enumeration	Religious
enumeration	Christian Rock
enumeration	Christian Hip Hop
enumeration	Christian Pop
enumeration	Chants
enumeration	Gospel
enumeration	Gregorian Music
enumeration	Hymn
enumeration	Mass
enumeration	Spiritual
enumeration	Worship
enumeration	Miscellaneous
enumeration	Anime / Video Game Soundtracks

enumeration	Bollywood
enumeration	Instrumental
enumeration	Vocal
enumeration	Acoustic
enumeration	Unplugged
enumeration	Live
enumeration	Traditional
enumeration	Karaoke
enumeration	Movie Scores
enumeration	Movie Soundtracks
enumeration	Sound Effects
enumeration	Soundtrack
enumeration	TV Soundtrack
enumeration	Wedding Music
enumeration	Holiday
enumeration	Chanukah
enumeration	Christmas
enumeration	Christmas: Children's
enumeration	Christmas: Classic
enumeration	Christmas: Classical
enumeration	Christmas: Jazz
enumeration	Christmas: Modern
enumeration	Christmas: Pop
enumeration	Christmas: R&B
enumeration	Christmas: Religious
enumeration	Christmas: Rock
enumeration	Easter
enumeration	Halloween
enumeration	Holiday: Other
enumeration	Thanksgiving
enumeration	Mashup
enumeration	Unclassifiable
enumeration	Word
enumeration	Business & Career
enumeration	Abstracts & Dossiers
enumeration	Accounting
enumeration	Business & Investing
enumeration	Communication
enumeration	Computers & Internet
enumeration	Economics
enumeration	Finance
enumeration	Management & Leadership
enumeration	Marketing & Sales
enumeration	Politics
enumeration	Self-Help
enumeration	Self-Organization
enumeration	Skills
enumeration	Small Business & Entrepeneurship

enumeration	Children's Audiobooks
enumeration	Popular Characters
enumeration	Animal Stories
enumeration	Children's Book Classics
enumeration	Children's Detective Stories
enumeration	Fairy Tales
enumeration	Fantasy & Spook
enumeration	Knowledge for Children
enumeration	Pirates, Knights & Historical
enumeration	Poems & Song
enumeration	Comedy & Humour
enumeration	Comedy & Cabaret
enumeration	Humoristic Novel
enumeration	Crime
enumeration	Detective Stories
enumeration	Detective Stories „Noir“
enumeration	Classic Detective Stories
enumeration	Scandinavian Detective Stories
enumeration	Temporary Detective Stories
enumeration	Education & Knowledge
enumeration	Art & Culture
enumeration	Biography & Memento
enumeration	Foreign Language
enumeration	History
enumeration	Philosophy
enumeration	Politics & Current Affairs
enumeration	Science & Technology
enumeration	Health, Mind & Body
enumeration	Autogenous Training
enumeration	Creativity
enumeration	Esoteric
enumeration	Fitness
enumeration	Health
enumeration	Lifestyle
enumeration	Love & Erotic
enumeration	Meditation / Yoga
enumeration	Memory Training
enumeration	Mental Training
enumeration	Motivation
enumeration	Philosophy
enumeration	Positive Thinking & Attitude
enumeration	Psychology
enumeration	Spirituality & Religion
enumeration	Sports
enumeration	Wellness & Beauty

enumeration	Science Fiction & Fantasy
enumeration	Ancient World
enumeration	Fantasy-Romance
enumeration	Historical Thriller
enumeration	Horror Classics
enumeration	Medieval Times & Early Modern Era
enumeration	Thriller
enumeration	Mystery & Conspiracy
enumeration	Psychological Thriller
enumeration	Espionage, Politics & Justice
enumeration	Vatican & Secret Societies
enumeration	Science & Medicine
enumeration	Literature
enumeration	Novels
enumeration	Erotica
enumeration	Romance
enumeration	Contemporary Literature
enumeration	Contemporary German Literature
enumeration	Entertainment
enumeration	Youth
enumeration	Youth Detective Stories
enumeration	Fantasy
enumeration	For Girls
enumeration	Knowledge for Teenagers
enumeration	Mystery
enumeration	Youth Classics
enumeration	Youth Today
enumeration	Language
enumeration	Albanian
enumeration	Arabic
enumeration	Bengali
enumeration	Bosnian
enumeration	Bulgarian
enumeration	Cantonese / Yue
enumeration	Croatian
enumeration	Czech
enumeration	Danish
enumeration	Dutch
enumeration	English
enumeration	Finnish
enumeration	French
enumeration	German
enumeration	Greek
enumeration	Hebrew
enumeration	Hindi / Urdu
enumeration	Hungarian

enumeration	Italian
enumeration	Japanese
enumeration	Korean
enumeration	Macedonian
enumeration	Mandarin
enumeration	Norwegian
enumeration	Patois
enumeration	Portuguese
enumeration	Russian
enumeration	Serbian
enumeration	Spanish
enumeration	Swedish
enumeration	Tamil
enumeration	Turkish
enumeration	Vietnamese
enumeration	Afrikaans
enumeration	Film
enumeration	Action
enumeration	3D
enumeration	Adventure
enumeration	Animation
enumeration	Author's Film
enumeration	Biography
enumeration	Cartoon
enumeration	Children
enumeration	Comedy
enumeration	Crime & Gangster
enumeration	Disaster
enumeration	Documentary
enumeration	Drama
enumeration	Epic / Historical
enumeration	Erotic
enumeration	Expressionism
enumeration	Family
enumeration	Fantasy
enumeration	Film-Noir
enumeration	GLBT
enumeration	Horror
enumeration	Independent Film
enumeration	Martial-Arts / Eastern
enumeration	Monumental
enumeration	Musical / Dance
enumeration	Music
enumeration	Mystery
enumeration	Reality-TV
enumeration	Romantic
enumeration	Science Fiction
enumeration	Silent Movie
enumeration	Sport

enumeration	Thriller
enumeration	TV-Series
enumeration	Tragicomedy
enumeration	War / Anti-War
enumeration	Western
enumeration	Youth
enumeration	Time
enumeration	Middle Ages
enumeration	20's
enumeration	30's
enumeration	40's
enumeration	50's
enumeration	60's
enumeration	70'
enumeration	80's
enumeration	90's
enumeration	2000's
enumeration	2010's
enumeration	2020's
enumeration	Adult
enumeration	Children
enumeration	Age: up to 6 years
enumeration	Age: 6 years +
enumeration	Age: 8 years +
enumeration	Kids & Family
enumeration	Lullabies
enumeration	Sing-Along
enumeration	Stories
enumeration	Country
enumeration	United Arab Emirates (AE)
enumeration	Afghanistan (AF)
enumeration	Antigua and Barbuda (AG)
enumeration	Anguilla (AI)
enumeration	Albania (AL)
enumeration	Armenia (AM)
enumeration	Angola (AO)
enumeration	Antarctica (AQ)
enumeration	Argentina (AR)
enumeration	American Samoa (AS)
enumeration	Austria (AT)
enumeration	Australia (AU)
enumeration	Aruba (AW)
enumeration	Åland Islands (AX)
enumeration	Azerbaijan (AZ)
enumeration	Bosnia and Herzegovina (BA)
enumeration	Barbados (BB)
enumeration	Bangladesh (BD)
enumeration	Belgium (BE)

enumeration	Burkina Faso (BF)
enumeration	Bulgaria (BG)
enumeration	Bahrain (BH)
enumeration	Burundi (BI)
enumeration	Benin (BJ)
enumeration	Saint Barthélemy (BL)
enumeration	Bermuda (BM)
enumeration	Brunei Darussalam (BN)
enumeration	Bolivia Plurinational State of (BO)
enumeration	Bonaire Saint Eustatius and Saba (BQ)
enumeration	Brazil (BR)
enumeration	Bahamas (BS)
enumeration	Bhutan (BT)
enumeration	Bouvet Island (BV)
enumeration	Botswana (BW)
enumeration	Belarus (BY)
enumeration	Belize (BZ)
enumeration	Canada (CA)
enumeration	Cocos (Keeling) Islands (CC)
enumeration	Congo the Democratic Republic of the (CD)
enumeration	Central African Republic (CF)
enumeration	Congo (CG)
enumeration	Switzerland (CH)
enumeration	Côte d'Ivoire (CI)
enumeration	Cook Islands (CK)
enumeration	Chile (CL)
enumeration	Cameroon (CM)
enumeration	China (CN)
enumeration	Colombia (CO)
enumeration	Costa Rica (CR)
enumeration	Cuba (CU)
enumeration	Cape Verde (CV)
enumeration	Curaçao (CW)
enumeration	Christmas Island (CX)
enumeration	Cyprus (CY)
enumeration	Czech Republic (CZ)
enumeration	Germany (DE)
enumeration	Djibouti (DJ)
enumeration	Denmark (DK)
enumeration	Dominica (DM)
enumeration	Dominican Republic (DO)
enumeration	Algeria (DZ)
enumeration	Ecuador (EC)
enumeration	Estonia (EE)
enumeration	Egypt (EG)
enumeration	Western Sahara (EH)

enumeration	Eritrea (ER)
enumeration	Spain (ES)
enumeration	Ethiopia (ET)
enumeration	Finland (FI)
enumeration	Fiji (FJ)
enumeration	Falkland Islands (Malvinas) (FK)
enumeration	Micronesia Federated States of (FM)
enumeration	Faroe Islands (FO)
enumeration	France (FR)
enumeration	Gabon (GA)
enumeration	United Kingdom (GB)
enumeration	Grenada (GD)
enumeration	Georgia (GE)
enumeration	French Guiana (GF)
enumeration	Guernsey (GG)
enumeration	Ghana (GH)
enumeration	Gibraltar (GI)
enumeration	Greenland (GL)
enumeration	Gambia (GM)
enumeration	Guinea (GN)
enumeration	Guadeloupe (GP)
enumeration	Equatorial Guinea (GQ)
enumeration	Greece (GR)
enumeration	South Georgia and the South Sandwich Islands (GS)
enumeration	Guatemala (GT)
enumeration	Guam (GU)
enumeration	Guinea-Bissau (GW)
enumeration	Guyana (GY)
enumeration	Hong Kong (HK)
enumeration	Heard Island and McDonald Islands (HM)
enumeration	Honduras (HN)
enumeration	Croatia (HR)
enumeration	Haiti (HT)
enumeration	Hungary (HU)
enumeration	Indonesia (ID)
enumeration	Ireland (IE)
enumeration	Israel (IL)
enumeration	Isle of Man (IM)
enumeration	India (IN)
enumeration	British Indian Ocean Territory (IO)
enumeration	Iraq (IQ)
enumeration	Iran Islamic Republic of (IR)
enumeration	Iceland (IS)
enumeration	Italy (IT)

enumeration	Jersey (JE)
enumeration	Jamaica (JM)
enumeration	Jordan (JO)
enumeration	Japan (JP)
enumeration	Kenya (KE)
enumeration	Kyrgyzstan (KG)
enumeration	Cambodia (KH)
enumeration	Kiribati (KI)
enumeration	Comoros (KM)
enumeration	Saint Kitts and Nevis (KN)
enumeration	Korea Democratic People's Republic of (KP)
enumeration	Korea Republic of (KR)
enumeration	Kuwait (KW)
enumeration	Cayman Islands (KY)
enumeration	Kazakhstan (KZ)
enumeration	Lao People's Democratic Republic (LA)
enumeration	Lebanon (LB)
enumeration	Saint Lucia (LC)
enumeration	Liechtenstein (LI)
enumeration	Sri Lanka (LK)
enumeration	Liberia (LR)
enumeration	Lesotho (LS)
enumeration	Lithuania (LT)
enumeration	Luxembourg (LU)
enumeration	Latvia (LV)
enumeration	Libyan Arab Jamahiriya (LY)
enumeration	Morocco (MA)
enumeration	Monaco (MC)
enumeration	Moldova Republic of (MD)
enumeration	Montenegro (ME)
enumeration	Saint Martin (French part) (MF)
enumeration	Madagascar (MG)
enumeration	Marshall Islands (MH)
enumeration	Macedonia the former Yugoslav Republic of (MK)
enumeration	Mali (ML)
enumeration	Myanmar (MM)
enumeration	Mongolia (MN)
enumeration	Macao (MO)
enumeration	Northern Mariana Islands (MP)
enumeration	Martinique (MQ)
enumeration	Mauritania (MR)
enumeration	Montserrat (MS)
enumeration	Malta (MT)
enumeration	Mauritius (MU)

enumeration	Maldives (MV)
enumeration	Malawi (MW)
enumeration	Mexico (MX)
enumeration	Malaysia (MY)
enumeration	Mozambique (MZ)
enumeration	Namibia (NA)
enumeration	New Caledonia (NC)
enumeration	Niger (NE)
enumeration	Norfolk Island (NF)
enumeration	Nigeria (NG)
enumeration	Nicaragua (NI)
enumeration	Netherlands (NL)
enumeration	Norway (NO)
enumeration	Nepal (NP)
enumeration	Nauru (NR)
enumeration	Niue (NU)
enumeration	New Zealand (NZ)
enumeration	Oman (OM)
enumeration	Panama (PA)
enumeration	Peru (PE)
enumeration	French Polynesia (PF)
enumeration	Papua New Guinea (PG)
enumeration	Philippines (PH)
enumeration	Pakistan (PK)
enumeration	Poland (PL)
enumeration	Saint Pierre and Miquelon (PM)
enumeration	Pitcairn (PN)
enumeration	Puerto Rico (PR)
enumeration	Palestinian Territory Occupied (PS)
enumeration	Portugal (PT)
enumeration	Palau (PW)
enumeration	Paraguay (PY)
enumeration	Qatar (QA)
enumeration	Réunion (RE)
enumeration	Romania (RO)
enumeration	Serbia (RS)
enumeration	Russian Federation (RU)
enumeration	Rwanda (RW)
enumeration	Saudi Arabia (SA)
enumeration	Solomon Islands (SB)
enumeration	Seychelles (SC)
enumeration	Sudan (SD)
enumeration	Sweden (SE)
enumeration	Singapore (SG)
enumeration	Saint Helena Ascension and Tristan da Cunha (SH)
enumeration	Slovenia (SI)

enumeration	Svalbard and Jan Mayen (SJ)
enumeration	Slovakia (SK)
enumeration	Sierra Leone (SL)
enumeration	San Marino (SM)
enumeration	Senegal (SN)
enumeration	Somalia (SO)
enumeration	Suriname (SR)
enumeration	South Sudan (SS)
enumeration	Sao Tome and Principe (ST)
enumeration	El Salvador (SV)
enumeration	Sint Maarten (Dutch part) (SX)
enumeration	Syrian Arab Republic (SY)
enumeration	Swaziland (SZ)
enumeration	Turks and Caicos Islands (TC)
enumeration	Chad (TD)
enumeration	French Southern Territories (TF)
enumeration	Togo (TG)
enumeration	Thailand (TH)
enumeration	Tajikistan (TJ)
enumeration	Tokelau (TK)
enumeration	Timor-Leste (TL)
enumeration	Turkmenistan (TM)
enumeration	Tunisia (TN)
enumeration	Tonga (TO)
enumeration	Turkey (TR)
enumeration	Trinidad and Tobago (TT)
enumeration	Tuvalu (TV)
enumeration	Taiwan Province of China (TW)
enumeration	Tanzania United Republic of (TZ)
enumeration	Ukraine (UA)
enumeration	Uganda (UG)
enumeration	United States Minor Outlying Islands (UM)
enumeration	United States (US)
enumeration	Uruguay (UY)
enumeration	Uzbekistan (UZ)
enumeration	Holy See (Vatican City State) (VA)
enumeration	Saint Vincent and the Grenadines (VC)
enumeration	Venezuela Bolivarian Republic of (VE)
enumeration	Virgin Islands British (VG)
enumeration	Virgin Islands U.S. (VI)
enumeration	Viet Nam (VN)

	enumeration	Vanuatu (VU)
	enumeration	Wallis and Futuna (WF)
	enumeration	Samoa (WS)
	enumeration	Yemen (YE)
	enumeration	Mayotte (YT)
	enumeration	South Africa (ZA)
	enumeration	Zambia (ZM)
	enumeration	Zimbabwe (ZW)
	enumeration	Axé
	enumeration	Baile Funk
	enumeration	Brazilian
	enumeration	Choro
	enumeration	Forró
	enumeration	Frevo
	enumeration	MPB
	enumeration	Pagode
	enumeration	Sertanejo
	enumeration	Chinese Alt
	enumeration	Chinese Classical
	enumeration	Chinese Flute
	enumeration	Chinese Hip-Hop
	enumeration	Chinese Opera
	enumeration	Chinese Orchestral
	enumeration	Chinese Regional Folk
	enumeration	Chinese Rock
	enumeration	Chinese Strings
	enumeration	C-Pop
	enumeration	Cantopop/HK Pop
	enumeration	Kayokyoku
	enumeration	Korean Classical
	enumeration	Korean Folk-Pop
	enumeration	Korean Hip-Hop
	enumeration	Korean Indie
	enumeration	Korean Rock
	enumeration	Korean Trad Instrumental
	enumeration	Korean Trad Song
	enumeration	Korean Trad Theater
	enumeration	Trot
	enumeration	Original Pilipino Music
	enumeration	Pinoy Pop
	enumeration	Indo Pop
	enumeration	Tai-Pop
	enumeration	Taiwanese Folk
	enumeration	Thai Pop
	enumeration	Tibetan Native Music
Used by	Element	genres/genre
Source	<pre><xsd:simpleType name="genre"> <xsd:annotation> <xsd:documentation xml:lang="en">This element includes a list of openSDX-genres.</ xsd:documentation></pre>	

```
</xsd:annotation>
<xsd:restriction base="xsd:string">
  <xsd:enumeration value="Rock"/>
  <xsd:enumeration value="Beat"/>
  <xsd:enumeration value="Blues Rock"/>
  <xsd:enumeration value="Rock'n'Roll"/>
  <xsd:enumeration value="Art Rock"/>
  <xsd:enumeration value="Classic Rock"/>
  <xsd:enumeration value="Deutschrock"/>
  <xsd:enumeration value="Emo"/>
  <xsd:enumeration value="Experimental Rock"/>
  <xsd:enumeration value="Glam Rock"/>
  <xsd:enumeration value="Hard Rock"/>
  <xsd:enumeration value="Krautrock"/>
  <xsd:enumeration value="Progressive Rock"/>
  <xsd:enumeration value="Psychedelic Rock"/>
  <xsd:enumeration value="Psychobilly Rock"/>
  <xsd:enumeration value="Rockabilly"/>
  <xsd:enumeration value="Soft Rock"/>
  <xsd:enumeration value="Southern Rock"/>
  <xsd:enumeration value="Surf Rock"/>
  <xsd:enumeration value="Alternative"/>
  <xsd:enumeration value="Crossover"/>
  <xsd:enumeration value="Dark Wave"/>
  <xsd:enumeration value="Garage Rock"/>
  <xsd:enumeration value="Goth / Industrial"/>
  <xsd:enumeration value="Grunge"/>
  <xsd:enumeration value="Hardcore"/>
  <xsd:enumeration value="Indie Rock"/>
  <xsd:enumeration value="New Wave"/>
  <xsd:enumeration value="Punk"/>
  <xsd:enumeration value="Funpunk"/>
  <xsd:enumeration value="Black Metal"/>
  <xsd:enumeration value="Death Metal"/>
  <xsd:enumeration value="Heavy Metal"/>
  <xsd:enumeration value="Power Metal"/>
  <xsd:enumeration value="Thrash / Speed Metal"/>
  <xsd:enumeration value="Doom Metal"/>
  <xsd:enumeration value="Grind Core"/>
  <xsd:enumeration value="Pop"/>
  <xsd:enumeration value="Britpop"/>
  <xsd:enumeration value="Dance Pop"/>
  <xsd:enumeration value="Deutschpop"/>
  <xsd:enumeration value="Disco"/>
  <xsd:enumeration value="Easy Listening"/>
  <xsd:enumeration value="Electropop"/>
  <xsd:enumeration value="Euro Dance"/>
  <xsd:enumeration value="Euro Pop"/>
  <xsd:enumeration value="French Pop"/>
  <xsd:enumeration value="Indie Pop"/>
  <xsd:enumeration value="Italo Pop"/>
  <xsd:enumeration value="J-Pop"/>
  <xsd:enumeration value="K-Pop"/>
  <xsd:enumeration value="Neue Deutsche Welle"/>
  <xsd:enumeration value="New Age"/>
  <xsd:enumeration value="Pop Rock"/>
  <xsd:enumeration value="Power Pop"/>
  <xsd:enumeration value="Schlager"/>
  <xsd:enumeration value="Singer / Songwriter"/>
  <xsd:enumeration value="Synthpop"/>
  <xsd:enumeration value="Teen Pop"/>
  <xsd:enumeration value="Country"/>
  <xsd:enumeration value="Alternative Country"/>
  <xsd:enumeration value="Bluegrass"/>
  <xsd:enumeration value="Contemporary Folk"/>
  <xsd:enumeration value="Country Gospel"/>
  <xsd:enumeration value="Honky-Tonk"/>
  <xsd:enumeration value="Jewish / Yiddish Music"/>
  <xsd:enumeration value="Nashville Sound"/>
  <xsd:enumeration value="Outlaw / Progressive Country"/>
  <xsd:enumeration value="Texas Country"/>
  <xsd:enumeration value="Traditional Country"/>
  <xsd:enumeration value="Western Swing"/>
  <xsd:enumeration value="Folk"/>
  <xsd:enumeration value="Americana"/>
  <xsd:enumeration value="Folk Rock"/>
  <xsd:enumeration value="Irish Folk"/>
  <xsd:enumeration value="German Folk / Volksmusik"/>
  <xsd:enumeration value="Jazz"/>
  <xsd:enumeration value="Acid Jazz"/>
  <xsd:enumeration value="Avantgarde"/>
  <xsd:enumeration value="Bebop"/>
  <xsd:enumeration value="Big Band"/>
```

```
<xsd:enumeration value="Classic Jazz"/>
<xsd:enumeration value="Cool Jazz"/>
<xsd:enumeration value="Dixieland music"/>
<xsd:enumeration value="Free jazz"/>
<xsd:enumeration value="Hard Bop"/>
<xsd:enumeration value="Jazz Fusion"/>
<xsd:enumeration value="New Orleans Jazz"/>
<xsd:enumeration value="Nu-Jazz"/>
<xsd:enumeration value="Smooth Jazz"/>
<xsd:enumeration value="Swing"/>
<xsd:enumeration value="Vocal Jazz"/>
<xsd:enumeration value="Hip Hop"/>
<xsd:enumeration value="Alternative Hip Hop"/>
<xsd:enumeration value="Crunk"/>
<xsd:enumeration value="Dirty South"/>
<xsd:enumeration value="G-Funk"/>
<xsd:enumeration value="Gangsta Rap"/>
<xsd:enumeration value="Golden Era"/>
<xsd:enumeration value="Grime"/>
<xsd:enumeration value="Hyphy"/>
<xsd:enumeration value="Instrumental Hip Hop"/>
<xsd:enumeration value="Miami Bass"/>
<xsd:enumeration value="New School"/>
<xsd:enumeration value="Old School"/>
<xsd:enumeration value="Turntablism"/>
<xsd:enumeration value="US Eastcoast"/>
<xsd:enumeration value="US Midwest"/>
<xsd:enumeration value="US Southern"/>
<xsd:enumeration value="US Westcoast"/>
<xsd:enumeration value="Blues"/>
<xsd:enumeration value="Boogie-Woogie"/>
<xsd:enumeration value="Electric Blues Guitar"/>
<xsd:enumeration value="Modern Blues"/>
<xsd:enumeration value="Regional Blues"/>
<xsd:enumeration value="Traditional Blues"/>
<xsd:enumeration value="Soul"/>
<xsd:enumeration value="Motown Sound"/>
<xsd:enumeration value="Neo Soul"/>
<xsd:enumeration value="Philly Sound"/>
<xsd:enumeration value="Funk"/>
<xsd:enumeration value="R&B"/>
<xsd:enumeration value="Contemporary R&B"/>
<xsd:enumeration value="Doo-wop"/>
<xsd:enumeration value="Electronic"/>
<xsd:enumeration value="Ambient"/>
<xsd:enumeration value="Chill Out"/>
<xsd:enumeration value="Lounge"/>
<xsd:enumeration value="Downbeat"/>
<xsd:enumeration value="Electronica"/>
<xsd:enumeration value="Indie Disco"/>
<xsd:enumeration value="Industrial / EBM"/>
<xsd:enumeration value="Techno"/>
<xsd:enumeration value="Dance"/>
<xsd:enumeration value="Electro"/>
<xsd:enumeration value="Glitch hop"/>
<xsd:enumeration value="House"/>
<xsd:enumeration value="Acid House"/>
<xsd:enumeration value="Deep House"/>
<xsd:enumeration value="Disco House"/>
<xsd:enumeration value="Electro House"/>
<xsd:enumeration value="Fidget House"/>
<xsd:enumeration value="Hard House"/>
<xsd:enumeration value="Progressive House"/>
<xsd:enumeration value="Soulful House"/>
<xsd:enumeration value="Tech House"/>
<xsd:enumeration value="Tribal"/>
<xsd:enumeration value="Vocal House"/>
<xsd:enumeration value="Big Beat"/>
<xsd:enumeration value="Breakbeat"/>
<xsd:enumeration value="Drum'n'Bass"/>
<xsd:enumeration value="Dubstep"/>
<xsd:enumeration value="Garage / UK Funky"/>
<xsd:enumeration value="IDM"/>
<xsd:enumeration value="Trip-Hop"/>
<xsd:enumeration value="Trance"/>
<xsd:enumeration value="Goa Trance"/>
<xsd:enumeration value="Hard Trance"/>
<xsd:enumeration value="Psychedelic Trance"/>
<xsd:enumeration value="Gabba"/>
<xsd:enumeration value="Jumpstyle / Hardstyle"/>
<xsd:enumeration value="Classic"/>
<xsd:enumeration value="Ancient music"/>
<xsd:enumeration value="Medieval music"/>
```

```
<xsd:enumeration value="Renaissance"/>
<xsd:enumeration value="Baroque"/>
<xsd:enumeration value="Classical period"/>
<xsd:enumeration value="Romantic"/>
<xsd:enumeration value="Neoromanticism"/>
<xsd:enumeration value="Neoclassicism"/>
<xsd:enumeration value="New Music / Contemporary Music"/>
<xsd:enumeration value="Modern, 20th / 21st Century"/>
<xsd:enumeration value="Postmodern Music"/>
<xsd:enumeration value="Music and other Media / Arts"/>
<xsd:enumeration value="Music and Word"/>
<xsd:enumeration value="12-Tone Composition"/>
<xsd:enumeration value="Anthem"/>
<xsd:enumeration value="Ballet"/>
<xsd:enumeration value="Cantata"/>
<xsd:enumeration value="Chamber Music"/>
<xsd:enumeration value="Choral"/>
<xsd:enumeration value="Crossover / Popular Classicism"/>
<xsd:enumeration value="Electronic Music / Computer Music"/>
<xsd:enumeration value="Madrigal"/>
<xsd:enumeration value="March"/>
<xsd:enumeration value="Minimal Music"/>
<xsd:enumeration value="Motet"/>
<xsd:enumeration value="Musical"/>
<xsd:enumeration value="Opera Arias"/>
<xsd:enumeration value="Opera Baroque"/>
<xsd:enumeration value="Opera Classical"/>
<xsd:enumeration value="Opera Renaissance"/>
<xsd:enumeration value="Opera Romantic"/>
<xsd:enumeration value="Operetta"/>
<xsd:enumeration value="Oratorio"/>
<xsd:enumeration value="Passion"/>
<xsd:enumeration value="Requiem"/>
<xsd:enumeration value="Serialism"/>
<xsd:enumeration value="Sonata"/>
<xsd:enumeration value="Suite"/>
<xsd:enumeration value="Symphonic Music / Orchestral Music"/>
<xsd:enumeration value="Symphony"/>
<xsd:enumeration value="Waltz"/>
<xsd:enumeration value="Brass Ensemble"/>
<xsd:enumeration value="Concerto / Solo Instrument with Orchestra"/>
<xsd:enumeration value="Mixed Ensemble (Strings / Wind)"/>
<xsd:enumeration value="Mixed Wind Ensemble (Woodwind / Brass)"/>
<xsd:enumeration value="Several Solo Instruments"/>
<xsd:enumeration value="Solo Instrument"/>
<xsd:enumeration value="String Ensemble"/>
<xsd:enumeration value="String Orchestra"/>
<xsd:enumeration value="String Quartet"/>
<xsd:enumeration value="String Trio"/>
<xsd:enumeration value="Woodwind Ensemble"/>
<xsd:enumeration value="A cappella"/>
<xsd:enumeration value="Vocal Ensemble"/>
<xsd:enumeration value="Vocal Music"/>
<xsd:enumeration value="Choir"/>
<xsd:enumeration value="Boy's Choir"/>
<xsd:enumeration value="Children's Choir"/>
<xsd:enumeration value="Choir with Orchestra"/>
<xsd:enumeration value="Women's Choir"/>
<xsd:enumeration value="Men's Choir"/>
<xsd:enumeration value="Mixed Choir"/>
<xsd:enumeration value="Soprano"/>
<xsd:enumeration value="Mezzosoprano"/>
<xsd:enumeration value="Alto"/>
<xsd:enumeration value="Tenor"/>
<xsd:enumeration value="Baritone"/>
<xsd:enumeration value="Bass"/>
<xsd:enumeration value="Accordion"/>
<xsd:enumeration value="Ancient Instruments"/>
<xsd:enumeration value="Bassoon"/>
<xsd:enumeration value="Cembalo"/>
<xsd:enumeration value="Clarinet"/>
<xsd:enumeration value="Double Bass"/>
<xsd:enumeration value="Flute"/>
<xsd:enumeration value="Guitar"/>
<xsd:enumeration value="Harp"/>
<xsd:enumeration value="Harpsichord"/>
<xsd:enumeration value="Horn"/>
<xsd:enumeration value="Lute"/>
<xsd:enumeration value="Mandolin"/>
<xsd:enumeration value="Oboe"/>
<xsd:enumeration value="Organ"/>
<xsd:enumeration value="Percussion (Vibraphone etc.)"/>
<xsd:enumeration value="Piano"/>
```

```
<xsd:enumeration value="Recorder / English Flute"/>
<xsd:enumeration value="Saxophone"/>
<xsd:enumeration value="Trombone"/>
<xsd:enumeration value="Trumpet"/>
<xsd:enumeration value="Tuba"/>
<xsd:enumeration value="Viola"/>
<xsd:enumeration value="Violin"/>
<xsd:enumeration value="Violoncello"/>
<xsd:enumeration value="Miscellaneous Lead Instrument"/>
<xsd:enumeration value="Reggae"/>
<xsd:enumeration value="Contemporary Reggae"/>
<xsd:enumeration value="Dancehall"/>
<xsd:enumeration value="Dub"/>
<xsd:enumeration value="Lover's Rock"/>
<xsd:enumeration value="Reggaeton"/>
<xsd:enumeration value="Roots"/>
<xsd:enumeration value="Ska"/>
<xsd:enumeration value="World"/>
<xsd:enumeration value="African Music"/>
<xsd:enumeration value="Afro Beat"/>
<xsd:enumeration value="Afro Pop"/>
<xsd:enumeration value="Asian Music"/>
<xsd:enumeration value="Austropop"/>
<xsd:enumeration value="Calypso"/>
<xsd:enumeration value="Caribbean Music"/>
<xsd:enumeration value="Celtic Music"/>
<xsd:enumeration value="Chanson"/>
<xsd:enumeration value="Coupé Decalé"/>
<xsd:enumeration value="Enka"/>
<xsd:enumeration value="European Music"/>
<xsd:enumeration value="Ghazal"/>
<xsd:enumeration value="Griot"/>
<xsd:enumeration value="Gypsy"/>
<xsd:enumeration value="Highlife"/>
<xsd:enumeration value="Judaica Music / Yiddish / Klezmer"/>
<xsd:enumeration value="Kuduro"/>
<xsd:enumeration value="Kwaito"/>
<xsd:enumeration value="Makossa"/>
<xsd:enumeration value="Marching Band"/>
<xsd:enumeration value="Mento"/>
<xsd:enumeration value="Middle Eastern Music"/>
<xsd:enumeration value="Nordic / Scandinavia"/>
<xsd:enumeration value="North American Music"/>
<xsd:enumeration value="South American Music"/>
<xsd:enumeration value="Parang"/>
<xsd:enumeration value="Polka"/>
<xsd:enumeration value="Rai"/>
<xsd:enumeration value="Soca"/>
<xsd:enumeration value="Soukous"/>
<xsd:enumeration value="Zouk"/>
<xsd:enumeration value="Zulu"/>
<xsd:enumeration value="Russian Chansons"/>
<xsd:enumeration value="Dini"/>
<xsd:enumeration value="Halk"/>
<xsd:enumeration value="Sanat"/>
<xsd:enumeration value="Dangdut"/>
<xsd:enumeration value="Indonesian Religious"/>
<xsd:enumeration value="Axé"/>
<xsd:enumeration value="Baile Funk"/>
<xsd:enumeration value="Brazilian"/>
<xsd:enumeration value="Choro"/>
<xsd:enumeration value="Forró"/>
<xsd:enumeration value="Frevo"/>
<xsd:enumeration value="MPB"/>
<xsd:enumeration value="Pagode"/>
<xsd:enumeration value="Sertanejo"/>
<xsd:enumeration value="Chinese Alt"/>
<xsd:enumeration value="Chinese Classical"/>
<xsd:enumeration value="Chinese Flute"/>
<xsd:enumeration value="Chinese Hip-Hop"/>
<xsd:enumeration value="Chinese Opera"/>
<xsd:enumeration value="Chinese Orchestral"/>
<xsd:enumeration value="Chinese Regional Folk"/>
<xsd:enumeration value="Chinese Rock"/>
<xsd:enumeration value="Chinese Strings"/>
<xsd:enumeration value="C-Pop"/>
<xsd:enumeration value="Cantopop/HK Pop"/>
<xsd:enumeration value="Kayokyoku"/>
<xsd:enumeration value="Korean Classical"/>
<xsd:enumeration value="Korean Folk-Pop"/>
<xsd:enumeration value="Korean Hip-Hop"/>
<xsd:enumeration value="Korean Indie"/>
<xsd:enumeration value="Korean Rock"/>
```

```
<xsd:enumeration value="Korean Trad Instrumental"/>
<xsd:enumeration value="Korean Trad Song"/>
<xsd:enumeration value="Korean Trad Theater"/>
<xsd:enumeration value="Trot"/>
<xsd:enumeration value="Original Pilipino Music"/>
<xsd:enumeration value="Pinoy Pop"/>
<xsd:enumeration value="Indo Pop"/>
<xsd:enumeration value="Tai-Pop"/>
<xsd:enumeration value="Taiwanese Folk"/>
<xsd:enumeration value="Thai Pop"/>
<xsd:enumeration value="Tibetan Native Music"/>
<xsd:enumeration value="Indian - Tamil"/>
<xsd:enumeration value="Indian - Telugu"/>
<xsd:enumeration value="Indian - Regional Indian"/>
<xsd:enumeration value="Indian - Indian Pop"/>
<xsd:enumeration value="Indian - Devotional & Spiritual"/>
<xsd:enumeration value="Indian - Sufi and Ghazals"/>
<xsd:enumeration value="Indian - Indian Classical"/>
<xsd:enumeration value="Latin"/>
<xsd:enumeration value="Bachata"/>
<xsd:enumeration value="Banda"/>
<xsd:enumeration value="Bhangra"/>
<xsd:enumeration value="Bolero"/>
<xsd:enumeration value="Bossa Nova"/>
<xsd:enumeration value="Corridos"/>
<xsd:enumeration value="Cumbia"/>
<xsd:enumeration value="Fado"/>
<xsd:enumeration value="Flamenco"/>
<xsd:enumeration value="Grupero"/>
<xsd:enumeration value="Mambo"/>
<xsd:enumeration value="Mariachi"/>
<xsd:enumeration value="Merengue"/>
<xsd:enumeration value="Norteno"/>
<xsd:enumeration value="Ranchero"/>
<xsd:enumeration value="Rock En Espanol"/>
<xsd:enumeration value="Salsa"/>
<xsd:enumeration value="Samba"/>
<xsd:enumeration value="Son Cubana"/>
<xsd:enumeration value="Sonidero"/>
<xsd:enumeration value="Tango"/>
<xsd:enumeration value="Tejano"/>
<xsd:enumeration value="Religious"/>
<xsd:enumeration value="Christian Rock"/>
<xsd:enumeration value="Christian Hip Hop"/>
<xsd:enumeration value="Christian Pop"/>
<xsd:enumeration value="Chants"/>
<xsd:enumeration value="Gospel"/>
<xsd:enumeration value="Gregorian Music"/>
<xsd:enumeration value="Hymn"/>
<xsd:enumeration value="Mass"/>
<xsd:enumeration value="Spiritual"/>
<xsd:enumeration value="Worship"/>
<xsd:enumeration value="Miscellaneous"/>
<xsd:enumeration value="Anime / Video Game Soundtracks"/>
<xsd:enumeration value="Bollywood"/>
<xsd:enumeration value="Instrumental"/>
<xsd:enumeration value="Vocal"/>
<xsd:enumeration value="Acoustic"/>
<xsd:enumeration value="Unplugged"/>
<xsd:enumeration value="Live"/>
<xsd:enumeration value="Traditional"/>
<xsd:enumeration value="Karaoke"/>
<xsd:enumeration value="Movie Scores"/>
<xsd:enumeration value="Movie Soundtracks"/>
<xsd:enumeration value="Sound Effects"/>
<xsd:enumeration value="Soundtrack"/>
<xsd:enumeration value="TV Soundtrack"/>
<xsd:enumeration value="Wedding Music"/>
<xsd:enumeration value="Holiday"/>
<xsd:enumeration value="Chanukah"/>
<xsd:enumeration value="Christmas"/>
<xsd:enumeration value="Christmas: Children's"/>
<xsd:enumeration value="Christmas: Classic"/>
<xsd:enumeration value="Christmas: Classical"/>
<xsd:enumeration value="Christmas: Jazz"/>
<xsd:enumeration value="Christmas: Modern"/>
<xsd:enumeration value="Christmas: Pop"/>
<xsd:enumeration value="Christmas: R&B"/>
<xsd:enumeration value="Christmas: Religious"/>
<xsd:enumeration value="Christmas: Rock"/>
<xsd:enumeration value="Easter"/>
<xsd:enumeration value="Halloween"/>
<xsd:enumeration value="Holiday: Other"/>
```

```
<xsd:enumeration value="Thanksgiving"/>
<xsd:enumeration value="Mashup"/>
<xsd:enumeration value="Unclassifiable"/>
<xsd:enumeration value="Word"/>
<xsd:enumeration value="Business & Career"/>
<xsd:enumeration value="Abstracts & Dossiers"/>
<xsd:enumeration value="Accounting"/>
<xsd:enumeration value="Business & Investing"/>
<xsd:enumeration value="Communication"/>
<xsd:enumeration value="Computers & Internet"/>
<xsd:enumeration value="Economics"/>
<xsd:enumeration value="Finance"/>
<xsd:enumeration value="Management & Leadership"/>
<xsd:enumeration value="Marketing & Sales"/>
<xsd:enumeration value="Politics"/>
<xsd:enumeration value="Self-Help"/>
<xsd:enumeration value="Self-Organization"/>
<xsd:enumeration value="Skills"/>
<xsd:enumeration value="Small Business & Entrepreneurship"/>
<xsd:enumeration value="Children's Audiobooks"/>
<xsd:enumeration value="Popular Characters"/>
<xsd:enumeration value="Animal Stories"/>
<xsd:enumeration value="Children's Book Classics"/>
<xsd:enumeration value="Children's Detective Stories"/>
<xsd:enumeration value="Fairy Tales"/>
<xsd:enumeration value="Fantasy & Spook"/>
<xsd:enumeration value="Knowledge for Children"/>
<xsd:enumeration value="Pirates, Knights & Historical"/>
<xsd:enumeration value="Poems & Song"/>
<xsd:enumeration value="Comedy & Humour"/>
<xsd:enumeration value="Comedy & Cabaret"/>
<xsd:enumeration value="Humoristic Novel"/>
<xsd:enumeration value="Crime"/>
<xsd:enumeration value="Detective Stories"/>
<xsd:enumeration value="Detective Stories „Noir“"/>
<xsd:enumeration value="Classic Detective Stories"/>
<xsd:enumeration value="Scandinavian Detective Stories"/>
<xsd:enumeration value="Temporary Detective Stories"/>
<xsd:enumeration value="Education & Knowledge"/>
<xsd:enumeration value="Art & Culture"/>
<xsd:enumeration value="Biography & Memento"/>
<xsd:enumeration value="Foreign Language"/>
<xsd:enumeration value="History"/>
<xsd:enumeration value="Philosophy"/>
<xsd:enumeration value="Politics & Current Affairs"/>
<xsd:enumeration value="Science & Technology"/>
<xsd:enumeration value="Health, Mind & Body"/>
<xsd:enumeration value="Autogenous Training"/>
<xsd:enumeration value="Creativity"/>
<xsd:enumeration value="Esoteric"/>
<xsd:enumeration value="Fitness"/>
<xsd:enumeration value="Health"/>
<xsd:enumeration value="Lifestyle"/>
<xsd:enumeration value="Love & Erotic"/>
<xsd:enumeration value="Meditation / Yoga"/>
<xsd:enumeration value="Memory Training"/>
<xsd:enumeration value="Mental Training"/>
<xsd:enumeration value="Motivation"/>
<xsd:enumeration value="Philosophy"/>
<xsd:enumeration value="Positive Thinking & Attitude"/>
<xsd:enumeration value="Psychology"/>
<xsd:enumeration value="Spirituality & Religion"/>
<xsd:enumeration value="Sports"/>
<xsd:enumeration value="Wellness & Beauty"/>
<xsd:enumeration value="Science Fiction & Fantasy"/>
<xsd:enumeration value="Ancient World"/>
<xsd:enumeration value="Fantasy-Romance"/>
<xsd:enumeration value="Historical Thriller"/>
<xsd:enumeration value="Horror Classics"/>
<xsd:enumeration value="Medieval Times & Early Modern Era"/>
<xsd:enumeration value="Thriller"/>
<xsd:enumeration value="Mystery & Conspiracy"/>
<xsd:enumeration value="Psychological Thriller"/>
<xsd:enumeration value="Espionage, Politics & Justice"/>
<xsd:enumeration value="Vatican & Secret Societies"/>
<xsd:enumeration value="Science & Medicine"/>
<xsd:enumeration value="Literature"/>
<xsd:enumeration value="Novels"/>
<xsd:enumeration value="Erotica"/>
<xsd:enumeration value="Romance"/>
<xsd:enumeration value="Contemporary Literature"/>
<xsd:enumeration value="Contemporary German Literature"/>
<xsd:enumeration value="Entertainment"/>
```

```
<xsd:enumeration value="Youth"/>
<xsd:enumeration value="Youth Detective Stories"/>
<xsd:enumeration value="Fantasy"/>
<xsd:enumeration value="For Girls"/>
<xsd:enumeration value="Knowledge for Teenagers"/>
<xsd:enumeration value="Mystery"/>
<xsd:enumeration value="Youth Classics"/>
<xsd:enumeration value="Youth Today"/>
<xsd:enumeration value="Language"/>
<xsd:enumeration value="Albanian"/>
<xsd:enumeration value="Arabic"/>
<xsd:enumeration value="Bengali"/>
<xsd:enumeration value="Bosnian"/>
<xsd:enumeration value="Bulgarian"/>
<xsd:enumeration value="Cantonese / Yue"/>
<xsd:enumeration value="Croatian"/>
<xsd:enumeration value="Czech"/>
<xsd:enumeration value="Danish"/>
<xsd:enumeration value="Dutch"/>
<xsd:enumeration value="English"/>
<xsd:enumeration value="Finnish"/>
<xsd:enumeration value="French"/>
<xsd:enumeration value="German"/>
<xsd:enumeration value="Greek"/>
<xsd:enumeration value="Hebrew"/>
<xsd:enumeration value="Hindi / Urdu"/>
<xsd:enumeration value="Hungarian"/>
<xsd:enumeration value="Italian"/>
<xsd:enumeration value="Japanese"/>
<xsd:enumeration value="Korean"/>
<xsd:enumeration value="Macedonian"/>
<xsd:enumeration value="Mandarin"/>
<xsd:enumeration value="Norwegian"/>
<xsd:enumeration value="Patois"/>
<xsd:enumeration value="Portuguese"/>
<xsd:enumeration value="Russian"/>
<xsd:enumeration value="Serbian"/>
<xsd:enumeration value="Spanish"/>
<xsd:enumeration value="Swedish"/>
<xsd:enumeration value="Tamil"/>
<xsd:enumeration value="Turkish"/>
<xsd:enumeration value="Vietnamese"/>
<xsd:enumeration value="Afrikaans"/>
<xsd:enumeration value="Film"/>
<xsd:enumeration value="Action"/>
<xsd:enumeration value="3D"/>
<xsd:enumeration value="Adventure"/>
<xsd:enumeration value="Animation"/>
<xsd:enumeration value="Author's Film"/>
<xsd:enumeration value="Biography"/>
<xsd:enumeration value="Cartoon"/>
<xsd:enumeration value="Children"/>
<xsd:enumeration value="Comedy"/>
<xsd:enumeration value="Crime & Gangster"/>
<xsd:enumeration value="Disaster"/>
<xsd:enumeration value="Documentary"/>
<xsd:enumeration value="Drama"/>
<xsd:enumeration value="Epic / Historical"/>
<xsd:enumeration value="Erotic"/>
<xsd:enumeration value="Expressionism"/>
<xsd:enumeration value="Family"/>
<xsd:enumeration value="Fantasy"/>
<xsd:enumeration value="Film-Noir"/>
<xsd:enumeration value="GLBT"/>
<xsd:enumeration value="Horror"/>
<xsd:enumeration value="Independent Film"/>
<xsd:enumeration value="Martial-Arts / Eastern"/>
<xsd:enumeration value="Monumental"/>
<xsd:enumeration value="Musical / Dance"/>
<xsd:enumeration value="Music"/>
<xsd:enumeration value="Mystery"/>
<xsd:enumeration value="Reality-TV"/>
<xsd:enumeration value="Romantic"/>
<xsd:enumeration value="Science Fiction"/>
<xsd:enumeration value="Silent Movie"/>
<xsd:enumeration value="Sport"/>
<xsd:enumeration value="Thriller"/>
<xsd:enumeration value="TV-Series"/>
<xsd:enumeration value="Tragicomedy"/>
<xsd:enumeration value="War / Anti-War"/>
<xsd:enumeration value="Western"/>
<xsd:enumeration value="Youth"/>
<xsd:enumeration value="Time"/>
```

```
<xsd:enumeration value="Middle Ages" />
<xsd:enumeration value="20's" />
<xsd:enumeration value="30's" />
<xsd:enumeration value="40's" />
<xsd:enumeration value="50's" />
<xsd:enumeration value="60's" />
<xsd:enumeration value="70's" />
<xsd:enumeration value="80's" />
<xsd:enumeration value="90's" />
<xsd:enumeration value="2000's" />
<xsd:enumeration value="2010's" />
<xsd:enumeration value="2020's" />
<xsd:enumeration value="Adult" />
<!-- xsd:enumeration value="Adult Contemporary" / -->
<xsd:enumeration value="Children" />
<xsd:enumeration value="Age: up to 6 years" />
<xsd:enumeration value="Age: 6 years +" />
<xsd:enumeration value="Age: 8 years +" />
<xsd:enumeration value="Kids & Family" />
<xsd:enumeration value="Lullabies" />
<xsd:enumeration value="Sing-Along" />
<xsd:enumeration value="Stories" />
<xsd:enumeration value="Country" />
<xsd:enumeration value="United Arab Emirates (AE)" />
<xsd:enumeration value="Afghanistan (AF)" />
<xsd:enumeration value="Antigua and Barbuda (AG)" />
<xsd:enumeration value="Anguilla (AI)" />
<xsd:enumeration value="Albania (AL)" />
<xsd:enumeration value="Armenia (AM)" />
<xsd:enumeration value="Angola (AO)" />
<xsd:enumeration value="Antarctica (AQ)" />
<xsd:enumeration value="Argentina (AR)" />
<xsd:enumeration value="American Samoa (AS)" />
<xsd:enumeration value="Austria (AT)" />
<xsd:enumeration value="Australia (AU)" />
<xsd:enumeration value="Aruba (AW)" />
<xsd:enumeration value="Åland Islands (AX)" />
<xsd:enumeration value="Azerbaijan (AZ)" />
<xsd:enumeration value="Bosnia and Herzegovina (BA)" />
<xsd:enumeration value="Barbados (BB)" />
<xsd:enumeration value="Bangladesh (BD)" />
<xsd:enumeration value="Belgium (BE)" />
<xsd:enumeration value="Burkina Faso (BF)" />
<xsd:enumeration value="Bulgaria (BG)" />
<xsd:enumeration value="Bahrain (BH)" />
<xsd:enumeration value="Burundi (BI)" />
<xsd:enumeration value="Benin (BJ)" />
<xsd:enumeration value="Saint Barthélemy (BL)" />
<xsd:enumeration value="Bermuda (BM)" />
<xsd:enumeration value="Brunei Darussalam (BN)" />
<xsd:enumeration value="Bolivia Plurinational State of (BO)" />
<xsd:enumeration value="Bonaire Saint Eustatius and Saba (BQ)" />
<xsd:enumeration value="Brazil (BR)" />
<xsd:enumeration value="Bahamas (BS)" />
<xsd:enumeration value="Bhutan (BT)" />
<xsd:enumeration value="Bouvet Island (BV)" />
<xsd:enumeration value="Botswana (BW)" />
<xsd:enumeration value="Belarus (BY)" />
<xsd:enumeration value="Belize (BZ)" />
<xsd:enumeration value="Canada (CA)" />
<xsd:enumeration value="Cocos (Keeling) Islands (CC)" />
<xsd:enumeration value="Congo the Democratic Republic of the (CD)" />
<xsd:enumeration value="Central African Republic (CF)" />
<xsd:enumeration value="Congo (CG)" />
<xsd:enumeration value="Switzerland (CH)" />
<xsd:enumeration value="Côte d'Ivoire (CI)" />
<xsd:enumeration value="Cook Islands (CK)" />
<xsd:enumeration value="Chile (CL)" />
<xsd:enumeration value="Cameroon (CM)" />
<xsd:enumeration value="China (CN)" />
<xsd:enumeration value="Colombia (CO)" />
<xsd:enumeration value="Costa Rica (CR)" />
<xsd:enumeration value="Cuba (CU)" />
<xsd:enumeration value="Cape Verde (CV)" />
<xsd:enumeration value="Curaçao (CW)" />
<xsd:enumeration value="Christmas Island (CX)" />
<xsd:enumeration value="Cyprus (CY)" />
<xsd:enumeration value="Czech Republic (CZ)" />
<xsd:enumeration value="Germany (DE)" />
<xsd:enumeration value="Djibouti (DJ)" />
<xsd:enumeration value="Denmark (DK)" />
<xsd:enumeration value="Dominica (DM)" />
<xsd:enumeration value="Dominican Republic (DO)" />
```

```
<xsd:enumeration value="Algeria (DZ)"/>
<xsd:enumeration value="Ecuador (EC)"/>
<xsd:enumeration value="Estonia (EE)"/>
<xsd:enumeration value="Egypt (EG)"/>
<xsd:enumeration value="Western Sahara (EH)"/>
<xsd:enumeration value="Eritrea (ER)"/>
<xsd:enumeration value="Spain (ES)"/>
<xsd:enumeration value="Ethiopia (ET)"/>
<xsd:enumeration value="Finland (FI)"/>
<xsd:enumeration value="Fiji (FJ)"/>
<xsd:enumeration value="Falkland Islands (Malvinas) (FK)"/>
<xsd:enumeration value="Micronesia Federated States of (FM)"/>
<xsd:enumeration value="Faroe Islands (FO)"/>
<xsd:enumeration value="France (FR)"/>
<xsd:enumeration value="Gabon (GA)"/>
<xsd:enumeration value="United Kingdom (GB)"/>
<xsd:enumeration value="Grenada (GD)"/>
<xsd:enumeration value="Georgia (GE)"/>
<xsd:enumeration value="French Guiana (GF)"/>
<xsd:enumeration value="Guernsey (GG)"/>
<xsd:enumeration value="Ghana (GH)"/>
<xsd:enumeration value="Gibraltar (GI)"/>
<xsd:enumeration value="Greenland (GL)"/>
<xsd:enumeration value="Gambia (GM)"/>
<xsd:enumeration value="Guinea (GN)"/>
<xsd:enumeration value="Guadeloupe (GP)"/>
<xsd:enumeration value="Equatorial Guinea (GQ)"/>
<xsd:enumeration value="Greece (GR)"/>
<xsd:enumeration value="South Georgia and the South Sandwich Islands (GS)"/>
<xsd:enumeration value="Guatemala (GT)"/>
<xsd:enumeration value="Guam (GU)"/>
<xsd:enumeration value="Guinea-Bissau (GW)"/>
<xsd:enumeration value="Guyana (GY)"/>
<xsd:enumeration value="Hong Kong (HK)"/>
<xsd:enumeration value="Heard Island and McDonald Islands (HM)"/>
<xsd:enumeration value="Honduras (HN)"/>
<xsd:enumeration value="Croatia (HR)"/>
<xsd:enumeration value="Haiti (HT)"/>
<xsd:enumeration value="Hungary (HU)"/>
<xsd:enumeration value="Indonesia (ID)"/>
<xsd:enumeration value="Ireland (IE)"/>
<xsd:enumeration value="Israel (IL)"/>
<xsd:enumeration value="Isle of Man (IM)"/>
<xsd:enumeration value="India (IN)"/>
<xsd:enumeration value="British Indian Ocean Territory (IO)"/>
<xsd:enumeration value="Iraq (IQ)"/>
<xsd:enumeration value="Iran Islamic Republic of (IR)"/>
<xsd:enumeration value="Iceland (IS)"/>
<xsd:enumeration value="Italy (IT)"/>
<xsd:enumeration value="Jersey (JE)"/>
<xsd:enumeration value="Jamaica (JM)"/>
<xsd:enumeration value="Jordan (JO)"/>
<xsd:enumeration value="Japan (JP)"/>
<xsd:enumeration value="Kenya (KE)"/>
<xsd:enumeration value="Kyrgyzstan (KG)"/>
<xsd:enumeration value="Cambodia (KH)"/>
<xsd:enumeration value="Kiribati (KI)"/>
<xsd:enumeration value="Comoros (KM)"/>
<xsd:enumeration value="Saint Kitts and Nevis (KN)"/>
<xsd:enumeration value="Korea Democratic People's Republic of (KP)"/>
<xsd:enumeration value="Korea Republic of (KR)"/>
<xsd:enumeration value="Kuwait (KW)"/>
<xsd:enumeration value="Cayman Islands (KY)"/>
<xsd:enumeration value="Kazakhstan (KZ)"/>
<xsd:enumeration value="Lao People's Democratic Republic (LA)"/>
<xsd:enumeration value="Lebanon (LB)"/>
<xsd:enumeration value="Saint Lucia (LC)"/>
<xsd:enumeration value="Liechtenstein (LI)"/>
<xsd:enumeration value="Sri Lanka (LK)"/>
<xsd:enumeration value="Liberia (LR)"/>
<xsd:enumeration value="Lesotho (LS)"/>
<xsd:enumeration value="Lithuania (LT)"/>
<xsd:enumeration value="Luxembourg (LU)"/>
<xsd:enumeration value="Latvia (LV)"/>
<xsd:enumeration value="Libyan Arab Jamahiriya (LY)"/>
<xsd:enumeration value="Morocco (MA)"/>
<xsd:enumeration value="Monaco (MC)"/>
<xsd:enumeration value="Moldova Republic of (MD)"/>
<xsd:enumeration value="Montenegro (ME)"/>
<xsd:enumeration value="Saint Martin (French part) (MF)"/>
<xsd:enumeration value="Madagascar (MG)"/>
<xsd:enumeration value="Marshall Islands (MH)"/>
<xsd:enumeration value="Macedonia the former Yugoslav Republic of (MK)"/>
```

```
<xsd:enumeration value="Mali (ML)"/>
<xsd:enumeration value="Myanmar (MM)"/>
<xsd:enumeration value="Mongolia (MN)"/>
<xsd:enumeration value="Macao (MO)"/>
<xsd:enumeration value="Northern Mariana Islands (MP)"/>
<xsd:enumeration value="Martinique (MQ)"/>
<xsd:enumeration value="Mauritania (MR)"/>
<xsd:enumeration value="Montserrat (MS)"/>
<xsd:enumeration value="Malta (MT)"/>
<xsd:enumeration value="Mauritius (MU)"/>
<xsd:enumeration value="Maldives (MV)"/>
<xsd:enumeration value="Malawi (MW)"/>
<xsd:enumeration value="Mexico (MX)"/>
<xsd:enumeration value="Malaysia (MY)"/>
<xsd:enumeration value="Mozambique (MZ)"/>
<xsd:enumeration value="Namibia (NA)"/>
<xsd:enumeration value="New Caledonia (NC)"/>
<xsd:enumeration value="Niger (NE)"/>
<xsd:enumeration value="Norfolk Island (NF)"/>
<xsd:enumeration value="Nigeria (NG)"/>
<xsd:enumeration value="Nicaragua (NI)"/>
<xsd:enumeration value="Netherlands (NL)"/>
<xsd:enumeration value="Norway (NO)"/>
<xsd:enumeration value="Nepal (NP)"/>
<xsd:enumeration value="Nauru (NR)"/>
<xsd:enumeration value="Niue (NU)"/>
<xsd:enumeration value="New Zealand (NZ)"/>
<xsd:enumeration value="Oman (OM)"/>
<xsd:enumeration value="Panama (PA)"/>
<xsd:enumeration value="Peru (PE)"/>
<xsd:enumeration value="French Polynesia (PF)"/>
<xsd:enumeration value="Papua New Guinea (PG)"/>
<xsd:enumeration value="Philippines (PH)"/>
<xsd:enumeration value="Pakistan (PK)"/>
<xsd:enumeration value="Poland (PL)"/>
<xsd:enumeration value="Saint Pierre and Miquelon (PM)"/>
<xsd:enumeration value="Pitcairn (PN)"/>
<xsd:enumeration value="Puerto Rico (PR)"/>
<xsd:enumeration value="Palestinian Territory Occupied (PS)"/>
<xsd:enumeration value="Portugal (PT)"/>
<xsd:enumeration value="Palau (PW)"/>
<xsd:enumeration value="Paraguay (PY)"/>
<xsd:enumeration value="Qatar (QA)"/>
<xsd:enumeration value="Réunion (RE)"/>
<xsd:enumeration value="Romania (RO)"/>
<xsd:enumeration value="Serbia (RS)"/>
<xsd:enumeration value="Russian Federation (RU)"/>
<xsd:enumeration value="Rwanda (RW)"/>
<xsd:enumeration value="Saudi Arabia (SA)"/>
<xsd:enumeration value="Solomon Islands (SB)"/>
<xsd:enumeration value="Seychelles (SC)"/>
<xsd:enumeration value="Sudan (SD)"/>
<xsd:enumeration value="Sweden (SE)"/>
<xsd:enumeration value="Singapore (SG)"/>
<xsd:enumeration value="Saint Helena Ascension and Tristan da Cunha (SH)"/>
<xsd:enumeration value="Slovenia (SI)"/>
<xsd:enumeration value="Svalbard and Jan Mayen (SJ)"/>
<xsd:enumeration value="Slovakia (SK)"/>
<xsd:enumeration value="Sierra Leone (SL)"/>
<xsd:enumeration value="San Marino (SM)"/>
<xsd:enumeration value="Senegal (SN)"/>
<xsd:enumeration value="Somalia (SO)"/>
<xsd:enumeration value="Suriname (SR)"/>
<xsd:enumeration value="South Sudan (SS)"/>
<xsd:enumeration value="Sao Tome and Principe (ST)"/>
<xsd:enumeration value="El Salvador (SV)"/>
<xsd:enumeration value="Sint Maarten (Dutch part) (SX)"/>
<xsd:enumeration value="Syrian Arab Republic (SY)"/>
<xsd:enumeration value="Swaziland (SZ)"/>
<xsd:enumeration value="Turks and Caicos Islands (TC)"/>
<xsd:enumeration value="Chad (TD)"/>
<xsd:enumeration value="French Southern Territories (TF)"/>
<xsd:enumeration value="Togo (TG)"/>
<xsd:enumeration value="Thailand (TH)"/>
<xsd:enumeration value="Tajikistan (TJ)"/>
<xsd:enumeration value="Tokelau (TK)"/>
<xsd:enumeration value="Timor-Leste (TL)"/>
<xsd:enumeration value="Turkmenistan (TM)"/>
<xsd:enumeration value="Tunisia (TN)"/>
<xsd:enumeration value="Tonga (TO)"/>
<xsd:enumeration value="Turkey (TR)"/>
<xsd:enumeration value="Trinidad and Tobago (TT)"/>
<xsd:enumeration value="Tuvalu (TV)"/>
```

```

<xsd:enumeration value="Taiwan Province of China (TW)" />
<xsd:enumeration value="Tanzania United Republic of (TZ)" />
<xsd:enumeration value="Ukraine (UA)" />
<xsd:enumeration value="Uganda (UG)" />
<xsd:enumeration value="United States Minor Outlying Islands (UM)" />
<xsd:enumeration value="United States (US)" />
<xsd:enumeration value="Uruguay (UY)" />
<xsd:enumeration value="Uzbekistan (UZ)" />
<xsd:enumeration value="Holy See (Vatican City State) (VA)" />
<xsd:enumeration value="Saint Vincent and the Grenadines (VC)" />
<xsd:enumeration value="Venezuela Bolivarian Republic of (VE)" />
<xsd:enumeration value="Virgin Islands British (VG)" />
<xsd:enumeration value="Virgin Islands U.S. (VI)" />
<xsd:enumeration value="Viet Nam (VN)" />
<xsd:enumeration value="Vanuatu (VU)" />
<xsd:enumeration value="Wallis and Futuna (WF)" />
<xsd:enumeration value="Samoa (WS)" />
<xsd:enumeration value="Yemen (YE)" />
<xsd:enumeration value="Mayotte (YT)" />
<xsd:enumeration value="South Africa (ZA)" />
<xsd:enumeration value="Zambia (ZM)" />
<xsd:enumeration value="Zimbabwe (ZW)" />
<xsd:enumeration value="Axé" />
<xsd:enumeration value="Baile Funk" />
<xsd:enumeration value="Brazilian" />
<xsd:enumeration value="Choro" />
<xsd:enumeration value="Forró" />
<xsd:enumeration value="Frevo" />
<xsd:enumeration value="MPB" />
<xsd:enumeration value="Pagode" />
<xsd:enumeration value="Sertanejo" />
<xsd:enumeration value="Chinese Alt" />
<xsd:enumeration value="Chinese Classical" />
<xsd:enumeration value="Chinese Flute" />
<xsd:enumeration value="Chinese Hip-Hop" />
<xsd:enumeration value="Chinese Opera" />
<xsd:enumeration value="Chinese Orchestral" />
<xsd:enumeration value="Chinese Regional Folk" />
<xsd:enumeration value="Chinese Rock" />
<xsd:enumeration value="Chinese Strings" />
<xsd:enumeration value="C-Pop" />
<xsd:enumeration value="Cantopop/HK Pop" />
<xsd:enumeration value="Kayokyoku" />
<xsd:enumeration value="Korean Classical" />
<xsd:enumeration value="Korean Folk-Pop" />
<xsd:enumeration value="Korean Hip-Hop" />
<xsd:enumeration value="Korean Indie" />
<xsd:enumeration value="Korean Rock" />
<xsd:enumeration value="Korean Trad Instrumental" />
<xsd:enumeration value="Korean Trad Song" />
<xsd:enumeration value="Korean Trad Theater" />
<xsd:enumeration value="Trot" />
<xsd:enumeration value="Original Pilipino Music" />
<xsd:enumeration value="Pinoy Pop" />
<xsd:enumeration value="Indo Pop" />
<xsd:enumeration value="Tai-Pop" />
<xsd:enumeration value="Taiwanese Folk" />
<xsd:enumeration value="Thai Pop" />
<xsd:enumeration value="Tibetan Native Music" />
</xsd:restriction>
</xsd:simpleType>

```

Namespace: "<http://fnppl.org/opensdx/languages>"

Schema(s)

Imported schema `openSDX_languages.xsd`

Namespace	http://fnppl.org/opensdx/languages
Properties	attribute form default: unqualified element form default: unqualified

Simple Type(s)

Simple Type `language`

Namespace	http://fnppl.org/opensdx/languages
-----------	---

Annotations	This element includes a list of ISO 639-1 language codes. See: http://en.wikipedia.org/wiki/List_of_ISO_639-1_codes																																																																																																																												
Diagram																																																																																																																													
Type	restriction of xsd:string																																																																																																																												
Facets	<table> <tr><td>enumeration</td><td>aa</td><td>Afar</td></tr> <tr><td>enumeration</td><td>ab</td><td>Abkhaz</td></tr> <tr><td>enumeration</td><td>ae</td><td>Avestan</td></tr> <tr><td>enumeration</td><td>af</td><td>Afrikaans</td></tr> <tr><td>enumeration</td><td>ak</td><td>Akan</td></tr> <tr><td>enumeration</td><td>am</td><td>Amharic</td></tr> <tr><td>enumeration</td><td>an</td><td>Aragonese</td></tr> <tr><td>enumeration</td><td>ar</td><td>Arabic</td></tr> <tr><td>enumeration</td><td>as</td><td>Assamese</td></tr> <tr><td>enumeration</td><td>av</td><td>Avaric</td></tr> <tr><td>enumeration</td><td>ay</td><td>Aymara</td></tr> <tr><td>enumeration</td><td>az</td><td>Azerbaijani</td></tr> <tr><td>enumeration</td><td>ba</td><td>Bashkir</td></tr> <tr><td>enumeration</td><td>be</td><td>Belarusian</td></tr> <tr><td>enumeration</td><td>bg</td><td>Bulgarian</td></tr> <tr><td>enumeration</td><td>bh</td><td>Bihari</td></tr> <tr><td>enumeration</td><td>bi</td><td>Bislama</td></tr> <tr><td>enumeration</td><td>bm</td><td>Bambara</td></tr> <tr><td>enumeration</td><td>bn</td><td>Bengali</td></tr> <tr><td>enumeration</td><td>bo</td><td>Tibetan Standard, Tibetan, Central</td></tr> <tr><td>enumeration</td><td>br</td><td>Breton</td></tr> <tr><td>enumeration</td><td>bs</td><td>Bosnian</td></tr> <tr><td>enumeration</td><td>ca</td><td>Catalan</td></tr> <tr><td>enumeration</td><td>ce</td><td>Chechen</td></tr> <tr><td>enumeration</td><td>ch</td><td>Chamorro</td></tr> <tr><td>enumeration</td><td>co</td><td>Corsican</td></tr> <tr><td>enumeration</td><td>cr</td><td>Cree</td></tr> <tr><td>enumeration</td><td>cs</td><td>Czech</td></tr> <tr><td>enumeration</td><td>cu</td><td>Old Church Slavonic, Church Slavic, Church Slavonic, Old Bulgarian, Old Slavonic</td></tr> <tr><td>enumeration</td><td>cv</td><td>Chuvash</td></tr> <tr><td>enumeration</td><td>cy</td><td>Welsh</td></tr> <tr><td>enumeration</td><td>da</td><td>Danish</td></tr> <tr><td>enumeration</td><td>de</td><td>German</td></tr> <tr><td>enumeration</td><td>dv</td><td>Divehi, Dhivehi, Maldivian</td></tr> <tr><td>enumeration</td><td>dz</td><td>Dzongkha</td></tr> <tr><td>enumeration</td><td>ee</td><td>Ewe</td></tr> <tr><td>enumeration</td><td>el</td><td>Greek, Modern</td></tr> <tr><td>enumeration</td><td>en</td><td>English</td></tr> <tr><td>enumeration</td><td>eo</td><td>Esperanto</td></tr> <tr><td>enumeration</td><td>es</td><td>Spanish, Castilian</td></tr> <tr><td>enumeration</td><td>et</td><td>Estonian</td></tr> </table>		enumeration	aa	Afar	enumeration	ab	Abkhaz	enumeration	ae	Avestan	enumeration	af	Afrikaans	enumeration	ak	Akan	enumeration	am	Amharic	enumeration	an	Aragonese	enumeration	ar	Arabic	enumeration	as	Assamese	enumeration	av	Avaric	enumeration	ay	Aymara	enumeration	az	Azerbaijani	enumeration	ba	Bashkir	enumeration	be	Belarusian	enumeration	bg	Bulgarian	enumeration	bh	Bihari	enumeration	bi	Bislama	enumeration	bm	Bambara	enumeration	bn	Bengali	enumeration	bo	Tibetan Standard, Tibetan, Central	enumeration	br	Breton	enumeration	bs	Bosnian	enumeration	ca	Catalan	enumeration	ce	Chechen	enumeration	ch	Chamorro	enumeration	co	Corsican	enumeration	cr	Cree	enumeration	cs	Czech	enumeration	cu	Old Church Slavonic, Church Slavic, Church Slavonic, Old Bulgarian, Old Slavonic	enumeration	cv	Chuvash	enumeration	cy	Welsh	enumeration	da	Danish	enumeration	de	German	enumeration	dv	Divehi, Dhivehi, Maldivian	enumeration	dz	Dzongkha	enumeration	ee	Ewe	enumeration	el	Greek, Modern	enumeration	en	English	enumeration	eo	Esperanto	enumeration	es	Spanish, Castilian	enumeration	et	Estonian
enumeration	aa	Afar																																																																																																																											
enumeration	ab	Abkhaz																																																																																																																											
enumeration	ae	Avestan																																																																																																																											
enumeration	af	Afrikaans																																																																																																																											
enumeration	ak	Akan																																																																																																																											
enumeration	am	Amharic																																																																																																																											
enumeration	an	Aragonese																																																																																																																											
enumeration	ar	Arabic																																																																																																																											
enumeration	as	Assamese																																																																																																																											
enumeration	av	Avaric																																																																																																																											
enumeration	ay	Aymara																																																																																																																											
enumeration	az	Azerbaijani																																																																																																																											
enumeration	ba	Bashkir																																																																																																																											
enumeration	be	Belarusian																																																																																																																											
enumeration	bg	Bulgarian																																																																																																																											
enumeration	bh	Bihari																																																																																																																											
enumeration	bi	Bislama																																																																																																																											
enumeration	bm	Bambara																																																																																																																											
enumeration	bn	Bengali																																																																																																																											
enumeration	bo	Tibetan Standard, Tibetan, Central																																																																																																																											
enumeration	br	Breton																																																																																																																											
enumeration	bs	Bosnian																																																																																																																											
enumeration	ca	Catalan																																																																																																																											
enumeration	ce	Chechen																																																																																																																											
enumeration	ch	Chamorro																																																																																																																											
enumeration	co	Corsican																																																																																																																											
enumeration	cr	Cree																																																																																																																											
enumeration	cs	Czech																																																																																																																											
enumeration	cu	Old Church Slavonic, Church Slavic, Church Slavonic, Old Bulgarian, Old Slavonic																																																																																																																											
enumeration	cv	Chuvash																																																																																																																											
enumeration	cy	Welsh																																																																																																																											
enumeration	da	Danish																																																																																																																											
enumeration	de	German																																																																																																																											
enumeration	dv	Divehi, Dhivehi, Maldivian																																																																																																																											
enumeration	dz	Dzongkha																																																																																																																											
enumeration	ee	Ewe																																																																																																																											
enumeration	el	Greek, Modern																																																																																																																											
enumeration	en	English																																																																																																																											
enumeration	eo	Esperanto																																																																																																																											
enumeration	es	Spanish, Castilian																																																																																																																											
enumeration	et	Estonian																																																																																																																											

enumeration	eu	Basque
enumeration	fa	Persian
enumeration	ff	Fula, Fulah, Pulaar, Pular
enumeration	fi	Finnish
enumeration	fj	Fijian
enumeration	fo	Faroese
enumeration	fr	French
enumeration	fy	Western Frisian
enumeration	ga	Irish
enumeration	gd	Scottish Gaelic, Gaelic
enumeration	gl	Galician
enumeration	gn	Guaraní
enumeration	gu	Gujarati
enumeration	gv	Manx
enumeration	ha	Hausa
enumeration	he	Hebrew (modern)
enumeration	hi	Hindi
enumeration	ho	Hiri Motu
enumeration	hr	Croatian
enumeration	ht	Haitian, Haitian Creole
enumeration	hu	Hungarian
enumeration	hy	Armenian
enumeration	hz	Herero
enumeration	ia	Interlingua
enumeration	id	Indonesian
enumeration	ie	Interlingue
enumeration	ig	Igbo
enumeration	ii	Nuosu
enumeration	ik	Inupiaq
enumeration	io	Ido
enumeration	is	Icelandic
enumeration	it	Italian
enumeration	iu	Inuktitut
enumeration	ja	Japanese
enumeration	jv	Javanese
enumeration	ka	Georgian
enumeration	kg	Kongo
enumeration	ki	Kikuyu, Gikuyu
enumeration	kj	Kwanyama, Kuanyama
enumeration	kk	Kazakh
enumeration	kl	Kalaallisut, Greenlandic
enumeration	km	Khmer
enumeration	kn	Kannada
enumeration	ko	Korean
enumeration	kr	Kanuri
enumeration	ks	Kashmiri
enumeration	ku	Kurdish
enumeration	kv	Komi
enumeration	kw	Cornish

enumeration	ky	Kyrgyz
enumeration	la	Latin
enumeration	lb	Luxembourgish, Letzeburgesch
enumeration	lg	Ganda
enumeration	li	Limburgish, Limburgan, Limburger
enumeration	ln	Lingala
enumeration	lo	Lao
enumeration	lt	Lithuanian
enumeration	lu	Luba-Katanga
enumeration	lv	Latvian
enumeration	mg	Malagasy
enumeration	mh	Marshallese
enumeration	mi	M#ori
enumeration	mk	Macedonian
enumeration	ml	Malayalam
enumeration	mn	Mongolian
enumeration	mr	Marathi (Mar##h#)
enumeration	ms	Malay
enumeration	mt	Maltese
enumeration	my	Burmese
enumeration	na	Nauru
enumeration	nb	Norwegian Bokmål
enumeration	nd	North Ndebele
enumeration	ne	Nepali
enumeration	ng	Ndonga
enumeration	nl	Dutch
enumeration	nn	Norwegian Nynorsk
enumeration	no	Norwegian
enumeration	nr	South Ndebele
enumeration	nv	Navajo, Navaho
enumeration	ny	Chichewa, Chewa, Nyanja
enumeration	oc	Occitan
enumeration	oj	Ojibwe, Ojibwa
enumeration	om	Oromo
enumeration	or	Oriya
enumeration	os	Ossetian, Ossetic
enumeration	pa	Punjabi, Punjabi
enumeration	pi	P#li
enumeration	pl	Polish
enumeration	ps	Pashto, Pushto
enumeration	pt	Portuguese
enumeration	qu	Quechua
enumeration	rm	Romansh
enumeration	rn	Kirundi
enumeration	ro	Romanian, Moldavian, Moldovan
enumeration	ru	Russian
enumeration	rw	Kinyarwanda
enumeration	sa	Sanskrit (Sa#sk#ta)
enumeration	sc	Sardinian

enumeration	sd	Sindhi
enumeration	se	Northern Sami
enumeration	sg	Sango
enumeration	si	Sinhala, Sinhalese
enumeration	sk	Slovak
enumeration	sl	Slovene
enumeration	sm	Samoan
enumeration	sn	Shona
enumeration	so	Somali
enumeration	sq	Albanian
enumeration	sr	Serbian
enumeration	ss	Swati
enumeration	st	Southern Sotho
enumeration	su	Sundanese
enumeration	sv	Swedish
enumeration	sw	Swahili
enumeration	ta	Tamil
enumeration	te	Telugu
enumeration	tg	Tajik
enumeration	th	Thai
enumeration	ti	Tigrinya
enumeration	tk	Turkmen
enumeration	tl	Tagalog
enumeration	tn	Tswana
enumeration	to	Tonga (Tonga Islands)
enumeration	tr	Turkish
enumeration	ts	Tsonga
enumeration	tt	Tatar
enumeration	tw	Twi
enumeration	ty	Tahitian
enumeration	ug	Uighur, Uyghur
enumeration	uk	Ukrainian
enumeration	ur	Urdu
enumeration	uz	Uzbek
enumeration	ve	Venda
enumeration	vi	Vietnamese
enumeration	vo	Volapük
enumeration	wa	Walloon
enumeration	wo	Wolof
enumeration	xh	Xhosa
enumeration	yi	Yiddish
enumeration	yo	Yoruba
enumeration	za	Zhuang, Chuang
enumeration	zh	Chinese
enumeration	zu	Zulu
Used by	Element	information/main_language
Source	<pre><xsd:simpleType name="language"> <xsd:annotation> <xsd:documentation xml:lang="en">This element includes a list of ISO 639-1 language codes. See: http://en.wikipedia.org/wiki/List_of_ISO_639-1_codes</xsd:documentation></pre>	

```
</xsd:annotation>
<xsd:restriction base="xsd:string">
  <xsd:enumeration value="aa">
    <xsd:annotation>
      <xsd:documentation>Afar</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="ab">
    <xsd:annotation>
      <xsd:documentation>Abkhaz</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="ae">
    <xsd:annotation>
      <xsd:documentation>Avestan</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="af">
    <xsd:annotation>
      <xsd:documentation>Afrikaans</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="ak">
    <xsd:annotation>
      <xsd:documentation>Akan</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="am">
    <xsd:annotation>
      <xsd:documentation>Amharic</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="an">
    <xsd:annotation>
      <xsd:documentation>Aragonese</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="ar">
    <xsd:annotation>
      <xsd:documentation>Arabic</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="as">
    <xsd:annotation>
      <xsd:documentation>Assamese</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="av">
    <xsd:annotation>
      <xsd:documentation>Avaric</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="ay">
    <xsd:annotation>
      <xsd:documentation>Aymara</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="az">
    <xsd:annotation>
      <xsd:documentation>Azerbaijani</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="ba">
    <xsd:annotation>
      <xsd:documentation>Bashkir</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="be">
    <xsd:annotation>
      <xsd:documentation>Belarusian</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="bg">
    <xsd:annotation>
      <xsd:documentation>Bulgarian</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="bh">
    <xsd:annotation>
      <xsd:documentation>Bihari</xsd:documentation>
    </xsd:annotation>
  </xsd:enumeration>
  <xsd:enumeration value="bi">
```

```
<xsd:annotation>
  <xsd:documentation>Bislama</xsd:documentation>
</xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="bm">
  <xsd:annotation>
    <xsd:documentation>Bambara</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="bn">
  <xsd:annotation>
    <xsd:documentation>Bengali</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="bo">
  <xsd:annotation>
    <xsd:documentation>Tibetan Standard, Tibetan, Central</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="br">
  <xsd:annotation>
    <xsd:documentation>Breton</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="bs">
  <xsd:annotation>
    <xsd:documentation>Bosnian</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="ca">
  <xsd:annotation>
    <xsd:documentation>Catalan</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="ce">
  <xsd:annotation>
    <xsd:documentation>Chechen</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="ch">
  <xsd:annotation>
    <xsd:documentation>Chamorro</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="co">
  <xsd:annotation>
    <xsd:documentation>Corsican</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="cr">
  <xsd:annotation>
    <xsd:documentation>Cree</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="cs">
  <xsd:annotation>
    <xsd:documentation>Czech</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="cu">
  <xsd:annotation>
    <xsd:documentation>Old Church Slavonic, Church Slavic, Church Slavonic, Old Bulgarian, Old Slavonic</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="cv">
  <xsd:annotation>
    <xsd:documentation>Chuvash</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="cy">
  <xsd:annotation>
    <xsd:documentation>Welsh</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="da">
  <xsd:annotation>
    <xsd:documentation>Danish</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="de">
  <xsd:annotation>
    <xsd:documentation>German</xsd:documentation>
```

```
</xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="dv">
  <xsd:annotation>
    <xsd:documentation>Divehi, Dhivehi, Maldivian</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="dz">
  <xsd:annotation>
    <xsd:documentation>Dzongkha</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="ee">
  <xsd:annotation>
    <xsd:documentation>Ewe</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="el">
  <xsd:annotation>
    <xsd:documentation>Greek, Modern</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="en">
  <xsd:annotation>
    <xsd:documentation>English</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="eo">
  <xsd:annotation>
    <xsd:documentation>Esperanto</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="es">
  <xsd:annotation>
    <xsd:documentation>Spanish, Castilian</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="et">
  <xsd:annotation>
    <xsd:documentation>Estonian</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="eu">
  <xsd:annotation>
    <xsd:documentation>Basque</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="fa">
  <xsd:annotation>
    <xsd:documentation>Persian</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="ff">
  <xsd:annotation>
    <xsd:documentation>Fula, Fulah, Pulaar, Pular</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="fi">
  <xsd:annotation>
    <xsd:documentation>Finnish</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="fj">
  <xsd:annotation>
    <xsd:documentation>Fijian</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="fo">
  <xsd:annotation>
    <xsd:documentation>Faroese</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="fr">
  <xsd:annotation>
    <xsd:documentation>French</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="fy">
  <xsd:annotation>
    <xsd:documentation>Western Frisian</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="ga">
```

```
<xsd:annotation>
  <xsd:documentation>Irish</xsd:documentation>
</xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="gd">
  <xsd:annotation>
    <xsd:documentation>Scottish Gaelic, Gaelic</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="gl">
  <xsd:annotation>
    <xsd:documentation>Galician</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="gn">
  <xsd:annotation>
    <xsd:documentation>Guaraní</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="gu">
  <xsd:annotation>
    <xsd:documentation>Gujarati</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="gv">
  <xsd:annotation>
    <xsd:documentation>Manx</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="ha">
  <xsd:annotation>
    <xsd:documentation>Hausa</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="he">
  <xsd:annotation>
    <xsd:documentation>Hebrew (modern)</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="hi">
  <xsd:annotation>
    <xsd:documentation>Hindi</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="ho">
  <xsd:annotation>
    <xsd:documentation>Hiri Motu</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="hr">
  <xsd:annotation>
    <xsd:documentation>Croatian</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="ht">
  <xsd:annotation>
    <xsd:documentation>Haitian, Haitian Creole</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="hu">
  <xsd:annotation>
    <xsd:documentation>Hungarian</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="hy">
  <xsd:annotation>
    <xsd:documentation>Armenian</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="hz">
  <xsd:annotation>
    <xsd:documentation>Herero</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="ia">
  <xsd:annotation>
    <xsd:documentation>Interlingua</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="id">
  <xsd:annotation>
    <xsd:documentation>Indonesian</xsd:documentation>
  </xsd:annotation>
```

```
</xsd:enumeration>
<xsd:enumeration value="ie">
  <xsd:annotation>
    <xsd:documentation>Interlingue</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="ig">
  <xsd:annotation>
    <xsd:documentation>Igbo</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="ii">
  <xsd:annotation>
    <xsd:documentation>Nuosu</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="ik">
  <xsd:annotation>
    <xsd:documentation>Inupiaq</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="io">
  <xsd:annotation>
    <xsd:documentation>Ido</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="is">
  <xsd:annotation>
    <xsd:documentation>Icelandic</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="it">
  <xsd:annotation>
    <xsd:documentation>Italian</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="iu">
  <xsd:annotation>
    <xsd:documentation>Inuktitut</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="ja">
  <xsd:annotation>
    <xsd:documentation>Japanese</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="jv">
  <xsd:annotation>
    <xsd:documentation>Javanese</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="ka">
  <xsd:annotation>
    <xsd:documentation>Georgian</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="kg">
  <xsd:annotation>
    <xsd:documentation>Kongo</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="ki">
  <xsd:annotation>
    <xsd:documentation>Kikuyu, Gikuyu</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="kj">
  <xsd:annotation>
    <xsd:documentation>Kwanyama, Kuanyama</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="kk">
  <xsd:annotation>
    <xsd:documentation>Kazakh</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="kl">
  <xsd:annotation>
    <xsd:documentation>Kalaallisut, Greenlandic</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="km">
  <xsd:annotation>
```

```
<xsd:documentation>Khmer</xsd:documentation>
</xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="kn">
  <xsd:annotation>
    <xsd:documentation>Kannada</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="ko">
  <xsd:annotation>
    <xsd:documentation>Korean</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="kr">
  <xsd:annotation>
    <xsd:documentation>Kanuri</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="ks">
  <xsd:annotation>
    <xsd:documentation>Kashmiri</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="ku">
  <xsd:annotation>
    <xsd:documentation>Kurdish</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="kv">
  <xsd:annotation>
    <xsd:documentation>Komi</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="kw">
  <xsd:annotation>
    <xsd:documentation>Cornish</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="ky">
  <xsd:annotation>
    <xsd:documentation>Kyrgyz</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="la">
  <xsd:annotation>
    <xsd:documentation>Latin</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="lb">
  <xsd:annotation>
    <xsd:documentation>Luxembourgish, Letzeburgesch</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="lg">
  <xsd:annotation>
    <xsd:documentation>Ganda</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="li">
  <xsd:annotation>
    <xsd:documentation>Limburgish, Limburgan, Limburger</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="ln">
  <xsd:annotation>
    <xsd:documentation>Lingala</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="lo">
  <xsd:annotation>
    <xsd:documentation>Lao</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="lt">
  <xsd:annotation>
    <xsd:documentation>Lithuanian</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="lu">
  <xsd:annotation>
    <xsd:documentation>Luba-Katanga</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
```

```
<xsd:enumeration value="lv">
  <xsd:annotation>
    <xsd:documentation>Latvian</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="mg">
  <xsd:annotation>
    <xsd:documentation>Malagasy</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="mh">
  <xsd:annotation>
    <xsd:documentation>Marshalllese</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="mi">
  <xsd:annotation>
    <xsd:documentation>M#ori</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="mk">
  <xsd:annotation>
    <xsd:documentation>Macedonian</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="ml">
  <xsd:annotation>
    <xsd:documentation>Malayalam</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="mn">
  <xsd:annotation>
    <xsd:documentation>Mongolian</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="mr">
  <xsd:annotation>
    <xsd:documentation>Marathi (Mar##h#)</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="ms">
  <xsd:annotation>
    <xsd:documentation>Malay</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="mt">
  <xsd:annotation>
    <xsd:documentation>Maltese</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="my">
  <xsd:annotation>
    <xsd:documentation>Burmese</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="na">
  <xsd:annotation>
    <xsd:documentation>Nauru</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="nb">
  <xsd:annotation>
    <xsd:documentation>Norwegian Bokmål</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="nd">
  <xsd:annotation>
    <xsd:documentation>North Ndebele</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="ne">
  <xsd:annotation>
    <xsd:documentation>Nepali</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="ng">
  <xsd:annotation>
    <xsd:documentation>Ndonga</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="nl">
  <xsd:annotation>
    <xsd:documentation>Dutch</xsd:documentation>
```

```
</xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="nn">
  <xsd:annotation>
    <xsd:documentation>Norwegian Nynorsk</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="no">
  <xsd:annotation>
    <xsd:documentation>Norwegian</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="nr">
  <xsd:annotation>
    <xsd:documentation>South Ndebele</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="nv">
  <xsd:annotation>
    <xsd:documentation>Navajo, Navaho</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="ny">
  <xsd:annotation>
    <xsd:documentation>Chichewa, Chewa, Nyanja</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="oc">
  <xsd:annotation>
    <xsd:documentation>Occitan</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="oj">
  <xsd:annotation>
    <xsd:documentation>Ojibwe, Ojibwa</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="om">
  <xsd:annotation>
    <xsd:documentation>Oromo</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="or">
  <xsd:annotation>
    <xsd:documentation>Oriya</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="os">
  <xsd:annotation>
    <xsd:documentation>Ossetian, Ossetic</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="pa">
  <xsd:annotation>
    <xsd:documentation>Panjabi, Punjabi</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="pi">
  <xsd:annotation>
    <xsd:documentation>P#li</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="pl">
  <xsd:annotation>
    <xsd:documentation>Polish</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="ps">
  <xsd:annotation>
    <xsd:documentation>Pashto, Pushto</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="pt">
  <xsd:annotation>
    <xsd:documentation>Portuguese</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="qu">
  <xsd:annotation>
    <xsd:documentation>Quechua</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="rm">
```

```
<xsd:annotation>
  <xsd:documentation>Romanian</xsd:documentation>
</xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="rn">
  <xsd:annotation>
    <xsd:documentation>Kirundi</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="ro">
  <xsd:annotation>
    <xsd:documentation>Romanian, Moldavian, Moldovan</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="ru">
  <xsd:annotation>
    <xsd:documentation>Russian</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="rw">
  <xsd:annotation>
    <xsd:documentation>Kinyarwanda</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="sa">
  <xsd:annotation>
    <xsd:documentation>Sanskrit (Sa#sk#ta)</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="sc">
  <xsd:annotation>
    <xsd:documentation>Sardinian</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="sd">
  <xsd:annotation>
    <xsd:documentation>Sindhi</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="se">
  <xsd:annotation>
    <xsd:documentation>Northern Sami</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="sg">
  <xsd:annotation>
    <xsd:documentation>Sango</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="si">
  <xsd:annotation>
    <xsd:documentation>Sinhala, Sinhalese</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="sk">
  <xsd:annotation>
    <xsd:documentation>Slovak</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="sl">
  <xsd:annotation>
    <xsd:documentation>Slovene</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="sm">
  <xsd:annotation>
    <xsd:documentation>Samoan</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="sn">
  <xsd:annotation>
    <xsd:documentation>Shona</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="so">
  <xsd:annotation>
    <xsd:documentation>Somali</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="sq">
  <xsd:annotation>
    <xsd:documentation>Albanian</xsd:documentation>
  </xsd:annotation>
```

```
</xsd:enumeration>
<xsd:enumeration value="sr">
  <xsd:annotation>
    <xsd:documentation>Serbian</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="ss">
  <xsd:annotation>
    <xsd:documentation>Swati</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="st">
  <xsd:annotation>
    <xsd:documentation>Southern Sotho</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="su">
  <xsd:annotation>
    <xsd:documentation>Sundanese</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="sv">
  <xsd:annotation>
    <xsd:documentation>Swedish</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="sw">
  <xsd:annotation>
    <xsd:documentation>Swahili</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="ta">
  <xsd:annotation>
    <xsd:documentation>Tamil</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="te">
  <xsd:annotation>
    <xsd:documentation>Telugu</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="tg">
  <xsd:annotation>
    <xsd:documentation>Tajik</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="th">
  <xsd:annotation>
    <xsd:documentation>Thai</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="ti">
  <xsd:annotation>
    <xsd:documentation>Tigrinya</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="tk">
  <xsd:annotation>
    <xsd:documentation>Turkmen</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="tl">
  <xsd:annotation>
    <xsd:documentation>Tagalog</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="tn">
  <xsd:annotation>
    <xsd:documentation>Tswana</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="to">
  <xsd:annotation>
    <xsd:documentation>Tonga (Tonga Islands)</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="tr">
  <xsd:annotation>
    <xsd:documentation>Turkish</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="ts">
  <xsd:annotation>
```

```
<xsd:documentation>Tsonga</xsd:documentation>
</xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="tt">
  <xsd:annotation>
    <xsd:documentation>Tatar</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="tw">
  <xsd:annotation>
    <xsd:documentation>Twi</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="ty">
  <xsd:annotation>
    <xsd:documentation>Tahitian</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="ug">
  <xsd:annotation>
    <xsd:documentation>Uighur, Uyghur</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="uk">
  <xsd:annotation>
    <xsd:documentation>Ukrainian</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="ur">
  <xsd:annotation>
    <xsd:documentation>Urdu</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="uz">
  <xsd:annotation>
    <xsd:documentation>Uzbek</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="ve">
  <xsd:annotation>
    <xsd:documentation>Venda</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="vi">
  <xsd:annotation>
    <xsd:documentation>Vietnamese</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="vo">
  <xsd:annotation>
    <xsd:documentation>Volapük</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="wa">
  <xsd:annotation>
    <xsd:documentation>Walloon</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="wo">
  <xsd:annotation>
    <xsd:documentation>Wolof</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="xh">
  <xsd:annotation>
    <xsd:documentation>Xhosa</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="yi">
  <xsd:annotation>
    <xsd:documentation>Yiddish</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="yo">
  <xsd:annotation>
    <xsd:documentation>Yoruba</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="za">
  <xsd:annotation>
    <xsd:documentation>Zhuang, Chuang</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
```

```
<xsd:enumeration value="zh">
  <xsd:annotation>
    <xsd:documentation>Chinese</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
<xsd:enumeration value="zu">
  <xsd:annotation>
    <xsd:documentation>Zulu</xsd:documentation>
  </xsd:annotation>
</xsd:enumeration>
</xsd:restriction>
</xsd:simpleType>
```