

Docker Paris Meetup #15 - 12/08/2014




Grounds

Adrien Folie

@folieadrien

Under the hood

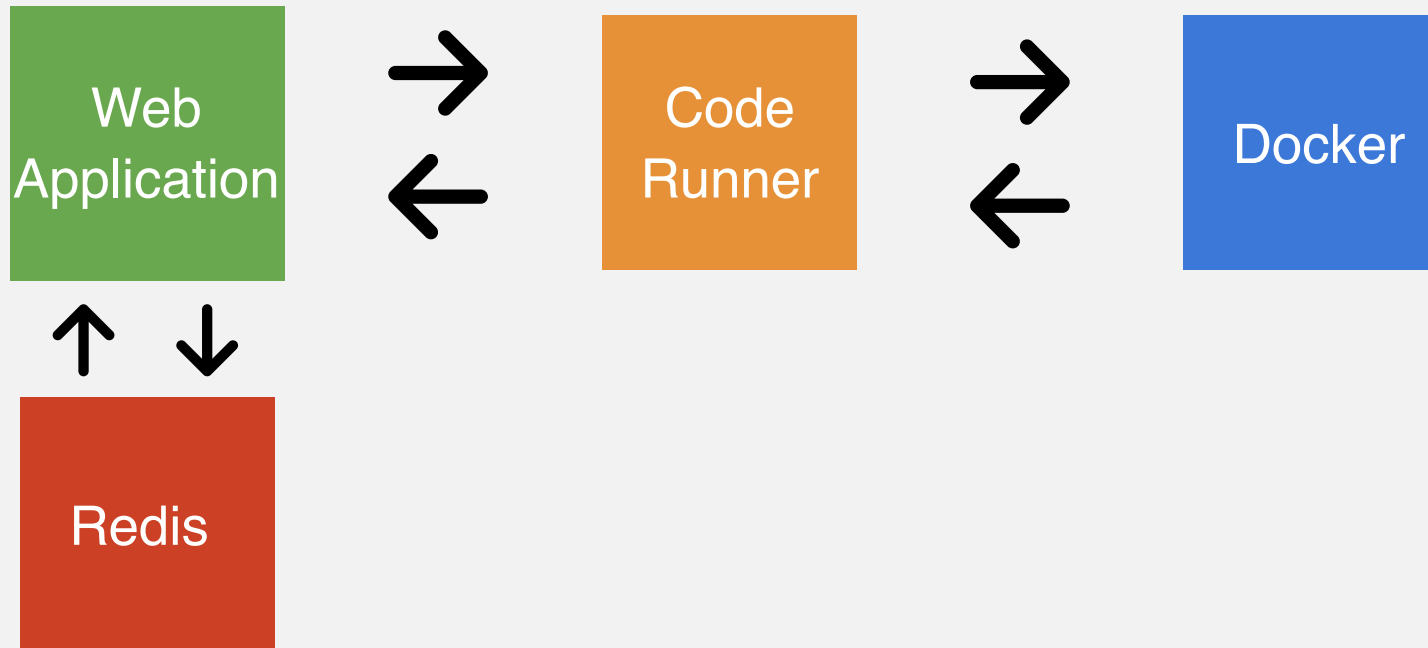

Code runner images



One image per language stack

- Easily pluggable / unpluggable
- Based on official language stack images

Official language stack images

- Simplicity
- Common layers
- Latest language stack version

Image example

Dockerfile

```
FROM ruby:latest

COPY run.sh /home/dev/run.sh

# Add a user with access to dev directory
RUN useradd dev
RUN chown -R dev: /home/dev

# Switch to user dev
USER dev

# Set working dir to app's location
WORKDIR /home/dev

# Start container with run.sh script
ENTRYPOINT [ "/home/dev/run.sh" ]
```

run.sh

```
#!/bin/sh

# Create a code file
echo "$1" > prog.rb

# Launch the program
ruby prog.rb
```

```
$> docker run exec-ruby "puts 'hello world!'"
hello world!
```

Security

Container

- Limited Memory
- Short Lifetime
- Destroyed after a run
- No root inside

Self Promotion



github.com/grounds

- Adrien Folie *@folieadrien*
- Gaetan Gueraud *@exadeci*
- Thomas Petrachi *@thmszpy*

Questions