

Choose an upload mode

Start upload

Upload mode:

- Upload one file per one request.
- Upload all files in one request.

Payload positions

Target:


1
2
3
4
5
6

Add S

Clear S

Auto S

Refresh

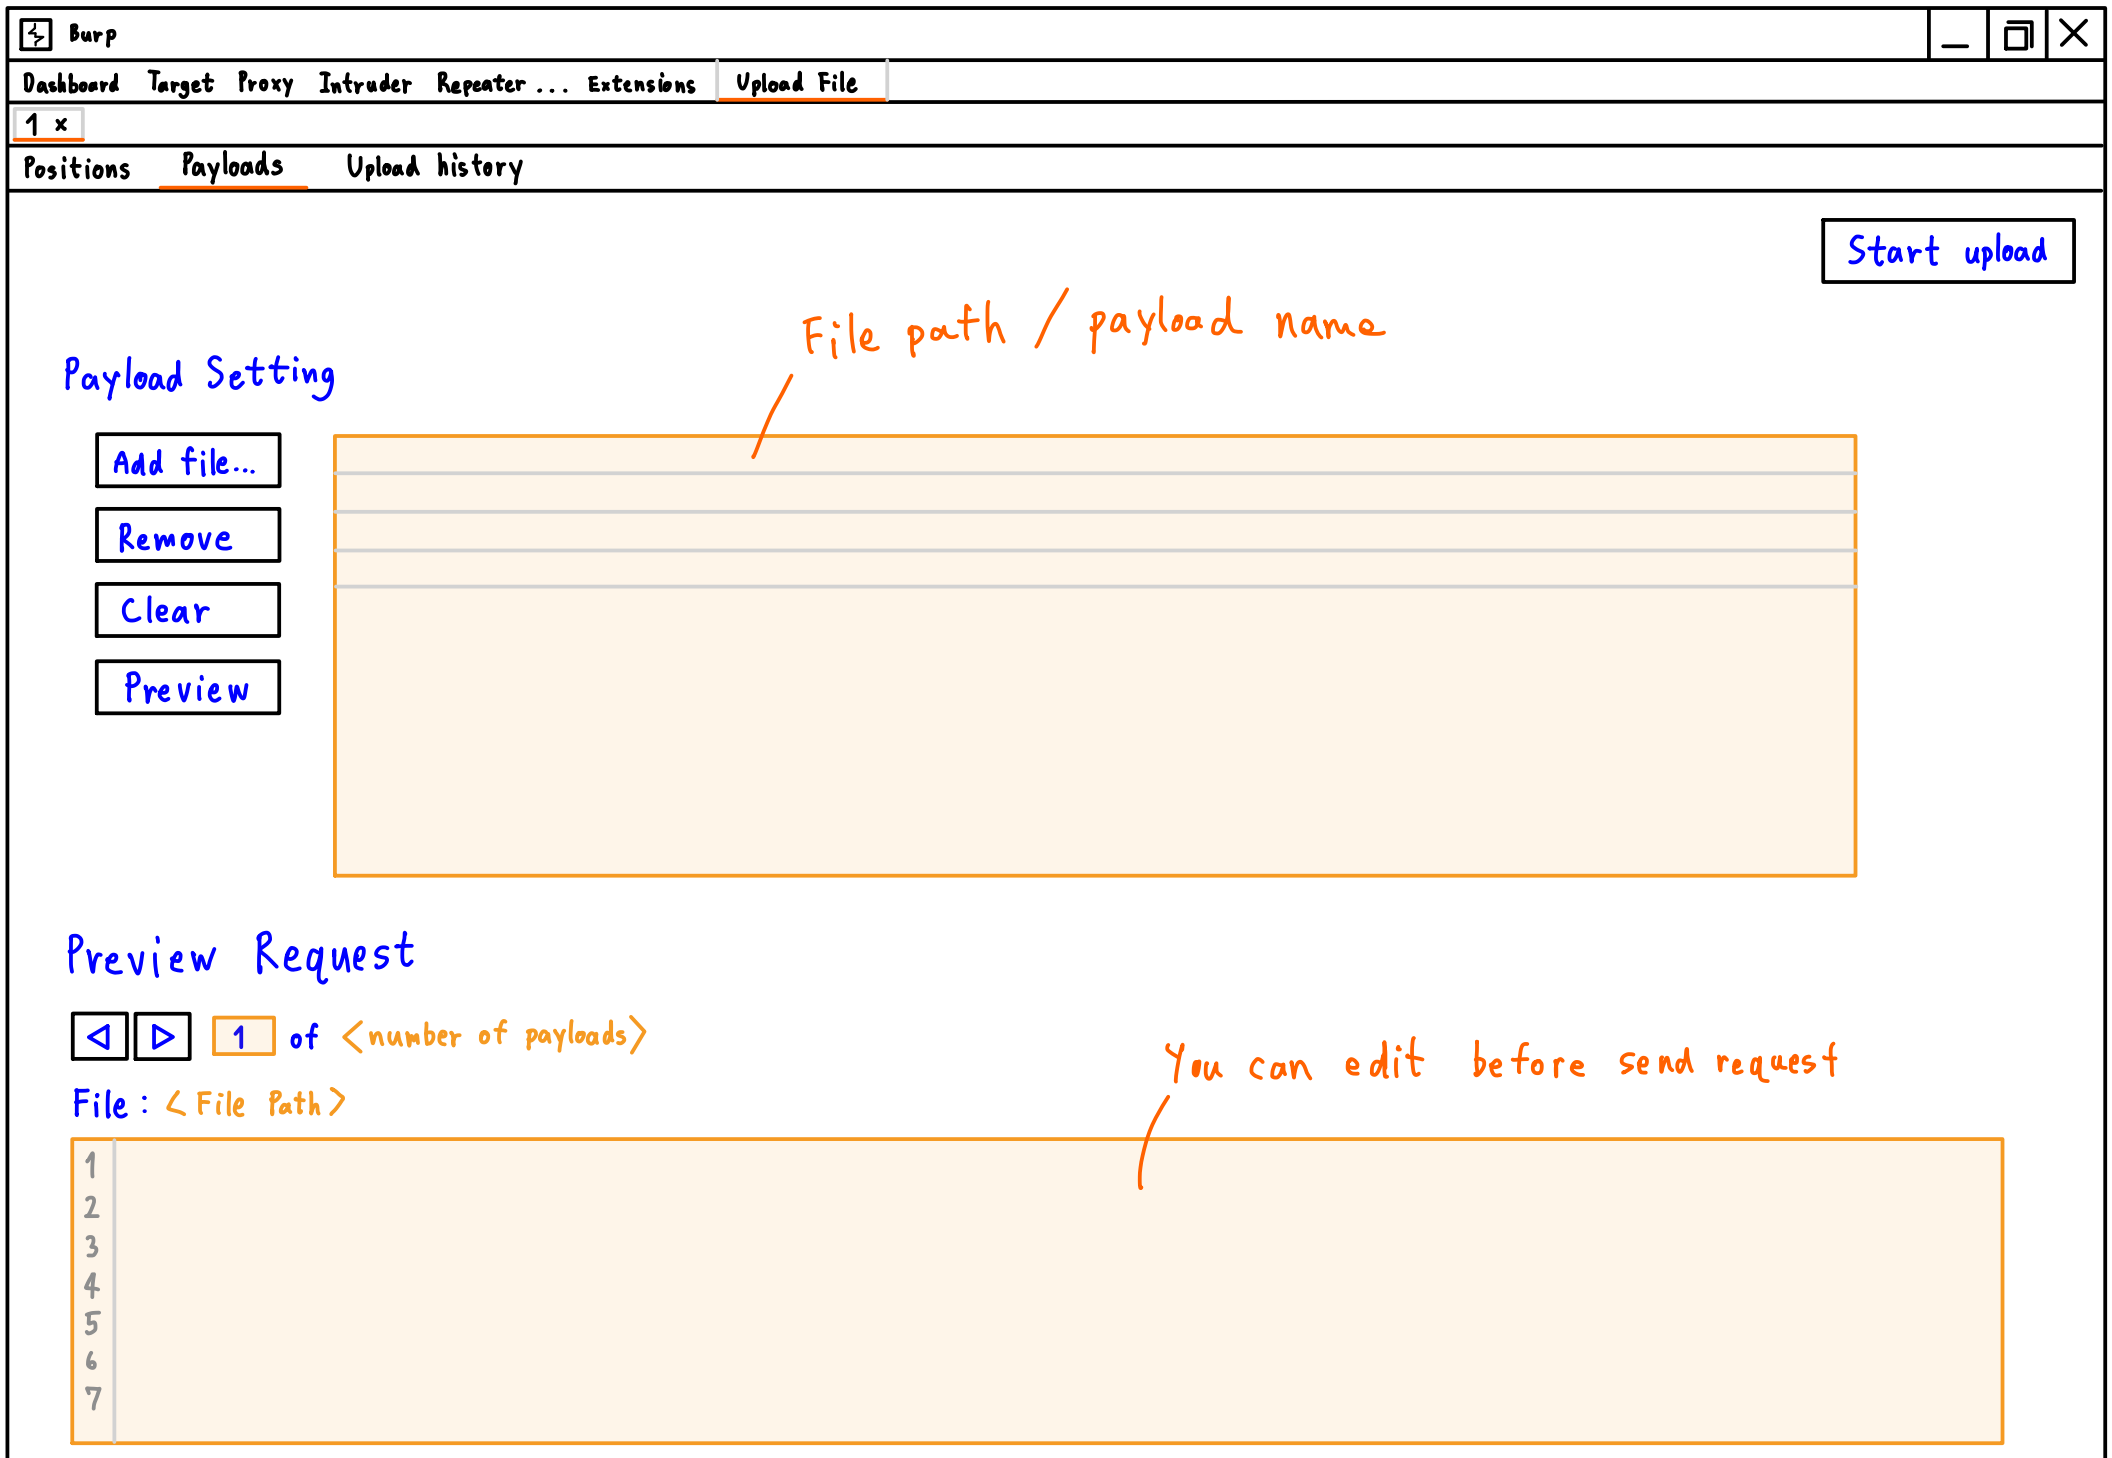

Burp

Dashboard

Target

Proxy

Intruder

Repeater ...

Extensions

Upload File

1 x

Positions

Payloads

Upload history

Start upload

URL

Method

File path

Status code

Length

Time

#

Request

Response

Inspector

1

2

3

4

5

6

7

1

2

3

4

5

6

7

Request

Pretty	Raw	Hex
1	POST /upload_endpoint HTTP/1.1	
2	Host: example.com	
3	Content-Length: [length]	
4	Content-Type: multipart/form-data; boundary=Boundary	
5		
6	--Boundary	
7	Content-Disposition: form-data; name="file1"; filename="myfile1.txt"	
8	Content-Type: text/plain	
9		
10	[FILE1 CONTENTS]	
11		
12	--Boundary	
13	Content-Disposition: form-data; name="file2"; filename="myfile2.jpg"	
14	Content-Type: image/jpeg	
15		
16	[FILE2 CONTENTS]	
17		
18	--Boundary--	
19		

Ex. →

Request

Pretty	Raw	Hex
1	POST / HTTP/1.1	
2	[[Less interesting headers ...]]	
3	Content-Type: multipart/form-data;	
4	boundary=-----735323031399963166993862150	
5	Content-Length: 834	
6	-----735323031399963166993862150	
7	Content-Disposition: form-data; name="text1"	
8		
9	text default	
10	-----735323031399963166993862150	
11	Content-Disposition: form-data; name="text2"	
12		
13	a[]b	
14	-----735323031399963166993862150	
15	Content-Disposition: form-data; name="file1"; filename="a.txt"	
16	Content-Type: text/plain	
17		
18	Content of a.txt.	
19		
20	-----735323031399963166993862150	
21	Content-Disposition: form-data; name="file2"; filename="a.html"	
22	Content-Type: text/html	
23		
24	<!DOCTYPE html><title>Content of a.html.</title>	
25		
26	-----735323031399963166993862150	
27	Content-Disposition: form-data; name="file3"; filename="binary"	
28	Content-Type: application/octet-stream	
29		
30	a[]b	
31	-----735323031399963166993862150--	

Request

Pretty	Raw	Hex
1	PUT /upload_endpoint/myfile.txt HTTP/1.1	
2	Host: example.com	
3	Content-Length: [length]	
4	Content-Type: text/plain	
5		
6	[FILE CONTENTS]	

Request

Pretty	Raw	Hex
1	PATCH /upload_endpoint/myfile.txt HTTP/1.1	
2	Host: example.com	
3	Content-Length: [length]	
4	Content-Type: multipart/form-data; boundary=Boundary	
5		
6	--Boundary	
7	Content-Disposition: form-data; name="file"; filename="myfile.txt"	
8	Content-Type: text/plain	
9		
10	[FILE CONTENTS]	
11	--Boundary--	

Request

Pretty	Raw	Hex
1	POST /upload HTTP/1.1	
2	Host: example.com	
3	Content-Length: [length]	
4	Content-Type: application/octet-stream	
5		
6	{BINARY FILE CONTENTS}	

Request

Pretty	Raw	Hex
1	POST /upload HTTP/1.1	
2	Host: example.com	
3	Content-Length: [length]	
4	Content-Type: application/json	
5		
6	{	
7	"filename": "myfile.txt",	
8	"filedata": "[BASE64 ENCODED FILE CONTENTS]"	
9	}	

Request

Pretty	Raw	Hex
1	POST /upload HTTP/1.1	
2	Host: example.com	
3	Content-Length: [length]	
4	Content-Type: application/xml	
5		
6	<file>	
7	<filename>myfile.txt</filename>	
8	<data>[FILE CONTENTS, POSSIBLY BASE64 ENCODED]</data>	
9	</file>	