

phone: string

address: string

hours: string

info: string

is_full: bool

inactive

delayed_in_contact delayed_at_risk

timepoint_type: is complete: bo notes: string timepoints PK id: number name: string has_survey: bool survey_url: string protocol: string

default_type: time

group_type: grou

reward: number

sequence_index:

client_timepo

(composite ke

client_info_id


timepoint_id

address: string

date: date

PΚ

Account creation flow

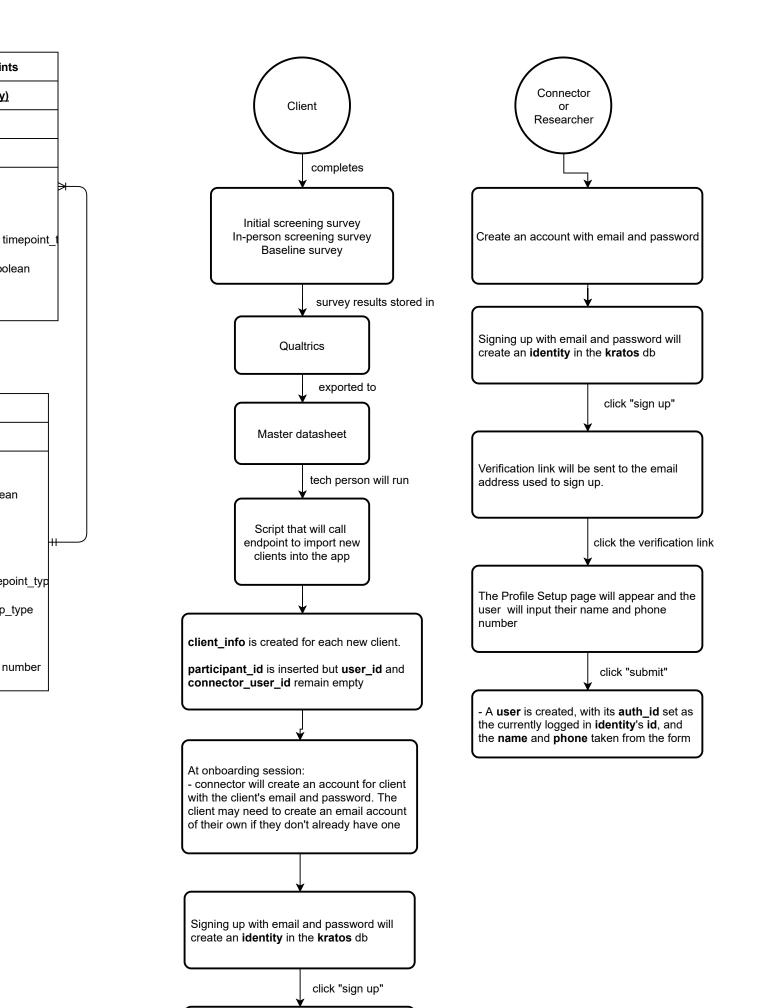

On the next page(profile setup), the connector will input the client's **participant_id** and phone number, and select themself from the list of connectors

click "submit"

- If there is no **client_info** that has the entered **participant_id**, it returns an error.
- Else, a **user** is created, with its **auth_id** set as the currently logged in **identity**'s **id**, and the **name** and **phone** taken from the form
- The matching **client_info** is found by searching for the one with the correct **participant_id**. Its **user_id** is set to the new **user**'s **id**, and its **connector_user_id** is set to the connector **user**'s **id**.