

Project Documentation II

Lilli Charlotte Heidinger

Project: Disembodied

 [GitHub Repository](#)

 [Website Link](#)

Development Timeline:

11.06.2026

Project Pitch

<https://canva.link/rhihv357es1kk5h>

→ decided on an idea

→ layout of the website sketched (Site-map)

24.06.2026

Basic Structure for User Interactions

<https://foreverearthmover.github.io/WebProgramming/week4.html>


→ sketch up for landing page

→ containers on background image links to other pages (hotspots)

→ some kind of scrolling pop-up/fade-in that informs about the project (requires curiosity)


05.07.2026

Add demo for page 1 (Tarot) and page 3 (Hamster Wheel) + tidy up landing page

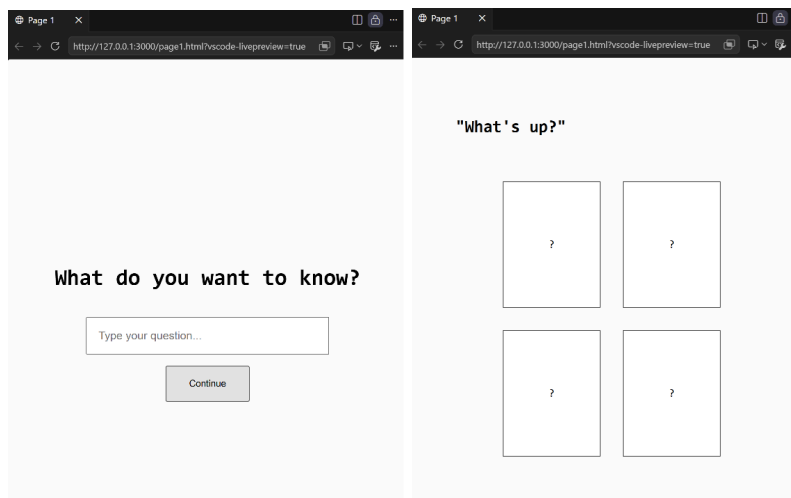


→ when clicked - modal pop-up: image + title + text + close button


https://www.w3schools.com/howto/howto_css_modals.asp

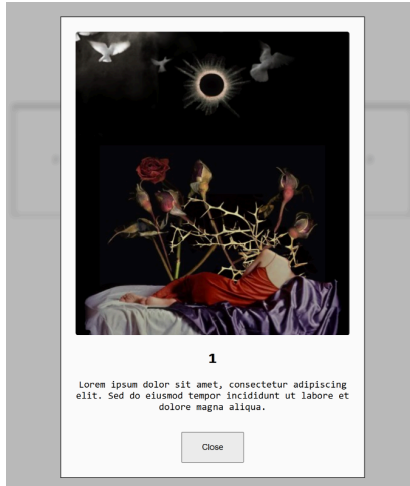


- cards are shuffled when entering the second screen but right now you can still click multiple
- should later just be a pre-selected four or more cards that we choose one from ourselves
- want to add some stylization to pop-up windows (e.g., make them look like tabs?)
- do i really need to make the cards 3D? especially since I also want to use objects and Truisms which are easier to depict in 2D

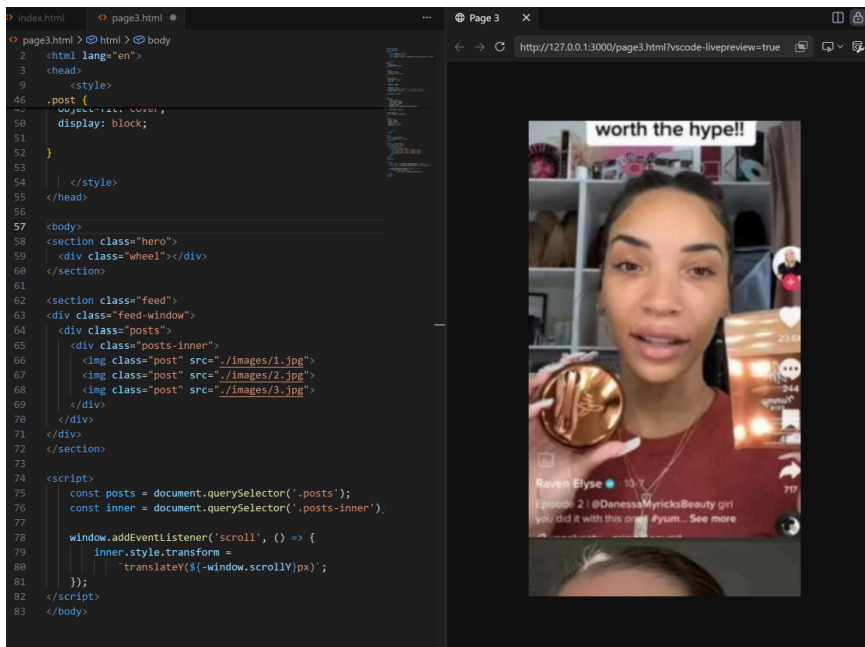

- random tiktoks as placeholders, positioned under each other in a rectangular window
- scrolling effect: https://developer.mozilla.org/en-US/docs/Web/API/Document/scroll_event
- should we be able to scroll up and down? would be closer to the Hamster Wheel concept



- 1) Prompted AI for help with javascript scrolling so that the background stays static since I couldn't figure out the math :-(



```
const posts = document.querySelector('.posts');
const inner = document.querySelector('.posts-inner');

function updateScroll() {
  const feedTop = feed.offsetTop;
  const scrollRange = feed.offsetHeight - window.innerHeight; // distance the
section is "sticky-active" for
```

```

    const maxTranslate = Math.max(0, inner.scrollHeight - posts.clientHeight); //
    how far the inner content can move

    let progress = (window.scrollY - feedTop) / scrollRange;
    progress = Math.min(Math.max(progress, 0), 1); // clamp 0..1

    inner.style.transform = `translateY(${ -progress * maxTranslate}px)`;
  }

  window.addEventListener('scroll', updateScroll);
  window.addEventListener('resize', updateScroll);
  updateScroll();

```

→ not guaranteed that this approach will work with my plan to animate images (update: it didn't because I didn't understand it enough to integrate ideas practically)

2) Added images to page 1 and changed sizing/content of the modal pop-up

→ second Tarot card and placeholder objects

→ Intermediate Presentation

13.07.2026

Test Tarot Card Shuffling and Flip on Reveal

- add back image to the card (for now a placeholder)
- add flip → clicking card “reveals” random image

```

const begin=document.getElementById("begin");

begin.onclick=()=>{
  const q=document.getElementById("question").value;
  if(q==="") return;
  document.getElementById("question-screen").style.display="none";
  document.getElementById("selection-screen").style.display="block";
  document.getElementById("questionText").innerHTML=
  "You asked:<br><em>"+q+"</em>";
};

function reveal(card){
  const index = card.dataset.item;
  const item = items[index];
  const randomImage =
    item.images[
      Math.floor(Math.random()*item.images.length)
    ]; // select random image

  const img = card.querySelector(".card-back img");
  const text = card.querySelector("p");
  img.src = randomImage;

```

```

    text.textContent = item.text;

    document.querySelectorAll(".card").forEach(c=>{

        if(c!==card){
            c.style.opacity=".2";
            c.style.pointerEvents="none";
        }
    });
    card.classList.add("flipped");
}

let chosen = false;
const cards=document.querySelectorAll(".card");
cards.forEach(card=>{
card.addEventListener("click", ()=>{
if(chosen) return;
chosen=true;
reveal(card);
});
});

```

- add shuffle attempt → moving mouse on/around card causes movement


```

const container=document.getElementById("objects");
container.addEventListener("mousemove", shuffle);
let timeout;


function shuffle(){
    if(chosen) return;
clearTimeout(timeout);
document.querySelectorAll(".card").forEach(card=>{
const x=(Math.random()*20)-10;
const y=(Math.random()*20)-10;
const r=(Math.random()*10)-5;


card.style.transform=
`translate(${x}px, ${y}px)
rotate(${r}deg)`;
});
}

```

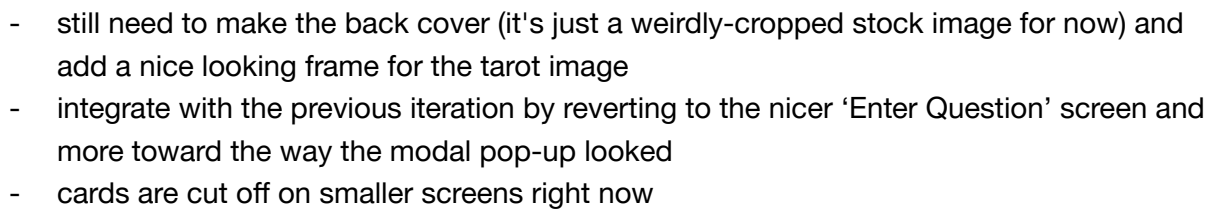

Add some styling back

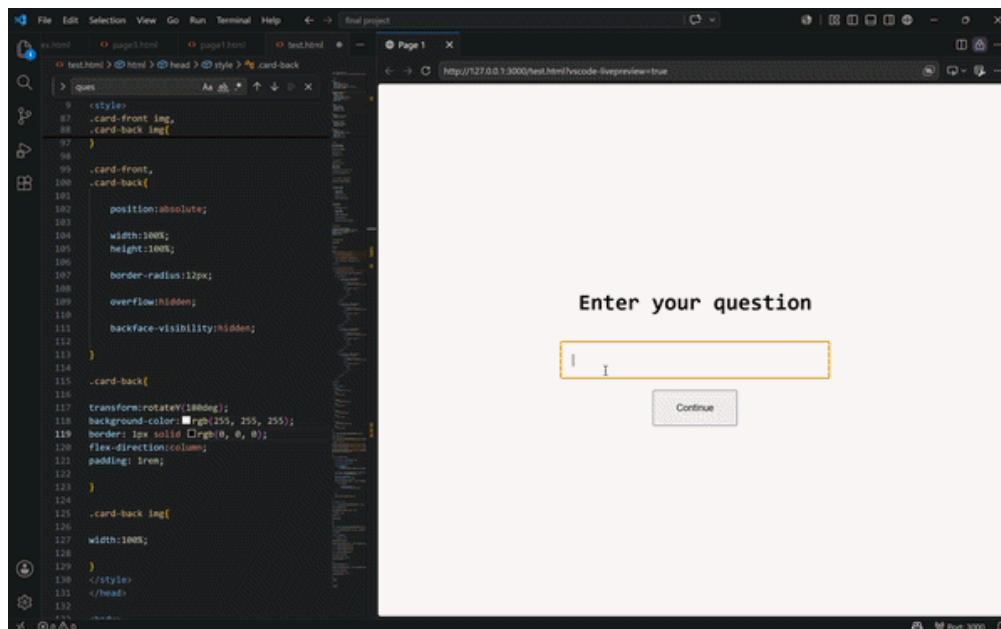

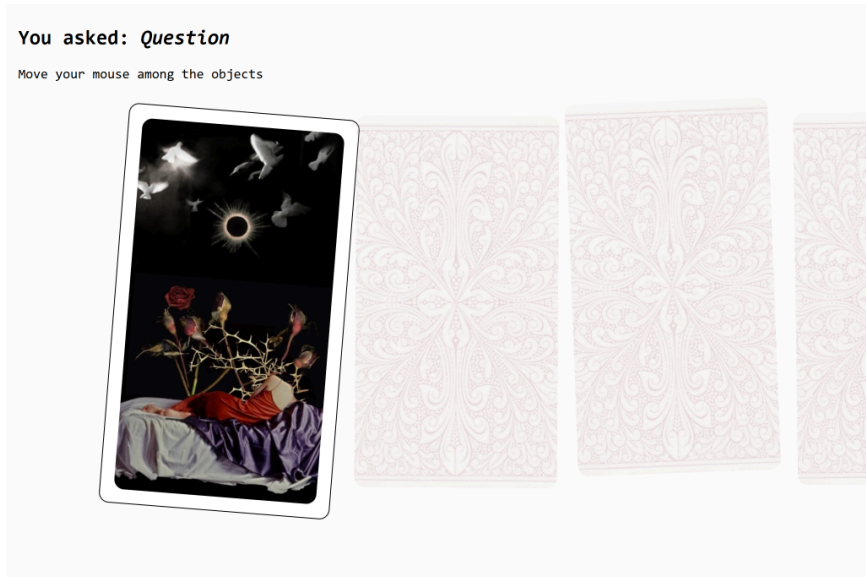

→ bring back monospace font and question screen

→ add flexbox

- later on:


- add a background, add “error” message, i.e., when no question is entered and you press continue anyway
- hide scrollbar
- add textbox to support interpretation of card ✓

27.07.2026


Work on page 3 (hamster wheel)

→ using [CSS snap scroll](#) to make the scrolling look more like TikTok or Reels and [hiding scrollbar](#)

- instead of continuous, pixel-wise movement, scrolling snaps onto next image
- very simple, .posts becomes a scrollable container instead of being a fixed div that has to be manually adjusted
- downside: might have to handle through javascript later when I add effects based on scrolling behavior since snap scroll isn't very flexible




Work on Page 2, add hotspots that spawn “windows” when clicked




Add text & title to Tarot Cards

→ mock-up in Figma:

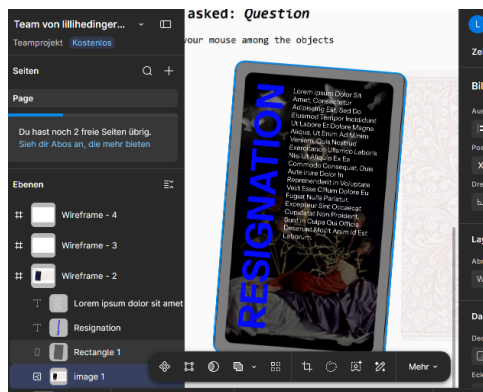


→ translated into CSS:

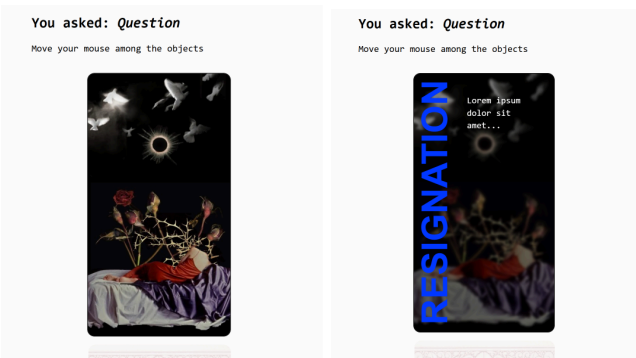

17.08.2026

Add background image (and white outline to H1 text for visibility)

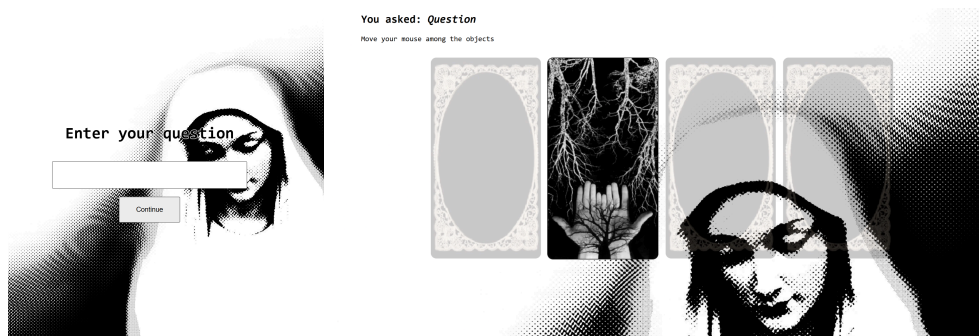

20.08.2026

Add new Tarot Cards



→ “card-front” design inverted, matching the signature blue

> might have to increase contrast for readability

→ blur/darken unchosen cards instead of just reducing opacity, so background doesn’t “shine through” unnaturally:

```
document.querySelectorAll(".card").forEach(c => {
  if (c !== card) {
    c.style.filter = "blur(4px) brightness(0.9)";
    c.style.pointerEvents = "none";
  }
});
```

30.08.2026

Work on Page 3:

- tried to add interaction of tracking user scrolls, as well as looping the posts but
 - CSS scroll-snap alone can't loop; would've needed to introduce complicated javascript tricks like rendering the images tripled (buffer copies before and after), start the scroll position in the middle copy, and silently jump back by one "set" whenever the user scrolls into the buffer so it looks endless
 - my idea was to start fading in a transparent image when the user stops scrolling to represent the compulsiveness of trying to get unpleasant content out of your head after seeing it by just scrolling more but it looked silly in practice and requires a lot of images - would've required the loop
- scrapped
- instead, opted to insert messages in between posts through text panels to illustrate the mental conflict after scrolling past something distressing, cognitive dissonance between wanting to act and repression
- at the end of all posts: last post repeats for a few times, intermittently user is asked why they keep going; at the end I inserted two buttons: whether they want to stay here with the distressing image or go back (reloads the page) → ironic, both do "nothing"

```
<div class="posts" id="posts">
  
  
  
  
    <div class="message"><p>Are you going to keep scrolling?</p></div>
  
  
    <div class="message"><p>You aren't helping anyone.</p></div>
  
  
  
    <div class="message"><p>What are you searching for?</p></div>
  
    <div class="message"><p>You won't find it here.</p></div>
  
  
    <div class="message"><p>Here, you won't find anything.</p></div>
```

```

  <div class="message"><p>You'll stay where you are.</p></div>

  <div class="message"><p>It's the same image.</p></div>

  <div class="message"><p>There's no relief here.</p></div>

  <div class="message final" id="finalMessage">
    <p>Do you want to stay here, or go back?</p>
    <div class="choices">
      <button type="button" id="stayBtn">Stay</button>
      <button type="button" id="restartBtn">Go to the beginning</button>
    </div>
  </div>
</div>
```

```
<script>
  const posts = document.getElementById('posts');
  const stayBtn = document.getElementById('stayBtn');
  const restartBtn = document.getElementById('restartBtn');

  stayBtn.addEventListener('click', () => {
    // nothing happens intentionally
  });

  // "Go to the beginning" reloads the page
  restartBtn.addEventListener('click', () => {
    window.location.reload();
  });
</script>
```


01.09.2026

Finish Base Animations for Page 2

→ animated image overlays to drag with mouse/finger (need to test on smartphone once i upload to GitHub but should work!)

- event listener for pointer movement (up/down/left/right) moves eyes

- able to drag PNGs of mask, mouth, nose and eyebrows

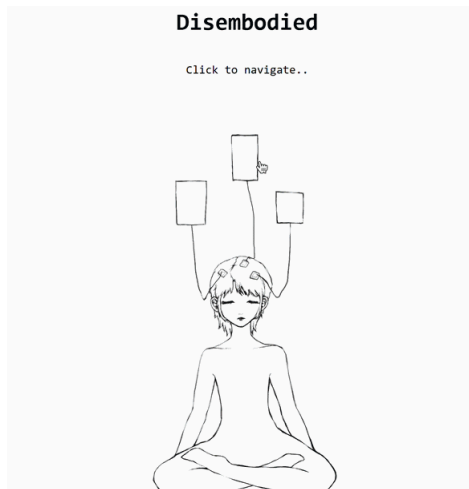

Most important learnings:

Pointer events: https://developer.mozilla.org/en-US/docs/Web/API/Pointer_events

<https://developer.mozilla.org/en-US/docs/Web/CSS/Reference/Properties/touch-action>

→ accessibility for devices, stopping native browser processes that interfere with user

- i.e., had to disable browser's draggable property:

<https://developer.mozilla.org/en-US/docs/Web/API/HTMLElement/draggable>

setPointerCapture() element:

<https://developer.mozilla.org/en-US/docs/Web/API/Element/setPointerCapture>

```
el.addEventListener('pointerdown', function (e) {  
  if (isDragging) return; // already dragging this one, ignore extra  
  fingers/clicks  
  
  isDragging = true;  
  pointerId = e.pointerId;  
  el.setPointerCapture(pointerId);  
  el.classList.remove('settling');  
  el.classList.add('dragging');  
  startX = e.clientX;  
  startY = e.clientY;  
});
```

→ even when pointer moves outside its boundaries it still targets the element (i.e., when while dragging the pointer leaves the viewport)

Transitions: <https://developer.mozilla.org/en-US/docs/Web/CSS/Guides/Transitions/Using>

→ for all the animations; fading, flinging, etc.

Transitionend Event:

https://developer.mozilla.org/en-US/docs/Web/API/Element/transitionend_event

→ flingAway()

→ stops animation when its finished

min(): <https://developer.mozilla.org/en-US/docs/Web/CSS/Reference/Values/min>

→ sizing of “stage” at different viewport sizes (i.e., shrinking)

object-position:

<https://developer.mozilla.org/en-US/docs/Web/CSS/Reference/Properties/object-position>

→ wanted to take pictures with digital camera for the look of the pictures so i had to sit close to the camera or you could hardly see anything - that’s why my legs are cut off → the images need to sit at the bottom of the viewport


object-fit: <https://developer.mozilla.org/en-US/docs/Web/CSS/Reference/Properties/object-fit>

→ had to tinker with this so the images would line up and not be distorted/stretched

→ contain instead of fill on the draggable layers (.layer) so sizing is similar on pictures taken at different distances (contain would leave blank space) → needed higher resolution for the face parts

03.09.2026

Add “About” modal pop up on home page

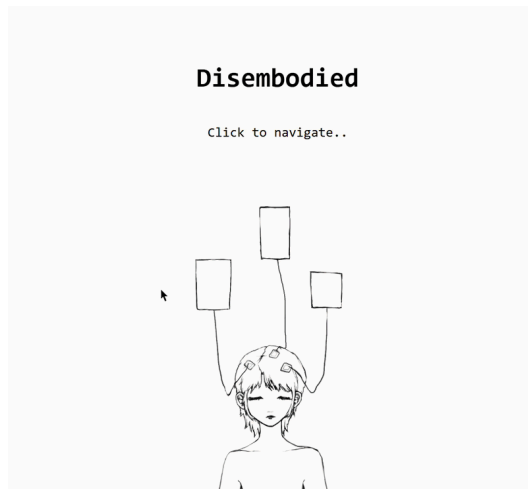

04.09.2026

Add Fade-ins and text boxes

```
window.addEventListener('load', function () {  
  showTextbox('intro-text');  
  fadeFromBlack(1200);  
});
```

→ fade-in as soon as page loads

```
.textbox.pos-bottom{  
  left: 50vw; bottom: 8vh;  
  transform: translate(-50%, 6px);  
  text-align: center;  
  transition-delay: 0.1s;  
}
```

→ style multiple types of textboxes

```
<!-- SCENE 2 -->
<section class="scene" id="scene-sequence">
  <div class="textbox pos-bottom" id="sequence-text">
    <p>Stop that!</p>
  </div>
  <img class="bleed-img" id="sequence-img" src="" alt="">
  <div class="hotspot" id="sequence-hotspot"></div>
</section>
```

→ then, “define” in html

```
// =====
// SCENE 1 - intro image
// =====
document.getElementById('intro-img').src = CONFIG.introImage;

document.getElementById('intro-hotspot').addEventListener('click', function ()
{
  hideTextbox('intro-text');

  fadeToBlack(CONFIG.fade.sequenceIn, function () {
    startSequenceScene();
    goToScene('sequence');
    showTextbox('sequence-text');
    fadeFromBlack(CONFIG.fade.sequenceOut);
  });
});
```

→ show/hide in script

```
function onlyEyesRemain() {
  revealStage.classList.add('only-eyes');
  showTextbox('reveal-text');
  showTextbox('breakdown-text1');
  showTextbox('breakdown-text2');
  showTextbox('breakdown-text3');

  // send them back to the start after a few seconds
  // same setTimeout trick as before
  setTimeout(function () {
    window.location.href = 'index.html';
  }, 3000);
}
```

→ once all textboxes have been shown, send back to homepage

→ setTimeout to add delay:

<https://stackoverflow.com/questions/14226803/wait-5-seconds-before-executing-next-line/14226807#14226807>

05.09.2026

1) Implement every text for Tarot Cards

2) User Testing

Target Audience:

- those interested in Media Art & Technology
- likely between ages 15-30

→ asked two friends of mine to click through my website, in person, on my laptop (before deployment/locally)

- once moderated (Person 1), once unmoderated (Person 2)
- asked one of them (Person 2) to try to “break the website”

→ asked them to say out loud what they were thinking

Person 1:

0 - Homepage

- didn't find the About section until I told them to search for one
- scrolled down to find the Footer
- clicked link in the middle first

2 - Masked

- started clicking quickly, hinted at by the pointer
- found the unmasked face scary 🤩
- dragging worked, a little confused by the set order of dragging mouth, nose and then eyebrows but i think its ok like this

1 - Tarot Cards

- asked “Will I get a good grade?”
- appreciated the artwork and text
- wasn't sure what to make of the result → requires intrinsic motivation and more comfortable when alone

3 - Hamster Wheel

- visible reactions to uncomfortable images but quiet overall → concentrated on reading/seeing: good sign?
- confused why the buttons are so useless → confusion effect is desirable (in general, this project is pretty abstract and surrealist at parts, only with a lot of interest the

thematic links could be guessed → add more description or leave this way on purpose??)

Person 2:

0 - Homepage

- found the About section because they clicked on basically everything right away due to the extra instruction
- scrolled down to find the footer
- clicked first hotspot

1 - Tarot Cards

- entered random text into question box, tried to confirm with Enter → going to add this
- tried entering no text → going to add error message/instruction
- clicked on the cards a lot but this just showed and hid the result text and title quickly

2 - Masked

- just instantly started clicking around the middle → intuitive controls
- double-clicking at any point or dragging the mask/face-parts off only slightly didn't cause anything unexpected
- no other ideas to break it and also very linear/short experience

3 - Hamster Wheel

- tried to scroll really quickly...pretty much instantly went to the button at the end - but it didn't break!
- didn't look at the pictures at first: too occupied with trying to break the snap scroll
- at end button: went back to the beginning and looked properly at images
- visible reaction to contrast frames too, no real concern after first "uncomfortable" thumbnail but felt a little caught after intermittent message redirected attention to the absurdity of instantly scrolling past it → success 🎉

Take-Aways: back button, actual responses from the website when you do something (would love to add more than just the error but not a lot of time left :-), add Enter as valid confirmation

06.09.2026

1) Implement Feedback

- back button on all subpages
- error message when nothing is entered into form
- Enter as validation

2) Add Search Engine & Asset Optimization

→ SEO not as important to me because I'm not really looking for a lot traffic, more so to use the website as a hosting platform for people I can interest in it around me, as well as for the project showcasing

- title and description tags
- tested on Edge and Brave
- optimized file size + .webp as prioritized file type to ensure smooth loading; no problems during development so no loading/decoding prioritization
- .svg for icons for a better user experience

3) Increase Accessibility


→ can't make my website fully accessible since it involves a lot of finicky interaction with the user, i.e., can't really add Keyboard navigation meaningfully. I also don't expect a broad audience, more so people I know and personally show the site to; I still added:

- alt text
- ARIA labels for buttons
- semantic HTML where possible (unorthodox website structure)
- lang = "eng" attribute
- relative units for broad device functioning
- high color contrasts

4) Upload all files and images to GitHub

5) Accessibility Audit: Lighthouse - Results

Index: Smartphone & PC

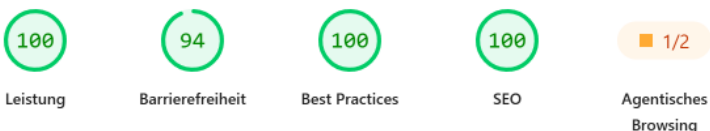

▲ Baumansicht für Barrierefreiheit hat nicht das richtige Format


Ein gut strukturierter Baum für **Barrierefreiheit** hilft KI-Agenten, auf der Seite zu navigieren und mit dieser zu interagieren.

Fehlgeschlagene Audits

Beschreibung	Fehlerhaftes Element	
ARIA role should be appropriate for the element		Disembodied <code><h1 id="about-trigger" tabindex="0" role="button" aria-controls="about-modal" aria-expanded="false"></code>
Links must have discernible text		link to page 1 <code></code>

- lighthouse didn't understand my title being a button i think? so don't need to fix
- could size down the background image by a few pixels but it'd only save 30 KiB (not a lot)
- can't really add link text because it's supposed to be hidden...alt text has to suffice


Tarot Cards: Smartphone & PC

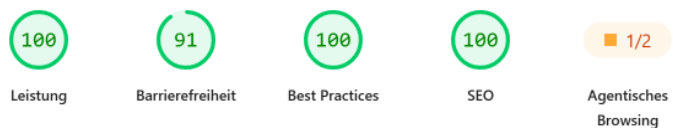

- should add label to form where user enters question

Masked:

Smartphone

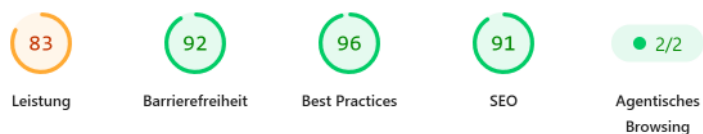

▲ Effiziente Verweildauer im Cache verwenden — Geschätzte Einsparung von 229 KiB

Eine lange Verweildauer im Cache kann wiederholte Besuche deiner Seite beschleunigen. [Weitere Informationen zum Caching](#) LCP FCP

Nicht bewertet

Anfrage	Cache-TTL	Übertragungsgröße
GitHub Utility Eigene		250 KiB
...images/mask.png (foreverearthmover.github.io)	10 Min.	134 KiB
...images/intro.webp (foreverearthmover.github.io)	10 Min.	41 KiB
...images/eyes.png (foreverearthmover.github.io)	10 Min.	27 KiB
...images/face-bare.webp (foreverearthmover.github.io)	10 Min.	25 KiB
...images/iris.png (foreverearthmover.github.io)	10 Min.	19 KiB
...images/back-button.svg (foreverearthmover.github.io)	10 Min.	4 KiB

→ not sure how this works...

→ going to convert the PNGs to WebP too because I just realized they retain transparency too, mask.png seems to be the biggest file

▲ LCP-Anfrageerkennung

Wenn du den [LCP optimieren möchtest](#), mache das LCP-Bild im HTML-Code direkt sichtbar und vermeide Lazy Loading LCP Nicht bewertet

- ✓ LCP-Ressourcen sollten nicht „loading=lazy“ verwenden
- ✗ „fetchpriority=high“ sollte angewendet werden
- ✓ Anfrage ist im ursprünglichen Dokument sichtbar




masked person sitting

```

```

→ could add fetchpriority=high to limit download time and make the experience quicker

PC

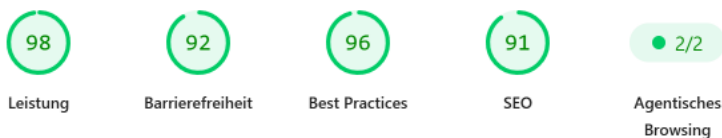

BEST PRACTICES

▲ `[user-scalable="no"]` wird im `<meta name="viewport">`-Element verwendet oder das `[maximum-scale]`-Attribut ist kleiner als 5.


Wenn du die Zoomfunktion deaktivierst, können Nutzer mit eingeschränktem Sehvermögen, die auf die Bildschirmvergrößerung angewiesen sind, den Inhalt einer Webseite nicht richtig sehen. [Weitere Informationen zum Darstellungsbereich-Meta-Tag.](#)

Fehlerhafte Elemente

```
head > meta
<meta name="viewport" content="width=device-width, initial-scale=1.0, user-scalable=no">
```

→ not user-scalable; would probably break the visuals..

Hamster Wheel: Smartphone & PC

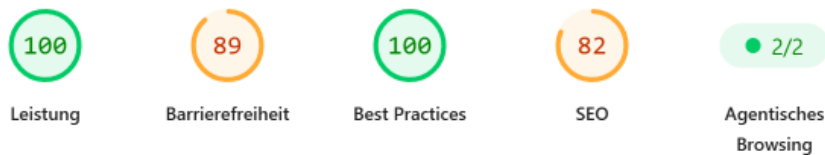

→ forgot `<meta description>` (on page 2 too but somehow it didn't get flagged) and alt text since there's so many images!

→ could use `fetchpriority=high` for the first one


6) Implement:

- label for question form on page 1
- `fetchpriority = high` on first images of page 2 and 3
- add meta description for pages 2 and 3
- add alt text for page 3

Successfully tested on two iPhones and iPad 🎉

→ corrected some file paths & added some previously missing images

7) Upload previous versions of files (/demos)

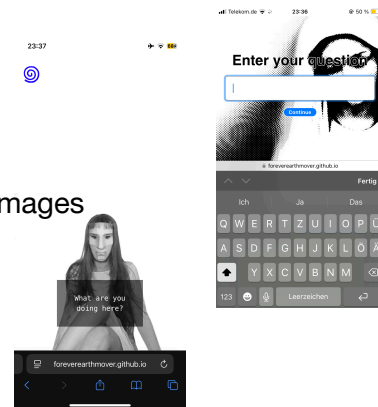

07.09.2026

User Testing II

At this point, I don't have a lot of time for big fixes and am just looking for any more quick fixes for shortcomings I didn't think of yet

→ sent the page to another person after implementation + first deployment; remote, unmoderated; asked them to test the website and for improvement suggestions → let them open the page on smartphone and laptop

Person 3:

0 - Homepage:


- didn't find the About pop up → more so an easter egg

1- Tarot Cards

- “Veiled” Tarot Card’s text is too long on Mobile
- asked a real question and got an “interesting tarot-typical response that satisfied [them]”

2 - Masked

- “the final screen could be shown for 500-1000ms longer so that you can read all the pop up but are still kicked off in time”
- “eerie” 🎭

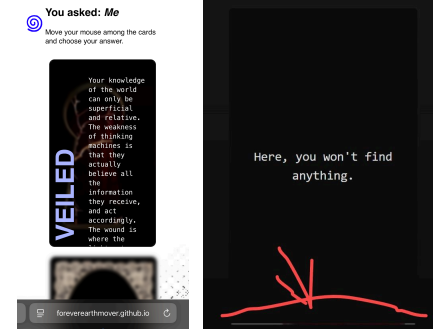

3 - Hamster Wheel

“the scroll pages sometimes have a 1pt line above or below the other pages, don’t know how one could fix that” → I also noticed this but have observed it really just happening at random (i.e., on some pages on my laptop, on others on my phone/iPad, not at all on my Desktop PC)

“maybe let the buttons disappear when the user clicks them. that way the user knows that their input was registered and that they have just as little from staying as expected”

→ they were confused whether the stay button was broken or it was supposed to be like this, will implement this

Take-Aways:

- adjust text length for some cards
- show final screen on Masked for a little longer
- let the buttons disappear when you press “stay”

08.09.2026

Implement take-aways & change last PNGs to webp

14.09.2026

Upload minified code

A small Reflection

- Concept is stronger than the execution, yet I’m happy with how true I stayed to my conceptual groundwork
- Multitude of media worked with
 - Maybe tried to “unter denselben Hut bringen” too much, webpage not the ideal “central” medium

- Especially the hamster wheel concept was very time consuming without really looking the part, I focused on details users maybe won't notice instead of considering the big picture first and seeing the difficulty of combining the ideas with the limiting medium/knowledge on the medium i have

Future Development:

- adding glitches and errors to the page
- adding a history of the inputs the user enters at the digital altar (timestamps etc.)
- making Tarot Cards actually 3D or using 3D objects
- making Hamster Wheel an actual loop, add more images and abstractions
- add something in the background of page 3 instead of just the gradient → original idea of adding GIFs was abandoned due to time constraints; would have taken a lot of extra time