
Pill
Progress
Project Banner
Radio
Relative Time Card
Scroller
Search Input
Select
Separator
Sheet
Show more
Skeleton
Slider
Snippet
Spinner
Split Button
Status Dot
Switch
Table
Tabs
Text With Copy Button
Textarea
Theme Switcher
Toast
Toggle
Tooltip
Video

Tabs

Display tab content.

Default

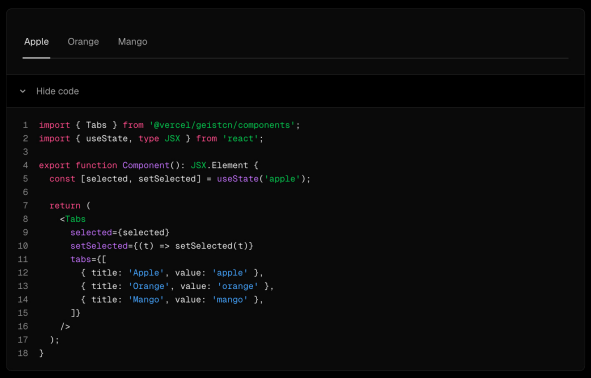



```tsx
import { Tabs } from '@vercel/geistcn/components';
import { useState, type JSX } from 'react';

export function Component(): JSX.Element {
  const [selected, setSelected] = useState('apple');

  return (
    <Tabs
      selected={selected}
      setSelected={(t) => setSelected(t)}
      tabs={[
        { title: 'Apple', value: 'apple' },
        { title: 'Orange', value: 'orange' },
        { title: 'Mango', value: 'mango' },
      ]}
    />
  );
}
```

Disabled

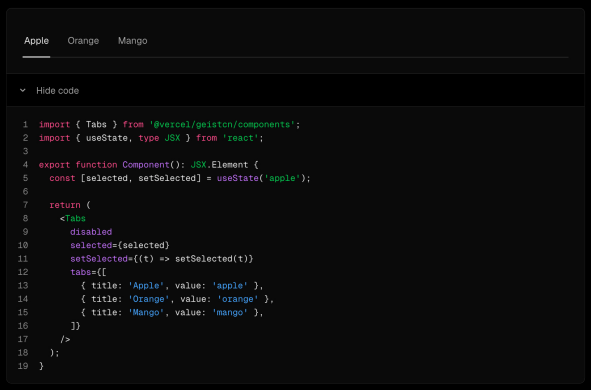



```tsx
import { Tabs } from '@vercel/geistcn/components';
import { useState, type JSX } from 'react';

export function Component(): JSX.Element {
  const [selected, setSelected] = useState('apple');

  return (
    <Tabs
      disabled
      selected={selected}
      setSelected={(t) => setSelected(t)}
      tabs={[
        { title: 'Apple', value: 'apple' },
        { title: 'Orange', value: 'orange' },
        { title: 'Mango', value: 'mango' },
      ]}
    />
  );
}
```

Disable specific tabs

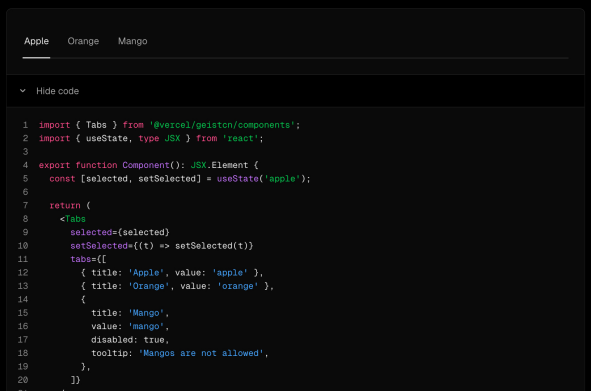



```tsx
import { Tabs } from '@vercel/geistcn/components';
import { useState, type JSX } from 'react';

export function Component(): JSX.Element {
  const [selected, setSelected] = useState('apple');

  return (
    <Tabs
      selected={selected}
      setSelected={(t) => setSelected(t)}
      tabs={[
        { title: 'Apple', value: 'apple' },
        { title: 'Orange', value: 'orange' },
        {
          title: 'Mango',
          value: 'mango',
          disabled: true,
          tooltip: 'Mangos are not allowed',
        },
      ]}
    />
  );
}
```

With icons

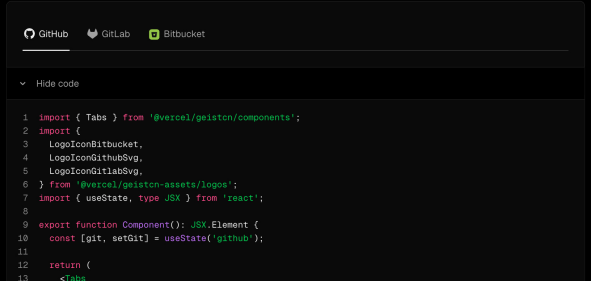



```tsx
import { Tabs } from '@vercel/geistcn/components';
import {
  LogoIconBitbucket,
  LogoIconGithubSvg,
  LogoIconGitlabSvg,
} from '@vercel/geistcn-assets/logos';
import { useState, type JSX } from 'react';

export function Component(): JSX.Element {
  const [git, setGit] = useState('github');

  return (
    <Tabs
```

```tsx
      selected={git}
      setSelected={(t) => setGit(t)}
      tabs={[
        { title: 'GitHub', value: 'github', icon: <LogoIconGithubSvg /> },
        { title: 'GitLab', value: 'gitlab', icon: <LogoIconGitlabSvg /> },
        {
          title: 'Bitbucket',
          value: 'bitbucket',
          icon: <LogoIconBitbucket colored />,
        },
      ]}
    />
  );
}
```

Secondary

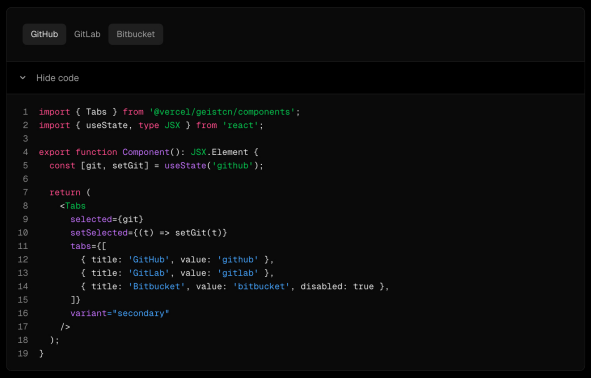


```tsx
import { Tabs } from '@vercel/geistcn/components';
import { useState, type JSX } from 'react';

export function Component(): JSX.Element {
  const [git, setGit] = useState('github');

  return (
    <Tabs
      selected={git}
      setSelected={(t) => setGit(t)}
      tabs={[
        { title: 'GitHub', value: 'github' },
        { title: 'GitLab', value: 'gitlab' },
        { title: 'Bitbucket', value: 'bitbucket', disabled: true },
      ]}
      variant="secondary"
    />
  );
}
```

Best Practices

When to use

- Use Tabs to switch between sibling views inside a single page (`Overview`, `Logs`, `Settings`).
- For navigation between unrelated pages, use a sub-menu, not Tabs. Tabs imply the views share scope, URL parent, and data model.
- Cap a Tabs row at 5–7 entries on desktop and 3–4 on mobile. Past that, consolidate or move secondary views behind a ⚙ **Menu**.

Behavior

- Selecting a tab is instant; don't trigger network confirmation or toast on tab change.
- Reflect the active tab in the URL (query param or path) so deep-links and refresh restore state.
- Disable individual tabs only for permission or empty-state reasons; pair the disabled tab with a `tooltip` that names the constraint.

Content

- `tabs[].title` is Title Case, 1–2 words, and names the destination noun (`Overview`, `Logs`, `Settings`). Verbs belong on buttons; `View Logs` is wrong on a tab.
- `tabs[].tooltip` is sentence case and explains the constraint (`Only visible to project owners.`), not the tab's purpose.
- Don't append a count to the title (`Logs (12)`); use a badge slot instead and drop the badge at zero.

Accessibility

- Keep Left/Right arrows moving focus across tabs and Enter/Space activating; don't hijack with global shortcuts.
- Label the tablist with `aria-label` when no visible heading sits above it (`aria-label="Sections"`).
- Maintain a visible focus ring on the active tab; don't suppress focus styles for visual polish.