






گیت‌هاب اکشنز؛ چرا و چگونه؟



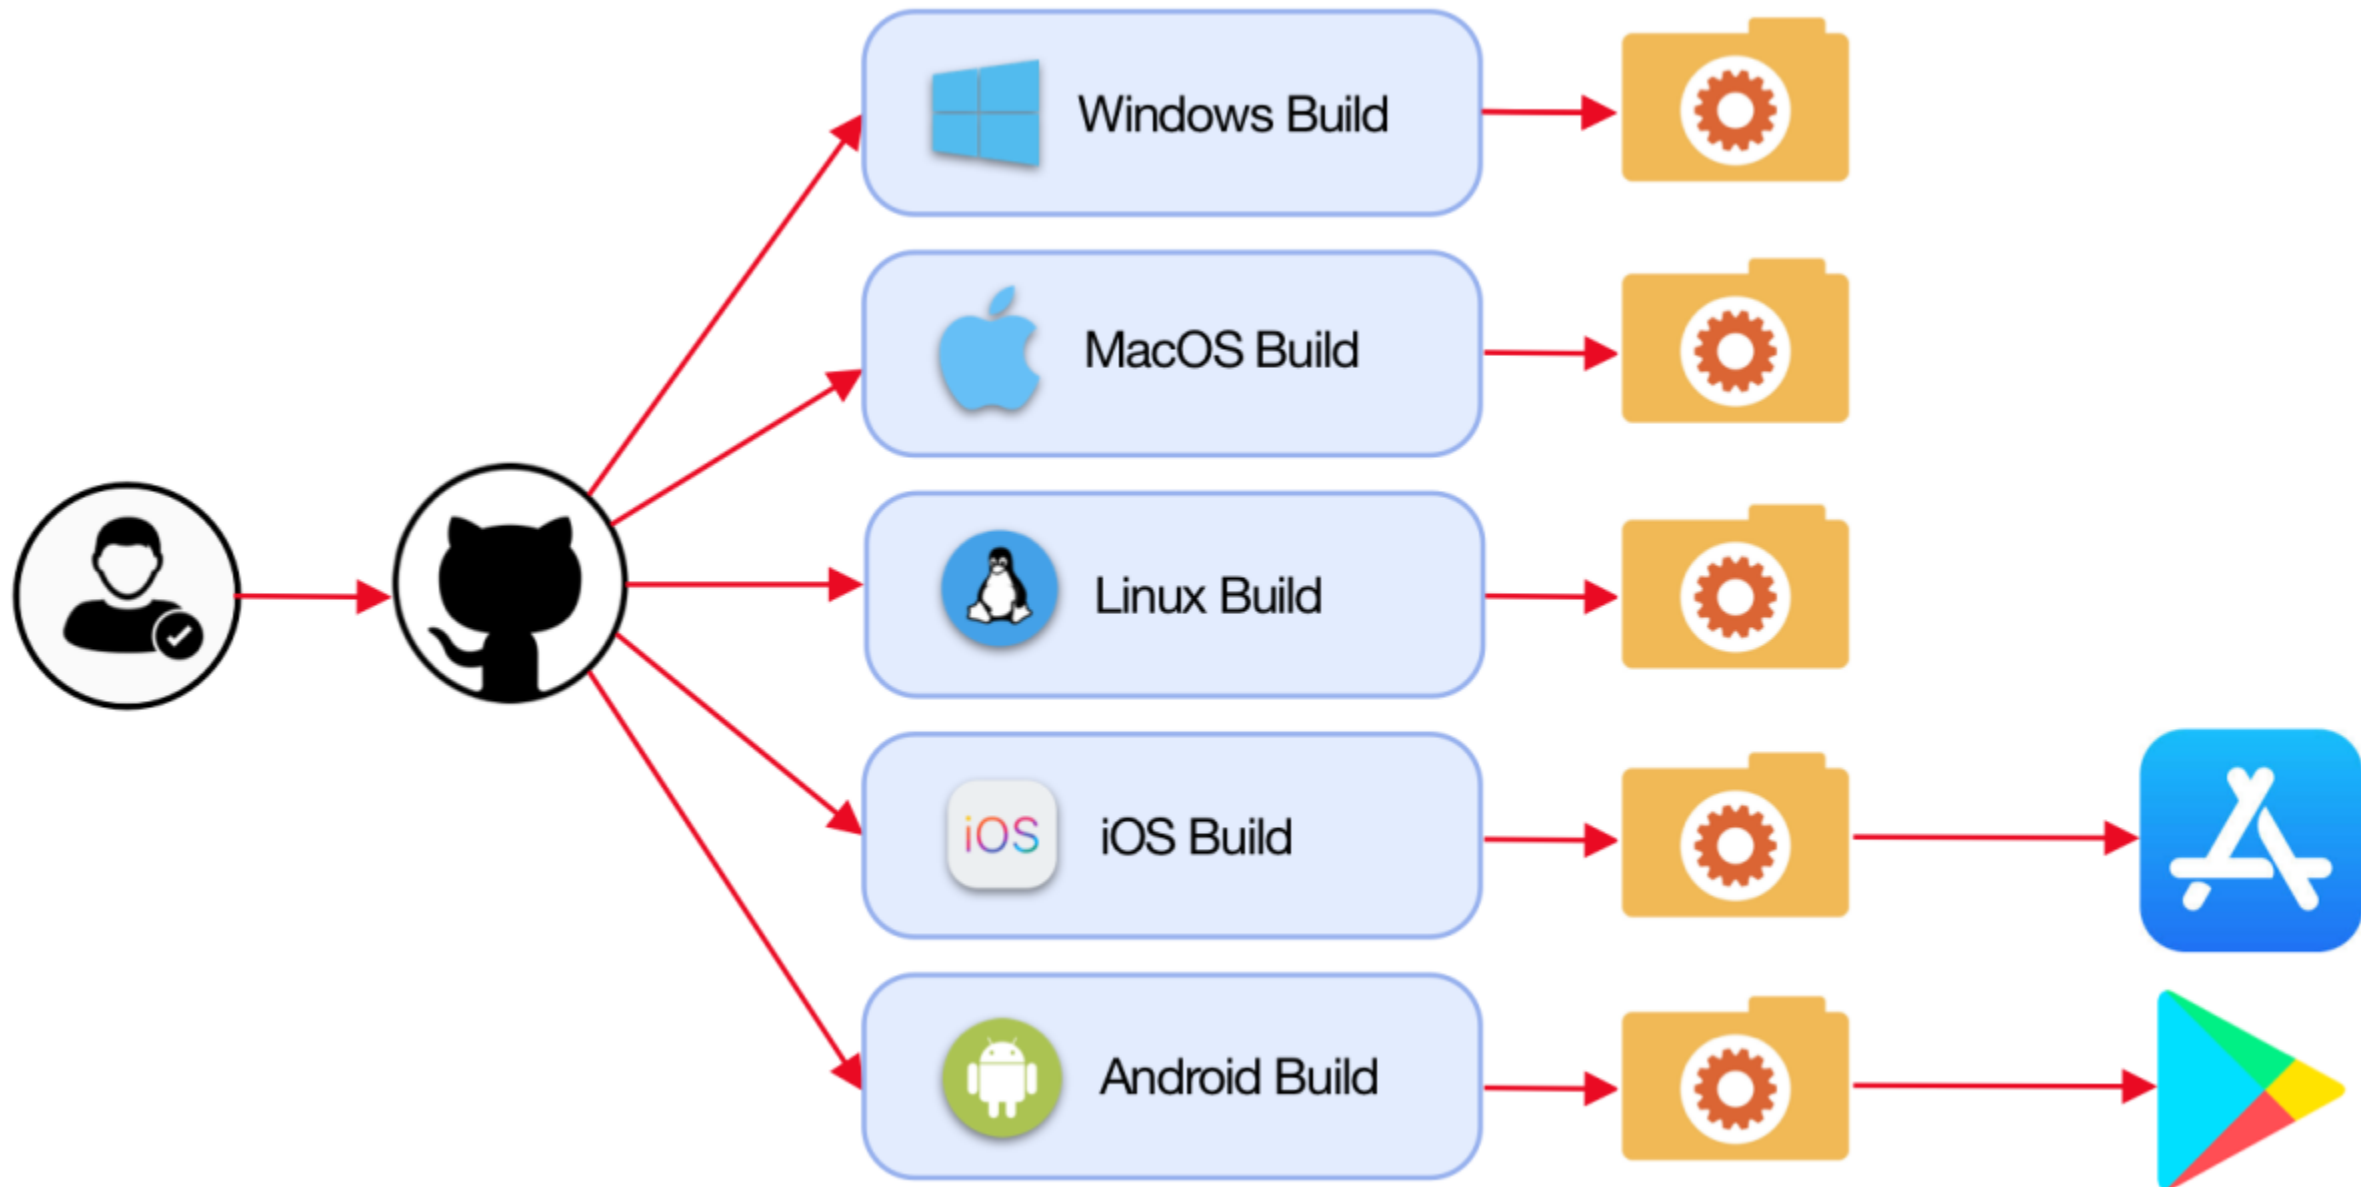

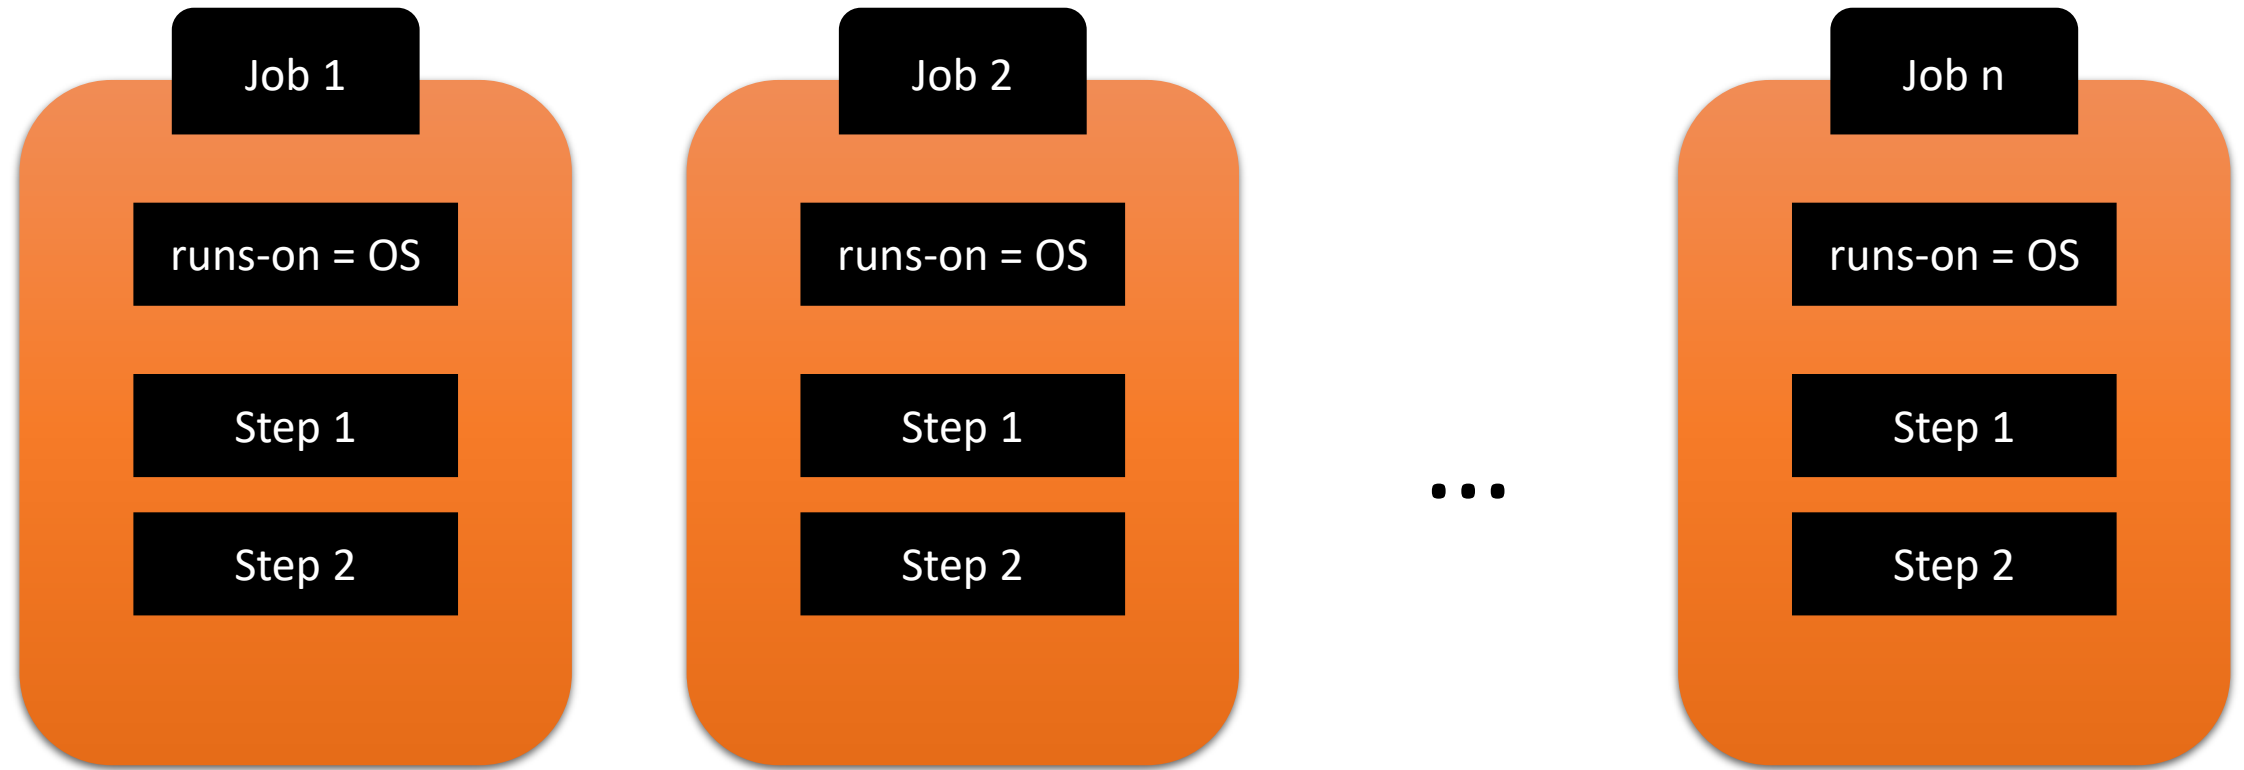

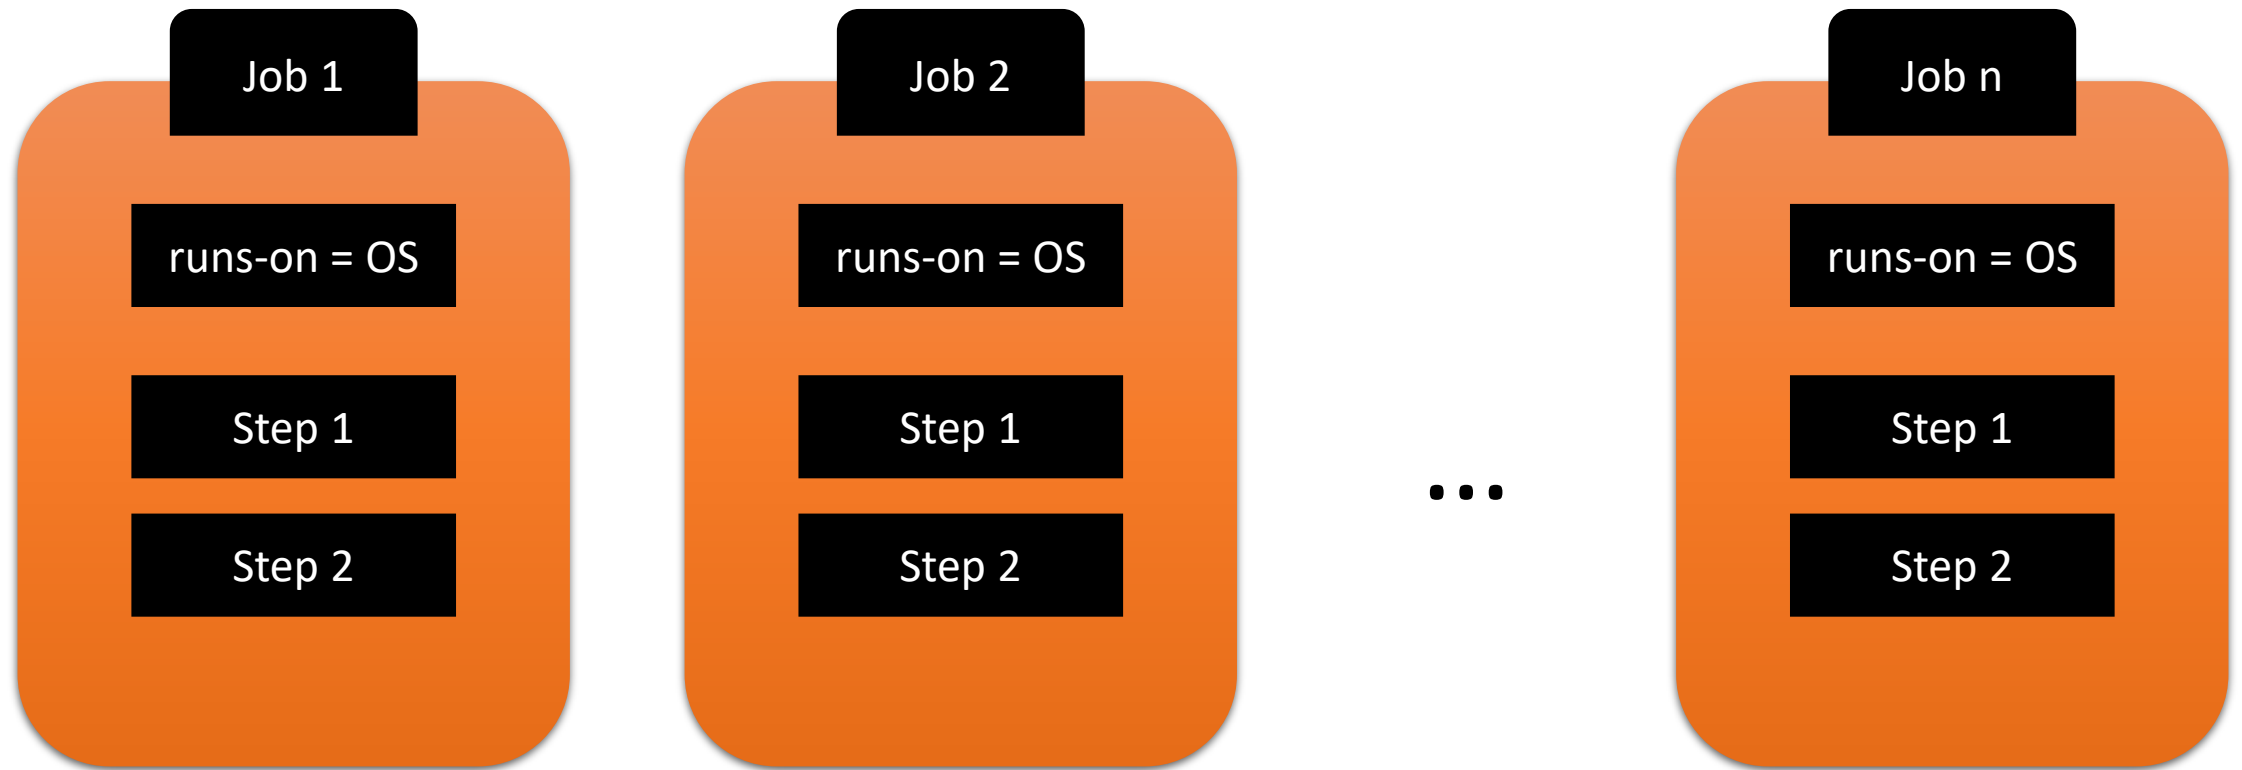

- **Jobs:** Each job is a set of steps that run in a specific environment. By default, **jobs run in parallel**.
- **Steps:** Steps are individual tasks that run within a job. Steps within the same job **run sequentially**.



ساختار کلی فایل yam1 برای تعریف workflow



name: Specifies the unique name of this workflow

on: Specifies the events that trigger the workflow.

jobs: A collection of jobs that define the tasks to run.

runs-on: Specifies the type of runner (environment) for a job.

needs: Specifies job dependencies to control execution order.

if: Adds conditional execution based on context.

steps: A sequence of tasks to be executed within a job.

uses: Specifies an action to use (from the marketplace or a repository).

run: Executes commands or scripts directly in the shell.

env: Defines environment variables for jobs or steps.

with: Provides input parameters to an action.

if: Adds conditional execution based on context.



GitHub Actions

نگاه بصورت بلوکی از کد



name: Specifies the unique name of this workflow

on: Specifies the events that trigger the workflow.

jobs: A collection of jobs that define the tasks to run.

runs-on: Specifies the type of runner (environment) for a job.

needs: Specifies job dependencies to control execution order.

if: Adds conditional execution based on context.

steps: A sequence of tasks to be executed within a job.

uses: Specifies an action to use (from the marketplace or a repository).

run: Executes commands or scripts directly in the shell.

env: Defines environment variables for jobs or steps.

with: Provides input parameters to an action.

if: Adds conditional execution based on context.

name: Specifies the unique name of this workflow

on: Specifies the events that trigger the workflow.

jobs: A collection of jobs that define the tasks to run.

runs-on: Specifies the type of runner (environment) for a job.

needs: Specifies job dependencies to control execution order.

if: Adds conditional execution based on context.

steps: A sequence of tasks to be executed within a job.

uses: Specifies an action to use (from the marketplace or a repository).

run: Executes commands or scripts directly in the shell.

env: Defines environment variables for jobs or steps.

with: Provides input parameters to an action.

if: Adds conditional execution based on context.

name: Specifies the unique name of this workflow

on: Specifies the events that trigger the workflow.

jobs: A collection of jobs that define the tasks to run.

runs-on: Specifies the type of runner (environment) for a job.

needs: Specifies job dependencies to control execution order.

if: Adds conditional execution based on context.

steps: A sequence of tasks to be executed within a job.

uses: Specifies an action to use (from the marketplace or a repository).

run: Executes commands or scripts directly in the shell.

env: Defines environment variables for jobs or steps.

with: Provides input parameters to an action.

if: Adds conditional execution based on context.

name: Specifies the unique name of this workflow

on: Specifies the events that trigger the workflow.

jobs: A collection of jobs that define the tasks to run.

runs-on: Specifies the type of runner (environment) for a job.

needs: Specifies job dependencies to control execution order.

if: Adds conditional execution based on context.

steps: A sequence of tasks to be executed within a job.

uses: Specifies an action to use (from the marketplace or a repository).

run: Executes commands or scripts directly in the shell.

env: Defines environment variables for jobs or steps.

with: Provides input parameters to an action.

if: Adds conditional execution based on context.

```
name: Simple Hello World Action

on:
  push:
    branches:
      - main

jobs:
  say_hello:
    runs-on: ubuntu-latest

    steps:
      - name: Say Hello
        run: echo "Hello, World!"
```

```
name: Simple Hello World Action
```

```
on:
```

```
  push:
```

```
    branches:
```

```
      - main
```

```
jobs:
```

```
  say_hello:
```

```
    runs-on: ubuntu-latest
```

```
    steps:
```

```
      - name: Say Hello
```

```
        run: echo "Hello, World!"
```

```
name: Simple Hello World Action
```

```
on:  
  push:  
    branches:  
      - main
```

```
jobs:  
  say_hello:  
    runs-on: ubuntu-latest  
  
    steps:  
      - name: Say Hello  
        run: echo "Hello, World!"
```

```
name: Simple Hello World Action
```

```
on:
```

```
  push:
```

```
    branches:
```

```
      - main
```

```
jobs:
```

```
  say_hello:
```

```
    runs-on: ubuntu-latest
```

```
    steps:
```

```
      - name: Say Hello
```

```
        run: echo "Hello, World!"
```

```
name: Simple Hello World Action
```

```
on:
```

```
  push:
```

```
    branches:
```

```
      - main
```

```
jobs:
```

```
  say_hello:
```

```
    runs-on: ubuntu-latest
```

```
    steps:
```

```
      - name: Say Hello
```

```
        run: echo "Hello, World!"
```



از هر چه بگذریم، باز هم خواهیم
رسید به قیمت‌گذاری 😎



Operating system	Minute multiplier
Linux	1
MacOS	10
Windows	2

Product	Storage	Minutes per month
GitHub Free	500 MB	2,000
GitHub Pro	1 GB	3,000
GitHub Free for organizations	500 MB	2,000
GitHub Team	2 GB	3,000
GitHub Enterprise Cloud	50 GB	50,000



GitHub Actions

v0.27.0

GitHub  github.com

 2,992,081

★★★★☆ (46)

GitHub Actions workflows and runs for github.com hosted repositories in VS Code

Disable



Uninstall



Auto Update



DETAILS

FEATURES

CHANGELOG

GitHub Actions for VS Code

The GitHub Actions extension lets you manage your workflows, view the workflow run history, and helps with authoring workflows.

Categories

Other

Resources