


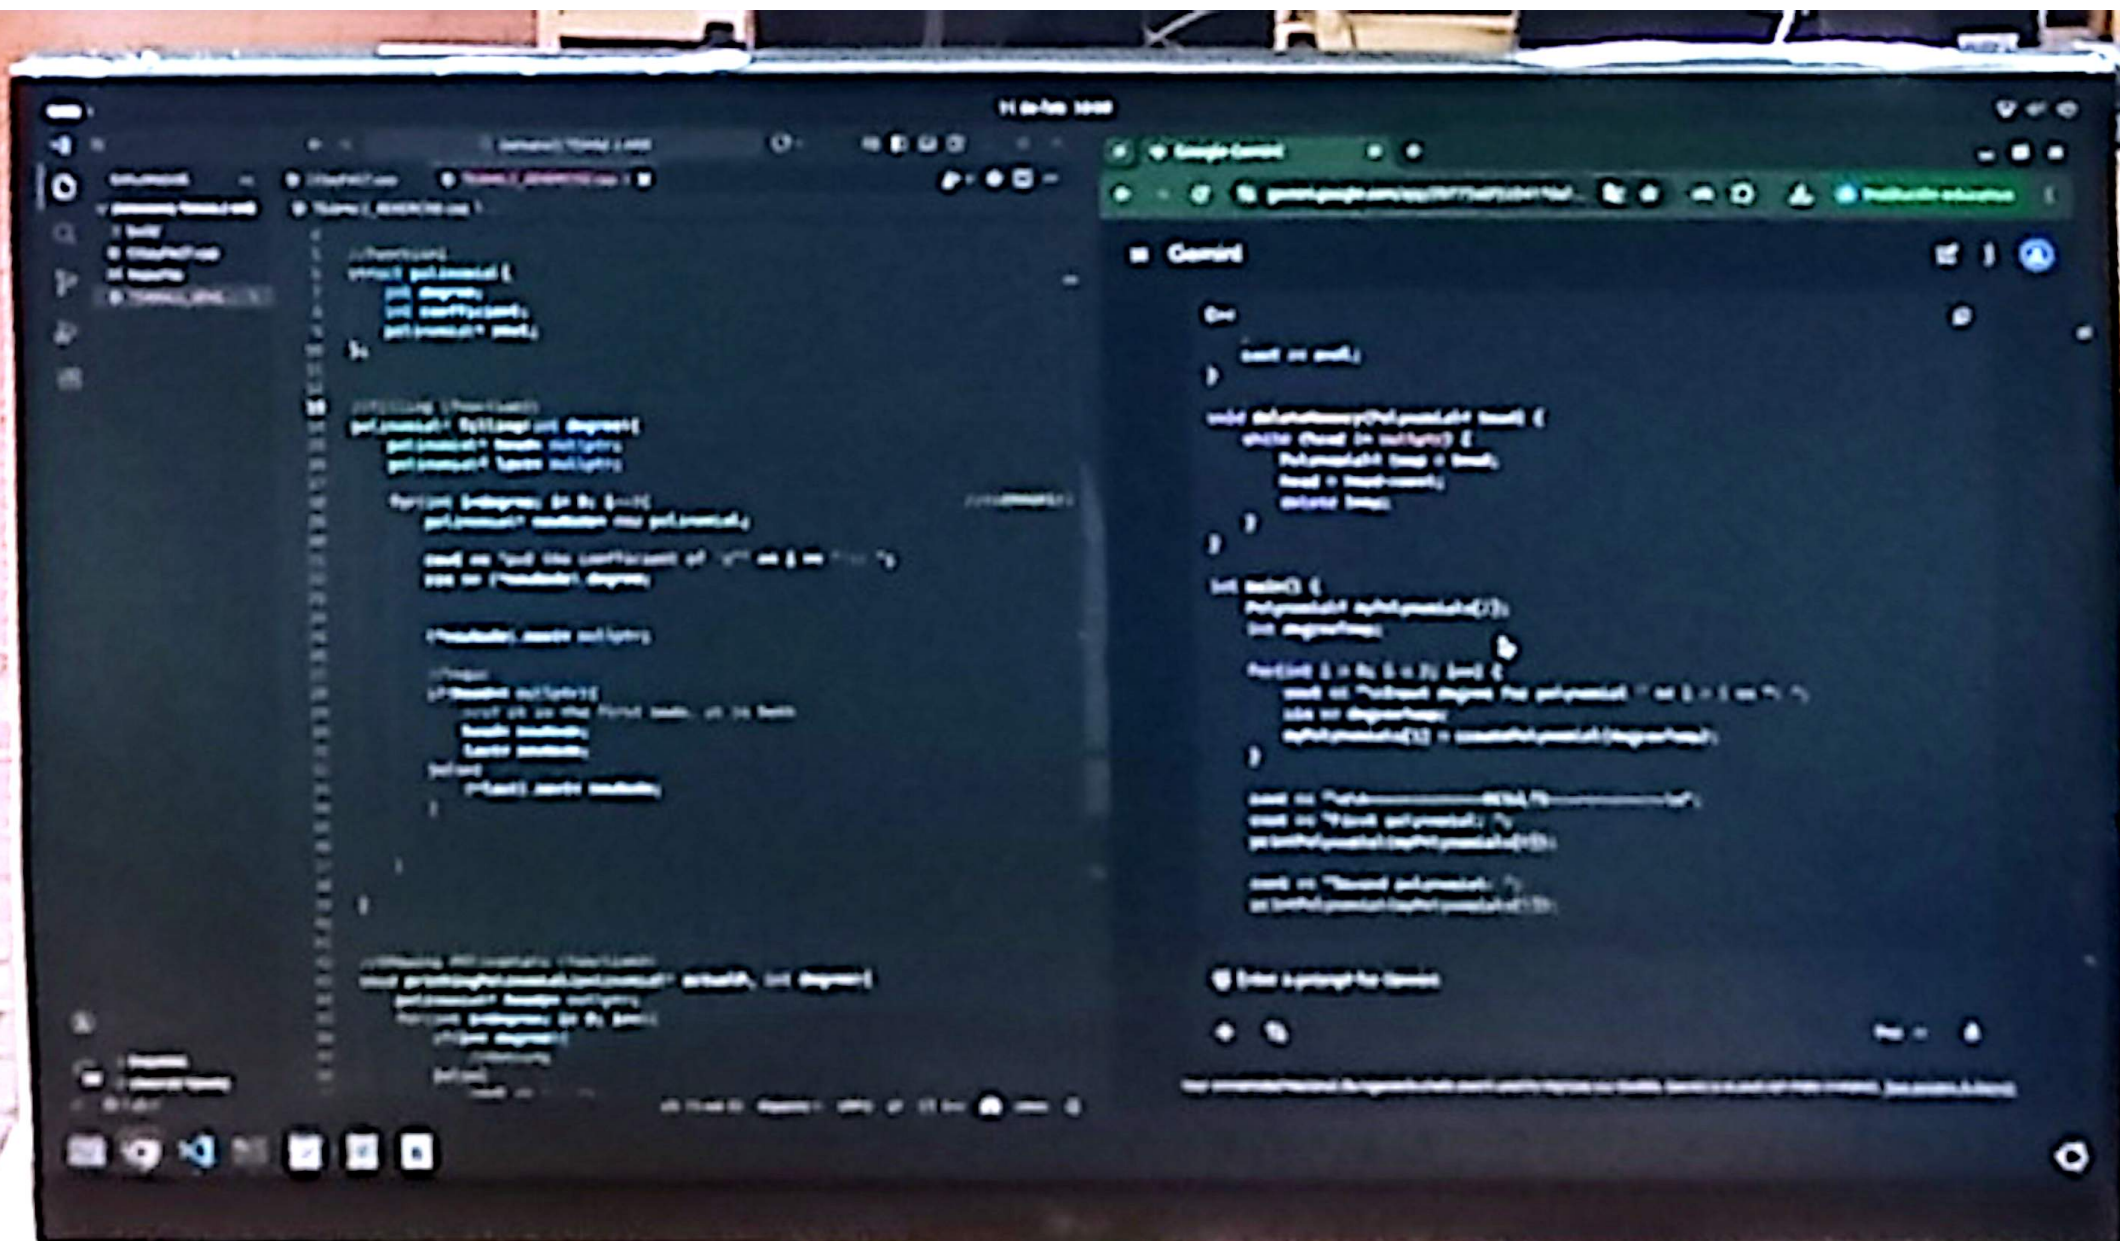

Now they are pointing
what they need

if (first loop) {
head = n;
last = n;

the steps move
pointers prep to
pointer

} else {
(*last).next = n;
last = n;

I'm putting it
the new one
into (inside) the
struct of the
previous one

from the
previous
loop

this is
the previous

[n]


}

}


Now i'm
changing the
direction
of pointing to
the new one

I just
put into (inside)
the previous one


① 1st loop finished

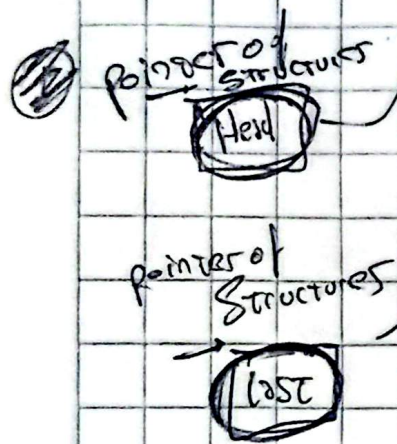

② 2nd loop finished

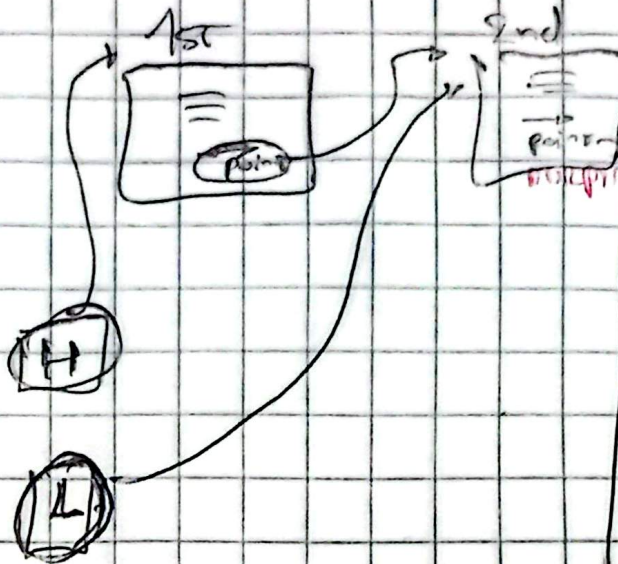

③ 3rd loop finished

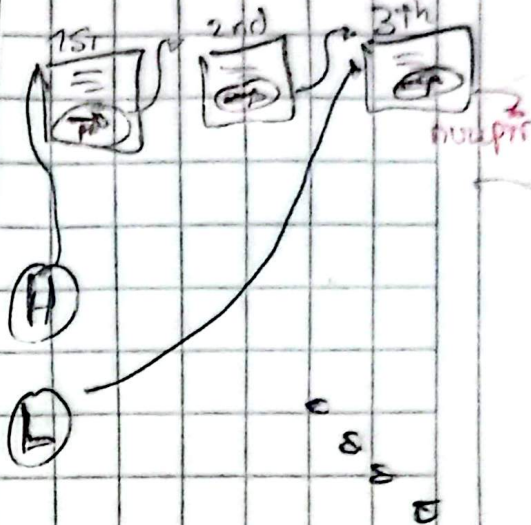

The last one keeps
a pointer
to the last node
in the structure
pointing to
NULL

That's what I'm gonna
to use to
take advantage
and be able of print this
system