




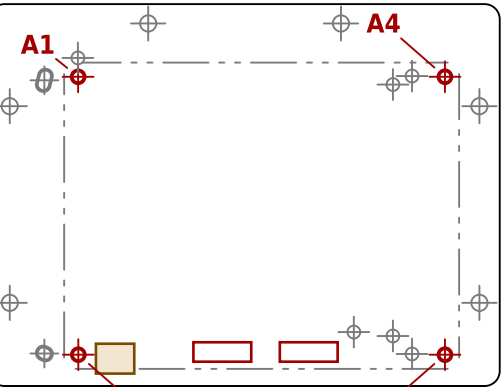


DB mpw
TT02, TT03
board rev tt123-v2.2.5, tt123-v2.2.6

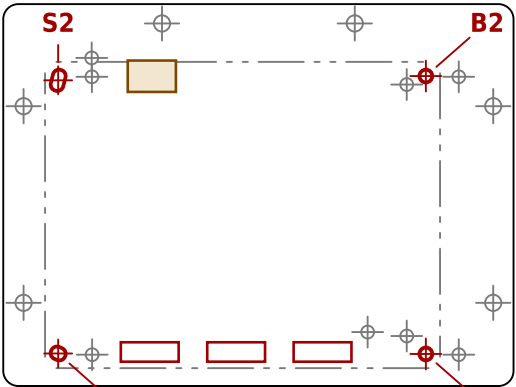


DB 4+
TT03p5, TT04, TT05
board rev v1.2.1, v1.2.2, v1.2.3

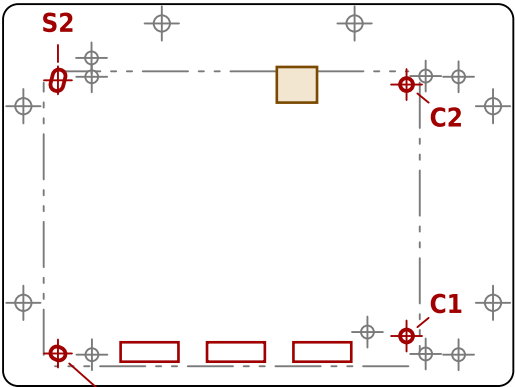

DB 06+
TT06, TT07, TT08
board rev v2.0.1, v2.1.0, v2.1.2

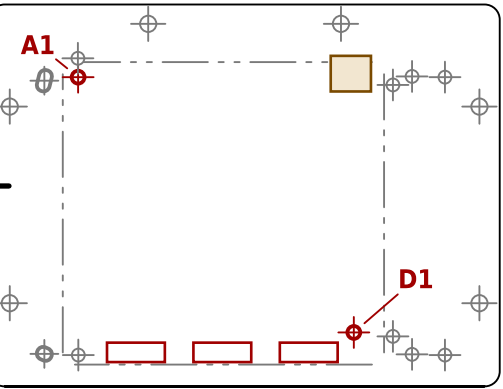

DB ETR v3.2
TT09, TTSKY25a, TTSKY25b, TTGF0p2
board rev v3.2

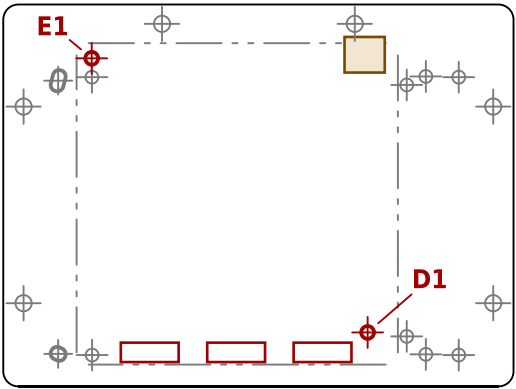

DB ETR v3.3
no shipped shuttle yet
board rev v3.3

NOTES

- Hole IDs are those of drawing TT-MP-PLATE, which governs every dimension.
- Revisions in a group share mounting holes and Pmod host positions exactly; they may differ elsewhere. v2.1.2's USB-C, for instance, is 0.9 mm from v2.0.1's.
- dX and dY place the board: add them to a coordinate in the board's own frame to get a plate coordinate.

BOARD PLACEMENT ON THE PLATE

BOARD	SHUTTLES	dX	dY	PMODS	HOLES USED
DB mpw	TT02, TT03	19.76	4.54	2, 3	A1, A2, A3, A4
DB 4+	TT03p5, TT04, TT05	11.05	4.72	1, 2, 3	B1, B2, S1, S2
DB 06+	TT06, TT07, TT08	10.74	5.22	1, 2, 3	C1, C2, S1, S2
DB ETR v3.2	TT09, TTSKY25a, TTSKY25b, TTGF0p2	19.40	5.77	1, 2, 3	A1, D1
DB ETR v3.3	not yet shipped	19.40	5.77	1, 2, 3	D1, E1

USB-C CONNECTOR POSITION ON THE PLATE

BOARD	X EXTENT mm	Y EXTENT mm
DB mpw	28.17 to 38.31	3.29 to 11.19
DB 4+	32.94 to 45.67	77.78 to 86.08
DB 06+	72.42 to 83.06	74.95 to 84.38
DB ETR v3.2	90.29 to 100.93	78.00 to 87.42
DB ETR v3.3	90.29 to 100.93	83.00 to 92.42

LEGEND

- Plate edge
- Hole or slot this revision uses
- Holes it does not use, and its board outline
- USB-C connector on this revision

TT MOUNTING PLATE FITTING GUIDE

Which holes each demo board revision uses

DRAWN generated		VERSION v0.0-160-g6011fbd		UNITS mm		SCALE 1:2	
SIZE A3	SHEET 2 OF 2		DRAWING NO TT-MP-PLATE-FITTING-GUIDE				REV A
MATERIAL - not a made part			GENERAL TOLERANCE reference only - TT-MP-PLATE governs every dimension				