C++: four row pointers, one shared offset

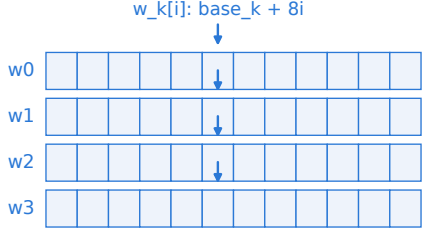


```
double* w1 = w.row(o+1);  ...  a1 += w1[i] * x[i];
one  addq $8, %rax  advances all four rows
```

OCaml: one block, header first, index from the start




```
d.(b1 + i) compiles to
  mov b1,%r10 ; add i,%r10
  vmulsd -8(%rbx,%r10,4),...
```