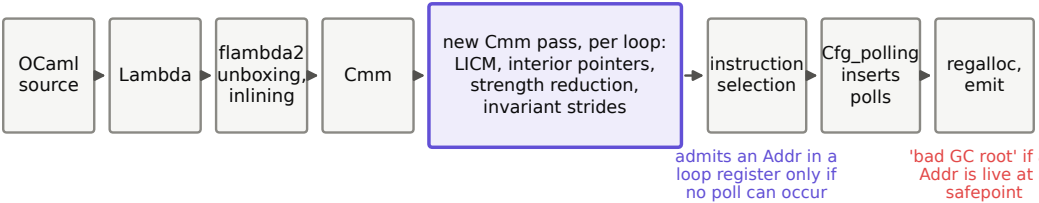

A loop arrives in Cmm as Ccatch Recursive: handler parameters are the loop-carried values, exits are its edges, and Cmm has no assignment, so 'bound outside' means 'invariant'.