


GIT WORKFLOW

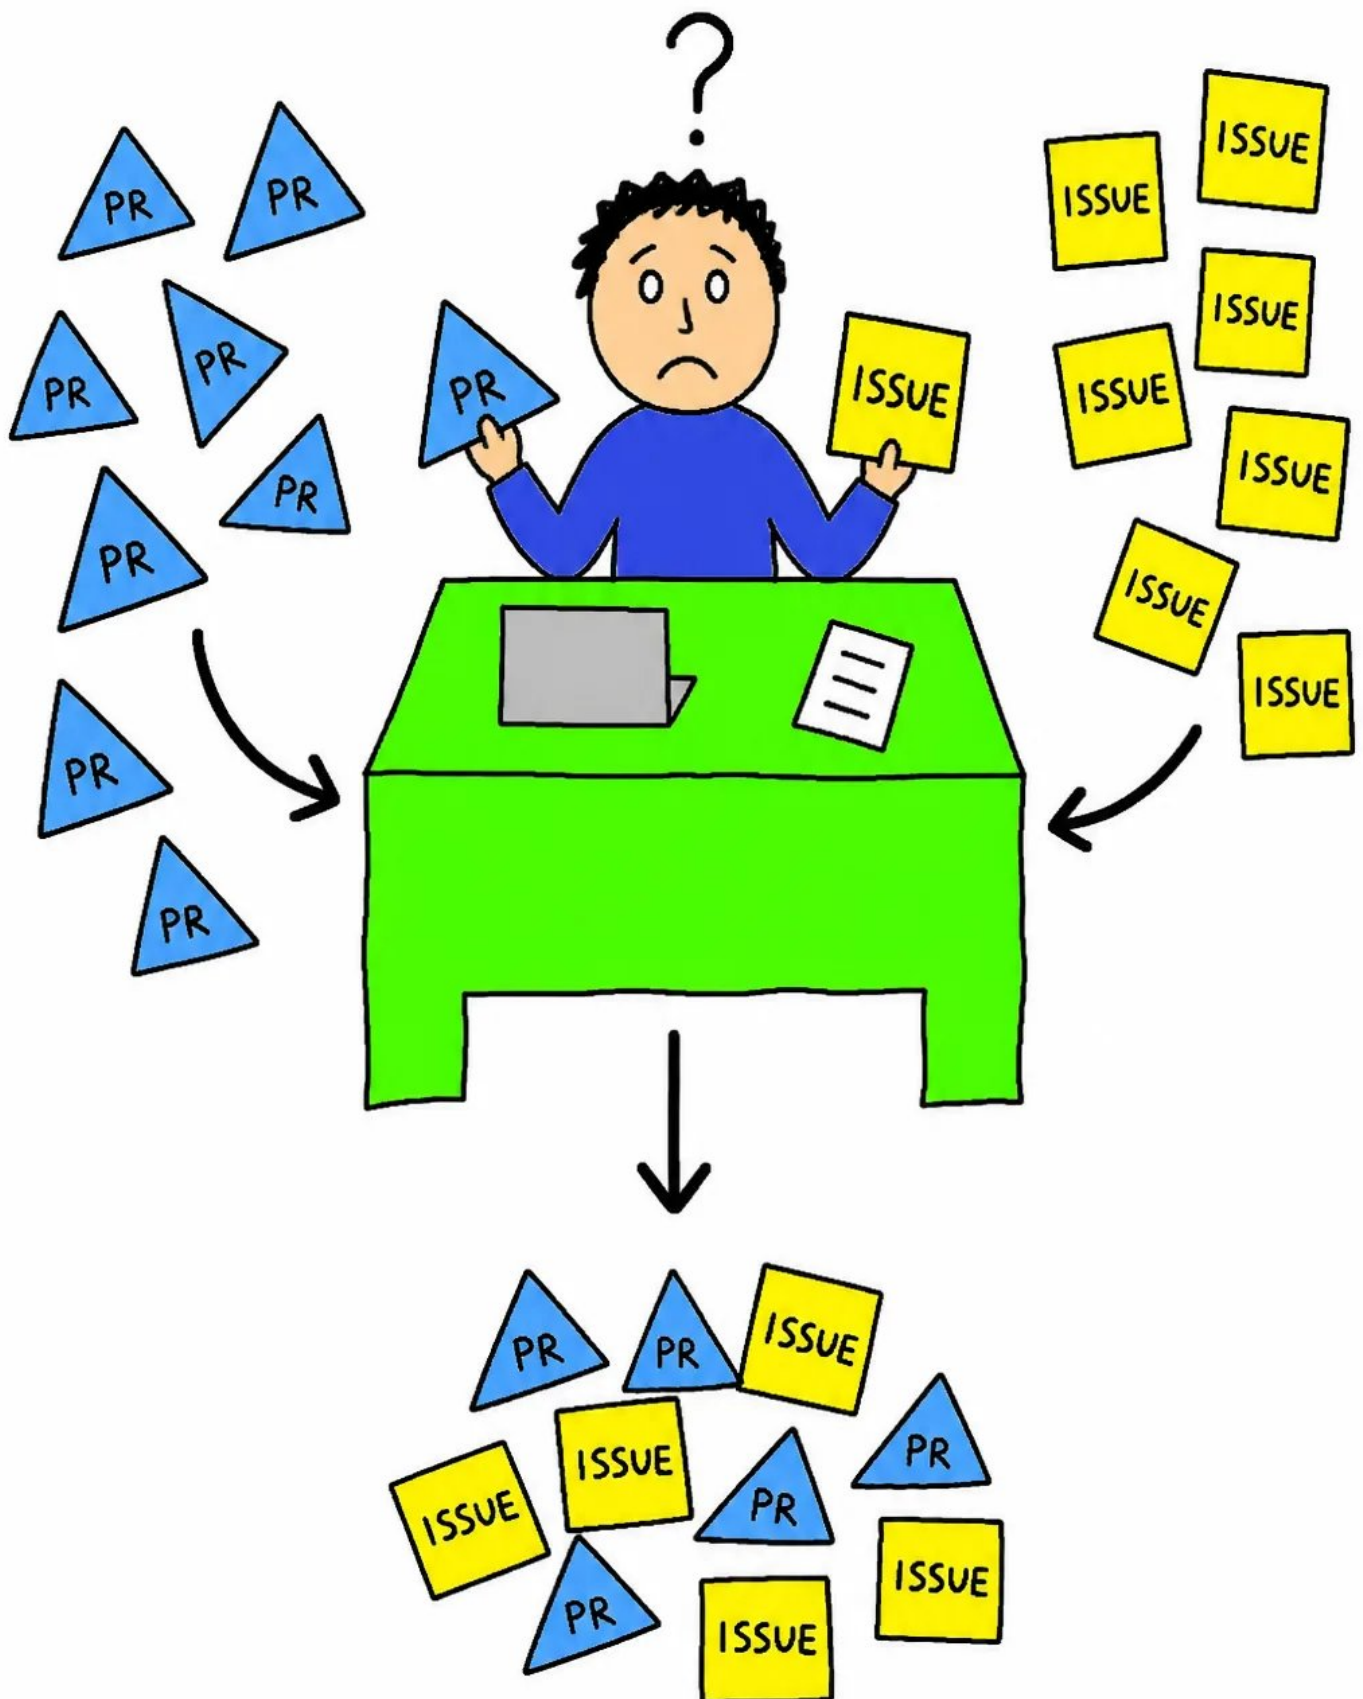


Reads: PRs, issues, reviews, branches, protection rules, and links.

Computes: Queue state, merge gates, cross-checks, and safe ordering in the local desk.

Model work: Diff reading, root-cause analysis, proposals, and judgment.

Changes: Only when a selected skill or explicit approval authorizes the action.

HOW IT WORKS

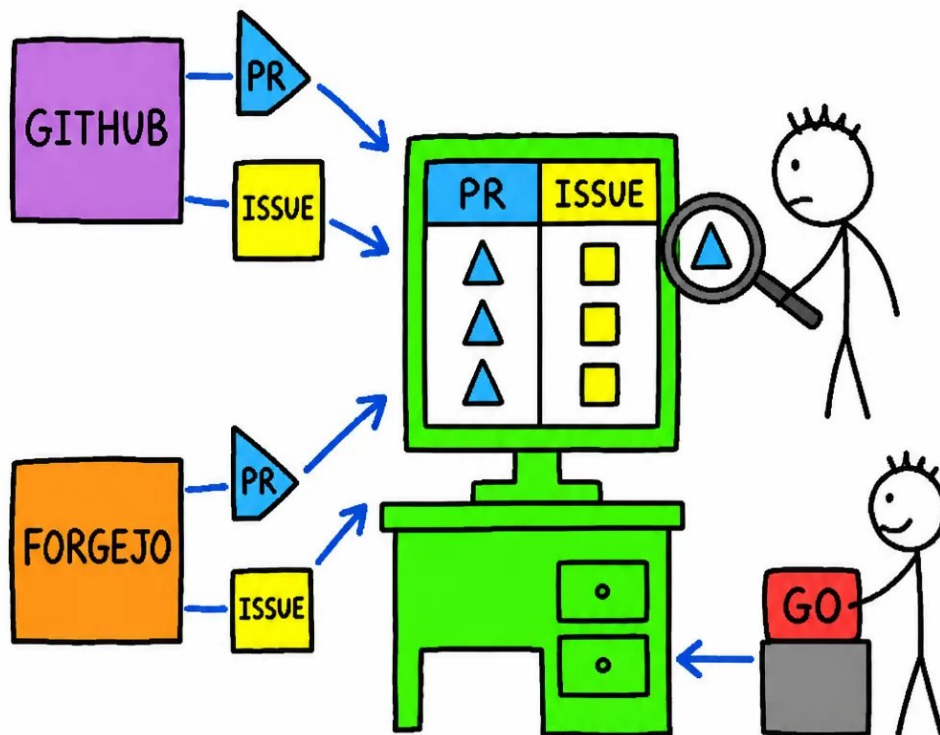

Use when: You want the PR dashboard.

Starts: A local server and a small web application in the browser.

Does: Reads and groups the PR queue; web-app buttons send selected work to the current chat.

Does not: Analyze every diff or act by itself.

PR-DESK




Use when: You want a read-only list of every PR involving you.

Reads: Queue fields and the merge gate, not full diffs.

Does: Splits the queue into ready, small action, review, waiting, and decision blocks.

Next: Hands the actionable set to pr-loop if requested.

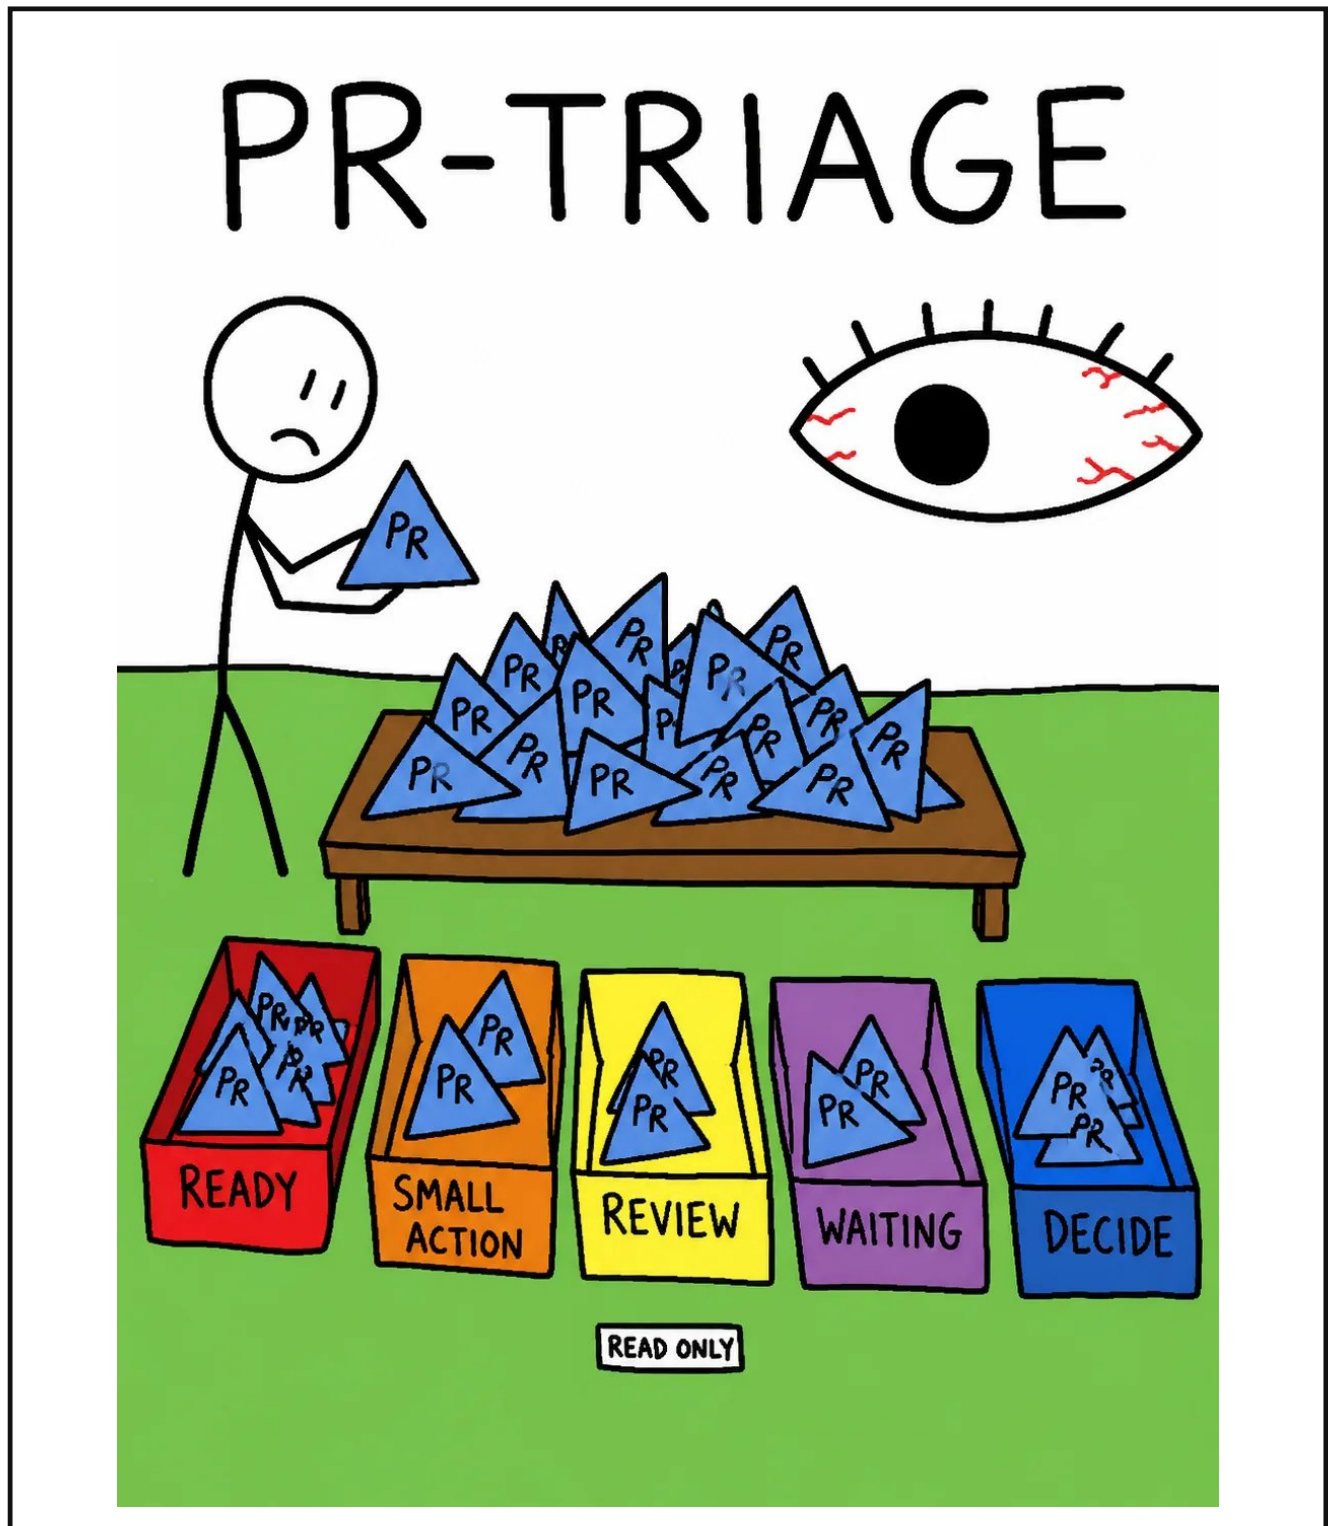


Use when: One PR needs a proper read.

Reads: The complete diff, description claims, history, reviews, and threads.

Returns: What it does, what happened, what to propose, and any useful draft.

Does not: Post, push, merge, or modify the PR.

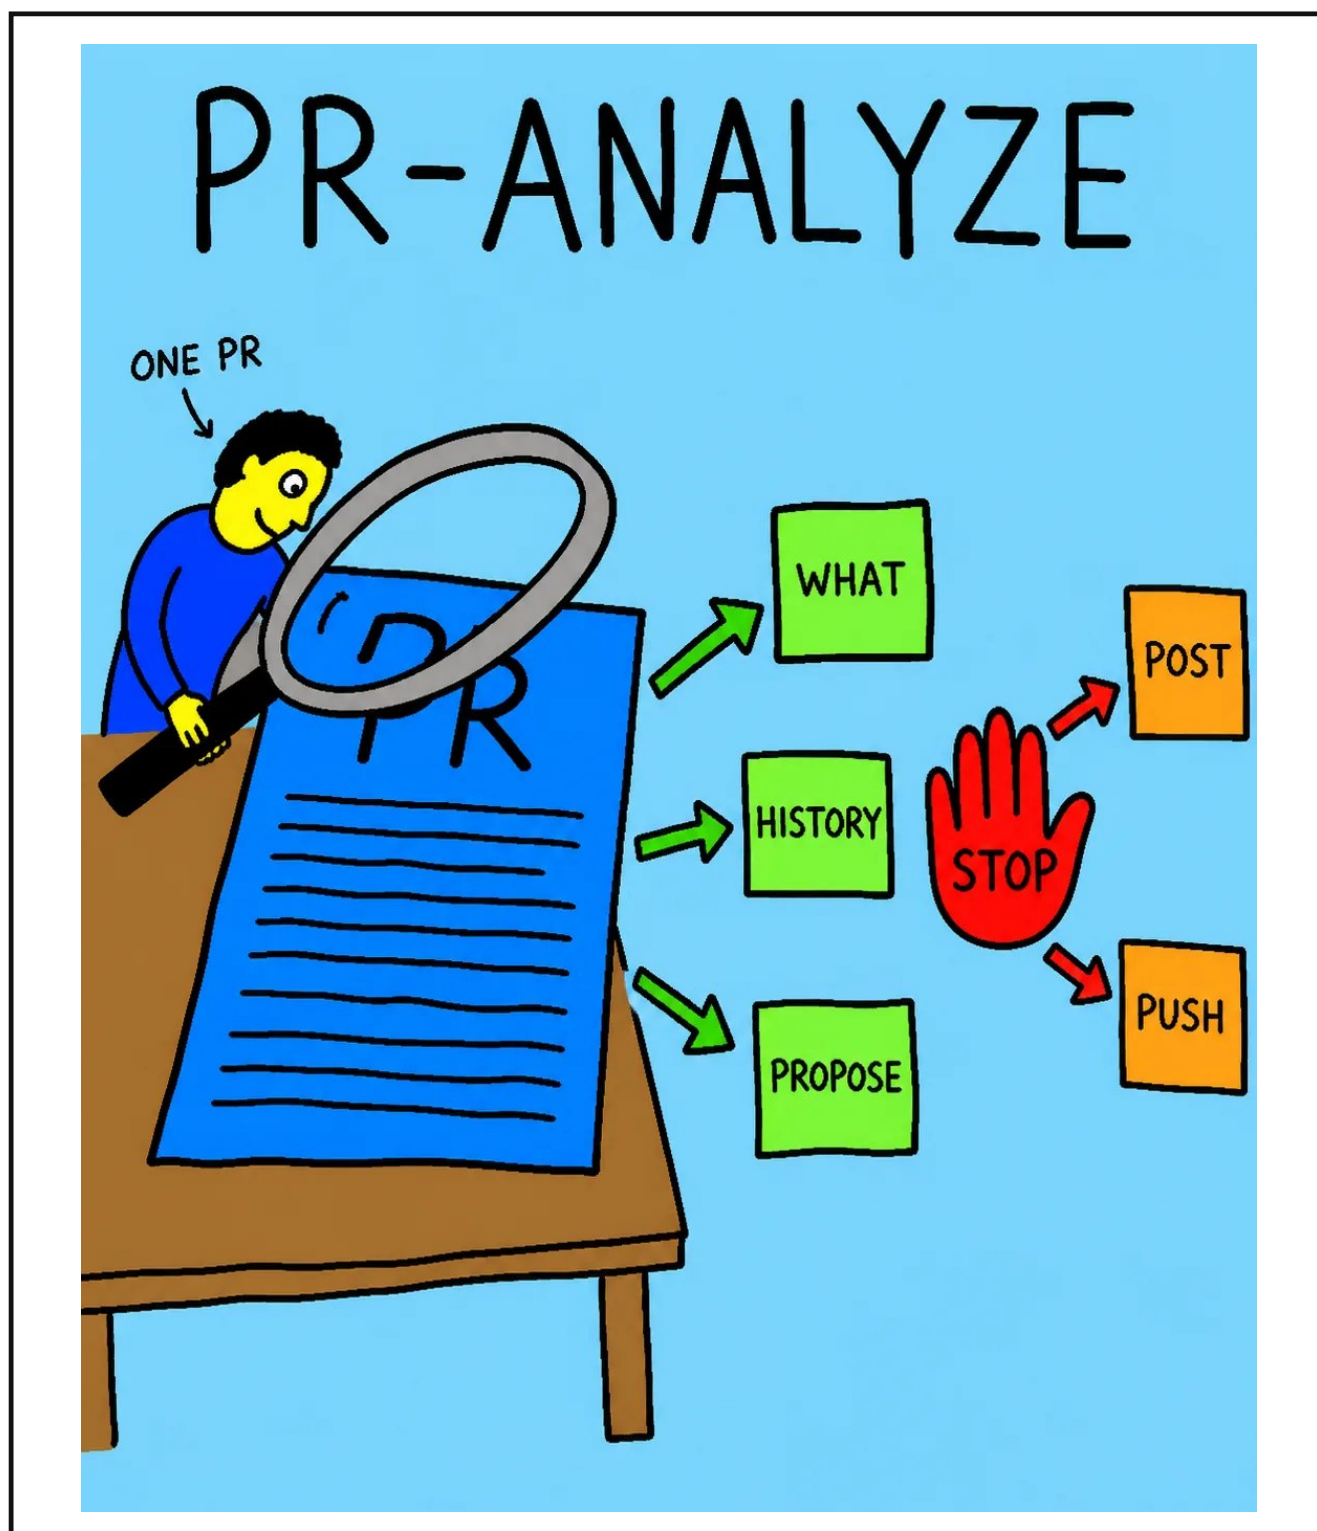

Use when: You want to work through PRs until nothing remains that only you can do.

Does directly: Only actions covered by its safe lane and current gates.

Asks first: For everything requiring judgment or a user decision.

Accepts: Exact PR numbers and batch=1..4; conflicting work is sequenced.




Use when: You want the issue dashboard.

Starts: A local server and a small web application in the browser.

Does: Cross-checks issues, branches, and PRs; web-app buttons send selected work to the current chat.

Does not: Analyze every issue at startup.

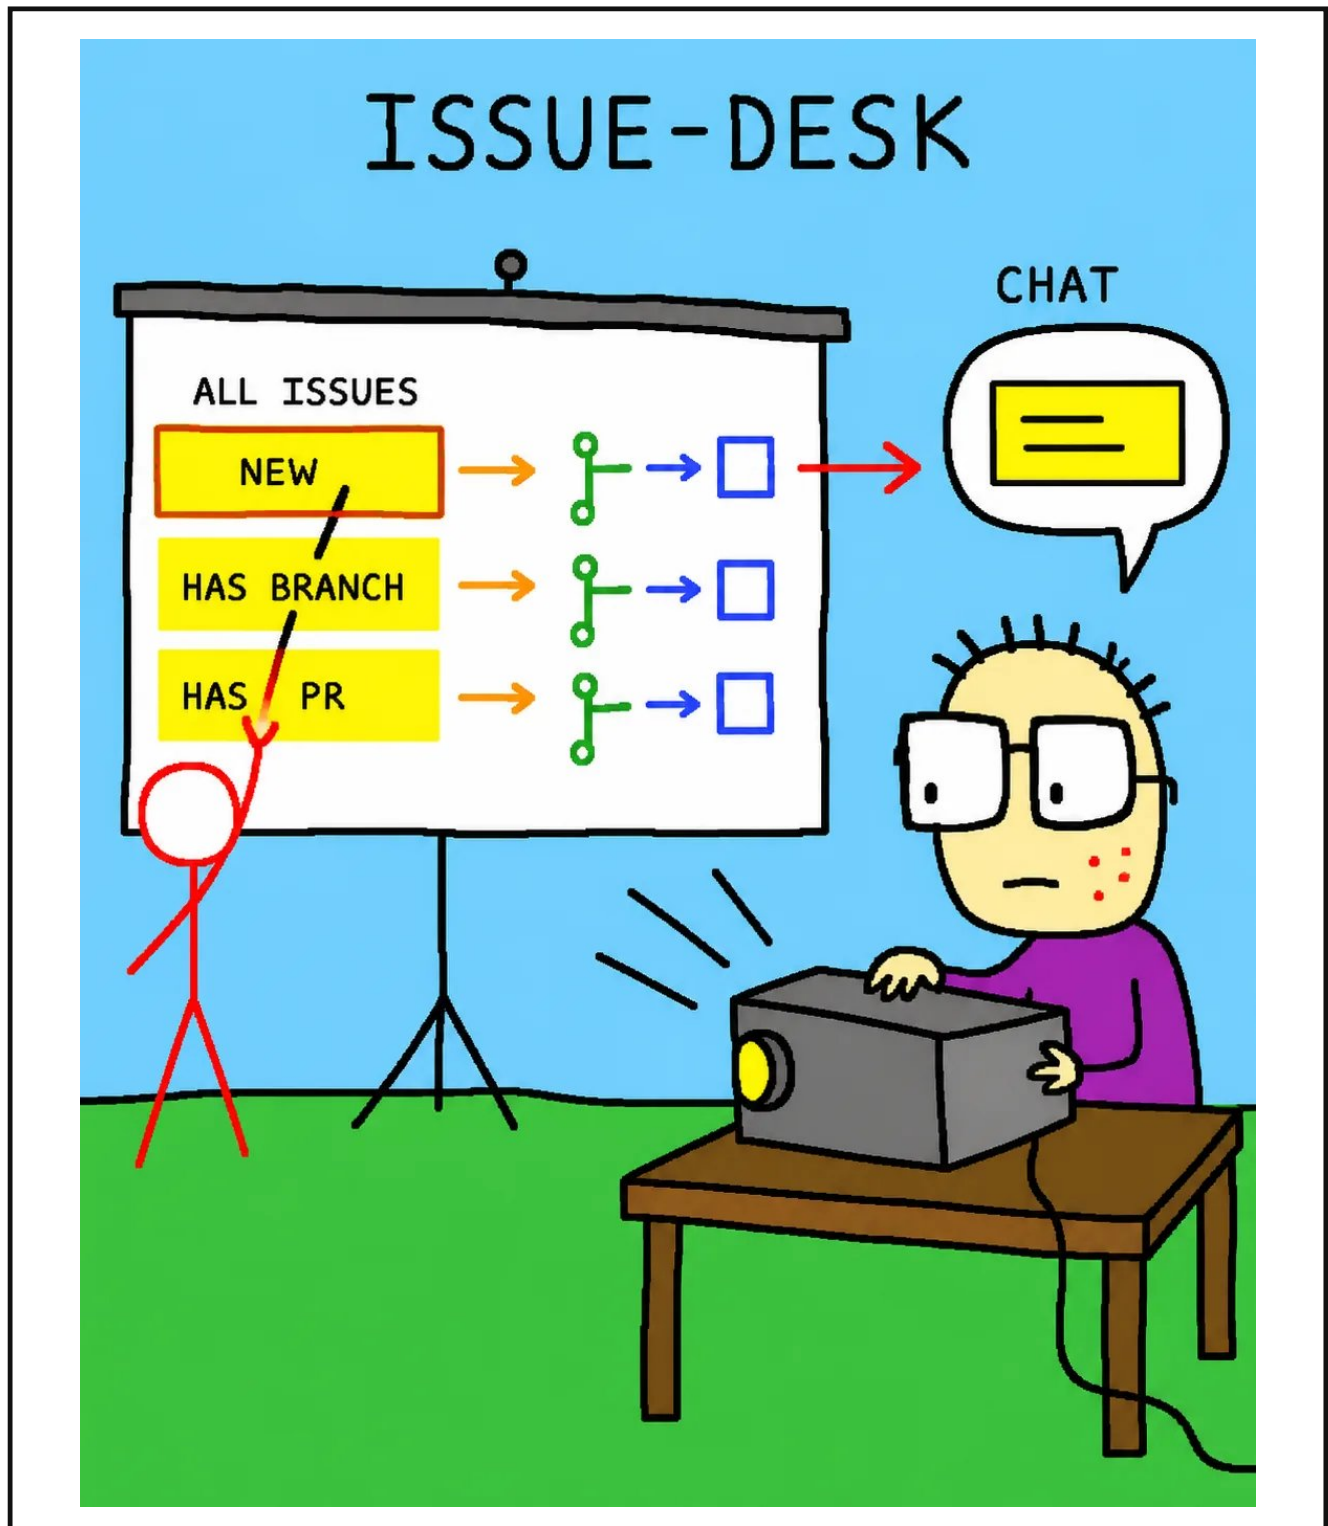


Use when: You want a read-only shortlist of recent, not-yet-analyzed issues.

Reads: Issue fields, branches, comments, and closing PR references.

Does: Ranks impact and classifies each item as DEFECT, REQUEST, QUESTION, or DOCS.

Next: Hands selected issues to issue-loop if requested.

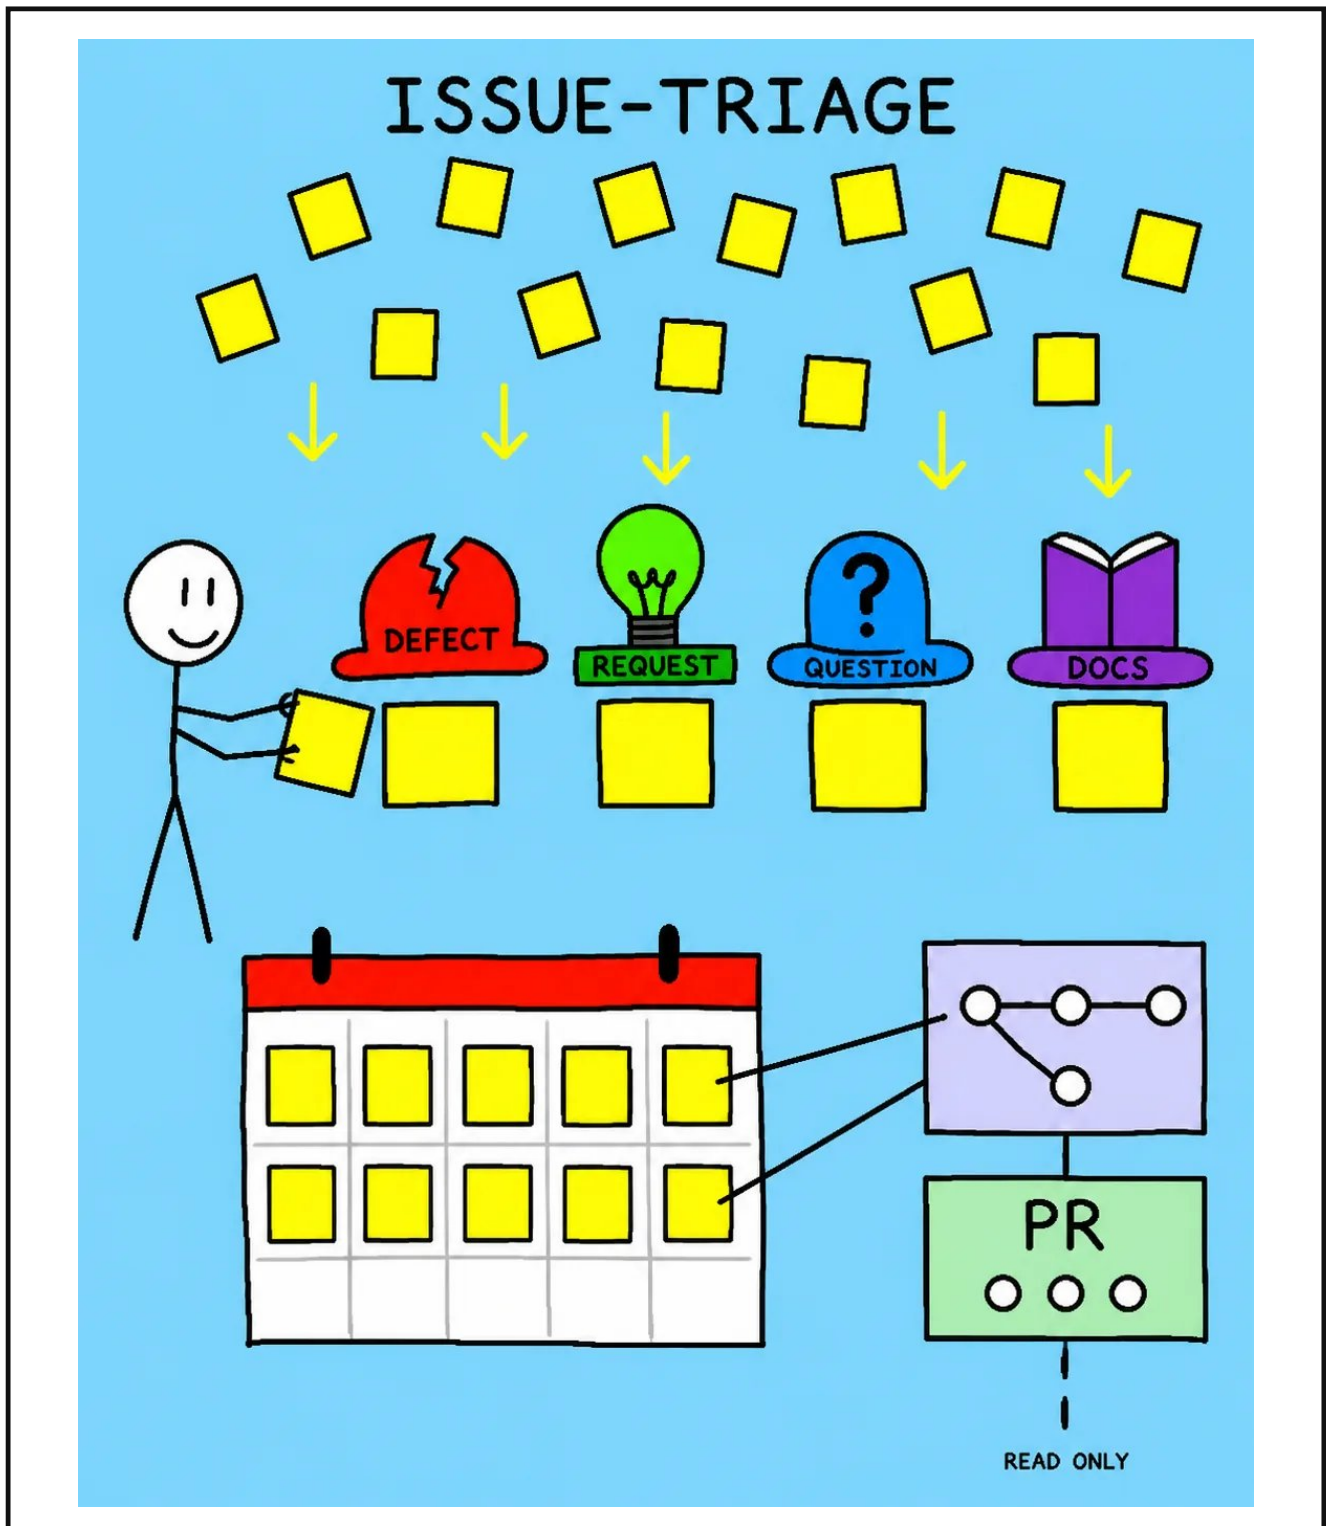


Use when: One issue needs fresh analysis.

Checks: Root cause, reuse, proving code, or the correct docs statement, based on type.

Returns: A typed verdict, minimum change, affected files, and verification plan.

Does not: Branch, comment, or modify code.

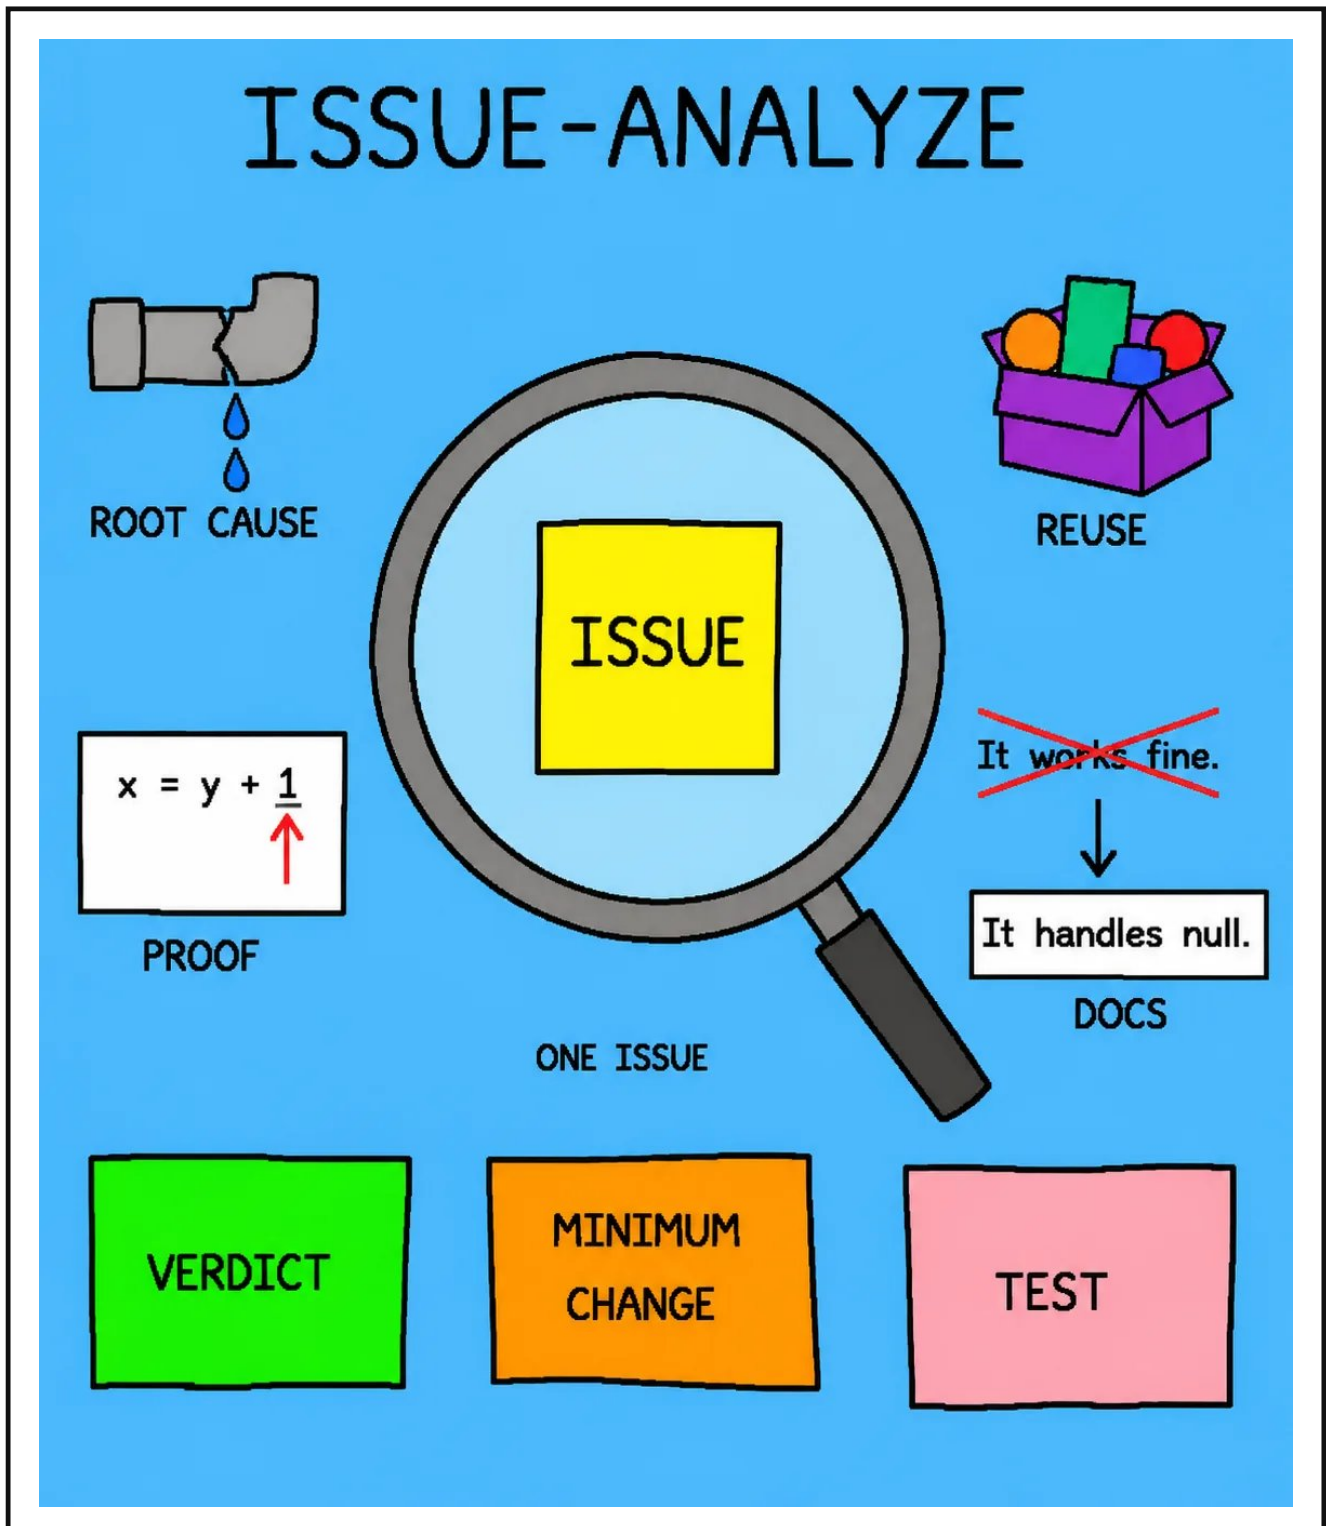


Use when: You want issues presented one after another, or in a selected batch.

For each: Analyze fresh, show a four-line proposal, and wait for approval.

After approval: Claim it, fix it in a worktree, test it, and open its PR.

Stops: When the selected set ends or the user says stop.

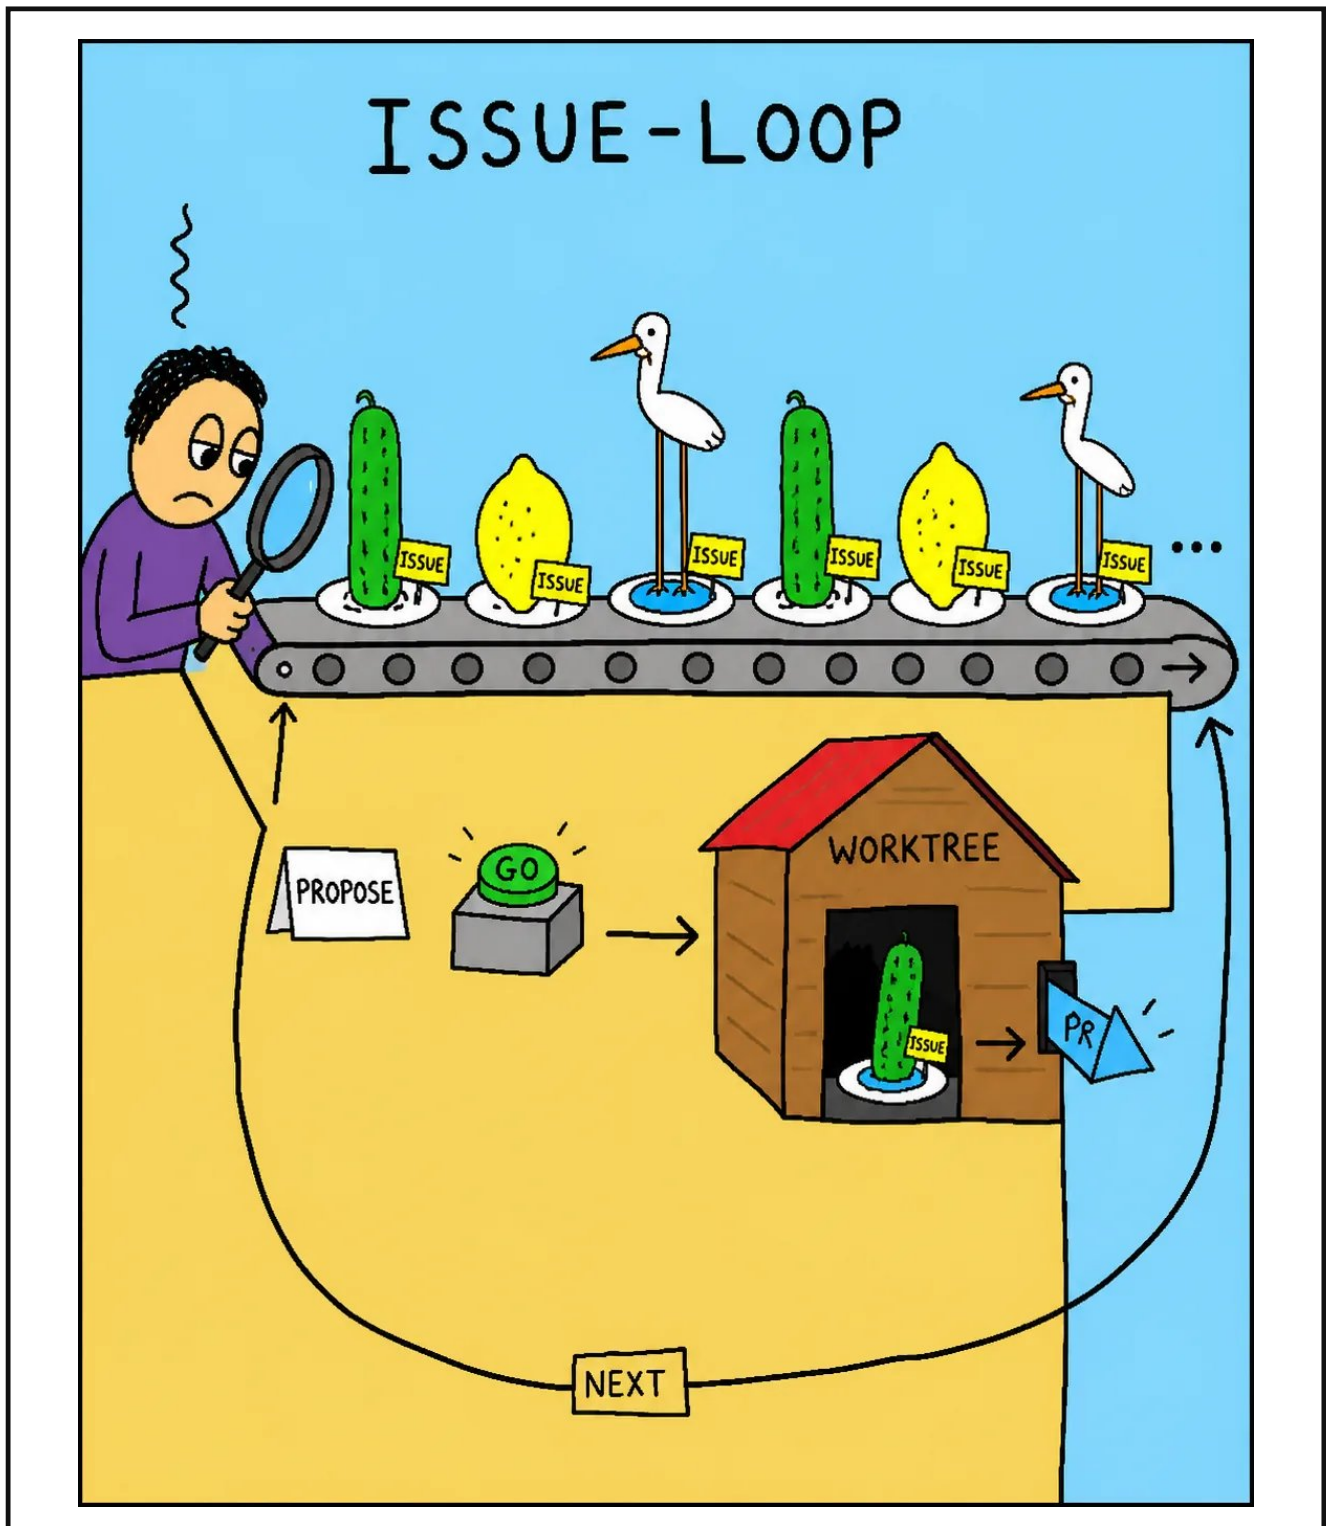


Use when: One issue deserves its own dedicated session.

Small work: Analyze, fix, test, and open one coherent PR.

Large work: Describe phases and offer phased-workflow when that plugin is installed.

Does not: Take an issue already assigned to somebody else.

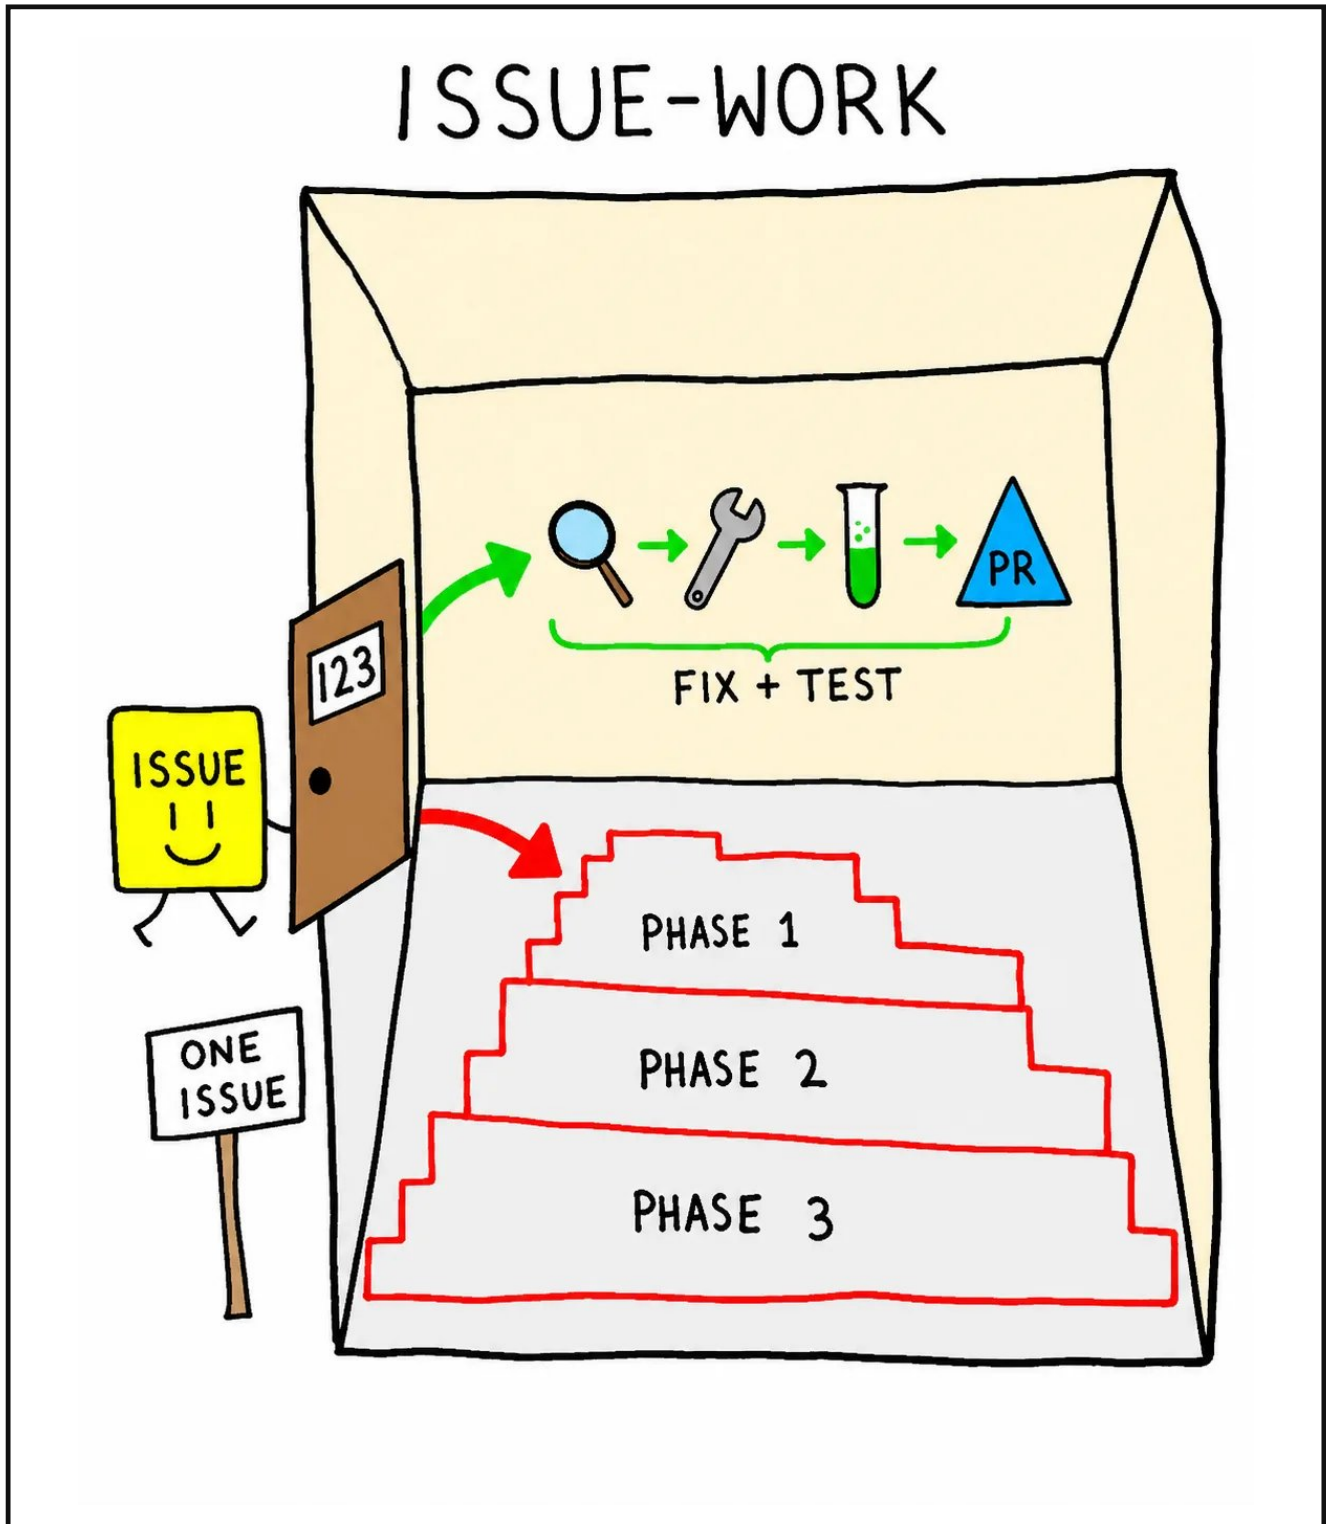


Use when: You want the PR and issue dashboards together.

Starts: Two local desk servers and their small web applications in the browser.

Does: Routes web-app actions such as analyze, run, and triage to the current chat.

Keeps: Selected rows and request state synchronized between the web frontends and the chat.

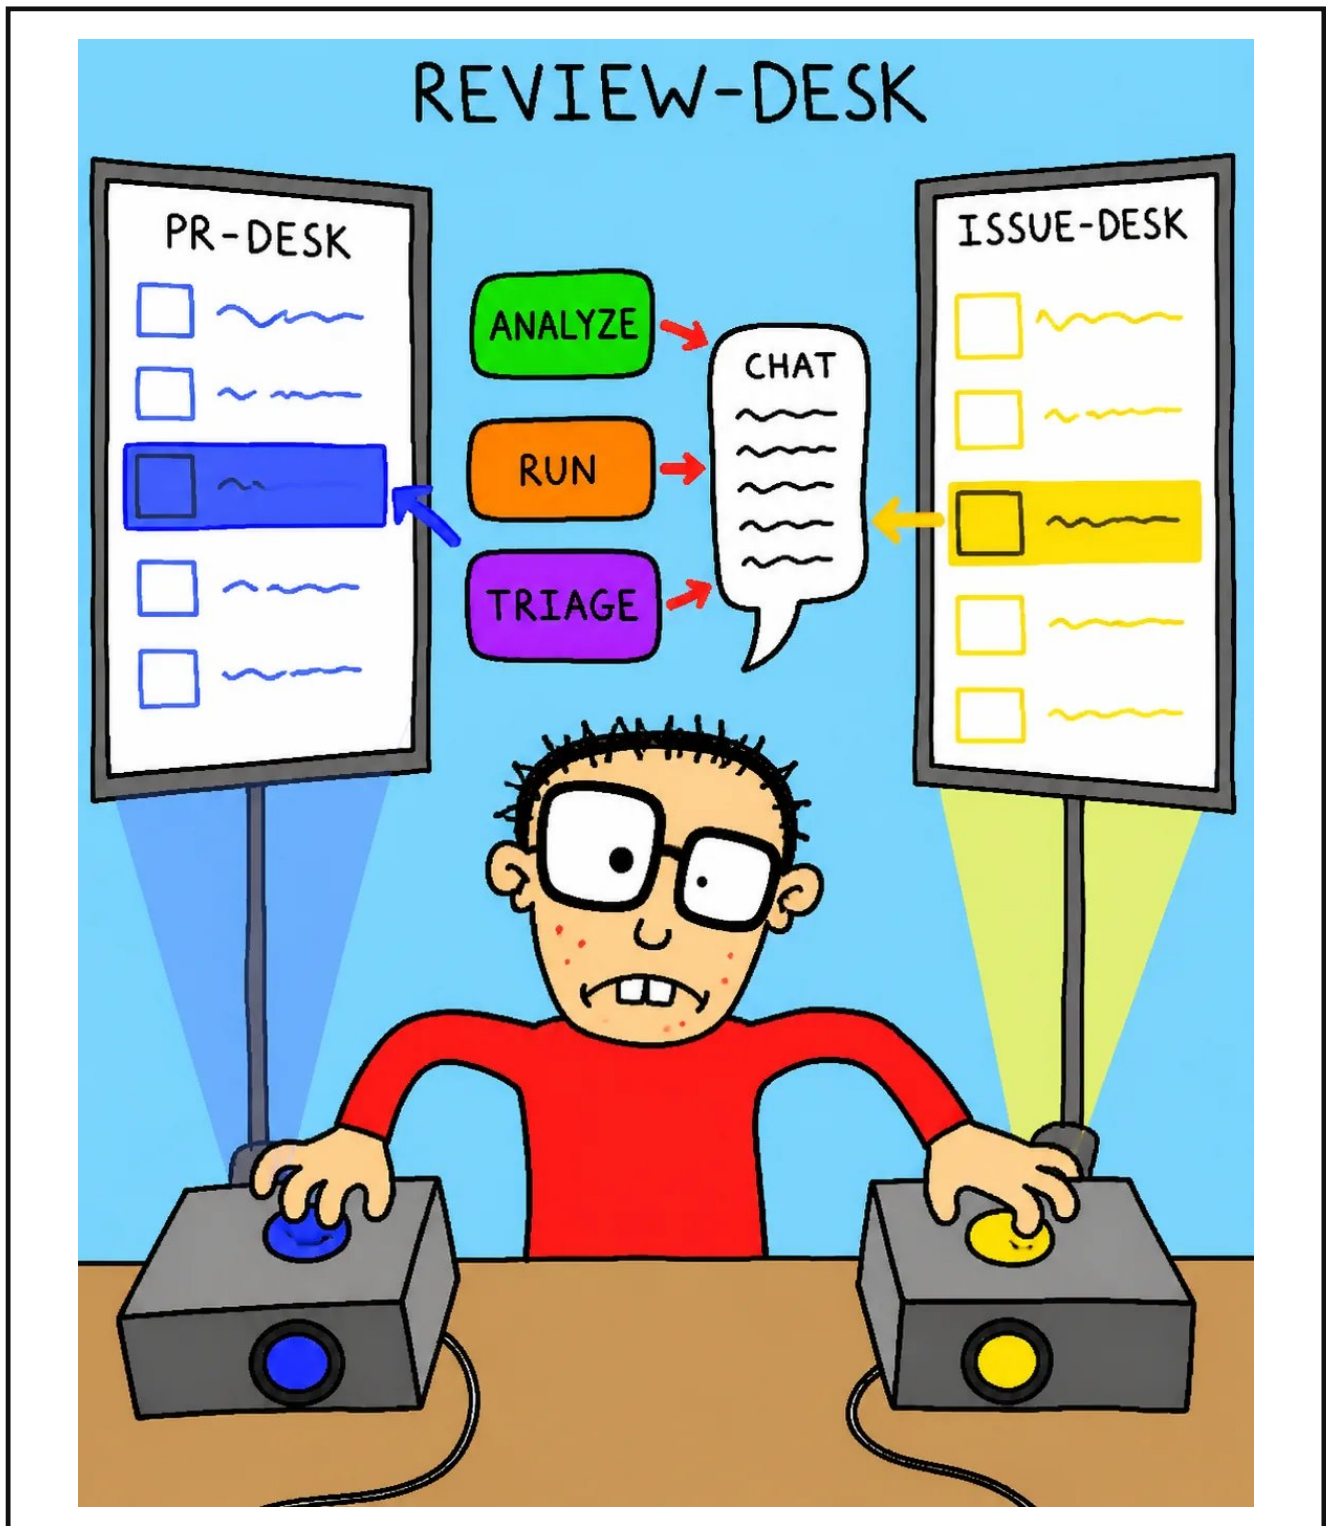


Batch: At most four proposals at a time.

Parallel: Independent work runs in separate worktrees.

Sequential: Same file, stacked PR, same issue, or unknown overlap.

Report: One row per item; one failure never hides the others.

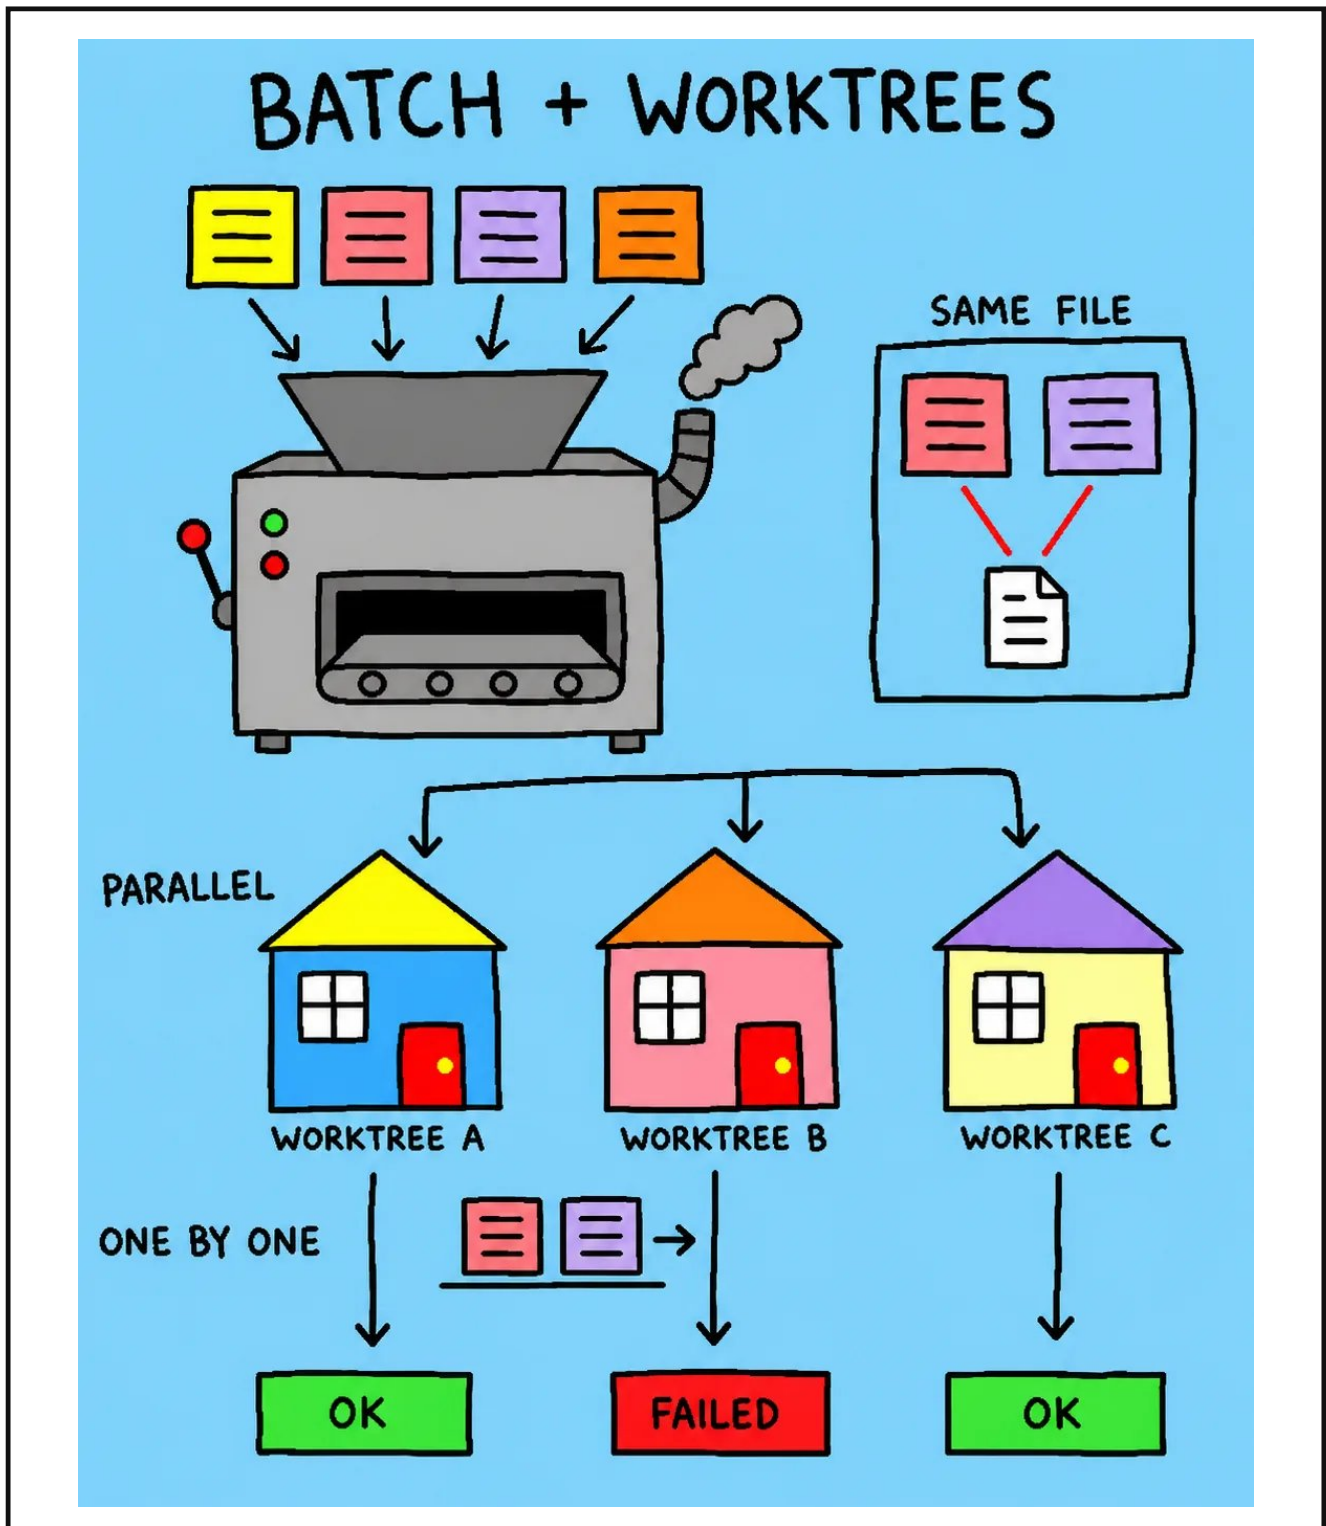

Shared: Workflow rules, desk state, provider data, and verdicts.

Per host: Adapters for questions, tasks, browser opening, and waiting.

Rule: Host mechanics must not duplicate or change workflow semantics.

Result: The same skills and outcomes through either host.

