

KanguroMovies

API Documentation

September 5, 2016

Contents

Contents	1
1 Package TrabajoTallerConstruccionSw	2
1.1 Modules	2
1.2 Variables	2
2 Package TrabajoTallerConstruccionSw.controllers	3
2.1 Modules	3
2.2 Variables	3
3 Module TrabajoTallerConstruccionSw.controllers.actor_controller	4
3.1 Functions	4
3.2 Variables	4
3.3 Class Actor	5
3.3.1 Methods	5
3.3.2 Properties	8
3.3.3 Class Variables	8
4 Module TrabajoTallerConstruccionSw.controllers.character_controller	9
4.1 Functions	9
4.2 Variables	9
4.3 Class Character	10
4.3.1 Methods	10
4.3.2 Properties	13
4.3.3 Class Variables	13
5 Module TrabajoTallerConstruccionSw.controllers.director_controller	14
5.1 Functions	14
5.2 Variables	14
5.3 Class Director	15
5.3.1 Methods	15
5.3.2 Properties	18
5.3.3 Class Variables	18
6 Module TrabajoTallerConstruccionSw.controllers.elenco_controller	19
6.1 Functions	19
6.2 Variables	19
6.3 Class Elenco	20

6.3.1	Methods	20
6.3.2	Properties	23
6.3.3	Class Variables	23
7	Module TrabajoTallerConstruccionSw.controllers.login_controller	24
7.1	Functions	24
7.2	Variables	24
7.3	Class Login	25
7.3.1	Methods	25
7.3.2	Properties	27
7.3.3	Class Variables	28
8	Module TrabajoTallerConstruccionSw.controllers.movie_controller	29
8.1	Functions	29
8.2	Variables	29
8.3	Class Pelicula	30
8.3.1	Methods	30
8.3.2	Properties	33
8.3.3	Class Variables	33
9	Module TrabajoTallerConstruccionSw.dbManager	34
9.1	Variables	34
9.2	Class dbManager	34
9.2.1	Methods	34
9.2.2	Properties	36
10	Module TrabajoTallerConstruccionSw.elenco_ui	37
10.1	Variables	37
11	Module TrabajoTallerConstruccionSw.main	38
11.1	Functions	38
11.2	Variables	38
11.3	Class Main	39
11.3.1	Methods	39
11.3.2	Properties	43
11.3.3	Class Variables	43
12	Module TrabajoTallerConstruccionSw.main_ui	44
12.1	Variables	44
12.2	Class Ui_MainWindow	44
12.2.1	Methods	44
12.2.2	Properties	44
13	Package TrabajoTallerConstruccionSw.views	45
13.1	Modules	45
13.2	Variables	45
14	Module TrabajoTallerConstruccionSw.views.actor_ui	46
14.1	Variables	46
14.2	Class Ui_Dialog	46
14.2.1	Methods	46
14.2.2	Properties	46

15 Module TrabajoTallerConstruccionSw.views.chars_ui	47
15.1 Variables	47
15.2 Class Ui_Dialog	47
15.2.1 Methods	47
15.2.2 Properties	47
16 Module TrabajoTallerConstruccionSw.views.director_ui	48
16.1 Variables	48
16.2 Class Ui_Dialog	48
16.2.1 Methods	48
16.2.2 Properties	48
17 Module TrabajoTallerConstruccionSw.views.elenco_ui	49
17.1 Variables	49
17.2 Class Ui_Dialog	49
17.2.1 Methods	49
17.2.2 Properties	49
18 Module TrabajoTallerConstruccionSw.views.login_ui	50
18.1 Variables	50
18.2 Class Ui_Dialog	50
18.2.1 Methods	50
18.2.2 Properties	50
19 Module TrabajoTallerConstruccionSw.views.movie_ui	51
19.1 Variables	51
19.2 Class Ui_Dialog	51
19.2.1 Methods	51
19.2.2 Properties	51

1 Package TrabajoTallerConstruccionSw

1.1 Modules

- **controllers** (Section 2, p. 3)
 - **actor_controller** (Section 3, p. 4)
 - **character_controller** (Section 4, p. 9)
 - **director_controller** (Section 5, p. 14)
 - **elenco_controller** (Section 6, p. 19)
 - **login_controller** (Section 7, p. 24)
 - **movie_controller** (Section 8, p. 29)
- **dbManager** (Section 9, p. 34)
- **elenco_ui** (Section 10, p. 37)
- **main** (Section 11, p. 38)
- **main_ui** (Section 12, p. 44)
- **views** (Section 13, p. 45)
 - **actor_ui** (Section 14, p. 46)
 - **chars_ui** (Section 15, p. 47)
 - **director_ui** (Section 16, p. 48)
 - **elenco_ui** (Section 17, p. 49)
 - **login_ui** (Section 18, p. 50)
 - **movie_ui** (Section 19, p. 51)

1.2 Variables

Name	Description
__package__	Value: None

2 Package TrabajoTallerConstruccionSw.controllers

2.1 Modules

- **actor_controller** (*Section 3, p. 4*)
- **character_controller** (*Section 4, p. 9*)
- **director_controller** (*Section 5, p. 14*)
- **elenco_controller** (*Section 6, p. 19*)
- **login_controller** (*Section 7, p. 24*)
- **movie_controller** (*Section 8, p. 29*)

2.2 Variables

Name	Description
__package__	Value: None

3 Module TrabajoTallerConstruccionSw.controllers.actor_controller

3.1 Functions

bin(*QTextStream*)

Return Value

QTextStream

hex(*QTextStream*)

Return Value

QTextStream

oct(*QTextStream*)


Return Value

QTextStream

3.2 Variables

Name	Description
PYQT_CONFIGURATION	Value: {'sip_flags': '-x VendorID -t WS_X11 -x PyQt_NoPrintRange...
PYQT_VERSION	Value: 264708
PYQT_VERSION_STR	Value: '4.10.4'
QT_VERSION	Value: 264198
QT_VERSION_STR	Value: '4.8.6'
QtCriticalMsg	Value: 2
QtDebugMsg	Value: 0
QtFatalMsg	Value: 3
QtSystemMsg	Value: 2
QtWarningMsg	Value: 1
__package__	Value: 'TrabajoTallerConstruccionSw.controllers'
qApp	Value: <PyQt4.QtGui.QApplication object at 0x7f015a7e0f28>

3.3 Class Actor

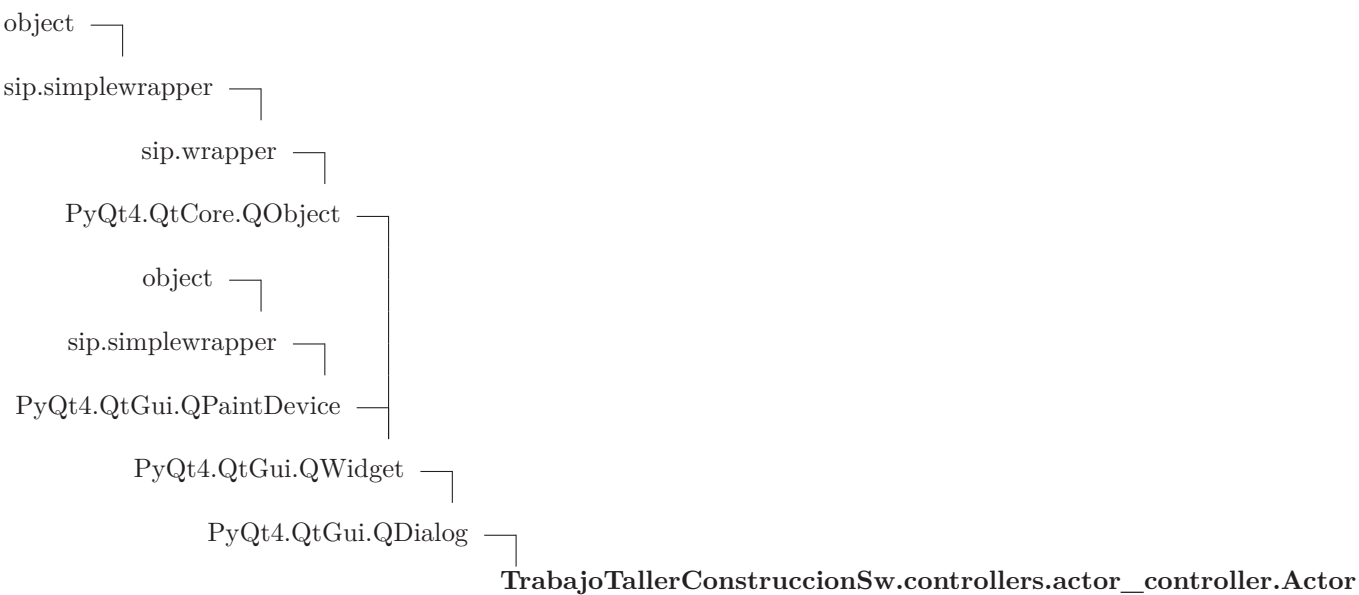

3.3.1 Methods

__init__(*self*)

x.__init__(...) initializes x; see help(type(x)) for signature

Overrides: object.__init__ exitit(inherited documentation)

signals(*self*)

boton_listo_clicked(*self*)

boton_cancelar_clicked(*self*)

boton_buscar_imagen_clicked(*self*)

setTitle(*self*, *title*)

accepted(*self*)

QDialog.accepted [signal]

Overrides: PyQt4.QtGui.QDialog.accepted exitit(inherited documentation)

getData(*self*, *data*)

<code>validaData(self)</code>

<code>clearData(self)</code>

<code>putData(self, data, value)</code>

<code>verificaEntrada(self, data)</code>
--

Inherited from PyQt4.QtGui.QDialog

`accept()`, `closeEvent()`, `contextMenuEvent()`, `done()`, `eventFilter()`, `exec_()`, `extension()`, `finished()`, `isSizeGripEnabled()`, `keyPressEvent()`, `minimumSizeHint()`, `open()`, `orientation()`, `reject()`, `rejected()`, `resizeEvent()`, `result()`, `setExtension()`, `setModal()`, `setOrientation()`, `setResult()`, `setSizeGripEnabled()`, `setVisible()`, `showEvent()`, `showExtension()`, `sizeHint()`

Inherited from PyQt4.QtGui.QWidget

`acceptDrops()`, `accessibleDescription()`, `accessibleName()`, `actionEvent()`, `actions()`, `activateWindow()`, `addAction()`, `addActions()`, `adjustSize()`, `autoFillBackground()`, `backgroundRole()`, `baseSize()`, `changeEvent()`, `childAt()`, `childrenRect()`, `childrenRegion()`, `clearFocus()`, `clearMask()`, `close()`, `contentsMargins()`, `contentsRect()`, `contextMenuPolicy()`, `create()`, `cursor()`, `customContextMenuRequested()`, `destroy()`, `devType()`, `dragEnterEvent()`, `dragLeaveEvent()`, `dragMoveEvent()`, `dropEvent()`, `effectiveWinId()`, `enabledChange()`, `ensurePolished()`, `enterEvent()`, `event()`, `find()`, `focusInEvent()`, `focusNextChild()`, `focusNextPrevChild()`, `focusOutEvent()`, `focusPolicy()`, `focusPreviousChild()`, `focusProxy()`, `focusWidget()`, `font()`, `fontChange()`, `fontInfo()`, `fontMetrics()`, `foregroundRole()`, `frameGeometry()`, `frameSize()`, `geometry()`, `getContentsMargins()`, `grabGesture()`, `grabKeyboard()`, `grabMouse()`, `grabShortcut()`, `graphicsEffect()`, `graphicsProxyWidget()`, `handle()`, `hasFocus()`, `hasMouseTracking()`, `height()`, `heightForWidth()`, `hide()`, `hideEvent()`, `inputContext()`, `inputMethodEvent()`, `inputMethodHints()`, `inputMethodQuery()`, `insertAction()`, `insertActions()`, `isActiveWindow()`, `isAncestorOf()`, `isEnabled()`, `isEnabledTo()`, `isEnabledToTLW()`, `isFullScreen()`, `isHidden()`, `isLeftToRight()`, `isMaximized()`, `isMinimized()`, `isModal()`, `isRightToLeft()`, `isTopLevel()`, `isVisible()`, `isVisibleTo()`, `isWindow()`, `isWindowModified()`, `keyReleaseEvent()`, `keyboardGrabber()`, `languageChange()`, `layout()`, `layoutDirection()`, `leaveEvent()`, `locale()`, `lower()`, `mapFrom()`, `mapFromGlobal()`, `mapFromParent()`, `mapTo()`, `mapToGlobal()`, `mapToParent()`, `mask()`, `maximumHeight()`, `maximumSize()`, `maximumWidth()`, `metric()`, `minimumHeight()`, `minimumSize()`, `minimumWidth()`, `mouseDoubleClickEvent()`, `mouseGrabber()`, `mouseMoveEvent()`, `mousePressEvent()`, `mouseReleaseEvent()`, `move()`, `moveEvent()`, `nativeParentWidget()`, `nextInFocusChain()`, `normalGeometry()`, `overrideWindowFlags()`, `overrideWindowState()`, `paintEngine()`, `paintEvent()`, `palette()`, `paletteChange()`, `parentWidget()`, `pos()`, `previousInFocusChain()`, `raise_()`, `rect()`, `releaseKeyboard()`, `releaseMouse()`, `releaseShortcut()`, `removeAction()`, `render()`, `repaint()`, `resetInput-`

Context(), resize(), restoreGeometry(), saveGeometry(), scroll(), setAcceptDrops(), setAccessibleDescription(), setAccessibleName(), setAttribute(), setAutoFillBackground(), setBackgroundRole(), setBaseSize(), setContentsMargins(), setContextMenuPolicy(), setCursor(), setDisabled(), setEnabled(), setFixedHeight(), setFixedSize(), setFixedWidth(), setFocus(), setFocusPolicy(), setFocusProxy(), setFont(), setForegroundRole(), setGeometry(), setGraphicsEffect(), setHidden(), setInputContext(), setInputMethodHints(), setLayout(), setLayoutDirection(), setLocale(), setMask(), setMaximumHeight(), setMaximumSize(), setMaximumWidth(), setMinimumHeight(), setMinimumSize(), setMinimumWidth(), setMouseTracking(), setPalette(), setParent(), setShortcutAutoRepeat(), setShortcutEnabled(), setShown(), setSizeIncrement(), setSizePolicy(), setStatusTip(), setStyle(), setStyleSheet(), setTabOrder(), setToolTip(), setUpdatesEnabled(), setWhatsThis(), setWindowFilePath(), setWindowFlags(), setWindowIcon(), setWindowIconText(), setWindowModality(), setWindowModified(), setWindowOpacity(), setWindowRole(), setWindowState(), setWindowTitle(), show(), showFullScreen(), showMaximized(), showMinimized(), showNormal(), size(), sizeIncrement(), sizePolicy(), stackUnder(), statusTip(), style(), styleSheet(), tabletEvent(), testAttribute(), toolTip(), topLevelWidget(), underMouse(), ungrabGesture(), unsetCursor(), unsetLayoutDirection(), unsetLocale(), update(), updateGeometry(), updateMicroFocus(), updatesEnabled(), visibleRegion(), whatsThis(), wheelEvent(), width(), winId(), window(), windowActivationChange(), windowFilePath(), windowFlags(), windowIcon(), windowIconText(), windowModality(), windowOpacity(), windowRole(), windowState(), windowTitle(), windowType(), x(), x11Info(), x11PictureHandle(), y()

Inherited from PyQt4.QtCore.QObject

__getattr__(), blockSignals(), childEvent(), children(), connect(), connectNotify(), customEvent(), deleteLater(), destroyed(), disconnect(), disconnectNotify(), dumpObjectInfo(), dumpObjectTree(), dynamicPropertyNames(), emit(), findChild(), findChildren(), inherits(), installEventFilter(), isWidgetType(), killTimer(), metaObject(), moveToThread(), objectName(), parent(), property(), pyqtConfigure(), receivers(), removeEventFilter(), sender(), senderSignalIndex(), setObjectName(), setProperty(), signalsBlocked(), startTimer(), thread(), timerEvent(), tr(), trUtf8()

Inherited from PyQt4.QtGui.QPaintDevice

colorCount(), depth(), heightMM(), logicalDpiX(), logicalDpiY(), numColors(), paintingActive(), physicalDpiX(), physicalDpiY(), widthMM()

Inherited from sip.simplewrapper

__new__()

Inherited from object

__delattr__(), __format__(), __getattr__(), __hash__(), __reduce__(), __reduce_ex__(), __repr__(), __setattr__(), __sizeof__(), __str__(), __sub-

classhook____()

3.3.2 Properties

Name	Description
<i>Inherited from object</i> ____class____	

3.3.3 Class Variables

Name	Description
<i>Inherited from PyQt4.QtGui.QDialog</i> Accepted, Rejected	
<i>Inherited from PyQt4.QtGui.QWidget</i> DrawChildren, DrawWindowBackground, IgnoreMask	
<i>Inherited from PyQt4.QtCore.QObject</i> staticMetaObject	
<i>Inherited from PyQt4.QtGui.QPaintDevice</i> PdmDepth, PdmDpiX, PdmDpiY, PdmHeight, PdmHeightMM, PdmNumColors, PdmPhysicalDpiX, PdmPhysicalDpiY, PdmWidth, PdmWidthMM	

4 Module TrabajoTallerConstruccionSw.controllers.character_controller

4.1 Functions

bin(*QTextStream*)

Return Value

QTextStream

hex(*QTextStream*)

Return Value

QTextStream

oct(*QTextStream*)


Return Value

QTextStream

4.2 Variables

Name	Description
PYQT_CONFIGURATI- ON	Value: {'sip_flags': '-x VendorID -t WS_X11 -x PyQt_NoPrintRange...
PYQT_VERSION	Value: 264708
PYQT_VERSION_STR	Value: '4.10.4'
QT_VERSION	Value: 264198
QT_VERSION_STR	Value: '4.8.6'
QtCriticalMsg	Value: 2
QtDebugMsg	Value: 0
QtFatalMsg	Value: 3
QtSystemMsg	Value: 2
QtWarningMsg	Value: 1
__package__	Value: 'TrabajoTallerConstruccionSw.controllers'
qApp	Value: <PyQt4.QtGui.QApplication object at 0x7f015a7e0f28>

4.3 Class Character

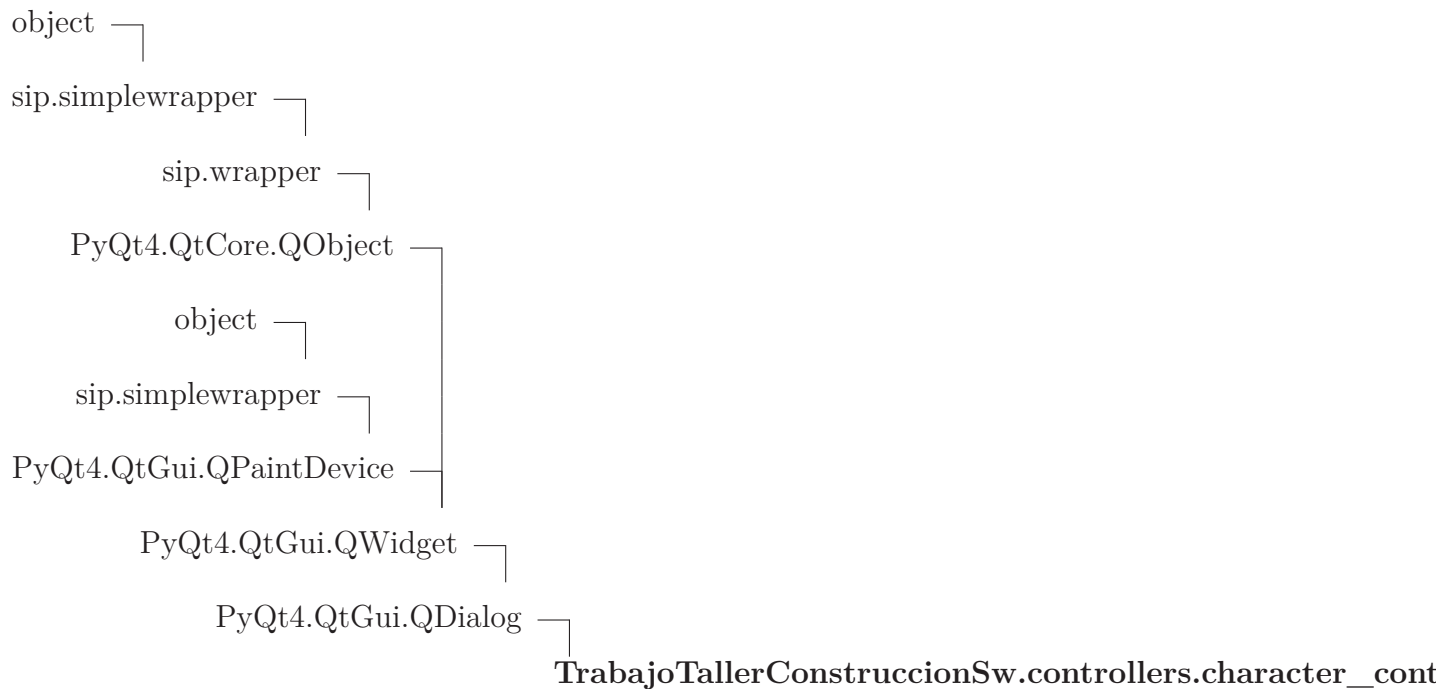

4.3.1 Methods

`__init__(self)`

`x.__init__(...)` initializes `x`; see `help(type(x))` for signature
 Overrides: `object.__init__` `exitit`(inherited documentation)

`signals(self)`

`exec__(self)`

Overrides: `PyQt4.QtGui.QDialog.exec__`

`updateCharactersList(self)`

`aceptar(self)`

`comboboxChanged(self)`

`updateData(self)`

`clearData(self)``BGuardar__clicked(self)``addCharacter(self)``updateCharacter(self)``deleteCharacter(self)``validaData(self)`***Inherited from PyQt4.QtGui.QDialog***

`accept()`, `accepted()`, `closeEvent()`, `contextMenuEvent()`, `done()`, `eventFilter()`, `extension()`, `finished()`, `isSizeGripEnabled()`, `keyPressEvent()`, `minimumSizeHint()`, `open()`, `orientation()`, `reject()`, `rejected()`, `resizeEvent()`, `result()`, `setExtension()`, `setModal()`, `setOrientation()`, `setResult()`, `setSizeGripEnabled()`, `setVisible()`, `showEvent()`, `showExtension()`, `sizeHint()`

Inherited from PyQt4.QtGui.QWidget

`acceptDrops()`, `accessibleDescription()`, `accessibleName()`, `actionEvent()`, `actions()`, `activateWindow()`, `addAction()`, `addActions()`, `adjustSize()`, `autoFillBackground()`, `backgroundRole()`, `baseSize()`, `changeEvent()`, `childAt()`, `childrenRect()`, `childrenRegion()`, `clearFocus()`, `clearMask()`, `close()`, `contentsMargins()`, `contentsRect()`, `contextMenuPolicy()`, `create()`, `cursor()`, `customContextMenuRequested()`, `destroy()`, `devType()`, `dragEnterEvent()`, `dragLeaveEvent()`, `dragMoveEvent()`, `dropEvent()`, `effectiveWinId()`, `enabledChange()`, `ensurePolished()`, `enterEvent()`, `event()`, `find()`, `focusInEvent()`, `focusNextChild()`, `focusNextPrevChild()`, `focusOutEvent()`, `focusPolicy()`, `focusPreviousChild()`, `focusProxy()`, `focusWidget()`, `font()`, `fontChange()`, `fontInfo()`, `fontMetrics()`, `foregroundRole()`, `frameGeometry()`, `frameSize()`, `geometry()`, `getContentsMargins()`, `grabGesture()`, `grabKeyboard()`, `grabMouse()`, `grabShortcut()`, `graphicsEffect()`, `graphicsProxyWidget()`, `handle()`, `hasFocus()`, `hasMouseTracking()`, `height()`, `heightForWidth()`, `hide()`, `hideEvent()`, `inputContext()`, `inputMethodEvent()`, `inputMethodHints()`, `inputMethodQuery()`, `insertAction()`, `insertActions()`, `isActiveWindow()`, `isAncestorOf()`, `isEnabled()`, `isEnabledTo()`, `isEnabledToTLW()`, `isFullScreen()`, `isHidden()`, `isLeftToRight()`, `isMaximized()`, `isMinimized()`, `isModal()`, `isRightToLeft()`, `isTopLevel()`, `isVisible()`, `isVisibleTo()`, `isWindow()`, `isWindowModified()`, `keyReleaseEvent()`, `keyboardGrabber()`, `languageChange()`, `layout()`, `layoutDirection()`, `leaveEvent()`, `locale()`, `lower()`, `mapFrom()`, `mapFromGlobal()`, `mapFromParent()`, `mapTo()`, `mapToGlobal()`, `mapToParent()`, `mask()`, `maximumHeight()`, `maximumSize()`, `maximumWidth()`, `metric()`, `minimumHeight()`, `minimumSize()`, `minimumWidth()`, `mouseDoubleClickEvent()`, `mouseGrabber()`, `mouse-`

MoveEvent(), mousePressEvent(), mouseReleaseEvent(), move(), moveEvent(), nativeParentWidget(), nextInFocusChain(), normalGeometry(), overrideWindowFlags(), overrideWindowState(), paintEngine(), paintEvent(), palette(), paletteChange(), parentWidget(), pos(), previousInFocusChain(), raise_(), rect(), releaseKeyboard(), releaseMouse(), releaseShortcut(), removeAction(), render(), repaint(), resetInputContext(), resize(), restoreGeometry(), saveGeometry(), scroll(), setAcceptDrops(), setAccessibleDescription(), setAccessibleName(), setAttribute(), setAutoFillBackground(), setBackgroundRole(), setBaseSize(), setContentsMargins(), setContextMenuPolicy(), setCursor(), setDisabled(), setEnabled(), setFixedHeight(), setFixedSize(), setFixedWidth(), setFocus(), setFocusPolicy(), setFocusProxy(), setFont(), setForegroundRole(), setGeometry(), setGraphicsEffect(), setHidden(), setInputContext(), setInputMethodHints(), setLayout(), setLayoutDirection(), setLocale(), setMask(), setMaximumHeight(), setMaximumSize(), setMaximumWidth(), setMinimumHeight(), setMinimumSize(), setMinimumWidth(), setMouseTracking(), setPalette(), setParent(), setShortcutAutoRepeat(), setShortcutEnabled(), setShown(), setSizeIncrement(), setSizePolicy(), setStatusTip(), setStyle(), setStyleSheet(), setTabOrder(), setToolTip(), setUpdatesEnabled(), setWhatsThis(), setWindowFilePath(), setWindowFlags(), setWindowIcon(), setWindowIconText(), setWindowModality(), setWindowModified(), setWindowOpacity(), setWindowRole(), setWindowState(), setWindowTitle(), show(), showFullScreen(), showMaximized(), showMinimized(), showNormal(), size(), sizeIncrement(), sizePolicy(), stackUnder(), statusTip(), style(), stylesheet(), tabletEvent(), testAttribute(), tooltip(), topLevelWidget(), underMouse(), ungrabGesture(), unsetCursor(), unsetLayoutDirection(), unsetLocale(), update(), updateGeometry(), updateMicroFocus(), updatesEnabled(), visibleRegion(), whatsThis(), wheelEvent(), width(), winId(), window(), windowActivationChange(), windowFilePath(), windowFlags(), windowIcon(), windowIconText(), windowModality(), windowOpacity(), windowRole(), windowState(), windowTitle(), windowType(), x(), x11Info(), x11PictureHandle(), y()

Inherited from PyQt4.QtCore.QObject

__getattr__(), blockSignals(), childEvent(), children(), connect(), connectNotify(), customEvent(), deleteLater(), destroyed(), disconnect(), disconnectNotify(), dumpObjectInfo(), dumpObjectTree(), dynamicPropertyNames(), emit(), findChild(), findChildren(), inherits(), installEventFilter(), isWidgetType(), killTimer(), metaObject(), moveToThread(), objectName(), parent(), property(), pyqtConfigure(), receivers(), removeEventFilter(), sender(), senderSignalIndex(), setObjectName(), setProperty(), signalsBlocked(), startTimer(), thread(), timerEvent(), tr(), trUtf8()

Inherited from PyQt4.QtGui.QPaintDevice

colorCount(), depth(), heightMM(), logicalDpiX(), logicalDpiY(), numColors(), paintingActive(), physicalDpiX(), physicalDpiY(), widthMM()

Inherited from sip.simplewrapper

__new__()

Inherited from object

__delattr__(), __format__(), __getattr__(), __hash__(), __reduce__(),
__reduce_ex__(), __repr__(), __setattr__(), __sizeof__(), __str__(), __sub-
classhook__()

4.3.2 Properties

Name	Description
<i>Inherited from object</i> __class__	

4.3.3 Class Variables

Name	Description
<i>Inherited from PyQt4.QtGui.QDialog</i> Accepted, Rejected	
<i>Inherited from PyQt4.QtGui.QWidget</i> DrawChildren, DrawWindowBackground, IgnoreMask	
<i>Inherited from PyQt4.QtCore.QObject</i> staticMetaObject	
<i>Inherited from PyQt4.QtGui.QPaintDevice</i> PdmDepth, PdmDpiX, PdmDpiY, PdmHeight, PdmHeightMM, PdmNumColors, PdmPhysicalDpiX, PdmPhysicalDpiY, PdmWidth, PdmWidthMM	

5 Module TrabajoTallerConstruccionSw.controllers.director_controller

5.1 Functions

bin(*QTextStream*)

Return Value

QTextStream

hex(*QTextStream*)

Return Value

QTextStream

oct(*QTextStream*)


Return Value

QTextStream

5.2 Variables

Name	Description
PYQT_CONFIGURATI- ON	Value: {'sip_flags': '-x VendorID -t WS_X11 -x PyQt_NoPrintRange...
PYQT_VERSION	Value: 264708
PYQT_VERSION_STR	Value: '4.10.4'
QT_VERSION	Value: 264198
QT_VERSION_STR	Value: '4.8.6'
QtCriticalMsg	Value: 2
QtDebugMsg	Value: 0
QtFatalMsg	Value: 3
QtSystemMsg	Value: 2
QtWarningMsg	Value: 1
__package__	Value: 'TrabajoTallerConstruccionSw.controllers'
qApp	Value: <PyQt4.QtGui.QApplication object at 0x7f015a7e0f28>

5.3 Class Director

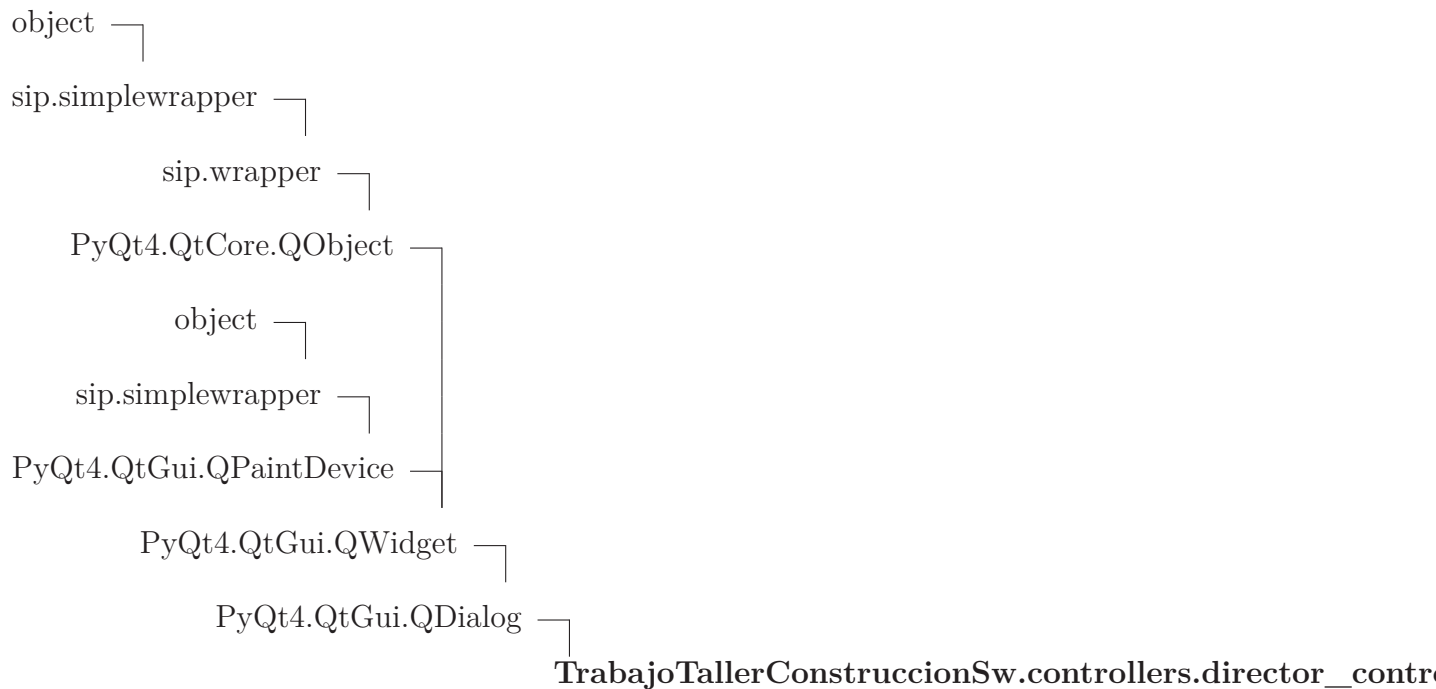

5.3.1 Methods

__init__(self)

x.__init__(...) initializes x; see help(type(x)) for signature
 Overrides: object.__init__ extit(inherited documentation)

signals(self)

boton_listo_clicked(self)

check_dead_clicked(self)

isDead(self)

boton_buscar_imagen_clicked(self)

boton_cancelar_clicked(self)

accepted(*self*)

QDialog.accepted [signal]

Overrides: PyQt4.QtGui.QDialog.accepted `exitit`(inherited documentation)

setTitle(*self*, *title*)

getData(*self*, *data*)

validaData(*self*)

clearData(*self*)

putData(*self*, *data*, *value*)

verificaEntrada(*self*, *data*)

Inherited from PyQt4.QtGui.QDialog

`accept()`, `closeEvent()`, `contextMenuEvent()`, `done()`, `eventFilter()`, `exec_()`, `extension()`, `finished()`, `isSizeGripEnabled()`, `keyPressEvent()`, `minimumSizeHint()`, `open()`, `orientation()`, `reject()`, `rejected()`, `resizeEvent()`, `result()`, `setExtension()`, `setModal()`, `setOrientation()`, `setResult()`, `setSizeGripEnabled()`, `setVisible()`, `showEvent()`, `showExtension()`, `sizeHint()`

Inherited from PyQt4.QtGui.QWidget

`acceptDrops()`, `accessibleDescription()`, `accessibleName()`, `actionEvent()`, `actions()`, `activateWindow()`, `addAction()`, `addActions()`, `adjustSize()`, `autoFillBackground()`, `backgroundRole()`, `baseSize()`, `changeEvent()`, `childAt()`, `childrenRect()`, `childrenRegion()`, `clearFocus()`, `clearMask()`, `close()`, `contentsMargins()`, `contentsRect()`, `contextMenuPolicy()`, `create()`, `cursor()`, `customContextMenuRequested()`, `destroy()`, `devType()`, `dragEnterEvent()`, `dragLeaveEvent()`, `dragMoveEvent()`, `dropEvent()`, `effectiveWinId()`, `enabledChange()`, `ensurePolished()`, `enterEvent()`, `event()`, `find()`, `focusInEvent()`, `focusNextChild()`, `focusNextPrevChild()`, `focusOutEvent()`, `focusPolicy()`, `focusPreviousChild()`, `focusProxy()`, `focusWidget()`, `font()`, `fontChange()`, `fontInfo()`, `fontMetrics()`, `foregroundRole()`, `frameGeometry()`, `frameSize()`, `geometry()`, `getContentsMargins()`, `grabGesture()`, `grabKeyboard()`, `grabMouse()`, `grabShortcut()`, `graphicsEffect()`, `graphicsProxyWidget()`, `handle()`, `hasFocus()`, `hasMouseTracking()`, `height()`, `heightForWidth()`, `hide()`, `hideEvent()`, `inputContext()`, `inputMethodEvent()`, `inputMethodHints()`, `inputMethodQuery()`, `insertAction()`, `insertActions()`, `isActiveWindow()`, `isAncestorOf()`, `isEnabled()`, `isEnabledTo()`, `isEnabledToTLW()`, `isFullScreen()`, `isHidden()`, `isLeftToRight()`, `isMaximized()`, `isMinimized()`, `isModal()`, `isRightToLeft()`, `isTopLevel()`, `isVisible()`, `isVisibleTo()`, `isWin-`

dow(), isWindowModified(), keyPressEvent(), keyboardGrabber(), languageChange(), layout(), layoutDirection(), leaveEvent(), locale(), lower(), mapFrom(), mapFromGlobal(), mapFromParent(), mapTo(), mapToGlobal(), mapToParent(), mask(), maxHeight(), maxSize(), maxWidth(), metric(), minHeight(), minimumSize(), minimumWidth(), mouseDoubleClickEvent(), mouseGrabber(), mouseMoveEvent(), mousePressEvent(), mouseReleaseEvent(), move(), moveEvent(), nativeParentWidget(), nextInFocusChain(), normalGeometry(), overrideWindowFlags(), overrideWindowState(), paintEngine(), paintEvent(), palette(), paletteChange(), parentWidget(), pos(), previousInFocusChain(), raise_(), rect(), releaseKeyboard(), releaseMouse(), releaseShortcut(), removeAction(), render(), repaint(), resetInputContext(), resize(), restoreGeometry(), saveGeometry(), scroll(), setAcceptDrops(), setAccessibleDescription(), setAccessibleName(), setAttribute(), setAutoFillBackground(), setBackgroundRole(), setBaseSize(), setContentsMargins(), setContextMenuPolicy(), setCursor(), setDisabled(), setEnabled(), setFixedHeight(), setFixedSize(), setFixedWidth(), setFocus(), setFocusPolicy(), setFocusProxy(), setFont(), setForegroundRole(), setGeometry(), setGraphicsEffect(), setHidden(), setInputContext(), setInputMethodHints(), setLayout(), setLayoutDirection(), setLocale(), setMask(), setMaximumHeight(), setMaximumSize(), setMaximumWidth(), setMinimumHeight(), setMinimumSize(), setMinimumWidth(), setMouseTracking(), setPalette(), setParent(), setShortcutAutoRepeat(), setShortcutEnabled(), setShown(), setSizeIncrement(), setSizePolicy(), setStatusTip(), setStyle(), setStyleSheet(), setTabOrder(), setToolTip(), setUpdatesEnabled(), setWhatsThis(), setWindowFilePath(), setWindowFlags(), setWindowIcon(), setWindowIconText(), setWindowModality(), setWindowModified(), setWindowOpacity(), setWindowRole(), setWindowState(), setWindowTitle(), show(), showFullScreen(), showMaximized(), showMinimized(), showNormal(), size(), sizeIncrement(), sizePolicy(), stackUnder(), statusTip(), style(), stylesheet(), tabletEvent(), testAttribute(), tooltip(), topLevelWidget(), underMouse(), ungrabGesture(), unsetCursor(), unsetLayoutDirection(), unsetLocale(), update(), updateGeometry(), updateMicroFocus(), updatesEnabled(), visibleRegion(), whatsThis(), wheelEvent(), width(), winId(), window(), windowActivationChange(), windowFilePath(), windowFlags(), windowIcon(), windowIconText(), windowModality(), windowOpacity(), windowRole(), windowState(), windowTitle(), windowType(), x(), x11Info(), x11PictureHandle(), y()

Inherited from PyQt4.QtCore.QObject

__getattr__(), blockSignals(), childEvent(), children(), connect(), connectNotify(), customEvent(), deleteLater(), destroyed(), disconnect(), disconnectNotify(), dumpObjectInfo(), dumpObjectTree(), dynamicPropertyNames(), emit(), findChild(), findChildren(), inherits(), installEventFilter(), isWidgetType(), killTimer(), metaObject(), moveToThread(), objectName(), parent(), property(), pyqtConfigure(), receivers(), removeEventFilter(), sender(), senderSignalIndex(), setObjectName(), setProperty(), signalsBlocked(), startTimer(), thread(), timerEvent(), tr(), trUtf8()

Inherited from PyQt4.QtGui.QPaintDevice

colorCount(), depth(), heightMM(), logicalDpiX(), logicalDpiY(), numColors(), paintingActive(), physicalDpiX(), physicalDpiY(), widthMM()

Inherited from sip.simplewrapper

__new__()

Inherited from object

__delattr__(), __format__(), __getattr__(), __hash__(), __reduce__(), __reduce_ex__(), __repr__(), __setattr__(), __sizeof__(), __str__(), __subclasshook__()

5.3.2 Properties

Name	Description
<i>Inherited from object</i>	
__class__	

5.3.3 Class Variables

Name	Description
<i>Inherited from PyQt4.QtGui.QDialog</i>	
Accepted, Rejected	
<i>Inherited from PyQt4.QtGui.QWidget</i>	
DrawChildren, DrawWindowBackground, IgnoreMask	
<i>Inherited from PyQt4.QtCore.QObject</i>	
staticMetaObject	
<i>Inherited from PyQt4.QtGui.QPaintDevice</i>	
PdmDepth, PdmDpiX, PdmDpiY, PdmHeight, PdmHeightMM, PdmNumColors, PdmPhysicalDpiX, PdmPhysicalDpiY, PdmWidth, PdmWidthMM	

6 Module TrabajoTallerConstruccionSw.controllers.elenco_controller

6.1 Functions

bin(*QTextStream*)

Return Value

QTextStream

hex(*QTextStream*)

Return Value

QTextStream

oct(*QTextStream*)


Return Value

QTextStream

6.2 Variables

Name	Description
PYQT_CONFIGURATI- ON	Value: {'sip_flags': '-x VendorID -t WS_X11 -x PyQt_NoPrintRange...
PYQT_VERSION	Value: 264708
PYQT_VERSION_STR	Value: '4.10.4'
QT_VERSION	Value: 264198
QT_VERSION_STR	Value: '4.8.6'
QtCriticalMsg	Value: 2
QtDebugMsg	Value: 0
QtFatalMsg	Value: 3
QtSystemMsg	Value: 2
QtWarningMsg	Value: 1
__package__	Value: 'TrabajoTallerConstruccionSw.controllers'
qApp	Value: <PyQt4.QtGui.QApplication object at 0x7f015a7e0f28>

6.3 Class *Elenco*

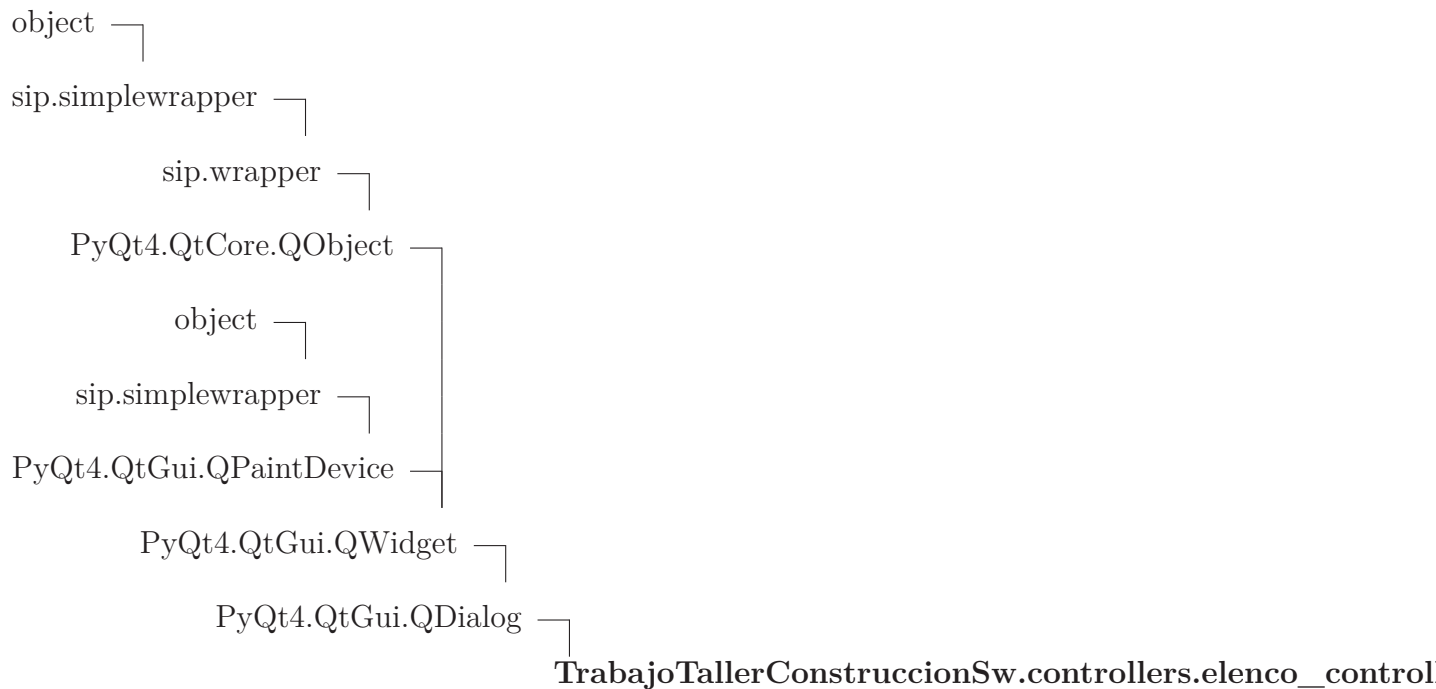

6.3.1 Methods

`__init__(self)`

`x.__init__(...)` initializes `x`; see `help(type(x))` for signature
 Overrides: `object.__init__` `exitit`(inherited documentation)

`signals(self)`

`adminPersonajes(self)`

`exec__(self)`

Overrides: `PyQt4.QtGui.QDialog.exec__`

`eliminarAElenco(self)`

`agregarAElenco(self)`

`updateMoviesList(self)`

updateActorsList(*self*)

updateCharactersList(*self*)

updateElencoList(*self*)

boton_listo_clicked(*self*)

Inherited from PyQt4.QtGui.QDialog

accept(), accepted(), closeEvent(), contextMenuEvent(), done(), eventFilter(), extension(), finished(), isSizeGripEnabled(), keyPressEvent(), minimumSizeHint(), open(), orientation(), reject(), rejected(), resizeEvent(), result(), setExtension(), setModal(), setOrientation(), setResult(), setSizeGripEnabled(), setVisible(), showEvent(), showExtension(), sizeHint()

Inherited from PyQt4.QtGui.QWidget

acceptDrops(), accessibleDescription(), accessibleName(), actionEvent(), actions(), activateWindow(), addAction(), addActions(), adjustSize(), autoFillBackground(), backgroundRole(), baseSize(), changeEvent(), childAt(), childrenRect(), childrenRegion(), clearFocus(), clearMask(), close(), contentsMargins(), contentsRect(), contextMenuPolicy(), create(), cursor(), customContextMenuRequested(), destroy(), devType(), dragEnterEvent(), dragLeaveEvent(), dragMoveEvent(), dropEvent(), effectiveWinId(), enabledChange(), ensurePolished(), enterEvent(), event(), find(), focusInEvent(), focusNextChild(), focusNextPrevChild(), focusOutEvent(), focusPolicy(), focusPreviousChild(), focusProxy(), focusWidget(), font(), fontChange(), fontInfo(), fontMetrics(), foregroundRole(), frameGeometry(), frameSize(), geometry(), getContentsMargins(), grabGesture(), grabKeyboard(), grabMouse(), grabShortcut(), graphicsEffect(), graphicsProxyWidget(), handle(), hasFocus(), hasMouseTracking(), height(), heightForWidth(), hide(), hideEvent(), inputContext(), inputMethodEvent(), inputMethodHints(), inputMethodQuery(), insertAction(), insertActions(), isActiveWindow(), isAncestorOf(), isEnabled(), isEnabledTo(), isEnabledToTLW(), isFullScreen(), isHidden(), isLeftToRight(), isMaximized(), isMinimized(), isModal(), isRightToLeft(), isTopLevel(), isVisible(), isVisibleTo(), isWindow(), isWindowModified(), keyReleaseEvent(), keyboardGrabber(), languageChange(), layout(), layoutDirection(), leaveEvent(), locale(), lower(), mapFrom(), mapFromGlobal(), mapFromParent(), mapTo(), mapToGlobal(), mapToParent(), mask(), maximumHeight(), maximumSize(), maximumWidth(), metric(), minimumHeight(), minimumSize(), minimumWidth(), mouseDoubleClickEvent(), mouseGrabber(), mouseMoveEvent(), mousePressEvent(), mouseReleaseEvent(), move(), moveEvent(), nativeParentWidget(), nextInFocusChain(), normalGeometry(), overrideWindowFlags(), overrideWindowState(), paintEngine(), paintEvent(), palette(), paletteChange(), parentWidget(), pos(), previousInFocusChain(), raise_(), rect(), releaseKeyboard(),

releaseMouse(), releaseShortcut(), removeAction(), render(), repaint(), resetInputContext(), resize(), restoreGeometry(), saveGeometry(), scroll(), setAcceptDrops(), setAccessibleDescription(), setAccessibleName(), setAttribute(), setAutoFillBackground(), setBackgroundRole(), setBaseSize(), setContentsMargins(), setContextMenuPolicy(), setCursor(), setDisabled(), setEnabled(), setFixedHeight(), setFixedSize(), setFixedWidth(), setFocus(), setFocusPolicy(), setFocusProxy(), setFont(), setForegroundRole(), setGeometry(), setGraphicsEffect(), setHidden(), setInputContext(), setInputMethodHints(), setLayout(), setLayoutDirection(), setLocale(), setMask(), setMaximumHeight(), setMaximumSize(), setMaximumWidth(), setMinimumHeight(), setMinimumSize(), setMinimumWidth(), setMouseTracking(), setPalette(), setParent(), setShortcutAutoRepeat(), setShortcutEnabled(), setShown(), setSizeIncrement(), setSizePolicy(), setStatusTip(), setStyle(), setStyleSheet(), setTabOrder(), setToolTip(), setUpdatesEnabled(), setWhatsThis(), setWindowFilePath(), setWindowFlags(), setWindowIcon(), setWindowIconText(), setWindowModality(), setWindowModified(), setWindowOpacity(), setWindowRole(), setWindowState(), setWindowTitle(), show(), showFullScreen(), showMaximized(), showMinimized(), showNormal(), size(), sizeIncrement(), sizePolicy(), stackUnder(), statusTip(), style(), styleSheet(), tabletEvent(), testAttribute(), toolTip(), topLevelWidget(), ungrabMouse(), ungrabGesture(), unsetCursor(), unsetLayoutDirection(), unsetLocale(), update(), updateGeometry(), updateMicroFocus(), updatesEnabled(), visibleRegion(), whatsThis(), wheelEvent(), width(), winId(), window(), windowActivationChange(), windowFilePath(), windowFlags(), windowIcon(), windowIconText(), windowModality(), windowOpacity(), windowRole(), windowState(), windowTitle(), windowType(), x(), x11Info(), x11PictureHandle(), y()

Inherited from PyQt4.QtCore.QObject

__getattr__(), blockSignals(), childEvent(), children(), connect(), connectNotify(), customEvent(), deleteLater(), destroyed(), disconnect(), disconnectNotify(), dumpObjectInfo(), dumpObjectTree(), dynamicPropertyNames(), emit(), findChild(), findChildren(), inherits(), installEventFilter(), isWidgetType(), killTimer(), metaObject(), moveToThread(), objectName(), parent(), property(), pyqtConfigure(), receivers(), removeEventFilter(), sender(), senderSignalIndex(), setObjectName(), setProperty(), signalsBlocked(), startTimer(), thread(), timerEvent(), tr(), trUtf8()

Inherited from PyQt4.QtGui.QPaintDevice

colorCount(), depth(), heightMM(), logicalDpiX(), logicalDpiY(), numColors(), paintingActive(), physicalDpiX(), physicalDpiY(), widthMM()

Inherited from sip.simplewrapper

__new__()

Inherited from object

__delattr__(), __format__(), __getattr__(), __hash__(), __reduce__(),

`__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

6.3.2 Properties

Name	Description
<i>Inherited from object</i>	
<code>__class__</code>	

6.3.3 Class Variables

Name	Description
<i>Inherited from PyQt4.QtGui.QDialog</i>	
Accepted, Rejected	
<i>Inherited from PyQt4.QtGui.QWidget</i>	
DrawChildren, DrawWindowBackground, IgnoreMask	
<i>Inherited from PyQt4.QtCore.QObject</i>	
staticMetaObject	
<i>Inherited from PyQt4.QtGui.QPaintDevice</i>	
PdmDepth, PdmDpiX, PdmDpiY, PdmHeight, PdmHeightMM, PdmNumColors, PdmPhysicalDpiX, PdmPhysicalDpiY, PdmWidth, PdmWidthMM	

7 Module TrabajoTallerConstruccionSw.controllers.login_controller

7.1 Functions

bin(*QTextStream*)

Return Value

QTextStream

hex(*QTextStream*)

Return Value

QTextStream

oct(*QTextStream*)


Return Value

QTextStream

7.2 Variables

Name	Description
PYQT_CONFIGURATI- ON	Value: {'sip_flags': '-x VendorID -t WS_X11 -x PyQt_NoPrintRange...
PYQT_VERSION	Value: 264708
PYQT_VERSION_STR	Value: '4.10.4'
QT_VERSION	Value: 264198
QT_VERSION_STR	Value: '4.8.6'
QtCriticalMsg	Value: 2
QtDebugMsg	Value: 0
QtFatalMsg	Value: 3
QtSystemMsg	Value: 2
QtWarningMsg	Value: 1
__package__	Value: 'TrabajoTallerConstruccionSw.controllers'
qApp	Value: <PyQt4.QtGui.QApplication object at 0x7f015a7e0f28>

7.3 Class Login

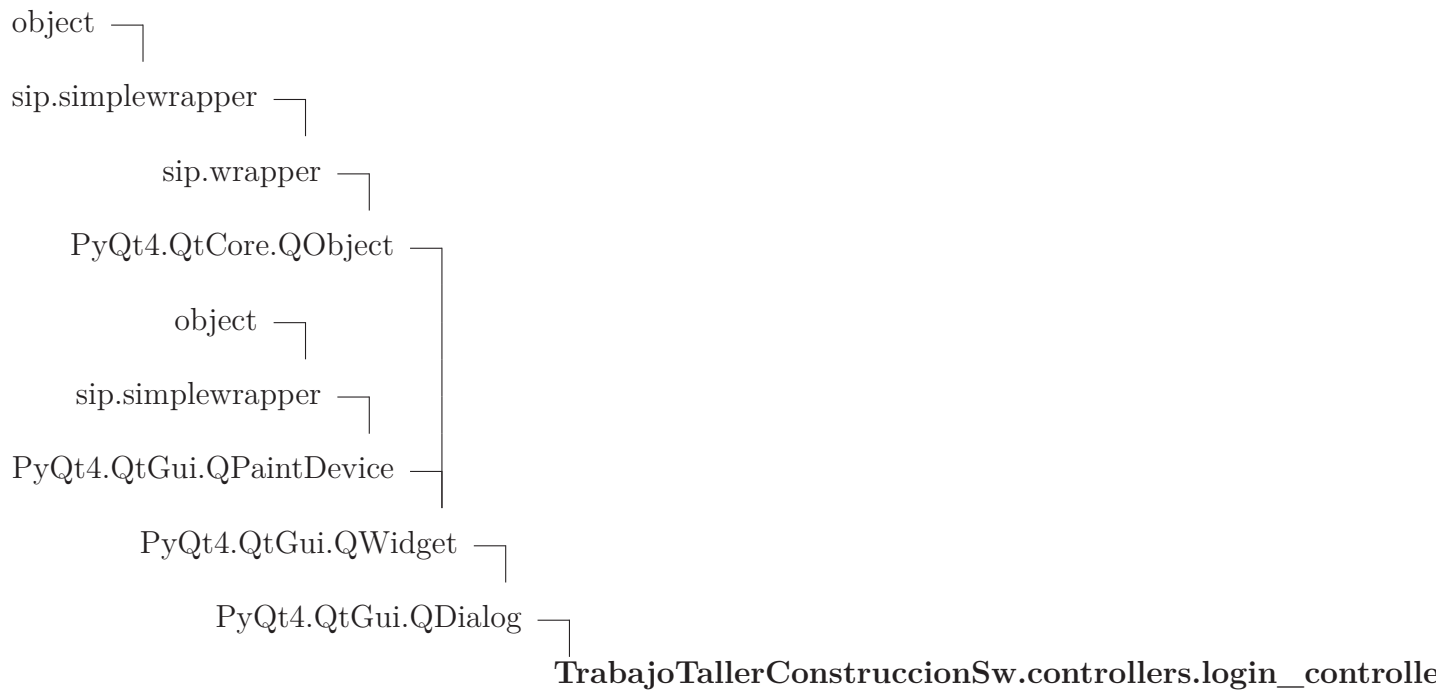

7.3.1 Methods

__init__(*self*)

x.__init__(...) initializes x; see help(type(x)) for signature

Overrides: object.__init__ extit(inherited documentation)

signals(*self*)

showDialog(*self*)

getUser(*self*)

getPwd(*self*)

setErrorMessage(*self*, *msg*)

isAccepted(*self*)

boton_ingresar_clicked(self)

quit(self)

Inherited from PyQt4.QtGui.QDialog

accept(), accepted(), closeEvent(), contextMenuEvent(), done(), eventFilter(), exec_(), extension(), finished(), isSizeGripEnabled(), keyPressEvent(), minimumSizeHint(), open(), orientation(), reject(), rejected(), resizeEvent(), result(), setExtension(), setModal(), setOrientation(), setResult(), setSizeGripEnabled(), setVisible(), showEvent(), showExtension(), sizeHint()

Inherited from PyQt4.QtGui.QWidget

acceptDrops(), accessibleDescription(), accessibleName(), actionEvent(), actions(), activateWindow(), addAction(), addActions(), adjustSize(), autoFillBackground(), backgroundRole(), baseSize(), changeEvent(), childAt(), childrenRect(), childrenRegion(), clearFocus(), clearMask(), close(), contentsMargins(), contentsRect(), contextMenuPolicy(), create(), cursor(), customContextMenuRequested(), destroy(), devType(), dragEnterEvent(), dragLeaveEvent(), dragMoveEvent(), dropEvent(), effectiveWinId(), enabledChange(), ensurePolished(), enterEvent(), event(), find(), focusInEvent(), focusNextChild(), focusNextPrevChild(), focusOutEvent(), focusPolicy(), focusPreviousChild(), focusProxy(), focusWidget(), font(), fontChange(), fontInfo(), fontMetrics(), foregroundRole(), frameGeometry(), frameSize(), geometry(), getContentsMargins(), grabGesture(), grabKeyboard(), grabMouse(), grabShortcut(), graphicsEffect(), graphicsProxyWidget(), handle(), hasFocus(), hasMouseTracking(), height(), heightForWidth(), hide(), hideEvent(), inputContext(), inputMethodEvent(), inputMethodHints(), inputMethodQuery(), insertAction(), insertActions(), isActiveWindow(), isAncestorOf(), isEnabled(), isEnabledTo(), isEnabledToTLW(), isFullScreen(), isHidden(), isLeftToRight(), isMaximized(), isMinimized(), isModal(), isRightToLeft(), isTopLevel(), isVisible(), isVisibleTo(), isWindow(), isWindowModified(), keyReleaseEvent(), keyboardGrabber(), languageChange(), layout(), layoutDirection(), leaveEvent(), locale(), lower(), mapFrom(), mapFromGlobal(), mapFromParent(), mapTo(), mapToGlobal(), mapToParent(), mask(), maximumHeight(), maximumSize(), maximumWidth(), metric(), minimumHeight(), minimumSize(), minimumWidth(), mouseDoubleClickEvent(), mouseGrabber(), mouseMoveEvent(), mousePressEvent(), mouseReleaseEvent(), move(), moveEvent(), nativeParentWidget(), nextInFocusChain(), normalGeometry(), overrideWindowFlags(), overrideWindowState(), paintEngine(), paintEvent(), palette(), paletteChange(), parentWidget(), pos(), previousInFocusChain(), raise_(), rect(), releaseKeyboard(), releaseMouse(), releaseShortcut(), removeAction(), render(), repaint(), resetInputContext(), resize(), restoreGeometry(), saveGeometry(), scroll(), setAcceptDrops(), setAccessibleDescription(), setAccessibleName(), setAttribute(), setAutoFillBackground(), setBackgroundRole(), setBaseSize(), setContentsMargins(), setContextMenuPolicy(), setCursor(), setDisabled(), setEnabled(), setFixedHeight(), setFixedSize(),

setFixedWidth(), setFocus(), setFocusPolicy(), setFocusProxy(), setFont(), setForegroundRole(), setGeometry(), setGraphicsEffect(), setHidden(), setInputContext(), setInputMethodHints(), setLayout(), setLayoutDirection(), setLocale(), setMask(), setMaximumHeight(), setMaximumSize(), setMaximumWidth(), setMinimumHeight(), setMinimumSize(), setMinimumWidth(), setMouseTracking(), setPalette(), setParent(), setShortcutAutoRepeat(), setShortcutEnabled(), setShown(), setSizeIncrement(), setSizePolicy(), setStatusTip(), setStyle(), setStyleSheet(), setTabOrder(), setToolTip(), setUpdatesEnabled(), setWhatsThis(), setWindowFilePath(), setWindowFlags(), setWindowIcon(), setWindowIconText(), setWindowModality(), setWindowModified(), setWindowOpacity(), setWindowRole(), setWindowState(), setWindowTitle(), show(), showFullScreen(), showMaximized(), showMinimized(), showNormal(), size(), sizeIncrement(), sizePolicy(), stackUnder(), statusTip(), style(), styleSheet(), tabletEvent(), testAttribute(), toolTip(), topLevelWidget(), underMouse(), ungrabGesture(), unsetCursor(), unsetLayoutDirection(), unsetLocale(), update(), updateGeometry(), updateMicroFocus(), updatesEnabled(), visibleRegion(), whatsThis(), wheelEvent(), width(), winId(), window(), windowActivationChange(), windowFilePath(), windowFlags(), windowIcon(), windowIconText(), windowModality(), windowOpacity(), windowRole(), windowState(), windowTitle(), windowType(), x(), x11Info(), x11PictureHandle(), y()

Inherited from PyQt4.QtCore.QObject

__getattr__(), blockSignals(), childEvent(), children(), connect(), connectNotify(), customEvent(), deleteLater(), destroyed(), disconnect(), disconnectNotify(), dumpObjectInfo(), dumpObjectTree(), dynamicPropertyNames(), emit(), findChild(), findChildren(), inherits(), installEventFilter(), isWidgetType(), killTimer(), metaObject(), moveToThread(), objectName(), parent(), property(), pyqtConfigure(), receivers(), removeEventFilter(), sender(), senderSignalIndex(), setObjectName(), setProperty(), signalsBlocked(), startTimer(), thread(), timerEvent(), tr(), trUtf8()

Inherited from PyQt4.QtGui.QPaintDevice

colorCount(), depth(), heightMM(), logicalDpiX(), logicalDpiY(), numColors(), paintingActive(), physicalDpiX(), physicalDpiY(), widthMM()

Inherited from sip.simplewrapper

__new__()

Inherited from object

__delattr__(), __format__(), __getattr__(), __hash__(), __reduce__(), __reduce_ex__(), __repr__(), __setattr__(), __sizeof__(), __str__(), __subclasshook__()

7.3.2 Properties

Name	Description
<i>Inherited from object</i> __class__	

7.3.3 Class Variables

Name	Description
<i>Inherited from PyQt4.QtGui.QDialog</i> Accepted, Rejected	
<i>Inherited from PyQt4.QtGui.QWidget</i> DrawChildren, DrawWindowBackground, IgnoreMask	
<i>Inherited from PyQt4.QtCore.QObject</i> staticMetaObject	
<i>Inherited from PyQt4.QtGui.QPaintDevice</i> PdmDepth, PdmDpiX, PdmDpiY, PdmHeight, PdmHeightMM, PdmNumColors, PdmPhysicalDpiX, PdmPhysicalDpiY, PdmWidth, PdmWidthMM	

8 Module TrabajoTallerConstruccionSw.controllers.movie_controller

8.1 Functions

bin(*QTextStream*)

Return Value

QTextStream

hex(*QTextStream*)

Return Value

QTextStream

oct(*QTextStream*)


Return Value

QTextStream

8.2 Variables

Name	Description
PYQT_CONFIGURATI- ON	Value: {'sip_flags': '-x VendorID -t WS_X11 -x PyQt_NoPrintRange...
PYQT_VERSION	Value: 264708
PYQT_VERSION_STR	Value: '4.10.4'
QT_VERSION	Value: 264198
QT_VERSION_STR	Value: '4.8.6'
QtCriticalMsg	Value: 2
QtDebugMsg	Value: 0
QtFatalMsg	Value: 3
QtSystemMsg	Value: 2
QtWarningMsg	Value: 1
__package__	Value: 'TrabajoTallerConstruccionSw.controllers'
qApp	Value: <PyQt4.QtGui.QApplication object at 0x7f015a7e0f28>

8.3 Class Pelicula

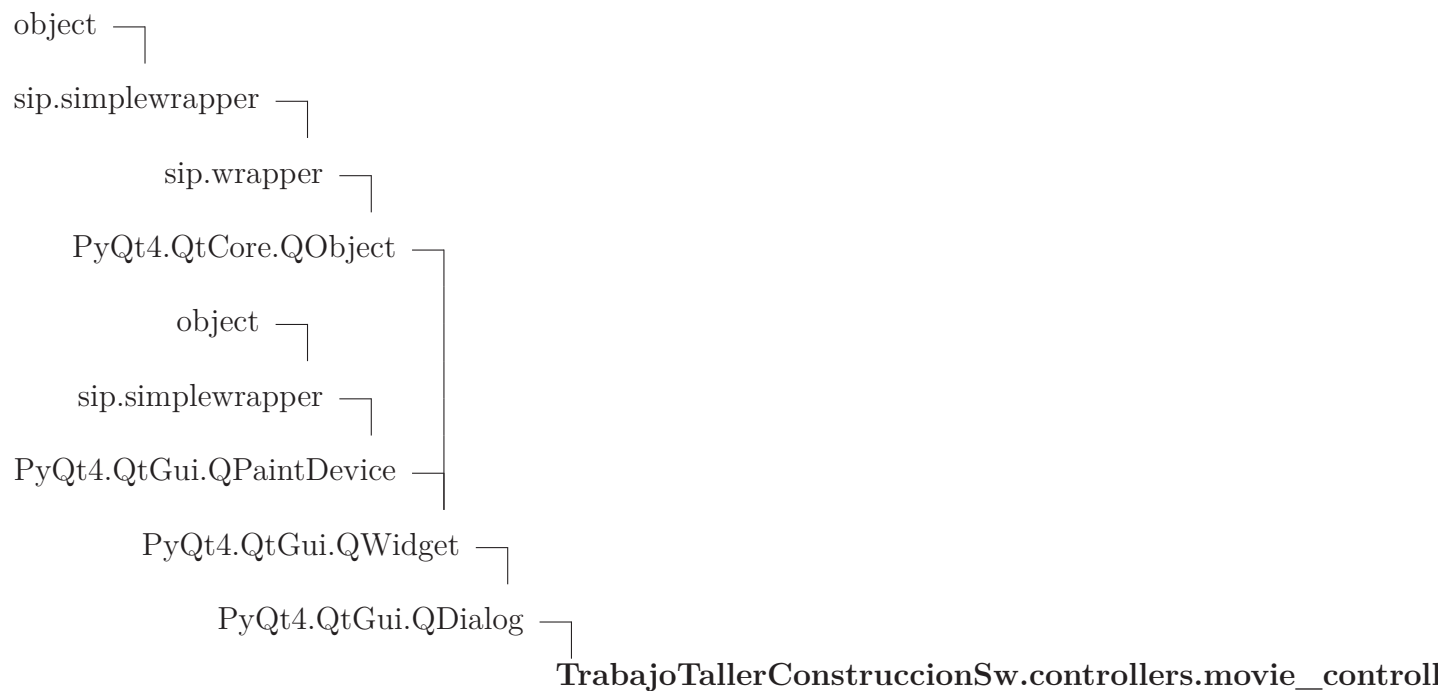

8.3.1 Methods

```

__init__(self)

```

`x.__init__(...)` initializes `x`; see `help(type(x))` for signature

Overrides: `object.__init__` `exit`(inherited documentation)

```
signals(self)
```

```
boton_listo_clicked(self)
```

```
boton_buscar_imagen_clicked(self)
```

```
boton_cancelar_clicked(self)
```

accepted(*self*)

QDialog.accepted [signal]

Overrides: `PyQt4.QtGui.QDialog.accepted` `exit`(inherited documentation)


```
setTitle(self, title)
```

```
getData(self, data)
```

```
validaData(self)
```

```
clearData(self)
```

```
putData(self, data, value)
```

```
verificaEntrada(self, data)
```

Inherited from PyQt4.QtGui.QDialog

accept(), closeEvent(), contextMenuEvent(), done(), eventFilter(), exec_(), extension(), finished(), isSizeGripEnabled(), keyPressEvent(), minimumSizeHint(), open(), orientation(), reject(), rejected(), resizeEvent(), result(), setExtension(), setModal(), setOrientation(), setResult(), setSizeGripEnabled(), setVisible(), showEvent(), showExtension(), sizeHint()

Inherited from PyQt4.QtGui.QWidget

acceptDrops(), accessibleDescription(), accessibleName(), actionEvent(), actions(), activateWindow(), addAction(), addActions(), adjustSize(), autoFillBackground(), backgroundRole(), baseSize(), changeEvent(), childAt(), childrenRect(), childrenRegion(), clearFocus(), clearMask(), close(), contentsMargins(), contentsRect(), contextMenuPolicy(), create(), cursor(), customContextMenuRequested(), destroy(), devType(), dragEnterEvent(), dragLeaveEvent(), dragMoveEvent(), dropEvent(), effectiveWinId(), enabledChange(), ensurePolished(), enterEvent(), event(), find(), focusInEvent(), focusNextChild(), focusNextPrevChild(), focusOutEvent(), focusPolicy(), focusPreviousChild(), focusProxy(), focusWidget(), font(), fontChange(), fontInfo(), fontMetrics(), foregroundRole(), frameGeometry(), frameSize(), geometry(), getContentsMargins(), grabGesture(), grabKeyboard(), grabMouse(), grabShortcut(), graphicsEffect(), graphicsProxyWidget(), handle(), hasFocus(), hasMouseTracking(), height(), heightForWidth(), hide(), hideEvent(), inputContext(), inputMethodEvent(), inputMethodHints(), inputMethodQuery(), insertAction(), insertActions(), isActiveWindow(), isAncestorOf(), isEnabled(), isEnabledTo(), isEnabledToTLW(), isFullScreen(), isHidden(), isLeftToRight(), isMaximized(), isMinimized(), isModal(), isRightToLeft(), isTopLevel(), isVisible(), isVisibleTo(), isWindow(), isWindowModified(), keyReleaseEvent(), keyboardGrabber(), languageChange(), layout(), layoutDirection(), leaveEvent(), locale(), lower(), mapFrom(), mapFromGlobal(), mapFromParent(), mapTo(), mapToGlobal(), mapToParent(), mask(), maximumHeight(), maximumSize(), maximumWidth(), metric(), minimumHeight(), minimumSize(), minimumWidth(), mouseDoubleClickEvent(), mouseGrabber(), mouse-

MoveEvent(), mousePressEvent(), mouseReleaseEvent(), move(), moveEvent(), nativeParentWidget(), nextInFocusChain(), normalGeometry(), overrideWindowFlags(), overrideWindowState(), paintEngine(), paintEvent(), palette(), paletteChange(), parentWidget(), pos(), previousInFocusChain(), raise_(), rect(), releaseKeyboard(), releaseMouse(), releaseShortcut(), removeAction(), render(), repaint(), resetInputContext(), resize(), restoreGeometry(), saveGeometry(), scroll(), setAcceptDrops(), setAccessibleDescription(), setAccessibleName(), setAttribute(), setAutoFillBackground(), setBackgroundRole(), setBaseSize(), setContentsMargins(), setContextMenuPolicy(), setCursor(), setDisabled(), setEnabled(), setFixedHeight(), setFixedSize(), setFixedWidth(), setFocus(), setFocusPolicy(), setFocusProxy(), setFont(), setForegroundRole(), setGeometry(), setGraphicsEffect(), setHidden(), setInputContext(), setInputMethodHints(), setLayout(), setLayoutDirection(), setLocale(), setMask(), setMaximumHeight(), setMaximumSize(), setMaximumWidth(), setMinimumHeight(), setMinimumSize(), setMinimumWidth(), setMouseTracking(), setPalette(), setParent(), setShortcutAutoRepeat(), setShortcutEnabled(), setShown(), setSizeIncrement(), setSizePolicy(), setStatusTip(), setStyle(), setStyleSheet(), setTabOrder(), setToolTip(), setUpdatesEnabled(), setWhatsThis(), setWindowFilePath(), setWindowFlags(), setWindowIcon(), setWindowIconText(), setWindowModality(), setWindowModified(), setWindowOpacity(), setWindowRole(), setWindowState(), setWindowTitle(), show(), showFullScreen(), showMaximized(), showMinimized(), showNormal(), size(), sizeIncrement(), sizePolicy(), stackUnder(), statusTip(), style(), stylesheet(), tabletEvent(), testAttribute(), tooltip(), topLevelWidget(), underMouse(), ungrabGesture(), unsetCursor(), unsetLayoutDirection(), unsetLocale(), update(), updateGeometry(), updateMicroFocus(), updatesEnabled(), visibleRegion(), whatsThis(), wheelEvent(), width(), winId(), window(), windowActivationChange(), windowFilePath(), windowFlags(), windowIcon(), windowIconText(), windowModality(), windowOpacity(), windowRole(), windowState(), windowTitle(), windowType(), x(), x11Info(), x11PictureHandle(), y()

Inherited from PyQt4.QtCore.QObject

__getattr__(), blockSignals(), childEvent(), children(), connect(), connectNotify(), customEvent(), deleteLater(), destroyed(), disconnect(), disconnectNotify(), dumpObjectInfo(), dumpObjectTree(), dynamicPropertyNames(), emit(), findChild(), findChildren(), inherits(), installEventFilter(), isWidgetType(), killTimer(), metaObject(), moveToThread(), objectName(), parent(), property(), pyqtConfigure(), receivers(), removeEventFilter(), sender(), senderSignalIndex(), setObjectName(), setProperty(), signalsBlocked(), startTimer(), thread(), timerEvent(), tr(), trUtf8()

Inherited from PyQt4.QtGui.QPaintDevice

colorCount(), depth(), heightMM(), logicalDpiX(), logicalDpiY(), numColors(), paintingActive(), physicalDpiX(), physicalDpiY(), widthMM()

Inherited from sip.simplewrapper

__new__()

Inherited from object

__delattr__(), __format__(), __getattr__(), __hash__(), __reduce__(),
__reduce_ex__(), __repr__(), __setattr__(), __sizeof__(), __str__(), __sub-
classhook__()

8.3.2 Properties

Name	Description
<i>Inherited from object</i> __class__	

8.3.3 Class Variables

Name	Description
<i>Inherited from PyQt4.QtGui.QDialog</i> Accepted, Rejected	
<i>Inherited from PyQt4.QtGui.QWidget</i> DrawChildren, DrawWindowBackground, IgnoreMask	
<i>Inherited from PyQt4.QtCore.QObject</i> staticMetaObject	
<i>Inherited from PyQt4.QtGui.QPaintDevice</i> PdmDepth, PdmDpiX, PdmDpiY, PdmHeight, PdmHeightMM, PdmNumColors, PdmPhysicalDpiX, PdmPhysicalDpiY, PdmWidth, PdmWidthMM	

9 Module TrabajoTallerConstruccionSw.dbManager

9.1 Variables

Name	Description
<code>__package__</code>	Value: 'TrabajoTallerConstruccionSw'

9.2 Class dbManager

object —
 TrabajoTallerConstruccionSw.dbManager.dbManager

9.2.1 Methods

`__init__(self, dbName)`

x.`__init__`(...) initializes x; see `help(type(x))` for signature

Overrides: object.`__init__` extit(inherited documentation)

`connect(self)`

`close(self)`

`getActorImage(self, id)`

`getDirectorImage(self, id)`

`getMovieImage(self, id)`

`getDirector(self, id)`

`getMovie(self, id)`

`getActor(self, id)`

`getActors(self)`

```
getTotalMovies(self, actor_id)
```

```
getDirectors(self)
```

```
getCharacters(self)
```

```
getCharacter(self, id)
```

```
addCharacter(self, name, desc)
```

```
updateCharacter(self, name, desc, id)
```

```
deleteCharacter(self, id)
```

```
getElenco(self, id)
```

```
getMovies(self)
```

```
getTotalActorsByMovie(self, movie_id)
```

```
checkLogin(self, user, pwd)
```

```
getMoviesByActor(self, actor_id)
```

```
getActorsByMovie(self, movie_id)
```

```
getMovieDescription(self, id)
```

```
addDirector(self, nombre, pais, fnac, fdef, img)
```

```
updateDirector(self, id, nombre, pais, fnac, fdef, img)
```

```
deleteDirector(self, id)
```

```
addMovie(self, nombre, descr, estreno, pais, img)
```

```
updateMovie(self, id, nombre, descr, estreno, pais, img)
```

```
deleteMovie(self, id)
```

<code>addActor(self, name, birth, genre, img)</code>
--

<code>updateActor(self, id, nombre, fnac, genero, img)</code>

<code>deleteActor(self, id)</code>

<code>addActorCharacter(self, a_id, c_id, m_id)</code>
--

<code>removeActorCharacter(self, id)</code>

<code>checkElenco(self, a_id, c_id, m_id)</code>
--

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__hash__()`, `__new__()`,
`__reduce__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`,
`__str__()`, `__subclasshook__()`

9.2.2 Properties

Name	Description
<i>Inherited from object</i>	
<code>__class__</code>	

10 Module TrabajoTallerConstruccionSw.elenco__ui

10.1 Variables

Name	Description
__package__	Value: None

11 Module TrabajoTallerConstruccionSw.main

11.1 Functions

bin(*QTextStream*)

Return Value

QTextStream

hex(*QTextStream*)

Return Value

QTextStream

oct(*QTextStream*)


Return Value

QTextStream

11.2 Variables

Name	Description
PYQT_CONFIGURATI- ON	Value: {'sip_flags': '-x VendorID -t WS_X11 -x PyQt_NoPrintRange...
PYQT_VERSION	Value: 264708
PYQT_VERSION_STR	Value: '4.10.4'
QT_VERSION	Value: 264198
QT_VERSION_STR	Value: '4.8.6'
QtCriticalMsg	Value: 2
QtDebugMsg	Value: 0
QtFatalMsg	Value: 3
QtSystemMsg	Value: 2
QtWarningMsg	Value: 1
__package__	Value: 'TrabajoTallerConstruccionSw'
qApp	Value: <PyQt4.QtGui.QApplication object at 0x7f015a7e0f28>

11.3 Class Main

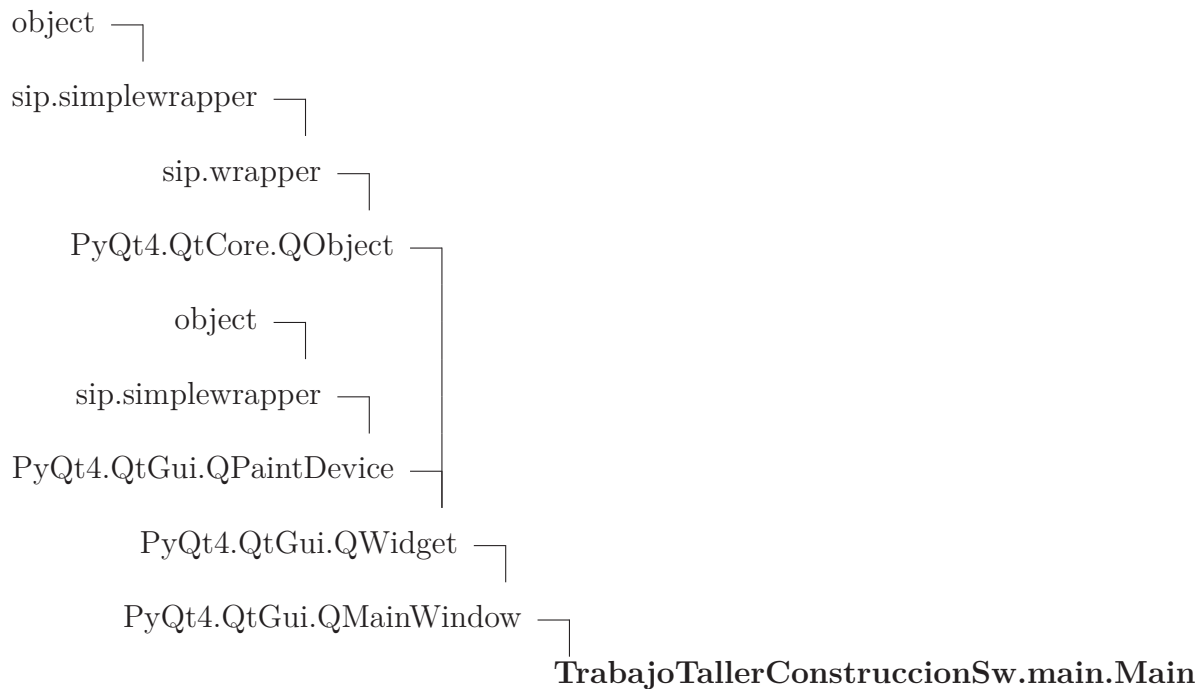

11.3.1 Methods

<code>__init__(self)</code> x. <code>__init__</code> (...) initializes x; see <code>help(type(x))</code> for signature Overrides: <code>object.__init__</code> <code>extit</code> (inherited documentation)
<code>init(self)</code>
<code>signals(self)</code>
<code>actualizar_tablas(self)</code> actualiza todas las tablas obteniendo la info del modelo "dbManager"
<code>showElenco(self)</code>
<code>actualizar_tabla_peliculas(self, filter=False)</code>
<code>actualizar_tabla_actores(self, filter=False)</code>

```
actualizar_tabla_directores(self)
```

```
actualiza_combobox_actores(self)
```

```
actualiza_combobox_peliculas(self)
```

```
actualiza_foto_actor(self, id)
```

```
actualiza_foto_director(self, id)
```

```
actualiza_foto_pelicula(self, id)
```

```
tabla_directores_clicked(self)
```

```
tabla_peliculas_clicked(self)
```

```
tabla_actores_clicked(self)
```

```
actor_combobox_clicked(self, actor_id)
```

```
movie_combobox_clicked(self, movie_id)
```

```
actor_filter_checkBox_clicked(self)
```

```
pelicula_filter_checkBox_clicked(self)
```

```
actualiza_descripcion_pelicula(self, id)
```

```
nuevo_director(self)
```

```
editar_director(self)
```

```
eliminar_director(self)
```

```
nuevo_actor(self)
```

```
editar_actor(self)
```

```
eliminar_actor(self)
```

```
printSomething(self)
```

```
nueva_película(self)
```

```
editar_película(self)
```

```
eliminar_película(self)
```

Inherited from PyQt4.QtGui.QMainWindow

addDockWidget(), addToolBar(), addToolBarBreak(), centralWidget(), contextMenuEvent(), corner(), createPopupMenu(), dockOptions(), dockWidgetArea(), documentMode(), event(), iconSize(), iconSizeChanged(), insertToolBar(), insertToolBarBreak(), isAnimated(), isDockNestingEnabled(), isSeparator(), menuBar(), menuWidget(), removeDockWidget(), removeToolBar(), removeToolBarBreak(), restoreDockWidget(), restoreState(), saveState(), setAnimated(), setCentralWidget(), setCorner(), setDockNestingEnabled(), setDockOptions(), setDocumentMode(), setIconSize(), setMenuBar(), setMenuWidget(), setStatusBar(), setTabPosition(), setTabShape(), setToolButtonStyle(), setUnifiedTitleAndToolBarOnMac(), splitDockWidget(), statusBar(), tabPosition(), tabShape(), tabifiedDockWidgets(), tabifyDockWidget(), toolbarArea(), toolbarBreak(), toolButtonStyle(), toolButtonStyleChanged(), unifiedTitleAndToolBarOnMac()

Inherited from PyQt4.QtGui.QWidget

acceptDrops(), accessibleDescription(), accessibleName(), actionEvent(), actions(), activateWindow(), addAction(), addActions(), adjustSize(), autoFillBackground(), backgroundRole(), baseSize(), changeEvent(), childAt(), childrenRect(), childrenRegion(), clearFocus(), clearMask(), close(), closeEvent(), contentsMargins(), contentsRect(), contextMenuPolicy(), create(), cursor(), customContextMenuRequested(), destroy(), devType(), dragEnterEvent(), dragLeaveEvent(), dragMoveEvent(), dropEvent(), effectiveWinId(), enabledChange(), ensurePolished(), enterEvent(), find(), focusInEvent(), focusNextChild(), focusNextPrevChild(), focusOutEvent(), focusPolicy(), focusPreviousChild(), focusProxy(), focusWidget(), font(), fontChange(), fontInfo(), fontMetrics(), foregroundRole(), frameGeometry(), frameSize(), geometry(), getContentsMargins(), grabGesture(), grabKeyboard(), grabMouse(), grabShortcut(), graphicsEffect(), graphicsProxyWidget(), handle(), hasFocus(), hasMouseTracking(), height(), heightForWidth(), hide(), hideEvent(), inputContext(), inputMethodEvent(), inputMethodHints(), inputMethodQuery(), insertAction(), insertActions(), isActiveWindow(), isAncestorOf(), isEnabled(), isEnabledTo(), isEnabledToTLW(), isFullScreen(), isHidden(), isLeftToRight(), isMaximized(), isMinimized(), isModal(), isRightToLeft(), isTopLevel(), isVisible(), isVisibleTo(), isWindow(), isWindowModified(), keyPressEvent(), keyReleaseEvent(), keyboardGrabber(), languageChange(), layout(), layoutDirection(), leaveEvent(), locale(), lower(), mapFrom(),

mapFromGlobal(), mapFromParent(), mapTo(), mapToGlobal(), mapToParent(), mask(), maxHeight(), maxSize(), maxWidth(), metric(), minHeight(), minSize(), minSizeHint(), minWidth(), mouseDoubleClickEvent(), mouseGrabber(), mouseMoveEvent(), mousePressEvent(), mouseReleaseEvent(), move(), moveEvent(), nativeParentWidget(), nextInFocusChain(), normalGeometry(), overrideWindowFlags(), overrideWindowState(), paintEngine(), paintEvent(), palette(), paletteChange(), parentWidget(), pos(), previousInFocusChain(), raise_(), rect(), releaseKeyboard(), releaseMouse(), releaseShortcut(), removeAction(), render(), repaint(), resetInputContext(), resize(), resizeEvent(), restoreGeometry(), saveGeometry(), scroll(), setAcceptDrops(), setAccessibleDescription(), setAccessibleName(), setAttribute(), setAutoFillBackground(), setBackgroundRole(), setBaseSize(), setContentsMargins(), setContextMenuPolicy(), setCursor(), setDisabled(), setEnabled(), setFixedHeight(), setFixedSize(), setFixedWidth(), setFocus(), setFocusPolicy(), setFocusProxy(), setFont(), setForegroundRole(), setGeometry(), setGraphicsEffect(), setHidden(), setInputContext(), setInputMethodHints(), setLayout(), setLayoutDirection(), setLocale(), setMask(), setMaximumHeight(), setMaximumSize(), setMaximumWidth(), setMinimumHeight(), setMinimumSize(), setMinimumWidth(), setMouseTracking(), setPalette(), setParent(), setShortcutAutoRepeat(), setShortcutEnabled(), setShown(), setSizeIncrement(), setSizePolicy(), setStatusTip(), setStyle(), setStyleSheet(), setTabOrder(), setToolTip(), setUpdatesEnabled(), setVisible(), setWhatsThis(), setWindowFilePath(), setWindowFlags(), setWindowIcon(), setWindowIconText(), setWindowModality(), setWindowModified(), setWindowOpacity(), setWindowRole(), setWindowState(), setWindowTitle(), show(), showEvent(), showFullScreen(), showMaximized(), showMinimized(), showNormal(), size(), sizeHint(), sizeIncrement(), sizePolicy(), stackUnder(), statusTip(), style(), styleSheet(), tabletEvent(), testAttribute(), tooltip(), topLevelWidget(), underMouse(), ungrabGesture(), unsetCursor(), unsetLayoutDirection(), unsetLocale(), update(), updateGeometry(), updateMicroFocus(), updatesEnabled(), visibleRegion(), whatsThis(), wheelEvent(), width(), winId(), window(), windowActivationChange(), windowFilePath(), windowFlags(), windowIcon(), windowIconText(), windowModality(), windowOpacity(), windowRole(), windowState(), windowTitle(), windowType(), x(), x11Info(), x11PictureHandle(), y()

Inherited from PyQt4.QtCore.QObject

__getattr__(), blockSignals(), childEvent(), children(), connect(), connectNotify(), customEvent(), deleteLater(), destroyed(), disconnect(), disconnectNotify(), dumpObjectInfo(), dumpObjectTree(), dynamicPropertyNames(), emit(), eventFilter(), findChild(), findChildren(), inherits(), installEventFilter(), isWidgetType(), killTimer(), metaObject(), moveToThread(), objectName(), parent(), property(), pyqtConfigure(), receivers(), removeEventFilter(), sender(), senderSignalIndex(), setObjectName(), setProperty(), signalsBlocked(), startTimer(), thread(), timerEvent(), tr(), trUtf8()

Inherited from PyQt4.QtGui.QPaintDevice

colorCount(), depth(), heightMM(), logicalDpiX(), logicalDpiY(), numColors(),
paintingActive(), physicalDpiX(), physicalDpiY(), widthMM()

Inherited from sip.simplewrapper

__new__()

Inherited from object

__delattr__(), __format__(), __getattr__(), __hash__(), __reduce__(),
__reduce_ex__(), __repr__(), __setattr__(), __sizeof__(), __str__(), __sub-
classhook__()

11.3.2 Properties

Name	Description
<i>Inherited from object</i>	
__class__	

11.3.3 Class Variables

Name	Description
<i>Inherited from PyQt4.QtGui.QMainWindow</i>	
AllowNestedDocks, AllowTabbedDocks, AnimatedDocks, ForceTabbedDocks, VerticalTabs	
<i>Inherited from PyQt4.QtGui.QWidget</i>	
DrawChildren, DrawWindowBackground, IgnoreMask	
<i>Inherited from PyQt4.QtCore.QObject</i>	
staticMetaObject	
<i>Inherited from PyQt4.QtGui.QPaintDevice</i>	
PdmDepth, PdmDpiX, PdmDpiY, PdmHeight, PdmHeightMM, PdmNumColors, PdmPhysicalDpiX, PdmPhysicalDpiY, PdmWidth, PdmWidthMM	

12 Module TrabajoTallerConstruccionSw.main_ui

12.1 Variables

Name	Description
<code>__package__</code>	Value: 'TrabajoTallerConstruccionSw'

12.2 Class Ui_MainWindow

object —
 TrabajoTallerConstruccionSw.main_ui.Ui_MainWindow

12.2.1 Methods

<code>setupUi(self, MainWindow)</code>
--

<code>retranslateUi(self, MainWindow)</code>
--

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__hash__()`, `__init__()`,
`__new__()`, `__reduce__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`,
`__sizeof__()`, `__str__()`, `__subclasshook__()`

12.2.2 Properties

Name	Description
<i>Inherited from object</i>	
<code>__class__</code>	

13 Package TrabajoTallerConstruccionSw.views

13.1 Modules

- **actor_ui** (*Section 14, p. 46*)
- **chars_ui** (*Section 15, p. 47*)
- **director_ui** (*Section 16, p. 48*)
- **elenco_ui** (*Section 17, p. 49*)
- **login_ui** (*Section 18, p. 50*)
- **movie_ui** (*Section 19, p. 51*)

13.2 Variables

Name	Description
__package__	Value: None

14 Module TrabajoTallerConstruccionSw.views.actor__ui

14.1 Variables

Name	Description
<code>__package__</code>	Value: 'TrabajoTallerConstruccionSw.views'

14.2 Class *Ui_Dialog*

object —
TrabajoTallerConstruccionSw.views.actor__ui.Ui_Dialog

14.2.1 Methods

<code>setupUi(self, Dialog)</code>

<code>retranslateUi(self, Dialog)</code>
--

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__hash__()`, `__init__()`,
`__new__()`, `__reduce__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`,
`__sizeof__()`, `__str__()`, `__subclasshook__()`

14.2.2 Properties

Name	Description
<i>Inherited from object</i> <code>__class__</code>	

15 Module TrabajoTallerConstruccionSw.views.chars__ui

15.1 Variables

Name	Description
<code>__package__</code>	Value: 'TrabajoTallerConstruccionSw.views'

15.2 Class *Ui_Dialog*

object —
 TrabajoTallerConstruccionSw.views.chars__ui.Ui_Dialog

15.2.1 Methods

<code>setupUi(self, Dialog)</code>

<code>retranslateUi(self, Dialog)</code>
--

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__hash__()`, `__init__()`,
`__new__()`, `__reduce__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`,
`__sizeof__()`, `__str__()`, `__subclasshook__()`

15.2.2 Properties

Name	Description
<i>Inherited from object</i> <code>__class__</code>	

16 Module TrabajoTallerConstruccionSw.views.director__ui

16.1 Variables

Name	Description
<code>__package__</code>	Value: 'TrabajoTallerConstruccionSw.views'

16.2 Class *Ui_Dialog*

object —
 TrabajoTallerConstruccionSw.views.director__ui.Ui_Dialog

16.2.1 Methods

<code>setupUi(self, Dialog)</code>

<code>retranslateUi(self, Dialog)</code>
--

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__hash__()`, `__init__()`,
`__new__()`, `__reduce__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`,
`__sizeof__()`, `__str__()`, `__subclasshook__()`

16.2.2 Properties

Name	Description
<i>Inherited from object</i> <code>__class__</code>	

17 Module TrabajoTallerConstruccionSw.views.elenco_ui

17.1 Variables

Name	Description
<code>__package__</code>	Value: 'TrabajoTallerConstruccionSw.views'

17.2 Class *Ui_Dialog*

object —
TrabajoTallerConstruccionSw.views.elenco_ui.Ui_Dialog

17.2.1 Methods

<code>setupUi(self, Dialog)</code>

<code>retranslateUi(self, Dialog)</code>
--

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__hash__()`, `__init__()`,
`__new__()`, `__reduce__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`,
`__sizeof__()`, `__str__()`, `__subclasshook__()`

17.2.2 Properties

Name	Description
<i>Inherited from object</i> <code>__class__</code>	

18 Module TrabajoTallerConstruccionSw.views.login_ui

18.1 Variables

Name	Description
<code>__package__</code>	Value: 'TrabajoTallerConstruccionSw.views'

18.2 Class *Ui_Dialog*

object —
 TrabajoTallerConstruccionSw.views.login_ui.Ui_Dialog

18.2.1 Methods

<code>setupUi(self, Dialog)</code>

<code>retranslateUi(self, Dialog)</code>
--

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__hash__()`, `__init__()`,
`__new__()`, `__reduce__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`,
`__sizeof__()`, `__str__()`, `__subclasshook__()`

18.2.2 Properties

Name	Description
<i>Inherited from object</i> <code>__class__</code>	

19 Module TrabajoTallerConstruccionSw.views.movie__ui

19.1 Variables

Name	Description
<code>__package__</code>	Value: 'TrabajoTallerConstruccionSw.views'

19.2 Class *Ui_Dialog*

object —
 TrabajoTallerConstruccionSw.views.movie__ui.Ui_Dialog

19.2.1 Methods

<code>setupUi(self, Dialog)</code>

<code>retranslateUi(self, Dialog)</code>
--

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__hash__()`, `__init__()`,
`__new__()`, `__reduce__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`,
`__sizeof__()`, `__str__()`, `__subclasshook__()`

19.2.2 Properties

Name	Description
<i>Inherited from object</i> <code>__class__</code>	

Index

- TrabajoTallerConstruccionSw (*package*), 2
- TrabajoTallerConstruccionSw (*module*), 51
- TrabajoTallerConstruccionSw.controllers (*package*), 3
 - TrabajoTallerConstruccionSw.controllers.actor_controller (*module*), 4–8
 - TrabajoTallerConstruccionSw.controllers.character_controller (*module*), 9–13
 - TrabajoTallerConstruccionSw.controllers.director_controller (*module*), 14–18
 - TrabajoTallerConstruccionSw.controllers.elenco_controller (*module*), 19–23
 - TrabajoTallerConstruccionSw.controllers.login_controller (*module*), 24–28
 - TrabajoTallerConstruccionSw.controllers.movie_controller (*module*), 29–33
- TrabajoTallerConstruccionSw.dbManager (*module*), 34–36
 - TrabajoTallerConstruccionSw.dbManager.dbManager (*class*), 34–36
- TrabajoTallerConstruccionSw.elenco_ui (*module*), 37
- TrabajoTallerConstruccionSw.main (*module*), 38–43
 - TrabajoTallerConstruccionSw.main.Main (*class*), 38–43
- TrabajoTallerConstruccionSw.main_ui (*module*), 44
 - TrabajoTallerConstruccionSw.main_ui.Ui_MainWindow (*class*), 44
- TrabajoTallerConstruccionSw.views (*package*), 45
 - TrabajoTallerConstruccionSw.views.actor_ui (*module*), 46
 - TrabajoTallerConstruccionSw.views.chars_ui (*module*), 47
 - TrabajoTallerConstruccionSw.views.director_ui (*module*), 48
 - TrabajoTallerConstruccionSw.views.elenco_ui (*module*), 49
 - TrabajoTallerConstruccionSw.views.login_ui (*module*), 50
 - TrabajoTallerConstruccionSw.views.movie_ui