



Bitbucket Data Center 9.3 (Latest)
Documentation

Administer Bitbucket

Cloud

Data Center 9.3

- Get started with Bitbucket Data Center
- Use Bitbucket Data Center

Administer Bitbucket Data Center

- Users and groups
- Advanced repository management
- External user directories

Global permissions

- Setting up your mail server
- Integrate with Atlassian applications
- Connect Bitbucket to an external database
- Migrating Bitbucket Data Center to another server
- Migrate Bitbucket Server from Windows to Linux
- Run Bitbucket in AWS
- Specify the Bitbucket base URL
- Configuring the application navigator

permissions to control to the Bitbucket instance

bucket User" permission or ship, will not be able to inlicensed and do not s.

r's page seen from the

itor

email.com

Related content

- Users and groups
- Get started with Git
- Delegate user management to Jira
- Creating projects
- OAuth 2.0 scopes for incoming links
- Controlling access to code
- Bitbucket guardrails
- Allowing public access to code
- Data protection by design and by default in Bitbucket Server and Data Center

Ce site utilise des cookies pour améliorer votre expérience de navigation, effectuer des analyses et des recherches, et cibler la publicité. Pour modifier vos préférences, cliquez sur Gérer les préférences. Sinon, cliquez sur Accepter tous les cookies pour indiquer que vous consentez à leur utilisation sur votre appareil. Cliquez sur Rejeter tous les cookies signifie que vous n'acceptez pas que nous utilisions des cookies qui ne sont pas strictement nécessaires sur votre appareil. [Avis relatif aux cookies et au suivi d'Atlassian](#)

Gérer les préférences

Rejeter tous les cookies

Accepter tous les cookies

←

Bitbucket Data Center 9.3 (Latest)

Documentation

› Get started with Bitbucket Data Center

› Use Bitbucket Data Center

▼ Administer Bitbucket Data Center

- Users and groups
- Advanced repository management
- › External user directories
- **Global permissions**
 - Setting up your mail server
- › Integrate with Atlassian applications
- › Connect Bitbucket to an external database
- Migrating Bitbucket Data Center to another server
- Migrate Bitbucket Server from Windows to Linux
- › Run Bitbucket in AWS
 - Specify the Bitbucket base URL
 - Configuring the application navigator

✓

✓

sions in Bitbucket.

ng Bitbucket user or

nts').

s as required.

field to set permissions for

up by clicking the X at the

re). This will remove that

Project CreatorBitbucket User

System Admin

Add

✓

✓

Ce site utilise des cookies pour améliorer votre expérience de navigation, effectuer des analyses et des recherches, et cibler la publicité. Pour modifier vos préférences, cliquez sur Gérer les préférences. Sinon, cliquez sur Accepter tous les cookies pour indiquer que vous consentez à leur utilisation sur votre appareil. Cliquez sur Rejeter tous les cookies signifie que vous n'acceptez pas que nous utilisions des cookies qui ne sont pas strictement nécessaires sur votre appareil. [Avis relatif aux cookies et au suivi d'Atlassian](#)

Page 2 of 4




Bitbucket Data Center 9.3 (Latest)
Documentation

- › Get started with Bitbucket Data Center
- › Use Bitbucket Data Center
- ▼ **Administer Bitbucket Data Center**
 - Users and groups
 - Advanced repository management
 - › External user directories
 - **Global permissions**
 - Setting up your mail server
 - › Integrate with Atlassian applications
 - › Connect Bitbucket to an external database
 - Migrating Bitbucket Data Center to another server
 - Migrate Bitbucket Server from Windows to Linux
 - › Run Bitbucket in AWS
 - Specify the Bitbucket base URL
 - Configuring the application navigator

admin. By default, a user
delete and archive/unarchive

es tab.
who can delete repositories.

es tab.
who can archive and

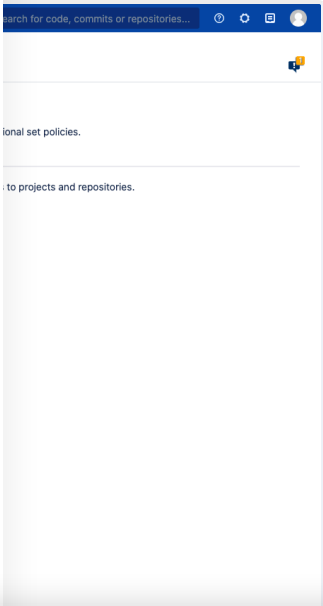

Ce site utilise des cookies pour améliorer votre expérience de navigation, effectuer des analyses et des recherches, et cibler la publicité. Pour modifier vos préférences, cliquez sur [Gérer les préférences](#). Sinon, cliquez sur [Accepter tous les cookies](#) pour indiquer que vous consentez à leur utilisation sur votre appareil. Cliquez sur [Rejeter tous les cookies](#) signifie que vous n'acceptez pas que nous utilisions des cookies qui ne sont pas strictement nécessaires sur votre appareil. [Avis relatif aux cookies et au suivi d'Atlassian](#)



Bitbucket Data Center 9.3 (Latest)
Documentation

- › Get started with Bitbucket Data Center
- › Use Bitbucket Data Center
- ▼ **Administer Bitbucket Data Center**
 - Users and groups
 - Advanced repository management
 - › External user directories
 - **Global permissions**
 - Setting up your mail server
 - › Integrate with Atlassian applications
 - › Connect Bitbucket to an external database
 - Migrating Bitbucket Data Center to another server
 - Migrate Bitbucket Server from Windows to Linux
 - › Run Bitbucket in AWS
 - Specify the Bitbucket base URL
 - Configuring the application navigator

Choices Privacy Policy Terms of Use Security © 2024 Atlassian

Ce site utilise des cookies pour améliorer votre expérience de navigation, effectuer des analyses et des recherches, et cibler la publicité. Pour modifier vos préférences, cliquez sur Gérer les préférences. Sinon, cliquez sur Accepter tous les cookies pour indiquer que vous consentez à leur utilisation sur votre appareil. Cliquez sur Rejeter tous les cookies signifie que vous n'acceptez pas que nous utilisions des cookies qui ne sont pas strictement nécessaires sur votre appareil. [Avis relatif aux cookies et au suivi d'Atlassian](#)