We use optional cookies to improve your experience on our websites, such as through social media connections, and to display personalized advertising based on your online activity. If you reject optional cookies, only cookies necessary to provide you the services will be used. You may change your selection by clicking "Manage Cookies" at the bottom of the page. **Privacy Statement Third-Party Cookies**

Accept

Reject

Manage cookies



Learn

Product documentation ∨

Development languages ∨

Topics ∨

Q Sign in



IIS Modules Overview

Article • 08/23/2022 • 8 contributors

♦ Feedback

In this article

Introduction

Prerequisites

Getting Started with Modules

Preconditions

Show 3 more

by IIS Team, Mike Volodarsky ☑

Compatibility

Expand table

Version	Notes
IIS 7.0 and later	The features described in this article were introduced in IIS 7.0.
IIS 6.0 and earlier	The features described in this article were not supported prior to IIS 7.0.

Introduction

The IIS 7 and above Web server feature set is componentized into more than thirty independent modules.

A module is either a Win32 DLL (native module) or a .NET 2.0 type contained within an assembly (managed module). Similar to a set of building blocks, modules are added to the server in order to provide the desired functionality for your applications. Likewise, all IIS modules can be removed, or replaced with custom modules developed using the IIS C++ APIs, or the familiar ASP.NET 2.0 APIs.

This article describes common IIS module management tasks, and details each module including its configuration settings and the potential effect a module removal has on the Web server. The management examples are given using both the graphical IIS Manager and the **AppCmd** command line tool.

Prerequisites

To follow the steps in this document it is best to do a full install of IIS.

① Note

Not all editions of Windows support all available IIS features. To see which features of IIS are supported on your operating system, you will need to consult the documentation which shipped with your version of Windows.

To Perform a Full Installation of IIS on Windows Vista, Windows 7, Windows 8, Windows 10 or Windows 11

- 1. Click Start and then click Control Panel.
- 2. In the **Control Panel**, click **Programs**.
- 3. Under Programs and Features, click Turn Windows features on or off.
- 4. In the Windows Features dialog, expand Internet Information Services and select all features.
 - You may need to expand some categories to select all the features in that category.
- 5. Click OK.

To Perform a Full Install of IIS on Windows Server 2008/R2, Windows Server 2012/R2, or Windows Server 2016

- 1. Open Server Manager > Roles and select Web Server (IIS).
- Check all features under Web Server.

Getting Started with Modules

In order to add a module to the server, you must perform two steps:

- 1. Install a module on the server (native modules only).
- 2. Enable the module in an application.

The first step registers the module globally with the server, making it available within each server worker process. It is necessary only for native modules due to the trusted nature of native code, and is available only to administrators.

(!) Note

A native module has unrestricted access to any resource available to the server worker process, just like an ISAPI filter or extension in previous versions. Because of this unrestricted access, you should install only native modules that come from a trusted source.

The second step enables the module to execute within a particular application and effectively allows the application administrator to control the server features enabled for the application. This step allows both installed native modules and managed modules to be enabled for each application.

To Install a Native Module

In order to install a native module, it must be registered with the server using one of the options below:

- Manually editing the IIS configuration store. In IIS 7.5 and later you can use the Configuration Editor in the IIS Manager.
- Using the IIS Manager
- Using the **AppCmd.exe** command line tool

All three of these options result in the module entry being added to the <globalModules> IIS configuration section, which can be set only at the server level. To examine the contents of this section, open the root configuration file located in

%windir%\system32\inetsrv\config\applicationhost.config, and
search for the string "<globalModules>".

After a full IIS installation, this section contains an entry for each of the native modules shipped with IIS, specifying a name and the path to the module DLL:

```
<globalModules>
     <add name="DefaultDocumentModule" image="%windir%\system
     <add name="DirectoryListingModule" image="%windir%\system")</pre>
```

```
<add name="StaticFileModule" image="%windir%\system32\ir
...
</globalModules>
```

All of these modules are described in detail later in this document.

To Uninstall a Native Module

You can uninstall a native module if that module is no longer in use on the server, or if you would like to replace it with another module.

Remove the corresponding module entry from the <globalModules> configuration list, and the associated entry in the <modules> configuration list using one of the following options:

- Manually editing the IIS configuration store. In IIS 7.5 and above you can use the Configuration Editor.
- Using the IIS Manager
- Using the AppCmd.exe command line tool

① Note

Because the <globalModules> configuration section can be set only at the server level, you must be an administrator to uninstall a module.

Enabling a Module for an Application

A module must be enabled before it can provide service for a particular application. In order to enable a native module, it must first be installed on the server (see the previous section, To Install a Native Module).

A managed module does not require installation, and can be enabled directly for each application. This allows applications to include their managed modules directly within the application by registering them in

the application's web.config file, and providing the implementation in /BIN or /App_Code directories.

To enable a module, do one of the following:

- Manually edit the IIS configuration store, either globally to enable
 the module for all applications on the server, or in a particular
 web.config file located within each application for which you
 would like to enable this module. In IIS 7.5 or above you can use
 the Configuration Editor.
- Use the IIS Manager
- Use the AppCmd.exe command line tool

All three of these options add the module entry to the <modules> IIS configuration section, which is can be set at both the server level and application level. Examine the contents of this section by opening the root configuration file located in

%windir%\system32\inetsrv\config\applicationhost.config, and
searching for the string "<modules>".

Unlike native modules, a managed module does not require adding an entry to the <globalModules> configuration section.

After a full IIS installation, the configuration section contains an entry for each of the modules (both managed and native) that shipped with IIS. The entry indicates that all these modules are enabled by default for all applications on the server. Each entry in this section specifies either the name of a native module that was previously installed on the server, or the name and .NET type of a managed module:

```
<modules>
<add name="DefaultDocumentModule" />
<add name="DirectoryListingModule" />
<add name="StaticFileModule"/>
    ...
</modules>
```

Disabling a Module in an Application

Disable a module if that module is no longer in use in the application, or if you want to replace it with another module. To disable a module, remove the corresponding module entry from the <modules> configuration collection for a particular application where you do not want this module to execute. If the module is enabled at the server level, remove it there to disable it in all applications on the server by default. Use one of the following options to remove the module at the server level:

- Manually edit the <system.webServer>/<modules> configuration section in your application.
- Use the IIS Manager.
- Use the **AppCmd.exe** command line tool.

After the module is removed from the application, it will not be active in that application. However, if the module is native, it will still be loaded in the server worker process, and may be used by other applications that did not remove it.

① Note

The configuration section is unlocked by default if ASP.NET is installed. This default unlocking allows applications to disable both native and managed modules enabled globally, and to add new managed modules. This configuration section can be locked at the server level to prevent modification entirely, or prevent removal of specific module entries if desired by the Administrator.

Preconditions

There is another attribute on a module entry called precondition. The IIS core engine uses preconditions to determine when to enable a particular module. Performance reasons, for example, might determine

that you only want to execute managed modules for requests that also go to a managed handler. The precondition in the following example (precondition="managedHandler") only enables the forms authentication module for requests that are also handled by a managed handler, such as requests to .aspx or .asmx files:

```
<add name="FormsAuthentication"type="System.Web.Security.For</pre>
```

If you remove the attribute precondition="managedHandler", Forms Authentication also applies to content that is not served by managed handlers, such as .html, .jpg, .doc, but also for classic ASP (.asp) or PHP (.php) extensions. See "How to Take Advantage of IIS Integrated Pipeline" for an example of enabling ASP.NET modules to run for all content.

You can also use a shortcut to enable all managed (ASP.NET) modules to run for all requests in your application, regardless of the "managedHandler" precondition. To enable all managed modules to run for all requests without configuring each module entry to remove the "managedHandler" precondition, use the

runAllManagedModulesForAllRequests property in the <modules> section:

```
<modules runAllManagedModulesForAllRequests="true"/>
```

When you use this property, the "managedHandler" precondition has no effect and all managed modules run for all requests.

Querying, Adding and Removing Modules Using the IIS Manager

The IIS Manager provides an easy way to query, add or remove modules.

- 1. To open the IIS Manager, click **Start**, type **inetmgr** in the **Search** box, and then press ENTER.
- 2. Click the computer name of your IIS server.
- 3. Click the **Modules** icon in the **IIS** category.



Figure 1: IIS Manager

To manage the enabled modules for a particular application

- 1. Connect to that application using the tree view on the left.
- 2. Navigate to the Modules feature pane.
- 3. Click **Add Managed Module** to add a Managed Module to your application. **Add Native Module** only allows you to add a module that is already registered on the Server level.

To remove a module from your application

1. Click the module in the list. The **Remove** task displays in the left pane.

2. Click Remove.

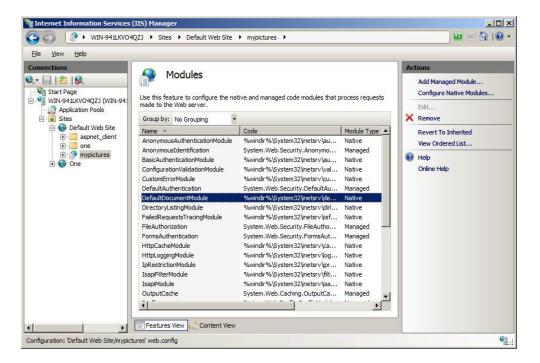



Figure 2: Modules List in IIS Manager

Managing Modules from the Command Line

To quickly manage modules from the command line, or script module management tasks, use the **AppCmd.exe** command line tool.

To install a module using AppCmd.exe

At the Command Prompt, type the following command, replacing values in italics with the values for the module on your computer.



Installing a native module automatically enables it at the server level.

For example, the following command installs the Default Document module.

 $\verb|\windir| \verb|\system32| inetsrv| appcmd.exe install module / name: Delta in the control of the$

If you run the command on a computer where the module is already loaded, you wil get an error message similar to the following:

ERROR (message:Failed to add duplicate collection element "DefaultDocumentModule".)

To uninstall a module using AppCmd.exe

At the Command Prompt, type the following command, replacing values in italics with the values for the module on your computer.

Appcmd.exe uninstall module MODULE_NAME

① Note

Uninstalling a module automatically disables it at the server level.

For example, the following command uninstalls the Default Document module. This command is provided only as example. You should only run it on a test server.

%windir%\system32\inetsrv\appcmd.exe uninstall module Defaul

To list the modules enabled either for an application or globally

At the Command Prompt, type the following command, replacing values in italic text with the values for the module on your computer.

```
Appcmd.exe list modules [/app.name:APPLICATION_NAME]
```

For example, the following command lists the modules enabled for the Default Web Site.

```
\verb|\windir| \space{2.5cm} windir| \space{2.5cm} \space{2.5cm} system 32 \space{2.5cm} in ets rv \space{2.5cm} app. name: \space{2.5cm} \space
```

And this command lists the modules installed globally.

%windir%\system32\inetsrv\appcmd.exe list modules

To enable a module either for a particular application or globally

At the Command Prompt, type the following command, replacing values in italic text with the values for the module on your computer.

```
Appcmd.exe add module /name:MODULE_NAME /type:MGD_TYPE
```

For example, the following command adds the Forms Authentication module to the Default Web Site.

%windir%\system32\inetsrv\appcmd.exe add module /name:Forms/

And this command adds the Forms Authentication Module globally.

%windir%\system32\inetsrv\appcmd.exe add module /name:Forms/

To disable a module either for a particular application or globally

At the Command Prompt, type the following command, replacing values in italic text with the values for the module on your computer.

Appcmd.exe delete module MODULE_NAME [/app.name:APPLICATION_

For example, the following command removes the Forms Authentication module from the Default Web Site.

%windir%\system32\inetsrv\appcmd.exe delete module FormsAuth

And this command removes the Forms Authentication Module globally.

%windir%\system32\inetsrv\appcmd.exe delete module FormsAuth

To get more help on the syntax for each of the App Cmd.exe commands

To display the commands supported on the Module object type the following command:

Appcmd.exe module /?

To display the usage of each command, type the following command:

Appcmd.exe install module /? Appcmd add module /?

Module Reference

The IIS server is ready for customizing. Read the following list carefully to avoid side-effects, feature loss or removing security features.

Utility Modules

These modules do not provide request services, but instead assist the server engine with its internal operation.

Expand table

Module Name:	UriCacheModule
Description:	Implements a generic cache for URL-specific server state, such With this module, the server only reads configuration for the fire particular URL, and reuse it on subsequent requests until it cha
Configuration sections:	None.

Dependencies:	None.
Potential issues when removing this module	Performance loss due to state cached for each URL retrieval for
Module Name:	FileCacheModule
Description:	Caches file handles for files opened by the server engine and m
Configuration sections:	None.
Dependencies:	None.
Potential issues when removing this module	Performance loss. If file handles are not cached, the files have to every request.
Module Name:	TokenCacheModule
Description:	Caches windows security tokens for password based authentical (anonymous authentication, basic authentication, IIS client cert authentication).
Configuration sections:	None.
Dependencies:	None.
Potential issues when removing this module	Performance loss. The users must be logged on for every reque not cached. A major performance impact may result. For example, protected html page references 50 images that are also protect calls to the local account database, or worse, to an off-box domination of the local account database.
Module Name:	ManagedEngine
Description:	Managed Engine has a special place within all the other module for providing the IIS integration to hook up with the ASP.NET r

Configuration sections:	
Dependencies:	None.
Potential issues when removing this module	ASP.NET integration will be disabled. None of the managed mo the <modules> or ASP.NET handlers declared in the <handlers application="" called="" in="" integrated="" mode.<="" pool="" runs="" td="" the="" when=""></handlers></modules>
Module Name:	HttpCacheModule
Description:	The HttpCacheModule implements the IIS output cache and als caching items in the http.sys cache. Set the cache size, output c via configuration.
Configuration sections:	System.webServer/caching
Dependencies:	None.
Potential issues when removing this module	Content will no longer be cached in kernel mode. Cache profile: Removing the HttpCacheModule will probably have adverse eff performance and resource usage.
Module Name:	DynamicCompressionModule
Description:	Implements in-memory compression of dynamic content.
Configuration sections:	system.webServer/httpCompression and system.webServer/url
Dependencies:	There will not be any dependencies because Dynamic compress by default.
Module Name:	StaticCompressionModule
Description:	Implements compression (in memory as well as persistent in th static content.

Configuration sections:	system.webServer/httpCompression and system.webServer/url
Dependencies:	None.
Potential issues when removing this module	Potential Bandwidth saturation due to uncompressed content the client.
Module Name:	DefaultDocumentModule
Description:	Implements default document functionality. Requests that com / will be rerouted to a document in the default document list.
Configuration sections:	system.webServer/defaultDocument
Dependencies:	None.
Potential issues when removing this module	Requests to /, for example http://localhost/, return a 404 endirectoryBrowsing is enabled, a directory listing is generated.
Module Name:	DirectoryListingModule
Description:	Implements directory browsing functionality.
Configuration sections:	system.webServer/directoryBrowse
Dependencies:	None.
Potential issues when removing this module	If the neither the default document module nor the directoryLinhandle a request for a /, an empty response returns.
Module Name:	ProtocolSupportModule

Description:	Implements custom and redirect response headers. Implements Options HTTP verbs. Implements the supports which allow or t support via configuration.
Configuration sections:	system.webServer/httpProtocol
Dependencies:	None.
Potential issues when removing this module	TRACE or OPTIONS requests return a "405 Method not allowed
Module Name:	HttpRedirectionModule
Description:	Implements redirect functionality.
Configuration sections:	system.webServer/httpRedirect
Dependencies:	None.
Potential issues when removing this module	Potential security issue if resources were protected by redirectic Redirection module is removed, the content becomes accessible
Module Name:	ServerSideIncludeModule
Description:	Implements server side includes. This module is mapped as a he executing for requests ending in .stm, .shtm and .shtml.
Configuration sections:	system.webServer/serverSideInclude
Dependencies:	None.
Potential issues when removing this module	The static file module handles.stm, .shtm and .shtml files. If this mimeMap for these extensions the files become served as text. that this is not the default.

well a
urn a
erates icatio
thenti
he IIS ect is _I nerate
(Acti
Марг
nachir

Potential issues when removing this module	Requests are normally allowed if Active Directory Certificate Maprotect a directory; in this case, the module is removed.
Module Name:	BasicAuthenticationModule
Description:	implements HTTP Basic authentication described in RFC 2617.
Configuration sections:	system.webServer/security/authentication/basicAuthentication
Dependencies:	None.
Potential issues when removing this module	At least one authentication module has must be configured. The checks after the authentication phase if the HttpUser object is phase if the HttpUser object is an IIS data structure. A 401.2 error generate authentication populating the HttpUser object.
Module Name:	WindowsAuthenticationModule
Description:	Implements Windows authentication (NTLM or Negotiate (Kerk
Configuration	system.webServer/security/authentication/windowsAuthenticat
sections:	system.webserver/security/authentication/windows/authenticat
•	None.
sections:	None. At least one authentication module must be configured. The IIS checks after the authentication phase if the HttpUser object is part of the HttpUser object.
sections: Dependencies: Potential issues when removing this	None. At least one authentication module must be configured. The IIS checks after the authentication phase if the HttpUser object is an IIS data structure. A 401.2 error is general
sections: Dependencies: Potential issues when removing this module Module	None. At least one authentication module must be configured. The IIS checks after the authentication phase if the HttpUser object is phase if the HttpUser object is an IIS data structure. A 401.2 error is general authentication populating the HttpUser object.
sections: Dependencies: Potential issues when removing this module Module Name:	None. At least one authentication module must be configured. The IIS checks after the authentication phase if the HttpUser object is phase if the HttpUser object is an IIS data structure. A 401.2 error is general authentication populating the HttpUser object. DigestAuthenticationModule Implements digest authentication described in RFC 2617.
sections: Dependencies: Potential issues when removing this module Module Name: Description: Configuration	None. At least one authentication module must be configured. The IIS checks after the authentication phase if the HttpUser object is phase if the HttpUser object is an IIS data structure. A 401.2 error is general authentication populating the HttpUser object. DigestAuthenticationModule

Potential issues when removing this module	At least one authentication module must be configured. The IIS checks after the authentication phase if the HttpUser object is HttpUser object is an IIS data structure. A 401.2 error is general authentication populating the HttpUser object.
Module Name:	IISCertificateMappingAuthenticationModule
Description:	Implements IIS certificate mapping. Maps SSL client certificates account. Contrary to Active Directory Certificate mapping, user mapping rules are stored within the IIS configuration store
Configuration sections:	system. web Server/i is Client Certificate Mapping Authentication
Dependencies:	SSL with the requirement to receive client certificates has to be this module to work.
Potential issues when removing this module	At least one authentication module must be configured. The IIS checks after the authentication phase if the HttpUser object is HttpUser object is an IIS data structure. A 401.2 error generate authentication populating the HttpUser object.
Module Name:	UrlAuthorizationModule
	UrlAuthorizationModule Implements authorization based on configuration rules.
Name:	
Name: Description: Configuration	Implements authorization based on configuration rules.
Name: Description: Configuration sections:	Implements authorization based on configuration rules. system.webServer/security/authorization
Name: Description: Configuration sections: Dependencies: Potential issues when removing this	Implements authorization based on configuration rules. system.webServer/security/authorization None. Authorization rules which protected content are no longer eval
Name: Description: Configuration sections: Dependencies: Potential issues when removing this module Module	Implements authorization based on configuration rules. system.webServer/security/authorization None. Authorization rules which protected content are no longer eval that was supposed to be protected might be served.
Name: Description: Configuration sections: Dependencies: Potential issues when removing this module Module Name:	Implements authorization based on configuration rules. system.webServer/security/authorization None. Authorization rules which protected content are no longer eval that was supposed to be protected might be served. IsapiModule

Dependencies:	None.
Potential issues when removing this module	ISAPI Extensions mapped in the handlers section (modules=explicitly called ISAPI Extensions will no longer work.
Module Name:	IsapiFilterModule
Description:	Implements ISAPI filter functionality.
Configuration sections:	system.webServer/isapiFilters
Dependencies:	None.
Potential issues when removing this module	ISAPI filters often implement functionality applications rely on. ASP.NET or SharePoint. ASP.NET for example needs the aspnet_sensitive content and to rewrite URLs. Removing this module p loading ISAPI filters. Applications might stop working or sensitive exposed.
Module Name:	IpRestrictionModule
Description:	Implements an authorization scheme based on the IPv4 addres request.
Configuration sections:	system.webServer/security/ipSecurity
Dependencies:	IPv4 stack must be installed.
Potential issues when removing this module	Clients with IP addresses on the ipSecurity list will be allowed.
Module Name:	RequestFilteringModule

Configuration sections:	system.webServer/security/requestFiltering
Dependencies:	None.
Potential issues when removing this module	If this module is removed, the rules specified in the requestFilte longer apply. Potential security issues may result.
Module Name:	CustomLoggingModule
Description:	Implements the ILogPlugin interface on top of IIS. ILogPlugin is implementation that allowed customers to extend IIS logging. Verecommend extending IIS using this interface. Instead, custome module and subscribe to the RQ_LOG_REQUEST notification.
Configuration sections:	system.webServer/httpLogging and system.applicationhost/sites/site/logFile/customLogPluginClsid
Dependencies:	None.
Potential issues when removing this module	A custom log plug-in will no longer be called. For example, ODI implemented as ILogPlugin.
Module Name:	CustomErrorModule
Description:	Implements custom errors and the IIS detailed error feature.
Configuration sections:	system.webServer/httpErrors
Dependencies:	None.
Potential issues when removing this module	IIS returns blank pages with minimal information when errors v server occur. Remote users may see detailed error information server components which can result in disclosing information.
Module Name:	HttpLoggingModule

Description:	Implements standard IIS logging by telling HTTP.SYS what to Ic
Configuration sections:	system.applicationHost/log and system.webServer/httpLogging
Dependencies:	None.
Potential issues when removing this module	Standard IIS logging will no longer work.
Module Name:	FailedRequestsTracingModule
Description:	Implements tracing of failed requests. Define and set rules for f configuration.
Configuration sections:	system.webServer/tracing and system.webServer/httpTracing
Dependencies:	None.
Potential issues when removing this module	Tracing http requests will no longer work.
Module Name:	Request Monitor Module
Description:	Implements the IIS Run-time State and Control Interface (RSCA users to query for run-time information such as currently executive start/stop state of a web-site, or currently executing application
Configuration sections:	None.
Dependencies:	None.
Potential issues when removing this module	Tools will be unable to enumerate currently executing requests.

CgiModule
Implements CGI on top of IIS.
system.webServer/cgi and system.webServer/isapiCgiRestriction
None.
CGI programs will stop working.
TracingModule
Implements ETW tracing.
system.webServer/httpTracing
None.
ETW tracing will not work if this module is removed.
ConfigurationValidationModule
Validates that ASP.NET application configuration has been migr Integrated mode.
system.webServer/Validation
None.
Applications that specify legacy ASP.NET configuration for mod will not generate migration errors; a new application that has n will function incorrectly.

Managed Modules:

Expand table

Module Name:	OutputCache
Description:	Implements the ASP.NET Output Caching feature.
Configuration sections:	system.web/caching/outputCache
Dependencies:	ManagedEngine module has to be installed.
Potential issues when removing this module	ASP.NET will be unable to output cache responses to pages configured to be output cached.
Module Name:	Session
Description:	See ASP.NET 2.0 documentation for details
Configuration sections:	system.web/sessionState
Dependencies:	ManagedEngine module must be installed
Potential issues when removing this module	Managed session state is not available.
Module Name:	WindowsAuthentication
Description:	See ASP.NET 2.0 documentation for details.
Configuration sections:	system.web/authentication
Dependencies:	ManagedEngine module has to be installed
Potential issues when removing this module	WindowsAuthentication.OnAuthenticate event will not be raised, which may prevent some custom ASP.NET authentication code from running. Also, the authenticated user will not be replaced with the UNC user when on UNC share (legacy ASP.NET behavior). This module does not affect NTLM/Kerberos authentication for ASP.NET

	applications in Integrated mode, and is not required outside of the WindowsAuthentication.OnAuthenticate event and the legacy UNC behavior.
Module Name:	Forms Authentication
Description:	See ASP.NET 2.0 documentation for details.
Configuration sections:	system.web/authentication
Dependencies:	ManagedEngine module has to be installed
Potential issues when removing this module	ASP.NET forms-based authentication feature will not be available, resulting in clients with forms authentication tickets not being able to access protected resources.
Module Name:	DefaultAuthentication
Description:	See ASP.NET 2.0 documentation for details.
Configuration sections:	system.web/authentication
Dependencies:	ManagedEngine module has to be installed
Potential issues when removing this module	Some ASP.NET features may not work for anonymous requests if ASP.NET authentication mode is Forms. Also, DefaultAuthentication.OnAuthenticate event will not be raised.
Module Name:	RoleManager
Description:	See ASP.NET 2.0 documentation for details.
Configuration sections:	None.
Dependencies:	ManagedEngine module must be installed.
Potential issues when removing this module	Role Manager functionality not available.
Module Name:	UrlAuthorization

Description:	See ASP.NET 2.0 documentation for details. The native UrlAuthorization module implements URL authorization functionality in native code. This provides a scalable and fast native alternative for the managed URL authorization module.
Configuration sections:	system.web/authorization.
Dependencies:	ManagedEngine module must be installed.
Potential issues when removing this module	ASP.NET authorization rules will be ignored, possibly resulting in information disclosure and other security compromises.
Module Name:	AnonymousIdentification
Description:	See ASP.NET 2.0 documentation for details.
Configuration sections:	
Dependencies:	ManagedEngine module has to be installed.
Potential issues when removing this module	The anonymous identification feature used by the ASP.NET Profile will not work.
Module Name:	Profile
Description:	See ASP.NET 2.0 documentation for details.
Configuration sections:	
Dependencies:	ManagedEngine module must be installed.
Potential issues when removing this module	The ASP.NET Profile feature will not work.
Module Name:	UrlMappingsModule
Description:	See ASP.NET 2.0 documentation for details.

Configuration sections:

Dependencies: ManagedEngine module must be installed.

Potential issues The ASP.NET URL mappings will not work. when removing this module

Feedback

Was this page helpful?

🖒 Yes

⊘ No

Get help at Microsoft Q&A

Senglish (United States)

✓× Your Privacy Choices

☆ Theme ∨

Manage cookies Previous Versions Blog ☑ Contribute Privacy ☑ Terms of Use Trademarks ☑

© Microsoft 2024