We use optional cookies to improve your experience on our websites, such as through social media connections, and to display personalized advertising based on your online activity. If you reject optional cookies, only cookies necessary to provide you the services will be used. You may change your selection by clicking "Manage Cookies" at the bottom of the page. Privacy Statement Third-Party **Cookies** 

Reject Manage cookies Accept

# **Microsoft Ignite**

Nov 19-22, 2024

Register now >



Windows

Learn Discover ∨

Product documentation V Development languages V Topics V

Release health Windows client 🗸 Application developers 🗸 Hardware developers 🗸 Windows Server Windows for IoT Windows Insider Program More 🗸

Sign in

Learn / Windows /

# install command (winget)

Article • 07/31/2024 • 8 contributors

Feedback

#### In this article

Usage **Aliases** Arguments **Options** 


Show 4 more

The install command of the winget tool installs the specified application. Use the search command to identify the application you want to install.

The install command requires that you specify the exact string to install. If there is any ambiguity, you will be prompted to further filter the install command to an exact application.

## Usage

winget install [[-q] <query> ...] [<options>]

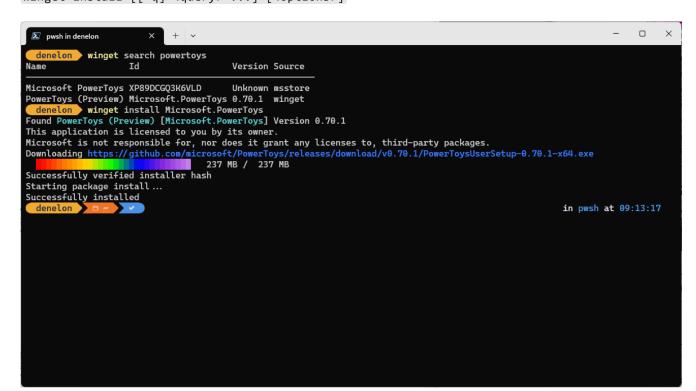

# **Aliases**

The following aliases are available for this command:

add

# **Arguments**

The following arguments are available.

**Expand table** 

Argument	Description
-q,query	The query used to search for an app.

### ① Note

The query argument is positional. Wild-card style syntax is not supported. This is most often the string of characters you expect to uniquely identify the package you wish to install.

# **Options**

The options allow you to customize the install experience to meet your needs.

**Expand table** 

	C Expand tabl
Option	Description
-m,manifest	Must be followed by the path to the manifest (YAML) file. You can use the manifest to run the install experience from a local YAML file.
id	Limits the install to the ID of the application.
name	Limits the search to the name of the application.
moniker	Limits the search to the moniker listed for the application.
-v,version	Enables you to specify an exact version to install. If not specified, latest will install the highest versioned application.
-s,source	Restricts the search to the source name provided. Must be followed by the source name.
scope	Allows you to specify if the installer should target user or machine scope. See known issues relating to package installation scope.
-a,architecture	Select the architecture to install.
installer-type	Select the installer type to install. See supported installer types for WinGet client.
-e,exact	Uses the exact string in the query, including checking for case-sensitivity. It will not use the default behavior of a substring.
-i,interactive	Runs the installer in interactive mode. The default experience shows installer progress
-h,silent	Runs the installer in silent mode. This suppresses all UI. The default experience shows installer progress.
locale	Specifies which locale to use (BCP47 format).
-o,log	Directs the logging to a log file. You must provide a path to a file that you have the write rights to.
custom	Arguments to be passed on to the installer in addition to the defaults.
override	A string that will be passed directly to the installer.
-l,location	Location to install to (if supported).
ignore-security-hash	Ignore the installer hash check failure. Not recommended.
allow-reboot	Allows a reboot if applicable.
skip-dependencies	Skips processing package dependencies and Windows features.
ignore-local-archive- malware-scan	Ignore the malware scan performed as part of installing an archive type package fron local manifest.
dependency-source	Find package dependencies using the specified source.
accept-package- agreements	Used to accept the license agreement, and avoid the prompt.
no-upgrade	Skips upgrade if an installed version already exists.
header	Optional Windows-Package-Manager REST source HTTP header.

authentication-mode	Specify authentication window preference (silent, silentPreferred or interactive).
authentication-account	Specify the account to be used for authentication.
accept-source-agreements	Used to accept the source license agreement, and avoid the prompt.
-r,rename	The value to rename the executable file (portable).
uninstall-previous	Uninstall the previous version of the package during upgrade.
force	Direct run the command and continue with non security related issues.
-?,help	Get additional help on this command.
wait	Prompts the user to press any key before exiting.
logs,open-logs	Open the default logs location.
verbose,verbose-logs	Used to override the logging setting and create a verbose log.
nowarn,ignore-warnings	Suppresses warning outputs.
disable-interactivity	Disable interactive prompts.
proxy	Set a proxy to use for this execution.
no-proxy	Disable the use of proxy for this execution.

## **Example queries**

The following example installs a specific version of an application.

CMD	🖺 Сору
winget install powertoysversion 0.15.2	

The following example installs an application from its ID.

```
CMD Copy
winget install --id Microsoft.PowerToys
```

The following example installs an application by version and ID.

```
CMD Page Copy
winget install --id Microsoft.PowerToys --version 0.15.2
```

# Multiple selections

If the query provided to **winget** does not result in a single application, then **winget** will display the results of the search. This will provide you with the additional data necessary to refine the search for a correct install.

The best way to limit the selection to one file is to use the **id** of the application combined with the **exact** query option. For example:

```
CMD Copy
winget install --id Git.Git -e
```

If multiple sources are configured, it is possible to have duplicate entries. Specifying a source is required to further disambiguate.

```
CMD Properties Copy
winget install --id Git.Git -e --source winget
```

The **msstore** source uses unique identifiers as the "ld" for packages. These do not require the **exact** query toption. For example:

```
CMD Copy
```

winget install XP9KHM4BK9FZ7Q -s msstore

### Local install

The manifest option enables you to install an application by passing in a YAML file directly to the client. If the manifest is a multi-file manifest, the directory containing the files must be used. The manifest option has the following usage.

Usage: winget install --manifest \<path>

**Expand table** 

Option	Description
-m,manifest	The path to the manifests of the application to install.

#### ① Note


Installing packages from local manifest files may have risks. As an extra measure of precaution this feature needs to be enabled by an administrator. To enable this feature run winget settings -- enable LocalManifestFiles. To disable this feature run winget settings --disable LocalManifestFiles.

### Log files

The log files for winget unless redirected, will be located in the following folder: %temp%\AICLI\\*.log

## **License Agreements**


Some applications when installed will require the user to agree to the license or other agreements before installing. When this occurs, the Windows Package Manager will prompt the user to agree to the agreements. If the user does not agree, the application will not install.

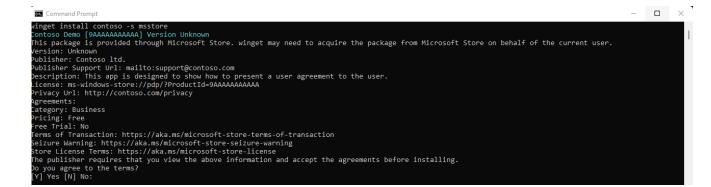

From the command line, you can auto accept the agreements by passing the following option --accept-package-agreements on the command line. This can be beneficial when scripting the Windows Package Manager.

## **Related topics**

• Use the winget tool to install and manage applications

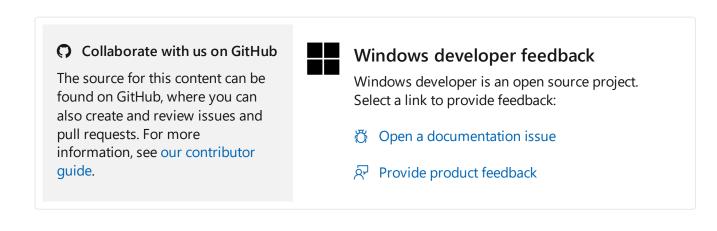



Use the winget tool
 Overview
 configure command
 download command
 export command

hash command
help command
import command
info command

features command

Windows Package Manager

Overview

#### install command

list command

pin command

search command

settings command

show command

source command

tab completion

uninstall command

upgrade command

validate command

validate command

Debugging and troubleshooting

- > WinGet Configuration
- > Submit packages
- > PowerToys

Windows Subsystem for Linux

Windows Terminal

> Sudo for Windows

Mac to Windows guide

Keyboard shortcuts

> Development paths

### **M** Training

Module

**Explore the Windows Package Manager tool - Training** 

Streamline the installation and maintenance of software on your computer by using Windows Package Manager. Explain the front-end components and commands, the Windows Package Manager repository, and how to contribute to the repository.

Download PDF

**Events** 

Nov 20, 12 AM - Nov 22, 12 AM

Terms of Use

Gain the competitive edge you need with powerful AI and Cloud solutions by attending Microsoft Ignite online.

Register now

Senglish (United States)

**✓** Your Privacy Choices

Contribute

☆ Theme Y

Manage cookies

**Previous Versions** 

Privacy ☑

Trademarks ☑

© Microsoft 2024