

i

We use optional cookies to improve your experience on our websites, such as through social media connections, and to display personalized advertising based on your online activity. If you reject optional cookies, only cookies necessary to provide you the services will be used. You may change your selection by clicking “Manage Cookies” at the bottom of the page. [Privacy Statement](#) [Third-Party Cookies](#)

Accept

Reject

Manage cookies

Microsoft Ignite

Nov 19–22, 2024

Register now >

X

Learn

Discover ▾

Product documentation ▾

Development languages ▾

Topics ▾

Q

Sign in

Windows

Release health

Windows client ▾

Application developers ▾

Hardware developers ▾

Windows Server

Windows for IoT

Windows Insider Program

More ▾

🔍

Filter by title

- Driver Development Tools
- Index of Windows Driver Kit Tools
- > Tools for Verifying Drivers
- > Additional Driver Verification Tools
- > Tools for Testing Drivers
- ▼ Tools for Software Tracing

Tools for Software Tracing

Survey of Software Tracing Tools

> Tracing Tool Concepts

> TraceView

> Tracelog

> Tracepdb

> Tracefmt

> Tracing During Boot

> WPP Software Tracing

> Software Tracing FAQ

> Event Tracing for Windows (ETW)
- ▼ DTrace on Windows

DTrace On Windows

DTrace Programming

DTrace Code Samples

DTrace ETW

DTrace Live Dump

> TraceLogging API

> Kernel Mode Performance Monitoring

> Additional Driver Tools
- Learn / Windows / Windows Drivers /
- ⊕

✎

⋮
- # DTrace on Windows
- Article • 02/02/2023 • 8 contributors
- 👉 Feedback
- ## In this article
- [Open DTrace Information](#)

[Providing feedback on Windows DTrace](#)

[DTrace Windows Extensions](#)

[DTrace Windows architecture](#)

Show 3 more
- DTrace (DTrace.exe) is a command-line tool that displays system information and events. DTrace is an open source tracing platform ported to windows. DTrace was originally developed for the Solaris operating system. It provides dynamic instrumentation of both user/kernel functions, the ability to script using the D-language, speculative tracing. In addition, DTrace has Windows OS specific extensions like ETW instrumentation, ETW event generation, system call probes and live dump capture capabilities.
- ⓘ

Note

DTrace is supported in the Insider builds of Windows after version 18980 and Windows Server Build 18975.
- The DTrace on Windows GitHub site is located here:
- <https://github.com/microsoft/DTrace-on-Windows> 🔗
- ## Open DTrace Information
- For detailed information about DTrace see the [OpenDTrace Specification version 1.0](#) 🔗 at the University Of Cambridge.
- The primary GitHub site is located at <https://github.com/opendtrace/> 🔗.
- A set of useful scripts is available at <https://github.com/opendtrace/toolkit> 🔗.
- A number of DTrace books are available, such as:
- DTrace: Dynamic Tracing in Oracle Solaris, Mac OS X and FreeBSD* by Brendan Gregg and Jim Mauro

*Solaris Performance and Tools: DTrace and MDB Techniques for Solaris 10 and OpenSolaris* by Richard McDougall, Jim Mauro and Brendan Gregg
- ## Providing feedback on Windows DTrace
- Use the feedback hub to request new features or to report any problems or bugs with Windows DTrace.
1. Launch the feedback hub. Go to search, enter the word *feedback*, and then select **Feedback Hub**.

2. Select either *Suggest a feature* or *Report a problem*.
- 📄 Download PDF
- Page 1 of 8

3. Provide a detailed, specific description of the issue or suggestion.

## DTrace Windows Extensions

The following are some of the providers available on Windows and what they instrument.

- syscall – NTOS system calls
- fbt (Function Boundary Tracing) – Kernel function entry and returns
- pid (Process ID) – User-mode process tracing. Like kernel-mode FBT, but also allowing the instrumentation of arbitrary function offsets.
- etw (Event Tracing for Windows) – Allows probes to be defined for ETW This provider helps to leverage existing operating system instrumentation in DTrace.

## SYSCALL

SYSCALL provides a pair of probes for each system call: an entry probe that fires before the system call is entered, and a return probe that fires after the system call has completed but before control has transferred back to user-level. For all SYSCALL probes, the function name is set to be the name of the instrumented system call and the module name is the module in which the function exists. The names of the system calls as provided by the SYSCALL provider may be found by typing the command `dtrace.exe -l -P syscall` from the command prompt. Note that the probe name is lower case syscall. The command `dtrace -ln syscall::` will also list all the probes and their parameters available from the syscall provider.

dtrace

Copy

```
C:\> dtrace -ln syscall::
  ID PROVIDER      MODULE                                FUNCTION NAME
   6  syscall      NtWaitHighEventPair entry
   7  syscall      NtWaitHighEventPair return
   8  syscall      NtRegisterThreadTerminatePort entry
   9  syscall      NtRegisterThreadTerminatePort return
  ...
```

Note that not all screen output is shown in these examples. "... " is used to represent truncated output.

To scroll through the output, pipe out to the *more* command like this:

```
dtrace -ln syscall::|more
```

Add the v option to display more information about the available syscall probes.

dtrace

Copy

```
C:\> dtrace -lvn syscall::
...

  942      syscall      NtSaveMergedKeys entry

      Probe Description Attributes
      Identifier Names: Private
      Data Semantics:   Private
      Dependency Class: ISA

      Argument Attributes
      Identifier Names: Private
      Data Semantics:   Private
      Dependency Class: ISA

      Argument Types
      args[0]: HANDLE
      args[1]: HANDLE
      args[2]: HANDLE
  ...
```

## ETW

DTrace includes support for existing manifested/tracelogged ETW probes. You can instrument, filter and parse ETW events synchronously at the time of event firing. In addition, DTrace can be used to combine various events/system states to provide a consolidated output stream to help debug complex error situations.

The command `dtrace -ln etw:::` will list all the probes and their parameters available from the syscall provider.

dtrace

Copy

```
C:\> dtrace -ln etw:::
ID      PROVIDER      MODULE      FUNCTION NAME
944      etw  048dc470-37c1-52a8-565a-54cb27be37ec      0xff_0xfffffffffffffffff ge
945      etw  aab97afe-deaf-5882-1e3b-d7210f059dc1      0xff_0xfffffffffffffffff ge
946      etw  b0f40491-9ea6-5fd5-ccb1-0ec63be8b674      0xff_0xfffffffffffffffff ge
947      etw  4ee869fa-9954-4b90-9a62-308c74f99d32      0xff_0xfffffffffffffffff ge
...
```

For more information, see [DTrace ETW](#).

## Function Boundary Tracing (FBT)

The Function Boundary Tracing (FBT) provider provides probes associated with the entry to and return from most functions in the Windows kernel. The function is the fundamental unit of program text. Similar to other DTrace providers, FBT has no probe effect when it is not explicitly enabled. When enabled, FBT only induces a probe effect in probed functions. FBT has been implemented on x86 and x64 platforms.

For each instruction set, there are a small number of functions that do not call other functions and are highly optimized by the compiler (so-called leaf functions) that cannot be instrumented by FBT. Probes for these functions are not present in DTrace.

The command `dtrace -ln fbt:nt::` will list all the probes and their parameters available for the nt module. Use the debugger [lm \(List Loaded Modules\)](#) command to list all available modules.

dtrace

Copy

```
C:\>dtrace -ln "fbt:nt::"
ID      PROVIDER      MODULE      FUNCTION NAME
3336      fbt      nt      PiDqActionDataFree entry
3337      fbt      nt      PiDqActionDataFree return
3338      fbt      nt  PiDqActionDataGetRequestedProperties entry
3339      fbt      nt  PiDqActionDataGetRequestedProperties return
3340      fbt      nt  _CmGetMatchingFilteredDeviceInterfaceList entry
...
```

### Note

As there are thousands of calls available in nt, it would not be a good idea to leave the function name empty when running a DTrace command that logs data. The recommended approach to avoid a possible performance impact is to specify at least part of the function name, such as `fbt:nt:*Timer*:entry`.

## PID

The DTrace PID provider allows you to trace the internal execution of user-mode processes such as a web browser or a database. You can also attach DTrace at the time of process launch so as to debug process start-up issues. As part of the PID definition, you specify the functions defined in the process and specific offsets (or all offset using wildcard \*) within the function. PID provider requires the binary to be launched or running at the time of script execution.

This example command displays information about a specific call in the PID associated with notepad.exe. Use the debugger [lm \(List Loaded Modules\)](#) command to list all available modules.

dtrace

Copy

```
C:\Windows\system32>dtrace -ln "pid$target:ntdll:RtlAllocateHeap:entry" -c notepad.exe
ID      PROVIDER      MODULE      FUNCTION NAME
5102      pid6100      ntdll      RtlAllocateHeap entry
```

### Note


When tracing functions written in C++, the function names may be too lengthy or decorated to be specified as a probe with their full form. A common solution is to use an expression that uniquely

matches your target function. For instance, use 'String??Copy' as a 'probefunc' portion of the probe name to match 'String::Copy()', or '\*GetPinnableReference' to match 'String::GetPinnableReference()'.

## DTrace Windows architecture

Users interact with DTrace through the DTrace command, which serves as a front-end to the DTrace engine. D scripts get compiled to an intermediate format (DIF) in user-space and sent to the DTrace kernel component for execution, sometimes called as the DIF Virtual Machine. This runs in the dtrace.sys driver.

Traceext.sys (trace extension) is a Windows kernel extension driver, which allows Windows to expose functionality that DTrace relies on to provide tracing. The Windows kernel provides callouts during stackwalk or memory accesses which are then implemented by the trace extension.

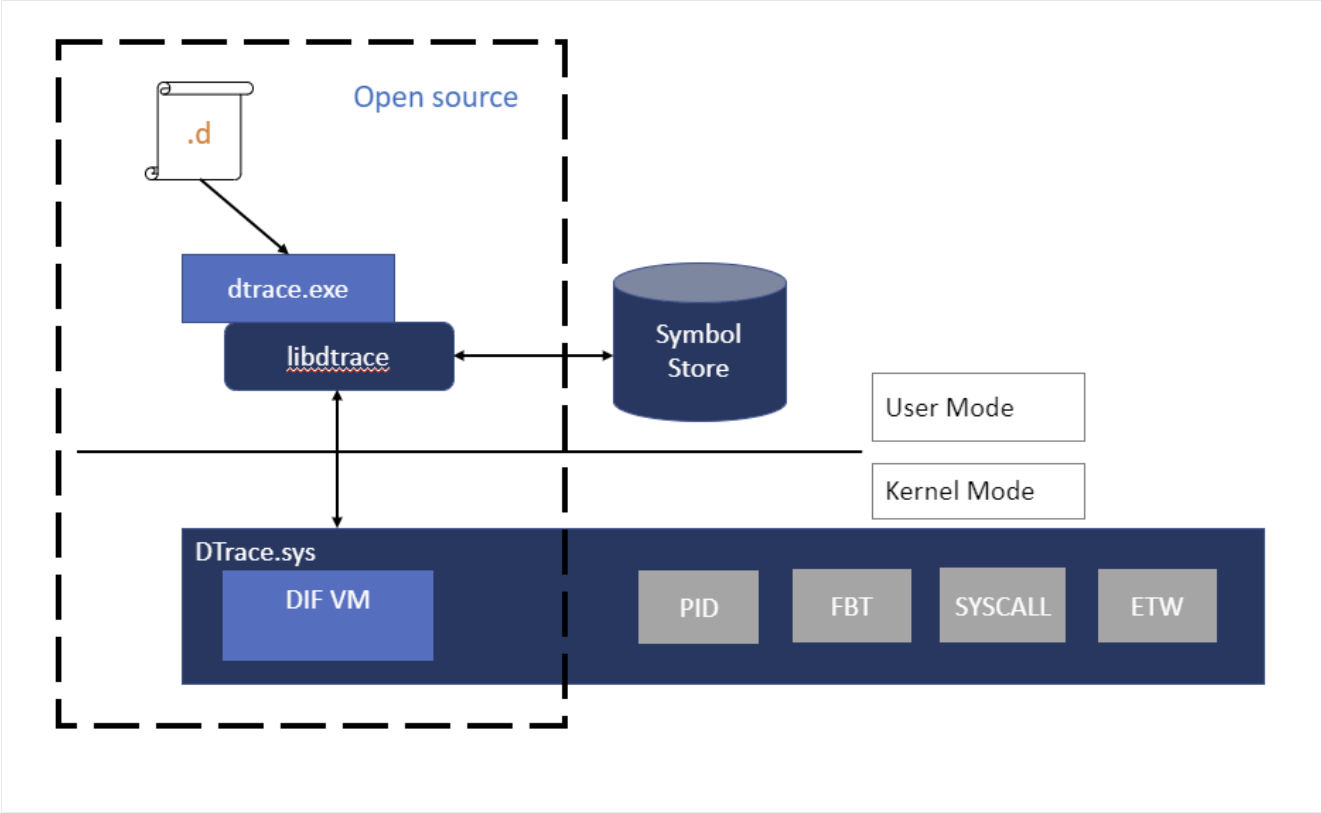

## Installing DTrace under Windows

1. Check that you are running a supported version of Windows. The current download of DTrace is supported in the Insider builds of 20H1 Windows after version 18980 and Windows Server Build 18975. *Installing this version of DTrace on older versions of Windows can lead to system instability and is not recommended.* (The archived version of DTrace for 19H1 is no longer available and is no longer supported.)
2. Download the MSI installation file ([Download DTrace on Windows](#)) from the Microsoft Download Center.
3. Select the Complete install.

### ⓘ Important

Before using bcdedit to change boot information you may need to temporarily suspend Windows security features such as Patchguard, BitLocker and Secure Boot on the test PC. Re-enable these security features when testing is complete and appropriately manage the test PC, when the security features are disabled.

4. Update the PATH environment variable to include C:\Program Files\DTrace

Copy

```
set PATH=%PATH%;"C:\Program Files\DTrace"
```

6. Enable DTrace on the machine using the bcdedit command.

Windows Command PromptCopy

```
bcdedit /set dtrace ON
```

When you update to a new Windows Insider build you will need to set the dtrace bcdedit option again.

ⓘ Note

If you are using BitLocker, disable it when making changes to the boot values. If you do not do this you may be prompted for the BitLocker recovery key. One way to recover from this situation is to boot to the recovery console and restore the bcdedit value, `bcdedit /set {default} dtrace on`. If an OS update has removed the value and you added it in, to recover the OS use bcdedit to remove the value, `bcdedit /deletevalue {default} dtrace`. Then disable BitLocker and re-enable dtrace, `bcdedit /set dtrace ON`.

Configure VSM (Virtual Secure Mode) on the machine for enabling kernel function boundary tracing (FBT) by setting "HKEY\_LOCAL\_MACHINE\SYSTEM\CurrentControlSet\Control\DeviceGuard\EnableVirtualizationBasedSecurity" set to 1 to enable VSM and the Secure Kernel.

To do this, use the REG Add command, like this:

Windows Command PromptCopy

```
REG ADD HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Control\DeviceGuard\ /v EnableVirtuali
```

Some DTrace command use Windows symbols. To use Windows symbols create a symbols directory and set the symbols path:

Windows Command PromptCopy

```
mkdir c:\symbols
set _NT_SYMBOL_PATH=srv*C:\symbols*https://msdl.microsoft.com/download/symbols
```

For more information about symbols paths, see [Symbol path for Windows debuggers](#).

## Using DTrace inside of a Virtual Machine

If running DTrace on a VM, turn on nested Virtualization on the machine supporting the VM, when the VM is stopped, using the following PowerShell command. Provide the `<VMName>` for the VM that you are running DTrace in. Open a PowerShell Windows as an Administrator.

PowerShellCopy

```
Set-VMProcessor -VMName <VMName> -ExposeVirtualizationExtensions $true
```

Reboot the PC supporting the VM.

## Validating the DTrace installation

Use the -l option to list the active probes. If DTrace is active many probes should be listed for etw and system events.

Open a Windows command prompt as an administrator to enter DTrace commands.

dtraceCopy

```
C:\> dtrace -l

...

179      syscall                                NtLockVirtualMemory return
180      syscall                                NtDeviceIoControlFile entry
181      syscall                                NtDeviceIoControlFile return
182      syscall                                NtCreateUserProcess entry
183      syscall                                NtCreateUserProcess return
184      syscall                                NtQuerySection entry
185      syscall                                NtQuerySection return

...

3161      etw 222962ab-6180-4b88-a825-346b75f2a24a      0xff_0xffffffffffffffff ge
3162      etw 3ac66736-cc59-4cff-8115-8df50e39816b      0xff_0xffffffffffffffff ge
3163      etw 42695762-ea50-497a-9068-5cbbb35e0b95      0xff_0xffffffffffffffff ge
3164      etw 3beef58a-6e0f-445d-b2a4-37ab737bd47e      0xff_0xffffffffffffffff ge
```

```
...
```

If only these three probes are listed, there is an issue with the DTrace.sys driver being loaded.

dtraceCopy

```
C:\> dtrace -l
ID PROVIDER MODULE FUNCTION NAME
1 dtrace BEGIN
2 dtrace END
3 dtrace ERROR
```

## Getting started with DTrace - One line commands

Get started by running these commands from an administrator command prompt.

This command displays a syscall summary by program for 5 seconds. The tick-5sec parameter specifies the time period. The exit(0); causes the command to exit upon completion back to the command prompt. The output is specified using [pid,execname] = count(); This displays the Process ID (PID), the executable name and a count for the last 5 seconds.

dtraceCopy

```
C:\> dtrace -Fn "tick-5sec {exit(0);} syscall::entry{ @num[pid,execname] = count();} "
dtrace: description 'tick-5sec ' matched 471 probes
CPU FUNCTION
0 | :tick-5sec

1792 svchost.exe 4
4684 explorer.exe 4
4916 dllhost.exe 4
6192 svchost.exe 4
6644 SecurityHealth 4
92 TrustedInstall 5
504 csrss.exe 5
696 svchost.exe 6
...
```

This command summarizes timer set/cancel calls for 3 seconds:

dtraceCopy

```
C:\> dtrace -Fn "tick-3sec {exit(0);} syscall::Nt*Timer*:entry { @[probefunc, execname, pi
dtrace: description 'tick-3sec ' matched 14 probes
CPU FUNCTION
0 | :tick-3sec

NtCreateTimer WmiPrvSE.exe
NtCreateTimer svchost.exe
NtCreateTimer svchost.exe
NtSetTimer2 svchost.exe
NtSetTimer2 svchost.exe
NtSetTimerEx WmiPrvSE.exe
...
```

## One line commands that use symbols

These command take advantage of Windows symbols and require that the symbol path is set as discussed in the installation section. As mentioned earlier in installation, create a directory and set the symbol path using these commands.

Windows Command PromptCopy

```
C:\> mkdir c:\symbols
C:\> set _NT_SYMBOL_PATH=srv*C:\symbols*https://msdl.microsoft.com/download/symbols
```

This example command displays the top NT functions.

dtraceCopy

```
C:\> dtrace -n "fbt:nt:*Timer*:entry { @k[probefunc] = count(); } tick-5s { trunc(@k, 10);
dtrace: description 'fbt:nt:*Timer*:entry ' matched 340 probes
CPU      ID                      FUNCTION:NAME
  0    22362                      :tick-5s
KeCancelTimer                      712
KeSetTimer2                        714
HalpTimerClearProblem              908
ExpSetTimerObject                  935
NtSetTimerEx                       935
KeSetTimer                        1139
KeSetCoalescableTimer              3159
KeResumeClockTimerFromIdle         11767
xHalTimerOnlyClockInterruptPending 22819
xHalTimerQueryAndResetRtcErrors     22819
```

This command dumps the SystemProcess kernel structure.

dtraceCopy

```
C:\> dtrace -n "BEGIN {print(*(struct nt`_EPROCESS *) nt`PsInitialSystemProcess);exit(0);}

...

uint64_t ParentSecurityDomain = 0
void *CoverageSamplerContext = 0
void *MmHotPatchContext = 0
union _PS_PROCESS_CONCURRENCY_COUNT ExpectedConcurrencyCount = {
    Fraction :20 = 0
    Count :12 = 0
    uint32_t AllFields = 0
}
struct _KAFFINITY_EX IdealProcessorSets = {
    uint16_t Count = 0x1
    uint16_t Size = 0x20
    uint32_t Reserved = 0
    uint64_t [32] Bitmap = [ 0x1, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0
}
}
```

This command displays the top kernel stack for the past 10 seconds.

dtraceCopy

```
C:\> dtrace -qn "profile-997hz { @[stack()] = count(); } tick-10sec { trunc(@,5); printa(@

nt`KiDispatchInterruptContinue
nt`KiDpcInterrupt+0x318
nt`KiSwapThread+0x1054
nt`KiCommitThreadWait+0x153
nt`KeRemoveQueueEx+0x263
nt`IoRemoveIoCompletion+0x54
nt`NtWaitForWorkViaWorkerFactory+0x284
nt`KiSystemServiceCopyEnd+0x35
14

nt`KiDispatchInterruptContinue
nt`KiDpcInterrupt+0x318

...

```

This command displays the top modules invoked by notepad.exe during launch. The -c option runs specified command (notepad.exe) and exits upon its completion.

dtraceCopy

```
C:\> dtrace -qn "pid$target:::entry { @k[probemod] = count();} tick-10s{printa(@k); exit(0)

gdi32full                      5
msvc_p_win                     6
combase                        7
notepad                        9
ADVAPI32                      10
GDI32                         11
SHELL32                       11
USER32                        21
win32u                        345
KERNELBASE                    3727
msvcrt                        7749
KERNEL32                     9883
RPCRT4                        11710
ntdll                        383445
```

## See also

[DTrace Windows Programming](#)

[DTrace ETW](#)

[DTrace Live Dump](#)

[DTrace Windows Code Samples](#)

## Feedback

Was this page helpful? [Yes](#) [No](#)

[Provide product feedback](#) | [Get help at Microsoft Q&A](#)

## Additional resources

### Training

Module

[Explore support and diagnostic tools - Training](#)

This module introduces the tools for troubleshooting the Windows client operating system and provides guidance on how to use them.