

Bitbucket Support



Bitbucket Data Center 9.3 (Latest)
Documentation

Administer Bitbucket Data Center

Cloud Data Center 9.3 ▾

- › Get started with Bitbucket Data Center
- › Use Bitbucket Data Center
- ▼ Administer Bitbucket Data Center
 - Users and groups
 - Advanced repository management
 - › External user directories
 - Global permissions
 - Setting up your mail server
 - › Integrate with Atlassian applications
 - › Connect Bitbucket to an external database
 - Migrating Bitbucket Data Center to another server
 - Migrate Bitbucket Server from Windows to Linux
 - › Run Bitbucket in AWS
 - Specify the Bitbucket base URL

software, sensitive keys, environment variables, and so on. They can be accidentally get added to your repository and gets pushed into your repository and persist until they are removed. This is the potential use of secret scanning. Secret scanning helps you make sure that sensitive information, like API keys, is not in your repository. Bitbucket scans your repository for secrets when leaked secrets are pushed to the repository. Secret scanning is solved in the commit of the repository. The person who pushed or committed the repository. Note that secret scanning is not available for all repositories. This means that

On this page

- About secret scanning
- Customize the scanner
- Customize allowlist rules
- Exclude repositories from scanning
- Resolve issues detected by secret scanning
- Track alerts about leaked secrets
- Secret scanning performance

Related content

Ce site utilise des cookies pour améliorer votre expérience de navigation, effectuer des analyses et des recherches, et cibler la publicité. Pour modifier vos préférences, cliquez sur [Gérer les préférences](#). Sinon, cliquez sur [Accepter tous les cookies](#) pour indiquer que vous consentez à leur utilisation sur votre appareil. Cliquez sur [Rejeter tous les cookies](#) signifie que vous n'acceptez pas que nous utilisions des cookies qui ne sont pas strictement nécessaires sur votre appareil. [Avis relatif aux cookies et au suivi d'Atlassian](#)

✕

[Gérer les préférences](#)

Rejeter tous les cookies

Accepter tous les cookies

› Mirrors



Bitbucket Data Center 9.3 (Latest)
Documentation

› Get started with Bitbucket Data Center

› Use Bitbucket Data Center

▼ Administer Bitbucket Data Center

Users and groups

Advanced repository management

› External user directories

Global permissions

Setting up your mail server

› Integrate with Atlassian applications

› Connect Bitbucket to an external database

Migrating Bitbucket Data Center to another server

Migrate Bitbucket Server from Windows to Linux

› Run Bitbucket in AWS

Specify the Bitbucket base URL

bitbucket.properties

an your repositories and can customize the e the number of false or add your own regex

ire the scanner at each the higher levels unless on (repository, project, les and will not sync rules

ository settings, select

rule or select **More**

ding regex for **Line**

d line pattern regex, only in the specified file

OAuth 2.0 scopes for incoming links

Creating projects

How to update your add-on

Link Bitbucket with Jira

Still need help?

The Atlassian Community is here for you.

Ask the community


Ce site utilise des cookies pour améliorer votre expérience de navigation, effectuer des analyses et des recherches, et cibler la publicité. Pour modifier vos préférences, cliquez sur Gérer les préférences. Sinon, cliquez sur Accepter tous les cookies pour indiquer que vous consentez à leur utilisation sur votre appareil. Cliquez sur Rejeter tous les cookies signifie que vous n'acceptez pas que nous utilisions des cookies qui ne sont pas strictement nécessaires sur votre appareil. [Avis relatif aux cookies et au suivi d'Atlassian](#)

➤ Mirrors



Bitbucket Data Center 9.3 (Latest)
Documentation

- › Get started with Bitbucket Data Center
- › Use Bitbucket Data Center
- ▼ **Administer Bitbucket Data Center**
 - Users and groups
 - Advanced repository management
 - › External user directories
 - Global permissions
 - Setting up your mail server
 - › Integrate with Atlassian applications
 - › Connect Bitbucket to an external database
 - Migrating Bitbucket Data Center to another server
 - Migrate Bitbucket Server from Windows to Linux
 - › Run Bitbucket in AWS
 - Specify the Bitbucket base URL

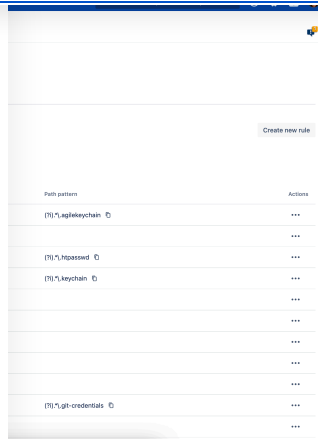

secret scanning rules

ory level to negate
erns can be defined the
wlist will not trigger a
d at the project level.

he allowlist rule takes

ettings, select **Secret**

Ce site utilise des cookies pour améliorer votre expérience de navigation, effectuer des analyses et des recherches, et cibler la publicité. Pour modifier vos préférences, cliquez sur [Gérer les préférences](#). Sinon, cliquez sur [Accepter tous les cookies](#) pour indiquer que vous consentez à leur utilisation sur votre appareil. **Cliquez sur Rejeter tous les cookies** signifie que vous n'acceptez pas que nous utilisions des cookies qui ne sont pas strictement nécessaires sur votre appareil. [Avis relatif aux cookies et au suivi d'Atlassian](#)

> Mirrors



Bitbucket Data Center 9.3 (Latest)
Documentation

> Get started with Bitbucket Data Center

> Use Bitbucket Data Center

▼ Administer Bitbucket Data Center

Users and groups

Advanced repository management

> External user directories

Global permissions

Setting up your mail server

> Integrate with Atlassian applications

> Connect Bitbucket to an external database

Migrating Bitbucket Data Center to another server

Migrate Bitbucket Server from Windows to Linux

> Run Bitbucket in AWS

Specify the Bitbucket base URL


anning

ng at the global or project
itories at the global level.
ommits added to the

gs, select **Secret**

pecific repositories from

> **Remove.**

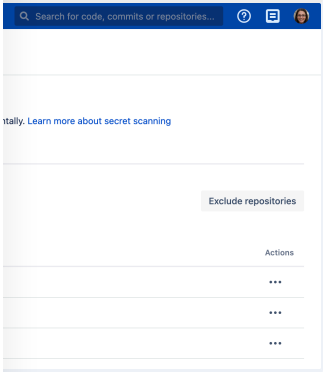

secret scanning

by the scanner, it is good

Ce site utilise des cookies pour améliorer votre expérience de navigation, effectuer des analyses et des recherches, et cibler la publicité. Pour modifier vos préférences, cliquez sur [Gérer les préférences](#). Sinon, cliquez sur [Accepter tous les cookies](#) pour indiquer que vous consentez à leur utilisation sur votre appareil. Cliquez sur [Rejeter tous les cookies](#) signifie que vous n'acceptez pas que nous utilisions des cookies qui ne sont pas strictement nécessaires sur votre appareil. [Avis relatif aux cookies et au suivi d'Atlassian](#)

› Mirrors



Bitbucket Data Center 9.3 (Latest)
Documentation

› Get started with Bitbucket Data Center

› Use Bitbucket Data Center

▼ Administer Bitbucket Data Center

Users and groups

Advanced repository management

› External user directories

Global permissions

Setting up your mail server

› Integrate with Atlassian applications

› Connect Bitbucket to an external database

Migrating Bitbucket Data Center to another server

Migrate Bitbucket Server from Windows to Linux

› Run Bitbucket in AWS

Specify the Bitbucket base URL

don't recommend that
as the only preventative
the tool they were

your admin and ask them
reduce the chance of a
own false positives:

:(sometimes the regex

id directories scanned.
itory levels to specify

o scan for secrets.

crets

ected secrets when a mail
e alerts in two locations:

Administration > Audit

: log, select
list of alerts by selecting
summary.

Ce site utilise des cookies pour améliorer votre expérience de navigation, effectuer des analyses et des recherches, et cibler la publicité. Pour modifier vos préférences, cliquez sur [Gérer les préférences](#). Sinon, cliquez sur [Accepter tous les cookies](#) pour indiquer que vous consentez à leur utilisation sur votre appareil. Cliquez sur [Rejeter tous les cookies](#) signifie que vous n'acceptez pas que nous utilisions des cookies qui ne sont pas strictement nécessaires sur votre appareil. [Avis relatif aux cookies et au suivi d'Atlassian](#)

› Mirrors

s found:
0be58caf71

4e56f46ac8cf01d4



Bitbucket Data Center 9.3 (Latest)
Documentation

› Get started with Bitbucket Data Center

› Use Bitbucket Data Center

▼ Administer Bitbucket Data Center

kevin

Users and groups

Advanced repository management

› External user directories

Global permissions

Setting up your mail server

file:

kevin

› Integrate with Atlassian applications

› Connect Bitbucket to an external database

Migrating Bitbucket Data Center to another server

Migrate Bitbucket Server from Windows to Linux

› Run Bitbucket in AWS

Specify the Bitbucket base URL

cludes a JSON record for
a new record with the
atically parsing these
ype key for entries similar

retscanning.audit.ac

Ce site utilise des cookies pour améliorer votre expérience de navigation, effectuer des analyses et des recherches, et cibler la publicité. Pour modifier vos préférences, cliquez sur [Gérer les préférences](#). Sinon, cliquez sur [Accepter tous les cookies](#) pour indiquer que vous consentez à leur utilisation sur votre appareil. Cliquez sur [Rejeter tous les cookies](#) signifie que vous n'acceptez pas que nous utilisions des cookies qui ne sont pas strictement nécessaires sur votre appareil. [Avis relatif aux cookies et au suivi d'Atlassian](#)

› Mirrors

ce or secret scanning with
t.properties file that

←

Bitbucket Data Center 9.3 (Latest)

Documentation

› Get started with Bitbucket Data Center

› Use Bitbucket Data Center

▼ Administer Bitbucket Data Center

Users and groups

Advanced repository management

› External user directories

Global permissions

Setting up your mail server

› Integrate with Atlassian applications

› Connect Bitbucket to an external database

Migrating Bitbucket Data Center to another server

Migrate Bitbucket Server from Windows to Linux

› Run Bitbucket in AWS

Specify the Bitbucket base URL

	Description
currency} ected	Controls the maximum number of threads allowed per node to perform secret scanning
	Controls the timeout in milliseconds for streaming the diff for a commit and detecting any secrets
	Controls the number of commits sent to the executor to

Ce site utilise des cookies pour améliorer votre expérience de navigation, effectuer des analyses et des recherches, et cibler la publicité. Pour modifier vos préférences, cliquez sur [Gérer les préférences](#). Sinon, cliquez sur [Accepter tous les cookies](#) pour indiquer que vous consentez à leur utilisation sur votre appareil. Cliquez sur [Rejeter tous les cookies](#) signifie que vous n'acceptez pas que nous utilisions des cookies qui ne sont pas strictement nécessaires sur votre appareil. [Avis relatif aux cookies et au suivi d'Atlassian](#)

Page 7 of 8

