

Debugging Everything

Code and other everyday things

HOME ABOUT CONTACT

Custom Protocol Handler (CPH)

By smike19 | June 21, 2019

1 Comment

Microsoft Windows supports registered custom protocols additionally to the common ones such as http, https, ftp, mailto and so on. To register an application to handle a particular URI scheme, new key, along with the appropriate subkeys and values should be added to the Windows registry. The new key The may be added to HKEY_LOCAL_MACHINE\Software\Classes and applied to all users on the local computer or HKEY_CURRENT_USER\Software\Classes that is applied only to the interactive user. Presented below c# console application is doing custom protocol registration for current user, unregistration and may be used for testing.

The code:

```
using System;

using Microsoft.Win32;

using System.Windows.Forms;

using System.Diagnostics;

namespace cph
{
    class Program
    {
        static void Main(string[] args)
        {
            if(args.Length == 0)
            {
                Console.WriteLine("Start application with one of following arguments:\n" +
                    "\\"-R \" - to register new custom protocol\n" +
                    "\\"-D \" - to unregister custom protocol\n" +
                    "\\"-T\" - to test custom protocol");
                return;
            }

            if(args[0].ToUpper() == "-R")
            {
                if(args.Length < 2)
                {
                    Console.WriteLine("Custom protocol name is not specified");
                } else
                {
                    Console.WriteLine("Register custom protocol: " + args[0]);

                    RegistryKey key = Registry.CurrentUser.OpenSubKey(@"Software\Classes", true);

                    RegistryKey keyCP = key.CreateSubKey(args[1],
RegistryKeyPermissionCheck.ReadWriteSubTree);

                    keyCP.SetValue("", String.Format("URL:{0} Protocol",args[1]));

                    keyCP.SetValue("URL Protocol", "");

                    RegistryKey keyIcon = keyCP.CreateSubKey("DefaultIcon");

                    keyIcon.SetValue("", Process.GetCurrentProcess().ProcessName+".exe,1" );

                    RegistryKey keyCPshell = keyCP.CreateSubKey("shell",
RegistryKeyPermissionCheck.ReadWriteSubTree);

                    RegistryKey keyCPopen = keyCPshell.CreateSubKey("open",
```

Search

Recent Posts

Statically Linking in golang to fix “version ‘GLIBC_2.34’ not found” execution error

snmp++v3 crashes after version upgrade.

Windows Subsystem for Linux. Accessing files.

Categories

Select Category ▼

Meta

Log in

Entries [RSS](#)

Comments [RSS](#)

WordPress.org

```
RegistryKeyPermissionCheck.ReadWriteSubTree);

        RegistryKey keyCPcommand = keyCPopen.CreateSubKey("command",
RegistryKeyPermissionCheck.ReadWriteSubTree);

        keyCPcommand.SetValue("", "\"" +
System.Reflection.Assembly.GetExecutingAssembly().Location + "\" \"%1\"");

    }

    return;

}

if (args[0].ToUpper() == "-D")

{

    if (args.Length < 2)

    {

        Console.WriteLine("Custom protocol name is not specified");

    }

    else

    {

        Console.WriteLine("Unregister custom protocol: " + args[0]);

        try

        {

            RegistryKey key = Registry.CurrentUser.OpenSubKey(@"Software\Classes", true);

            key.DeleteSubKeyTree(args[1]);

        } catch (Exception ex)

        {

            Console.WriteLine(ex.Message);

        }

    }

    return;

}

if (args[0].ToUpper().Contains(":-T"))

{

    Console.WriteLine("Test custom protocol, argument: " + args[0]);


    MessageBox.Show("Close me!");

    return;

}

}

}
```

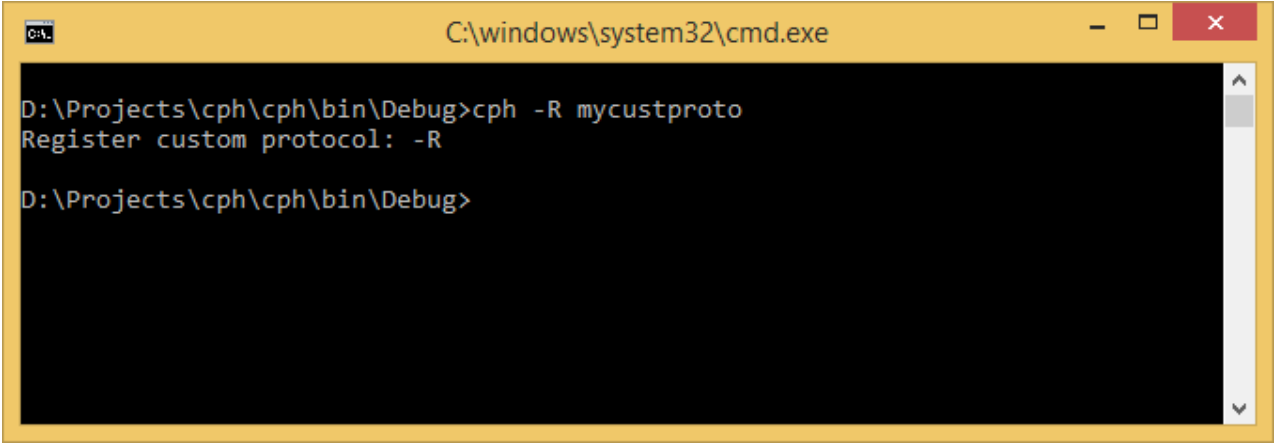

New registry entries looks like:

```
Windows Registry Editor Version 5.00

[HKEY_USERS\S-1-5-21-1447281611-1782198652-1689907268-14781\Software\Classes\mycustproto]
@="URL:mycustproto Protocol"
"URL Protocol"=""

[HKEY_USERS\S-1-5-21-1447281611-1782198652-1689907268-14781\Software\Classes\mycustproto\DefaultIcon]
@="cph.exe,1"


[HKEY_USERS\S-1-5-21-1447281611-1782198652-1689907268-
```

```
14781\Software\Classes\mycustproto\shell]

[HKEY_USERS\S-1-5-21-1447281611-1782198652-1689907268-
14781\Software\Classes\mycustproto\shell\open]

[HKEY_USERS\S-1-5-21-1447281611-1782198652-1689907268-
14781\Software\Classes\mycustproto\shell\open\command]

@="\"D:\Projects\cph\cph\bin\Debug\cph.exe\" \"%1\""
```

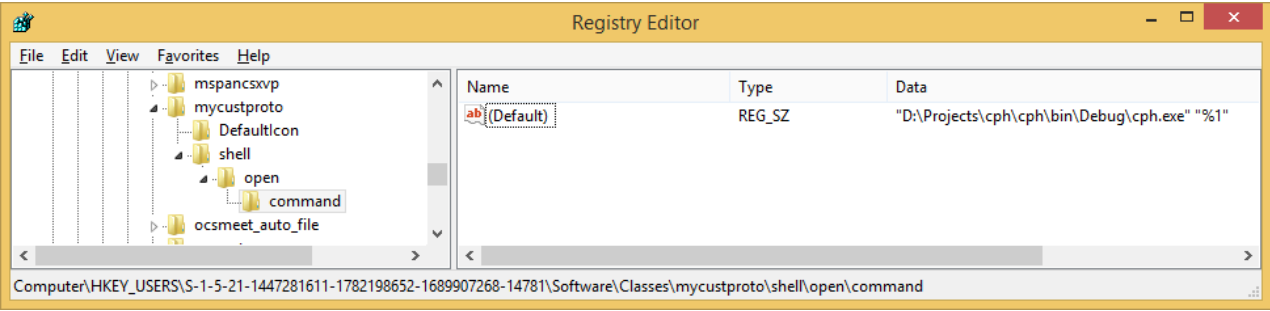

Step two, using notepad or other text editor create html file:

```
<html>


<body>

<a href="mycustproto:-T">Click here to test my custom protocol</a>


</body>

</html>
```

Step three, testing: open html file created in step two in IE, Chrome and Firefox browser and click on “Click here to test my custom protocol” link:

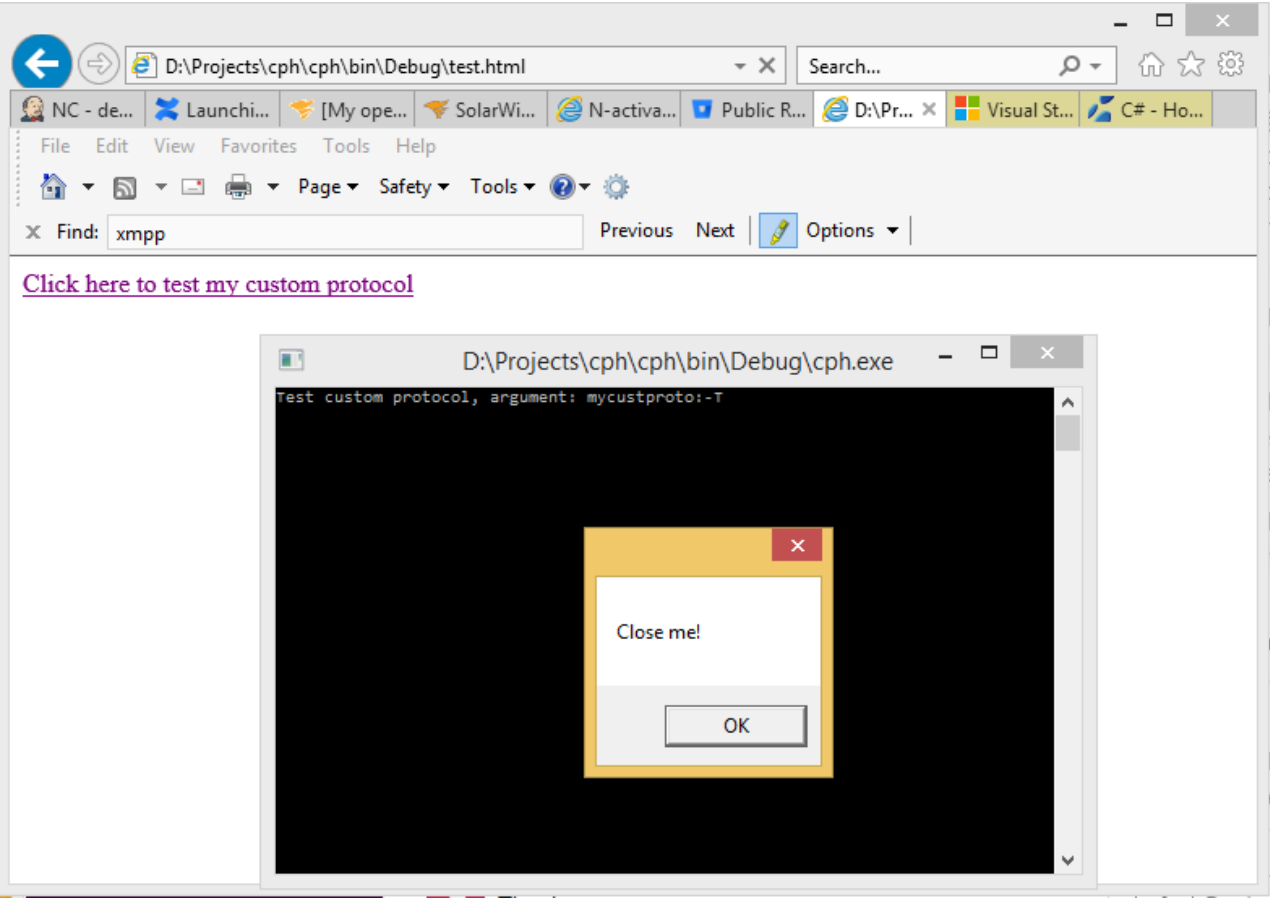

Step four, unregister mycustproto custom protocol (removing entries from registry):

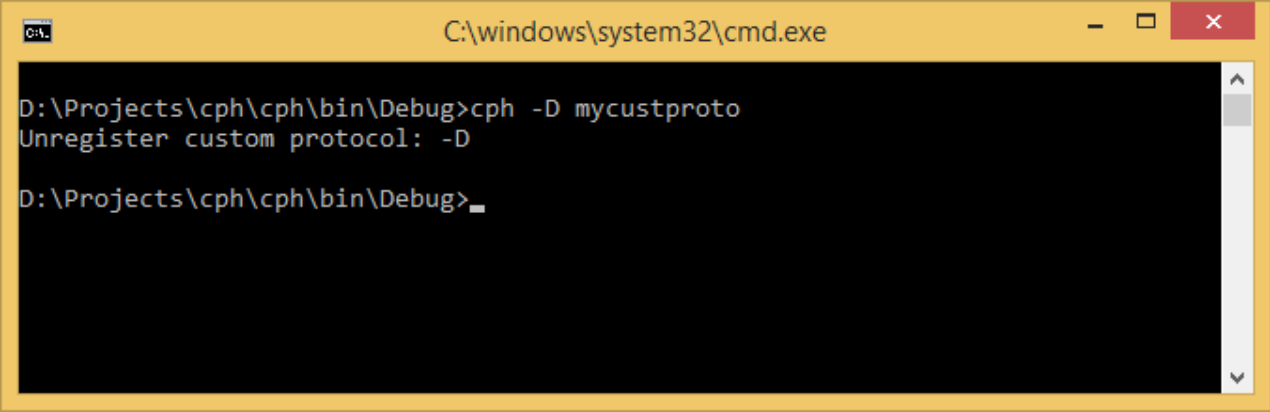

To enable/disable warning dialog before opening application related to this CPH, change value of WarnOnOpen to 1 or 0 respectively in Windows registry.

```
Windows Registry Editor Version 5.00

[HKEY_CURRENT_USER\Software\Microsoft\Internet
Explorer\ProtocolExecute\mycustproto]
"WarnOnOpen"=dword:00000001
```

Category: Coding Howto Windows

← Old hardware with new OS

Howto Increase CPU Usage →

One thought on “Custom Protocol Handler (CPH)”



Sasha
December 11, 2019

The argument of customer protocol handler cannot be more than 2K characters

Reply ↓

Leave a Reply

Your email address will not be published. Required fields are marked *


Comment

Name *

Email *

Website

☐ I'm not a robot


reCAPTCHA
[Privacy](#) - [Terms](#)

Post Comment